

## Set 15 – Survey Responses Analysis

### 15.1 Grouped Bar Chart

```
responses <- matrix(c(
  1,0,0,
  0,1,0,
  0,0,1
), nrow=3, byrow=TRUE)
colnames(responses) <- c("A","B","C")
rownames(responses) <- c("Survey 1","Survey 2","Survey 3")
barplot(responses,
  beside=TRUE,
  col=c("red","green","blue"),
  legend.text=rownames(responses),
  xlab="Question 1 Responses",
  ylab="Count",
  main="Distribution of Answers for Question 1")
```

#### Output:



### 15.2 Stacked Bar Chart


```
responses <- matrix(c(
  1,1,1,
  1,1,1,
  1,1,1
), nrow=3, byrow=TRUE)
colnames(responses) <- c("Question 1","Question 2","Question 3")
rownames(responses) <- c("Survey 1","Survey 2","Survey 3")
barplot(responses,
```

```

beside=FALSE,
col=c("red","green","blue"),
legend.text=rownames(responses),
xlab="Questions",
ylab="Responses",
main="Overall Distribution of Survey Responses")

```

## Output:

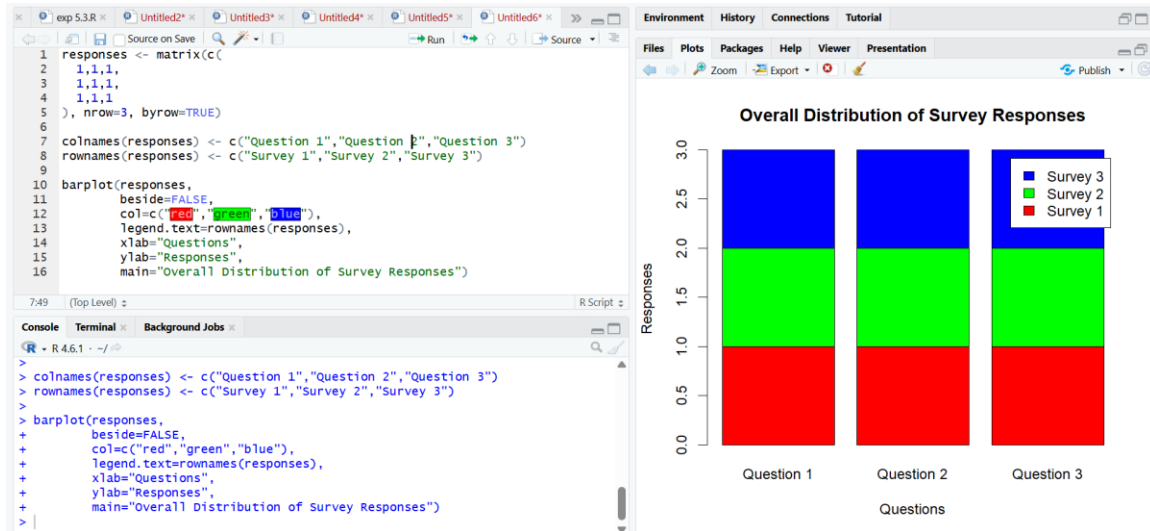

## 15.3 Table

```

survey <- data.frame(
  SurveyID=c(1,2,3),
  Question1=c("A","B","C"),
  Question2=c("B","A","A"),
  Question3=c("C","D","B")
)
print(survey)

```

## Output:

```
exp 5.3.R x  Untitled2* x  Untitled3* x  Untitled4* x
Source on Save
1 survey <- data.frame(
2   SurveyID=c(1,2,3),
3   Question1=c("A","B","C"),
4   Question2=c("B","A","A"),
5   Question3=c("C","D","B")
6 )
7
8 print(survey)
```

5:27 (Top Level) ▾

Console Terminal Background Jobs x

R 4.6.1 · ~/

```
+ SurveyID=c(1,2,3),
+ Question1=c("A","B","C"),
+ Question2=c("B","A","A"),
+ Question3=c("C","D","B")
+ )
> print(survey)
  SurveyID Question1 Question2 Question3
1         1         A         B         C
2         2         B         A         D
3         3         C         A         B
> |
```