


Set 13 – Geographic Data

13.3 Table

Program:

```
geo <- data.frame(  
  City = c("City A","City B","City C"),  
  Population = c(500000,700000,600000),  
  Avg_Temperature = c(75,68,80),  
  Elevation = c(1000,800,1200)  
)  
print(geo)
```

Output:

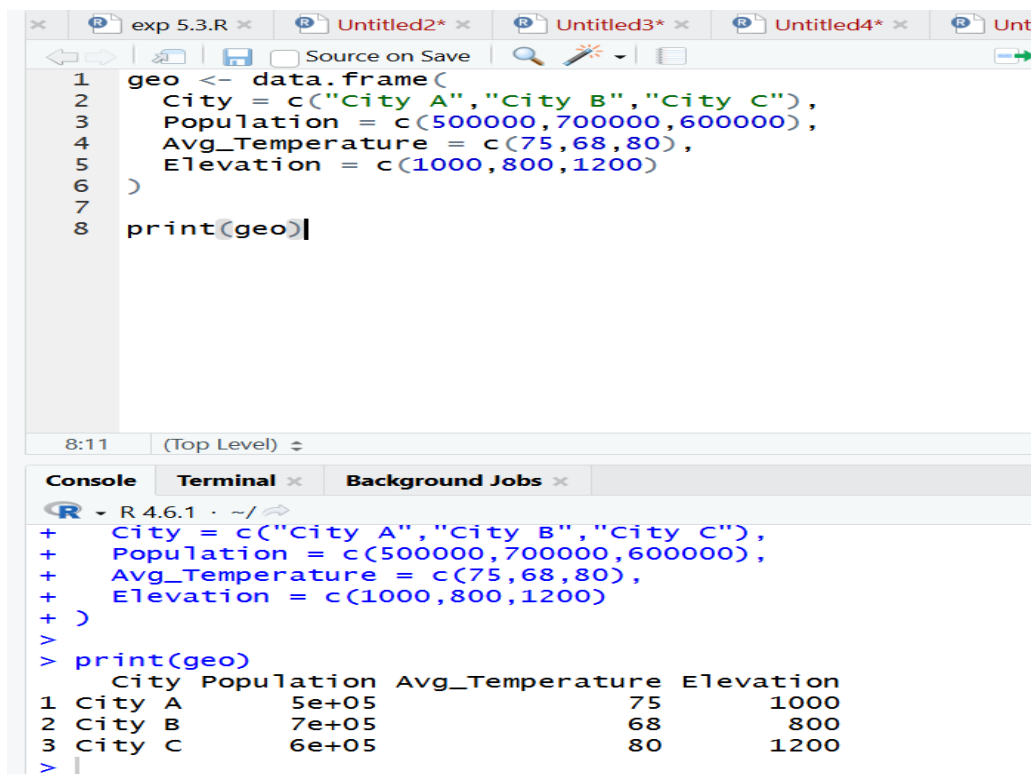

```
1 geo <- data.frame(  
2   City = c("City A","City B","City C"),  
3   Population = c(500000,700000,600000),  
4   Avg_Temperature = c(75,68,80),  
5   Elevation = c(1000,800,1200)  
6 )  
7  
8 print(geo)|
```

8:11 (Top Level) ⇅

Console Terminal Background Jobs

R 4.6.1 · ~/

```
+ City = c("City A","City B","City C"),  
+ Population = c(500000,700000,600000),  
+ Avg_Temperature = c(75,68,80),  
+ Elevation = c(1000,800,1200)  
+ )  
>  
> print(geo)  
  City Population Avg_Temperature Elevation  
1 City A      5e+05           75       1000  
2 City B      7e+05           68         800  
3 City C      6e+05           80       1200  
> |
```