


Set 14 – Survey Results

14.3 Table

Program:

```
survey <- data.frame(  
  Respondent=c(1,2,3),  
  Question1=c("A","B","C"),  
  Question2=c("B","A","A"),  
  Question3=c("C","D","B")  
)  
print(survey)
```

Output:

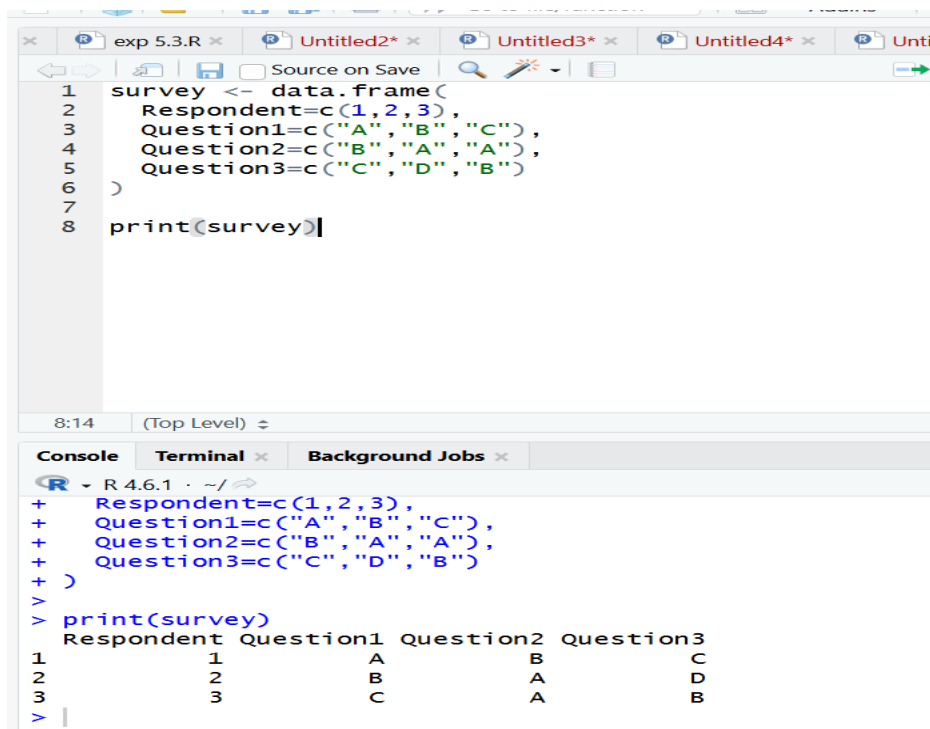

The screenshot shows an RStudio interface with a script editor and a console. The script editor contains the following R code:

```
1 survey <- data.frame(  
2   Respondent=c(1,2,3),  
3   Question1=c("A","B","C"),  
4   Question2=c("B","A","A"),  
5   Question3=c("C","D","B")  
6 )  
7  
8 print(survey)
```

The console shows the execution of the code, resulting in the following output:

```
+ Respondent=c(1,2,3),  
+ Question1=c("A","B","C"),  
+ Question2=c("B","A","A"),  
+ Question3=c("C","D","B")  
+ )  
>  
> print(survey)  
  Respondent Question1 Question2 Question3  
1          1         A         B         C  
2          2         B         A         D  
3          3         C         A         B
```