Interval search experiments

Built 2026-10-23 23:57 PT. Experiment design by Roland Gao; runs and analysis by Claude. Code: research/cooldown_search_probe.py (runs), research/cooldown_study.py (analysis), research/make_cooldown_study.py (this PDF). Logs: logs/research_cooldown_search_probe_*, logs/research_hparam_importance_*. Batch size 2000 throughout.

Experiment 1. Cooldown study: which 40-step lookahead ranks interval candidates like the final result?

Question

An interval search picks each interval's LR by training the interval with a candidate LR, then a short lookahead (the cooldown), and scoring the result. Which cooldown ranks the candidates the way the final accuracy does? Compared, all with a 40-step lookahead (one interval at batch size 2000): no lookahead; linear decay to 0 (conv only, or all four groups); one searched constant cooldown, either for conv only with the other groups on their ground-truth schedules, or shared by all four groups; and four searched constant cooldowns (one per group).

Setup

Item	Value
Model / data	CIFAR-10 airbench, batch size 2000, 200 steps, baseline_bs2000 (conv Muon2 0.22 -> 0; head, norm_bias, whiten_bias SGD on their baseline schedules)
Intervals	4 intervals of 40 steps: steps 0-40, 40-80, 80-120, 120-160 (the last interval has no room for a 40-step lookahead)
Candidates	7 constant conv LRs for the interval: the 0.6^k grid point nearest the baseline's mean conv LR in that interval, and 3 grid steps either side; other groups on the baseline
Ground truth	Final test TTA when training continues on the baseline schedule after the interval
No lookahead	Test TTA right after the interval
Linear to 0	Conv only: conv decays linearly from the candidate to 0 over 40 steps, the other groups continue their schedules. All groups: every group decays linearly to 0 from its current value
1 searched cooldown: conv only	Conv constant at m x candidate for 40 steps; the other groups follow their baseline (ground-truth) schedules; m chosen from {1, 0.6, 0.36, 0.22, 0.13, 0.078, 0.047, 0} by the best score on that seed
1 searched cooldown: shared	Constant LRs for 40 steps: conv at m x candidate, each other group at m x its mean LR over the interval; one m for all groups, chosen as above
4 searched cooldowns	As above but one m per group; coordinate search from the best shared m, one group at a time over the same 8 values, until no group changes (at most 3 passes)
Seed	1 training seed (0); every method uses the same prefix and data order
Score	Test-set TTA accuracy (%)

Results

Picked LR = the candidate with the highest score. Regret = ground truth at its best candidate minus ground truth at the picked one (pp). One seed: single-run noise is about 0.13 pp, so differences of that size between candidates are not resolved.

Picked LR (regret, pp)

Method	Interval 1	Interval 2	Interval 3	Interval 4
Ground truth (final TTA)	0.078 (0.00)	0.13 (0.00)	0.078 (0.00)	0.078 (0.00)
No lookahead	0.078 (0.00)	0.028 (0.34)	0.028 (0.01)	0.028 (0.29)
Linear to 0: conv only	0.13 (0.05)	0.078 (0.26)	0.078 (0.00)	0.028 (0.29)
Linear to 0: all four groups	0.13 (0.05)	0.078 (0.26)	0.047 (0.21)	0.028 (0.29)
1 searched cooldown: conv only, others on ground truth	0.13 (0.05)	0.078 (0.26)	0.047 (0.21)	0.047 (0.21)
1 searched cooldown: shared by all four groups	0.13 (0.05)	0.078 (0.26)	0.047 (0.21)	0.047 (0.21)
4 searched cooldowns (one per group)	0.13 (0.05)	0.078 (0.26)	0.047 (0.21)	0.047 (0.21)

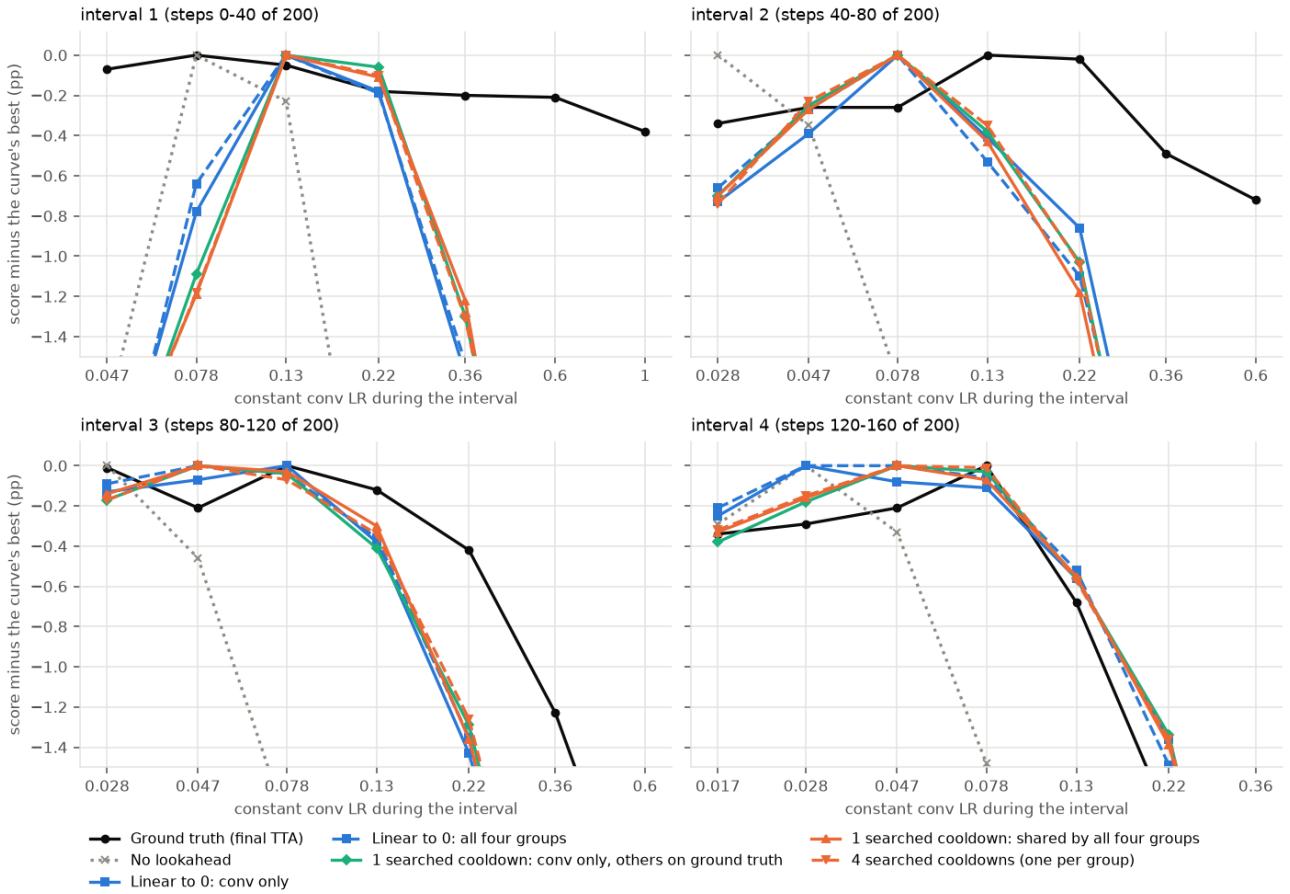


Figure 1. Each method's score per candidate, relative to its own best (the point at 0 is its pick).

Interval 1: score per candidate conv LR (bold: each row's best)

Method	0.047	0.078	0.13	0.22	0.36	0.6	1
Ground truth (final TTA)	93.99	**94.06**	94.01	93.88	93.86	93.85	93.68
No lookahead	81.57	**83.35**	83.12	80.45	68.80	56.07	35.18
Linear to 0: conv only	89.04	90.59	**91.37**	91.19	89.78	87.38	84.39
Linear to 0: all four groups	88.85	90.63	**91.27**	91.08	89.74	87.41	84.10
1 searched cooldown: conv only, others on ground truth	88.58	89.83	**90.92**	90.86	89.62	87.45	85.95
1 searched cooldown: shared by all four groups	88.65	89.70	**90.89**	90.78	89.67	87.16	85.13
4 searched cooldowns (one per group)	88.79	89.89	**91.07**	90.97	89.76	87.65	86.13

Candidate	Conv only: chosen m (seeds)	Shared: chosen m (seeds)	4 searched: chosen (conv, head, norm_bias, whiten_bias) (seeds)
0.047	0.6 x1	0.6 x1	(1, 1, 0.6, 0.36) x1
0.078	0.36 x1	0.36 x1	(0.36, 1, 1, 0.22) x1
0.13	0.22 x1	0.22 x1	(0.22, 1, 0.22, 0.22) x1
0.22	0.22 x1	0.22 x1	(0.22, 0.36, 0.22, 1) x1
0.36	0.13 x1	0.13 x1	(0.13, 0.047, 0.13, 0.13) x1
0.6	0.078 x1	0.078 x1	(0.078, 1, 0.36, 0.078) x1
1	0.078 x1	0.078 x1	(0.078, 0.6, 0.078, 0.6) x1

Interval 2: score per candidate conv LR (bold: each row's best)

Method	0.028	0.047	0.078	0.13	0.22	0.36	0.6
Ground truth (final TTA)	93.76	93.84	93.84	**94.10**	94.08	93.61	93.38
No lookahead	**91.12**	90.77	89.51	87.43	82.45	71.27	57.08
Linear to 0: conv only	92.25	92.59	**92.98**	92.57	92.12	90.18	87.94
Linear to 0: all four groups	92.27	92.66	**92.93**	92.40	91.83	90.11	87.78
1 searched cooldown: conv only, others on ground truth	92.16	92.61	**92.86**	92.48	91.83	89.82	87.93
1 searched cooldown: shared by all four groups	92.18	92.61	**92.88**	92.45	91.70	89.73	87.84
4 searched cooldowns (one per group)	92.20	92.71	**92.94**	92.59	91.90	89.87	87.98

Candidate	Conv only: chosen m (seeds)	Shared: chosen m (seeds)	4 searched: chosen (conv, head, norm_bias, whiten_bias) (seeds)
0.028	0.6 x1	0.6 x1	(0.6, 0.6, 1, 0.6) x1
0.047	0.36 x1	0.36 x1	(0.36, 1, 0.047, 0.36) x1
0.078	0.22 x1	0.22 x1	(0.22, 0.13, 0.22, 0.22) x1
0.13	0.22 x1	0.22 x1	(0.22, 1, 0.36, 0) x1
0.22	0.13 x1	0.13 x1	(0.13, 1, 1, 0.078) x1
0.36	0.13 x1	0.13 x1	(0.13, 0.6, 0, 0.047) x1
0.6	0.078 x1	0.078 x1	(0.078, 0.047, 0.13, 0.078) x1

Interval 3: score per candidate conv LR (bold: each row's best)

Method	0.028	0.047	0.078	0.13	0.22	0.36	0.6
Ground truth (final TTA)	93.99	93.79	**94.00**	93.88	93.58	92.77	91.54
No lookahead	**92.59**	92.13	90.81	87.68	82.32	71.78	56.20
Linear to 0: conv only	93.26	93.32	**93.39**	93.01	91.96	90.45	87.63
Linear to 0: all four groups	93.28	**93.37**	93.33	93.01	92.02	90.23	87.59
1 searched cooldown: conv only, others on ground truth	93.16	**93.33**	93.29	92.92	92.04	90.31	88.61
1 searched cooldown: shared by all four groups	93.13	**93.27**	93.24	92.97	91.91	90.29	88.64
4 searched cooldowns (one per group)	93.18	**93.35**	93.28	93.01	92.09	90.44	88.76

Candidate	Conv only: chosen m (seeds)	Shared: chosen m (seeds)	4 searched: chosen (conv, head, norm_bias, whiten_bias) (seeds)
0.028	0.36 x1	0.22 x1	(0.22, 0.13, 1, 0.22) x1
0.047	0.22 x1	0.36 x1	(0.22, 1, 1, 0.36) x1
0.078	0.22 x1	0.22 x1	(0.22, 1, 0.36, 0.22) x1
0.13	0.22 x1	0.22 x1	(0.22, 1, 0.22, 0.22) x1
0.22	0.22 x1	0.13 x1	(0.22, 0.36, 1, 0.13) x1
0.36	0.13 x1	0.13 x1	(0.13, 0.078, 0.6, 0.13) x1
0.6	0.078 x1	0.13 x1	(0.078, 0.36, 0.13, 0.13) x1

Interval 4: score per candidate conv LR (bold: each row's best)

Method	0.017	0.028	0.047	0.078	0.13	0.22	0.36
Ground truth (final TTA)	93.65	93.70	93.78	**93.99**	93.31	92.23	89.58
No lookahead	92.89	**93.18**	92.85	91.70	88.84	83.30	72.23
Linear to 0: conv only	93.55	**93.80**	93.72	93.69	93.24	92.44	90.63
Linear to 0: all four groups	93.55	**93.76**	**93.76**	93.70	93.24	92.27	90.57
1 searched cooldown: conv only, others on ground truth	93.51	93.71	**93.89**	93.86	93.33	92.55	90.70
1 searched cooldown: shared by all four groups	93.56	93.73	**93.89**	93.82	93.34	92.50	90.89
4 searched cooldowns (one per group)	93.62	93.79	**93.94**	93.93	93.37	92.58	90.93

Candidate	Conv only: chosen m (seeds)	Shared: chosen m (seeds)	4 searched: chosen (conv, head, norm_bias, whiten_bias) (seeds)
0.017	0.6 x1	0.6 x1	(0.6, 1, 1, 0.6) x1
0.028	0.6 x1	0.6 x1	(0.6, 1, 0.36, 0.6) x1
0.047	0.36 x1	0.36 x1	(0.36, 0.22, 1, 0.36) x1
0.078	0.22 x1	0.22 x1	(0.22, 0.047, 0.22, 0.22) x1
0.13	0.13 x1	0.13 x1	(0.13, 0.22, 0.13, 0.13) x1
0.22	0.13 x1	0.13 x1	(0.13, 1, 0.078, 0.13) x1
0.36	0.13 x1	0.13 x1	(0.13, 0.078, 1, 0.13) x1

Observations

One seed: single-run noise is about 0.13 pp, so ground-truth differences of that size are not resolved. Interval 1's ground truth is flat (93.85-94.06 from 0.047 to 0.6) and interval 3's is non-monotone (0.028: 93.99, 0.047: 93.79, 0.078: 94.00), so regrets of about 0.2 pp or less at those intervals are within noise.

All five 40-step lookahead variants pick the same LR at intervals 1 and 2, and the three searched-constant variants (conv only, shared, four per group) pick the same LR at every interval. How the other three groups cool down (continuing their ground-truth schedules, one shared multiplier, or their own multipliers) never changed the pick. Four searched multipliers score slightly higher in absolute terms than one but rank the candidates the same way.

The 40-step lookahead picks a smaller LR than the ground truth where the ground truth is clearly peaked: interval 2 (all variants pick 0.078 where 0.13 is best, 0.26 pp regret) and interval 4 (0.028-0.047 where 0.078 is best, 0.21-0.29 pp). No lookahead is worse at intervals 2 and 4 (0.34 / 0.29 pp) and always picks the smallest or second-smallest candidate after interval 1.

Linear decay and searched constants differ only at intervals 3 and 4, in opposite directions (linear conv-only is better at interval 3, searched constants at interval 4), both by about 0.2-0.3 pp: not resolved with one seed.

Experiment 2. Hparam importance from scratch

Question

How important is each of the four LRs when they are searched jointly from scratch, and does the answer depend on the main interval length?

Setup

Item	Value
Model / data	baseline_bs2000 except the four trained LRs (conv, head, norm_bias, whiten_bias), which are constant for the first L training steps from initialization
Main interval L	1, 2, 5, 10, 40 steps; the score is taken right after the L steps (no lookahead)
Joint search	From scratch: every LR starts at 1.0. Scan each LR over x10^k, k = -3..3 (others fixed), keep the best, snap to the 0.6^k grid, then coordinate-climb on the grid (one step up / down, move while the score improves) until no LR moves: the center
Sweep	From the center, each LR alone over 5 grid points on each side (others at the center). Offset +1 = one grid step larger (x1/0.6), -1 = one step smaller (x0.6)
Seed / score	1 seed (0); test-set TTA accuracy (%); the test cross-entropy loss is logged too

Joint-search centers

L (steps)	Center: conv, head, norm_bias, whiten_bias	Center TTA	Evaluations
1	0.13, 60, 0.00078, 60	25.43	73
2	0.22, 1, 1.7, 1300	36.89	71
5	0.078, 0.006, 2100, 1300	52.00	76
10	0.078, 0.017, 2100, 13	59.47	70
40	0.078, 2100, 280, 2100	84.60	73

Importance: TTA drop from the center (pp) at 1 step / 2 steps (mean of both sides) / worst within 5 steps

LR	L = 1	L = 2	L = 5	L = 10	L = 40
conv	0.58 / 2.01 / 16.42	1.00 / 2.90 / 19.69	3.20 / 7.96 / 32.96	2.02 / 4.11 / 29.37	1.95 / 5.26 / 49.82
head	0.03 / 0.14 / 0.29	0.02 / 0.02 / 0.08	0.10 / 0.12 / 0.18	0.32 / 0.49 / 0.67	0.54 / 1.65 / 62.56
norm_bias	0.00 / 0.00 / 0.00	0.05 / 0.02 / 0.08	0.51 / 1.46 / 28.09	1.12 / 2.77 / 28.84	0.43 / 0.84 / 6.98
whiten_bias	0.01 / 0.03 / 0.09	0.15 / 0.85 / 4.48	0.56 / 1.02 / 3.45	0.51 / 0.58 / 2.00	0.46 / 0.96 / 2.44

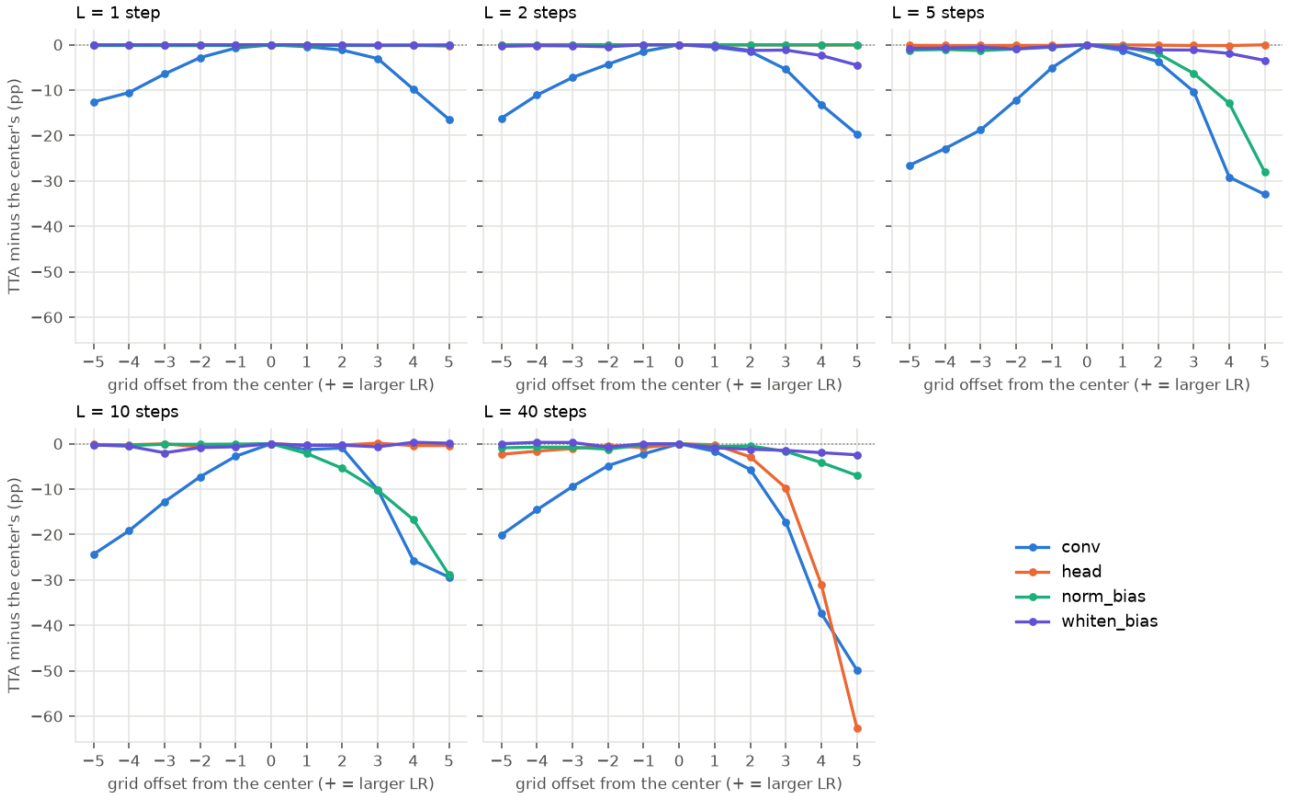


Figure 2. One-at-a-time sweeps around each L's joint-search center.

L = 1: TTA minus the center's (pp) at each grid offset (center LR in brackets; center TTA 25.43)

LR	-5	-4	-3	-2	-1	+0	+1	+2	+3	+4	+5
conv (0.13)	-12.58	-10.53	-6.44	-2.84	-0.73	+0.00	-0.43	-1.18	-3.06	-9.80	-16.42
head (60)	-0.15	-0.14	-0.17	-0.16	-0.03	+0.00	-0.03	-0.11	-0.16	-0.12	-0.29
norm_bias (0.00078)	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00	+0.00
whiten_bias (60)	-0.03	-0.02	-0.01	-0.01	-0.01	+0.00	-0.01	-0.05	-0.09	-0.08	-0.04

L = 2: TTA minus the center's (pp) at each grid offset (center LR in brackets; center TTA 36.89)

LR	-5	-4	-3	-2	-1	+0	+1	+2	+3	+4	+5
conv (0.22)	-16.19	-11.09	-7.21	-4.29	-1.48	+0.00	-0.52	-1.50	-5.41	-13.19	-19.69
head (1)	+0.01	+0.01	+0.02	+0.00	-0.01	+0.00	-0.03	-0.03	-0.05	-0.08	-0.04
norm_bias (1.7)	-0.07	-0.08	-0.05	-0.01	-0.04	+0.00	-0.05	-0.03	-0.03	-0.02	-0.01
whiten_bias (1300)	-0.34	-0.20	-0.26	-0.44	-0.01	+0.00	-0.29	-1.26	-1.18	-2.37	-4.48

L = 5: TTA minus the center's (pp) at each grid offset (center LR in brackets; center TTA 52.00)

LR	-5	-4	-3	-2	-1	+0	+1	+2	+3	+4	+5
conv (0.078)	-26.55	-22.87	-18.78	-12.17	-5.13	+0.00	-1.28	-3.75	-10.31	-29.17	-32.96
head (0.006)	-0.13	-0.17	-0.17	-0.14	-0.16	+0.00	-0.04	-0.10	-0.17	-0.18	-0.02
norm_bias (2100)	-1.19	-1.04	-1.29	-0.94	-0.54	+0.00	-0.47	-1.97	-6.33	-12.92	-28.09
whiten_bias (1300)	-0.81	-0.75	-0.58	-0.91	-0.41	+0.00	-0.71	-1.13	-1.17	-1.92	-3.45

L = 10: TTA minus the center's (pp) at each grid offset (center LR in brackets; center TTA 59.47)

LR	-5	-4	-3	-2	-1	+0	+1	+2	+3	+4	+5
conv (0.078)	-24.35	-19.17	-12.77	-7.28	-2.76	+0.00	-1.28	-0.95	-10.13	-25.72	-29.37
head (0.017)	-0.17	-0.23	-0.02	-0.67	-0.31	+0.00	-0.34	-0.30	+0.13	-0.42	-0.38
norm_bias (2100)	-0.29	-0.39	-0.12	-0.13	-0.09	+0.00	-2.15	-5.42	-10.23	-16.70	-28.84
whiten_bias (13)	-0.26	-0.53	-2.00	-0.85	-0.67	+0.00	-0.36	-0.32	-0.68	+0.32	+0.11

L = 40: TTA minus the center's (pp) at each grid offset (center LR in brackets; center TTA 84.60)

LR	-5	-4	-3	-2	-1	+0	+1	+2	+3	+4	+5
conv (0.078)	-20.08	-14.54	-9.42	-4.83	-2.24	+0.00	-1.67	-5.69	-17.22	-37.36	-49.82
head (2100)	-2.33	-1.63	-1.07	-0.40	-0.85	+0.00	-0.23	-2.90	-9.74	-31.04	-62.56
norm_bias (280)	-0.90	-0.75	-0.77	-1.20	-0.24	+0.00	-0.62	-0.48	-1.69	-4.15	-6.98
whiten_bias (2100)	+0.00	+0.30	+0.27	-0.72	-0.01	+0.00	-0.91	-1.21	-1.47	-1.97	-2.44

Experiment 3. Representation quality of schedule families

Question

How close to the baseline can each family of conv LR schedules get, under no transform and under the ramp, reverse ramp and wave transforms, when searched by the same global search?

Setup

Item	Value
Model / data	baseline_bs2000; only the conv LR schedule is searched, the other groups stay on the baseline. The transform multiplies the conv LR the search specifies
Conditions	No transform; ramp x 4^(2x-1) (x0.25 -> x4); reverse ramp x 4^(1-2x) (x4 -> x0.25); wave x 2^sin(2 pi x) (x1 -> x2 -> x0.5 -> x1); x = fraction of training
Families	5 constant intervals (5 values); linear decay to 0 (initial LR); power decay lr x (1-t)^p (lr, p; p = 1 is linear); 2 knots at t = 0, 0.5; 3 knots at t = 0, 1/3, 2/3; 5 knots at t = 0, 0.2, 0.4, 0.6, 0.8 (knot values; linear between knots, 0 at the end)
Search	Generalized global_neighbour (global_family): coordinate search over the family's parameters on multiplicative grids (LR values x0.6, p x0.8), one grid step at a time, moving while the score improves; every candidate is a full training run on seed 0 from the same initial state
Start	The oracle spec (baseline conv schedule divided by the transform) projected onto the family: interval means or knot values snapped to the grid; linear / power start at 0.22 with p = 1
Evaluation	Start and best schedules retrained on held-out seeds 100-107 (mean test TTA; not part of the search)

References (held-out TTA, seeds 100-107)

	No transform	Ramp	Reverse ramp	Wave
Baseline linear decay, no transform (the target)	93.92	93.92	93.92	93.92
Baseline spec kept under the transform (do-nothing)	93.92	93.42	93.57	93.72

Held-out TTA of the best schedule (start = the projected oracle before search; search cost)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	**93.62** (start 93.52; 18 runs, 182 s)	**93.65** (start 93.32; 28 runs, 285 s)	**93.86** (start 93.81; 28 runs, 279 s)	**93.82** (start 93.11; 22 runs, 222 s)
Linear decay (1 param)	**93.86** (start 93.92; 3 runs, 31 s)	**93.42** (start 93.42; 3 runs, 31 s)	**93.59** (start 93.57; 4 runs, 41 s)	**93.91** (start 93.72; 3 runs, 31 s)
Power decay (lr, p)	**93.86** (start 93.92; 8 runs, 81 s)	**93.95** (start 93.42; 14 runs, 141 s)	**93.59** (start 93.57; 6 runs, 61 s)	**93.91** (start 93.72; 5 runs, 51 s)
2 knots (t = 0, 0.5)	**93.86** (start 93.86; 5 runs, 51 s)	**93.77** (start 93.14; 9 runs, 91 s)	**93.88** (start 93.85; 8 runs, 83 s)	**93.83** (start 93.72; 12 runs, 121 s)
3 knots (t = 0, 1/3, 2/3)	**93.86** (start 93.94; 12 runs, 121 s)	**93.68** (start 93.74; 10 runs, 101 s)	**93.78** (start 93.90; 13 runs, 131 s)	**94.06** (start 93.90; 7 runs, 73 s)
5 knots (t = 0, 0.2, ..., 0.8)	**93.94** (start 93.97; 13 runs, 131 s)	**93.96** (start 93.91; 17 runs, 170 s)	**93.91** (start 93.91; 11 runs, 111 s)	**93.94** (start 93.97; 11 runs, 111 s)

Best parameter values (LR values in order; power: lr, p)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	0.13, 0.22, 0.078, 0.047, 0.028	0.36, 0.13, 0.078, 0.028, 0.0036	0.028, 0.078, 0.13, 0.078, 0.047	0.078, 0.078, 0.13, 0.078, 0.017
Linear decay (1 param)	0.13	0.22	0.078	0.13
Power decay (lr, p)	0.13, 0.64	0.36, 2	0.078, 1	0.13, 1
2 knots (t = 0, 0.5)	0.22, 0.13	0.6, 0.078	0.078, 0.078	0.13, 0.078
3 knots (t = 0, 1/3, 2/3)	0.13, 0.22, 0.047	0.36, 0.13, 0.047	0.078, 0.078, 0.047	0.13, 0.078, 0.13
5 knots (t = 0, 0.2, ..., 0.8)	0.13, 0.13, 0.13, 0.078, 0.047	1, 0.36, 0.22, 0.047, 0.017	0.047, 0.078, 0.078, 0.13, 0.13	0.13, 0.078, 0.078, 0.13, 0.078

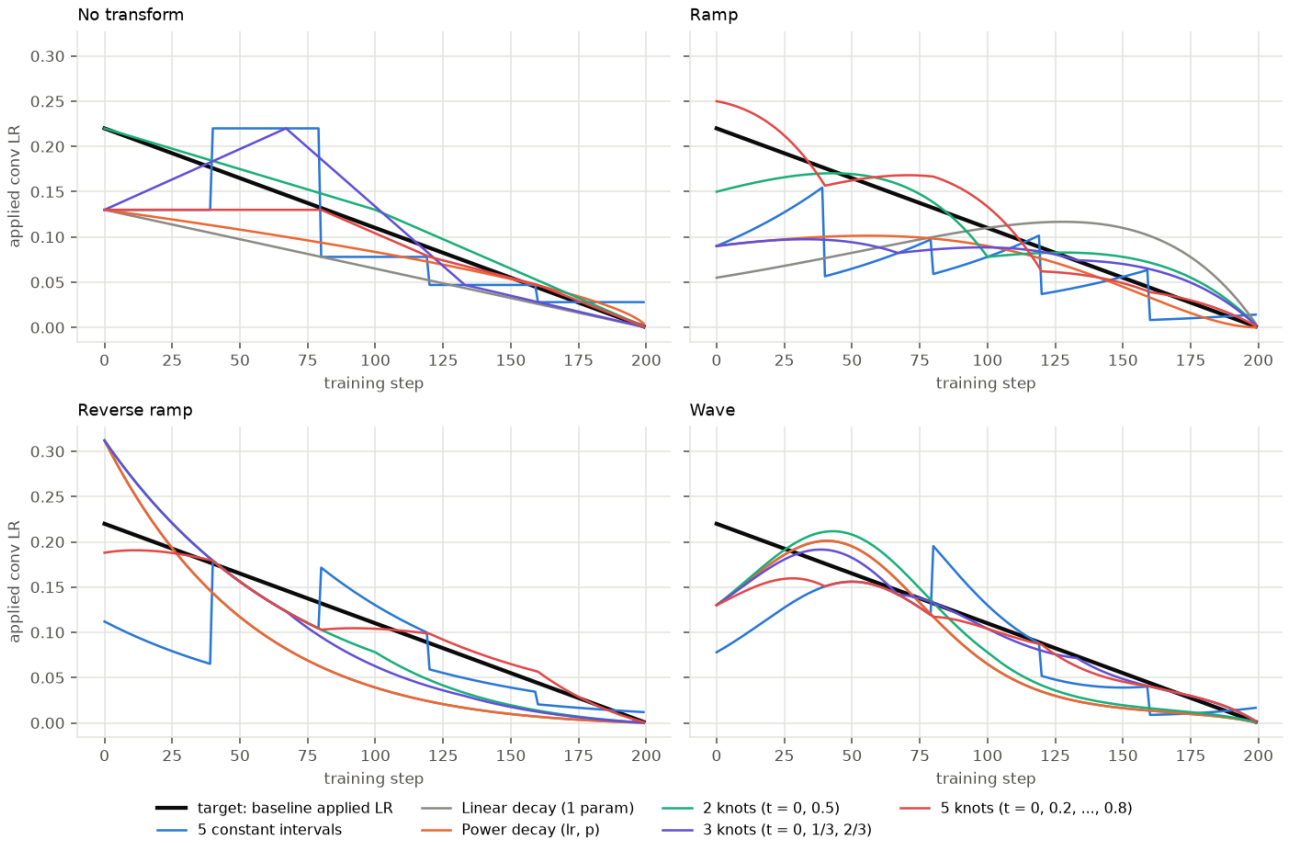


Figure 3. Applied conv LR (spec x transform) of each family's best schedule; the black line is the baseline's applied LR, which a perfect search would reproduce.

Observations

Held-out means over 8 seeds have a standard error of about 0.045 pp, so differences below about 0.1 pp are not resolved. Target: the baseline's 93.92 on the same seeds.

5 knots is the only family that reached the target in all four conditions in these searches (93.91-93.96), and its start, the oracle projected onto the family, is already there (93.91-93.97): 5 knots on the grid represent all four target schedules.

5 constant intervals of conv reach only 93.62 here without a transform (start 93.52), but that is this search's local optimum, not the family's limit. Earlier 5-interval searches at batch size 2000 (same held-out seeds) did better: conv only 93.77 (interval search; conv 0.13, 0.13, 0.078, 0.047, 0.01) and 93.72 (global_interval), and with all four LRs as 5 intervals 93.92 (interval search), matching the baseline, and 93.85 (global_interval). This search kept the last interval at 0.028 where those went to 0.01-0.017: a single-seed coordinate search can stop one grid step short at the end. Under the transforms it reaches 93.65 / 93.86 / 93.82 (ramp / reverse ramp / wave; projected starts 93.32 / 93.81 / 93.11).

Linear decay matches the target without a transform (93.86-93.92) and under wave (93.91), but no initial LR compensates a ramp (93.42) or a reverse ramp (93.59): the shape is wrong, not the scale. Power decay fixes the ramp (93.95 with p = 2, lr 0.36: decaying faster) but not the reverse ramp (93.59): (1-t)^p cannot rise early, which the reverse ramp needs.

2 and 3 knots land in between (93.68-94.06), with no consistent ordering across conditions.

Single-seed search sometimes leaves a good start for a worse held-out schedule (no transform: linear 93.92 -> 93.86, 3 knots 93.94 -> 93.86, 5 constant intervals moved its first value from 0.22 to 0.13): the search optimizes seed 0's test score, the same winner's curse as before.

Experiment 4. Hparam range from scratch (Experiment 2 redone)

Question

Experiment 2's +-5 sweeps depend on where the center landed. How far can each LR move from the center, on each side, before the score drops by 10%? A range that ends on both sides marks an LR with an optimum; a side that never drops marks an LR the score is insensitive to in that direction.

Setup

Item	Value
Model / score	As in Experiment 2: baseline_bs2000 except the four LRs, constant for the first L steps from initialization; test TTA right after the L steps; 1 seed (0)
Center	Experiment 2's joint-search center for each L (re-evaluated; it reproduces Experiment 2's TTA)
Probe	One LR at a time (others at the center), one 0.6^k grid step at a time on each side (+1 = x1/0.6, larger), until TTA <= 0.9 x the center's TTA (a 10% relative drop) or 20 steps. A diverged run counts as a drop

Stop offsets (smaller side / larger side) and the LR range within 10% of the center

LR	L = 1	L = 2	L = 5	L = 10	L = 40
conv	-2 / +3 0.078 - 0.36	-2 / +3 0.13 - 0.6	-2 / +3 0.047 - 0.22	-2 / +3 0.047 - 0.22	-3 / +3 0.028 - 0.22
head	<-20 / +7 0.0022 - 1300	<-20 / +14 3.7e-05 - 770	<-20 / >20 2.2e-07 - 170	<-20 / >20 6.1e-07 - 460	<-20 / +3 0.078 - 5900
norm_bias	<-20 / >20 2.9e-08 - 21	<-20 / +17 6.1e-05 - 5900	<-20 / +3 0.078 - 5900	<-20 / +3 0.078 - 5900	<-20 / +6 0.01 - 3500
whiten_bias	<-20 / +10 0.0022 - 5900	<-20 / +5 0.047 - 9800	<-20 / +6 0.047 - 16000	<-20 / +17 0.00047 - 46000	<-20 / +11 0.078 - 350000

<-20 / >20: no 10% drop within 20 steps on that side (the range shown then ends at the last probed point). Center TTA: L = 1: 25.43, L = 2: 36.89, L = 5: 52.00, L = 10: 59.47, L = 40: 84.60.

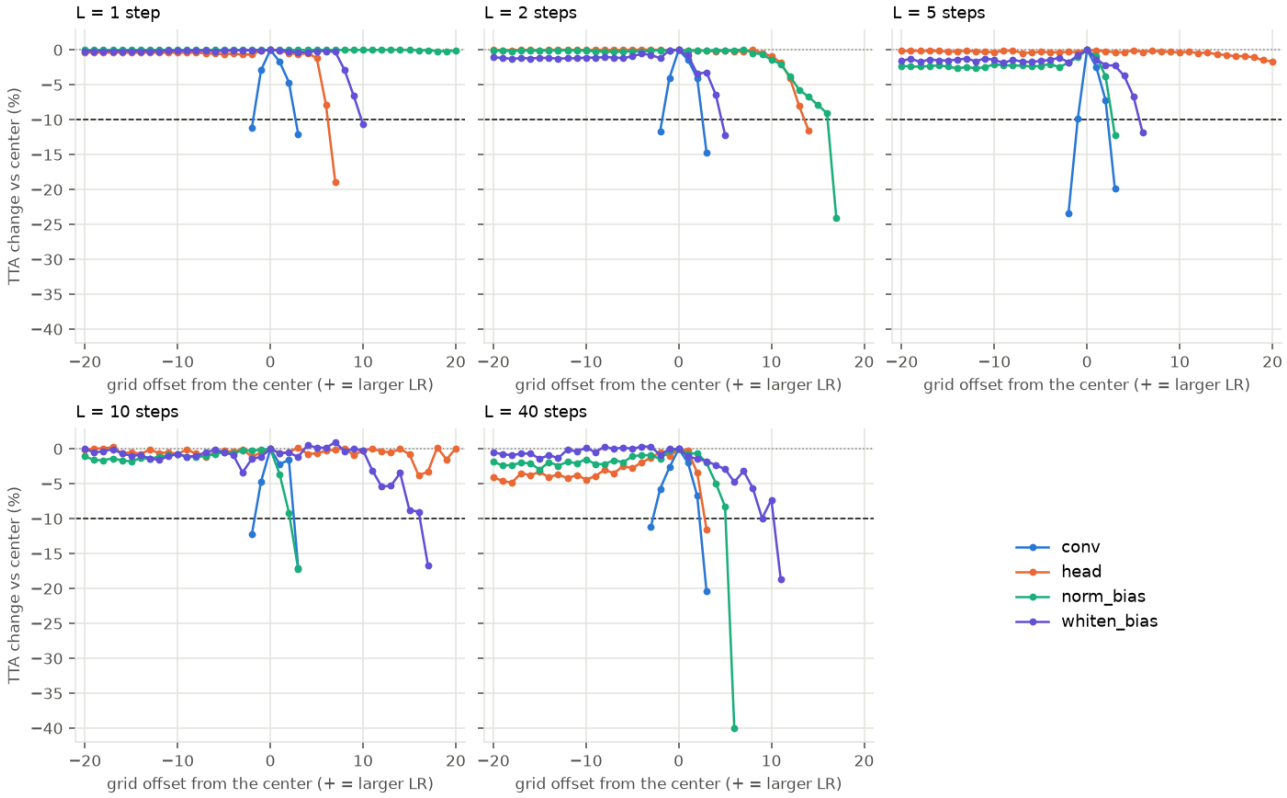


Figure 4. Relative TTA change along each probe; the dashed line is the 10% stop. Points below -40% are drawn at -40%.

Observations

One seed: single-run noise is about 0.13 pp at the full 200 steps; the stop criterion (a 10% relative drop: 2.5 pp at L = 1, 8.5 pp at L = 40) is far above it, so the stop offsets are not noise.

Conv is the only LR with an optimum: its range ends on both sides at every L, at -2 or -3 grid steps (smaller) and +3 (larger). The LR range within 10% of the center spans 5-6 grid points, a factor of 4.6-7.9 in LR (0.078-0.36 at L = 1, 0.028-0.22 at L = 40).

Head, norm_bias and whiten_bias never drop by 10% on the smaller side within 20 steps (down to 0.6^20 = 3.7e-5 x the center) at any L. The worst smaller-side loss is 4.10 pp (head, L = 40); most are below 1.5 pp, and at L = 1-2 below 0.5 pp. These three LRs only have an upper limit.

Their larger sides do end, but late and without a pattern across L: head at +7 / +14 / none / none / +3 (L = 1 / 2 / 5 / 10 / 40), norm_bias at none / +17 / +3 / +3 / +6, whiten_bias at +10 / +5 / +6 / +17 / +11. So their Experiment 2 centers mostly mark where "too large" begins, not an optimum: any value below that edge scores about the same.

At L = 10 a few probe points beat the center (whiten_bias +0.57 pp, head +0.15 pp): the joint-search center is not an exact optimum on one seed, which is the center dependence this experiment was meant to remove.

Experiment 5. Which non-conv interval schedules help

Question

The two original 5-interval searches scored 93.77 (conv only) and 93.92 (all four LRs) on held-out seeds, but their conv schedules differ in the last two intervals (0.078, 0.017 vs 0.047, 0.01). With conv fixed, do the other groups' searched intervals help, and which group?

Setup

Item	Value
Schedules	C4 = conv constant 0.13, 0.13, 0.078, 0.047, 0.01 (5 x 40 steps; the four-LR interval search's conv). Searched intervals: head 2100, 2100, 2100, 2100, 1300; norm_bias 770, 770, 770, 460, 280; whiten_bias 460, 460, 280, 280, 280. Baseline: conv 0.22 -> 0, head 1300 -> 0, norm_bias 99 -> 0 (linear over 200 steps), whiten_bias 36 -> 0 over 75 steps, then 0
Runs	Plain training runs (no search) on held-out seeds 100-107, current code; the paired difference is per seed against the first row

Held-out TTA

Conv	head	norm_bias	whiten_bias	Held-out TTA (mean +- SE)	vs first row (paired)
C4	baseline	baseline	baseline	93.95 +- 0.06	-
C4	searched	baseline	baseline	93.90 +- 0.05	-0.05 +- 0.08
C4	baseline	searched	baseline	93.77 +- 0.04	-0.18 +- 0.08
C4	baseline	baseline	searched	93.88 +- 0.05	-0.07 +- 0.07
C4	searched	searched	searched	93.92 +- 0.04	-0.03 +- 0.07
baseline (0.22 -> 0)	searched	searched	searched	93.87 +- 0.04	-0.08 +- 0.07
baseline (0.22 -> 0)	baseline	baseline	baseline	93.92 +- 0.05	-0.03 +- 0.07

For reference, the original conv-only interval search's schedule (conv 0.13, 0.13, 0.078, 0.078, 0.017, the others on the baseline) scored 93.77 on the same seeds (older code).

Observations

The other groups' searched intervals do not help. With conv fixed at C4 and the other three groups on the baseline, the held-out TTA is 93.95 +- 0.06, as high as any row. Switching all three to their searched intervals gives 93.92 (-0.03 +- 0.07 paired); switching one at a time gives head -0.05 +- 0.08, whiten_bias -0.07 +- 0.07 and norm_bias -0.18 +- 0.08 (about 2.3 SE: norm_bias's searched intervals, 770 -> 280 instead of 99 -> 0, probably hurt).

The 93.77 vs 93.92 gap between the original conv-only and four-LR searches came from conv, not from the other groups. Both conv schedules with the other groups on the baseline: 0.13, 0.13, 0.078, 0.078, 0.017 scores 93.77 and C4 (0.13, 0.13, 0.078, 0.047, 0.01) 93.95, +0.18 +- 0.05 paired (7 of 8 seeds). The four-LR rerun reproduces the original run's per-seed scores exactly, so the older 93.77 run is directly comparable.

So 5 constant intervals of conv alone do match the baseline (93.95 vs the baseline's 93.92 on these seeds) when the last two intervals are low enough (0.047, 0.01); Experiment 3's conv-only search stopped at 0.047, 0.028.

The searched non-conv intervals with the baseline's linear conv score 93.87 (-0.08 +- 0.07 vs the C4 control), close to the baseline itself: the other groups' schedules matter little with either conv schedule.

Experiment 6. Seed noise of the baseline

Question

How much does the baseline's score vary across training seeds, and how many seeds does a comparison need?

Setup

Item	Value
Runs	baseline_bs2000, plain training runs on seeds 0-127 (seed 0 is the search seed; 100-107 are the held-out seeds); the seed sets the initialization, data order and augmentation
Score	Test TTA accuracy (%) and test accuracy without TTA

Baseline across seeds (PARTIAL: 136/128)

Metric	Seeds	Mean	SD (one run)	SE of the mean	Min	Max
TTA	136	93.942	0.119	0.010	93.61	94.28
No TTA	136	93.165	0.140	0.012	92.69	93.52

Averaging over seeds

Seeds per mean (n)	SD of an n-seed mean: SD/sqrt(n)	Measured (disjoint blocks of n)	Smallest difference two n-seed means resolve (95%)
1	0.119	0.119 (136 blocks)	0.33 pp
2	0.084	0.088 (68 blocks)	0.23 pp
4	0.059	0.067 (34 blocks)	0.16 pp
8	0.042	0.049 (17 blocks)	0.12 pp
16	0.030	0.041 (8 blocks)	0.08 pp
32	0.021	0.028 (4 blocks)	0.06 pp

Seed 0 (the search seed): 93.92. Held-out seeds 100-107: mean 93.92. All seeds: 93.94.

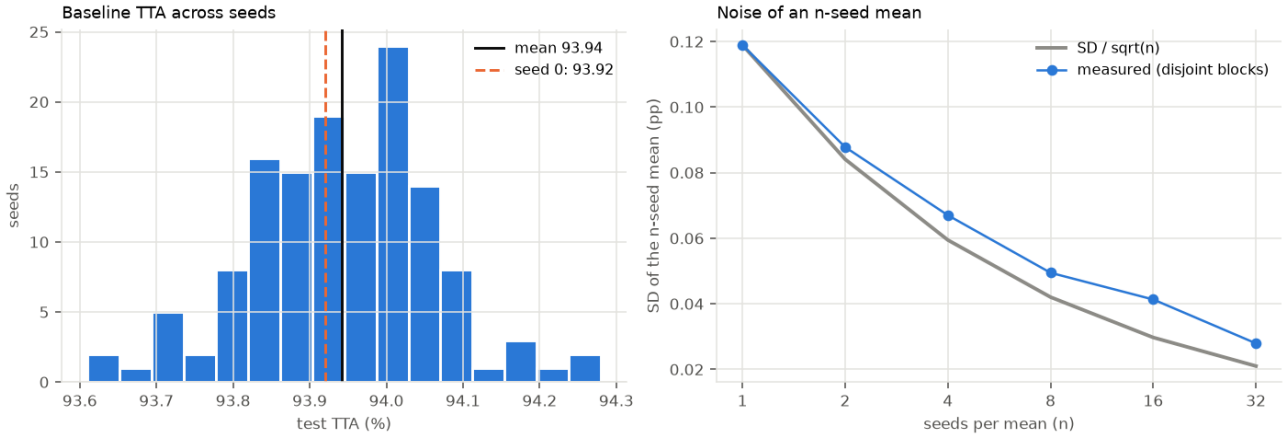


Figure 5. Left: the baseline's TTA over seeds. Right: the spread of an n-seed mean, predicted from the single-run SD and measured on disjoint blocks of seeds.

Observations

One run of the baseline has a seed SD of 0.121 pp in TTA (128 seeds: mean 93.94, range 93.61-94.28, 0.67 pp from worst to best seed); without TTA the SD is 0.140 pp (mean 93.16). The mean over all 128 seeds is known to +-0.011 pp (SE).

Averaging over seeds shrinks the noise about as SD / sqrt(n): measured on disjoint blocks of seeds, an 8-seed mean has SD 0.051 (predicted 0.043; 16 blocks, so the measured value itself is uncertain by about +-20%). Telling two schedules apart at 95% takes a difference of about 0.34 pp with 1 seed each, 0.12 pp with 8 seeds and 0.06 pp with 32 seeds (unpaired; pairing by seed helps only if the seeds' effects are shared).

The seeds used so far are typical: seed 0 (the search seed) scores 93.92 and the held-out seeds 100-107 average 93.92, both within 0.02 pp of the 128-seed mean.

Experiment 7. Hparam range around the baseline

Question

Starting from the baseline instead of a from-scratch center, how far can each LR's initial value move, on each side, before the full run's score drops by 10%?

Setup

Item	Value
Runs	baseline_bs2000, full 200-step runs, seed 0. One LR at a time (the others on the baseline)
Probe	The LR's whole baseline schedule is scaled so its initial value steps along the 0.6^k grid (+1 = x1/0.6, larger), on each side until TTA <= 0.9 x the baseline's TTA on seed 0, or 20 steps. A diverged run counts as a drop

Stop offsets (baseline TTA on seed 0: 93.92; stop at 84.53)

LR	Baseline initial LR	Stop (smaller / larger)	Initial LR range within 10%
conv	0.22	-6 / +6	0.017 - 2.8 (x165)
head	1300	<-20 / +8	0.047 - 46000 (x9.79e+05)
norm_bias	99	<-20 / +9	0.0036 - 5900 (x1.64e+06)
whiten_bias	36	<-20 / >20	0.0013 - 980000 (x7.54e+08)

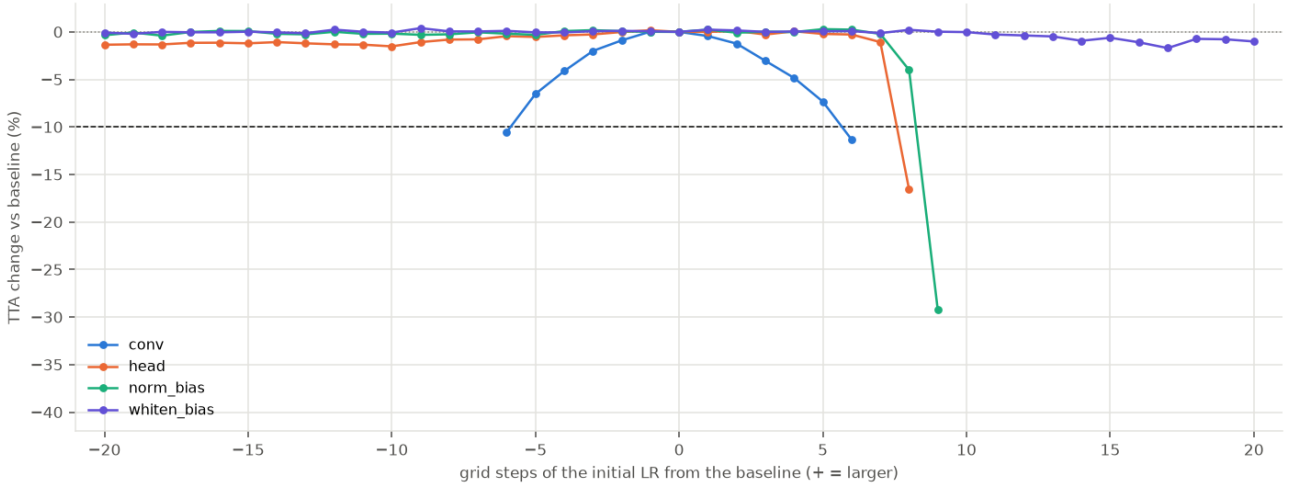


Figure 6. Relative TTA change of full runs as one LR's initial value moves from the baseline; dashed: the 10% stop. Points below -40% are drawn at -40%.

95% confidence set for the best initial LR

Each probed value is one run on seed 0, so its score carries the single-run noise of Experiment 6 (SD 0.119 pp, assumed the same at every value and independent between values). A value is kept when its score is within c of the best observed score, with c = q x SD and q the 95% quantile of max_j (Z_j - Z_1) over the k probed values (Z independent standard normals; Monte Carlo). This is Gupta's subset selection: the set contains the best probed value with probability at least 95%, even in the hardest case where all values are equally good. (open) marks an end that reaches the probe limit on a side without a 10% drop, so the set may continue beyond it.

LR	Probed points k	Cutoff c (pp)	Best observed	95% set (initial LR)	Points in set
conv	13	0.42	0.13 (93.95)	0.13 - 0.22	2 of 13
head	29	0.46	770 (94.08)	280 - 27000	10 of 29
norm_bias	30	0.46	1300 (94.19)	(open) 0.006 - 2100	21 of 30, with gaps
whiten_bias	41	0.47	0.36 (94.29)	(open) 0.0013 - 5900	28 of 41, with gaps

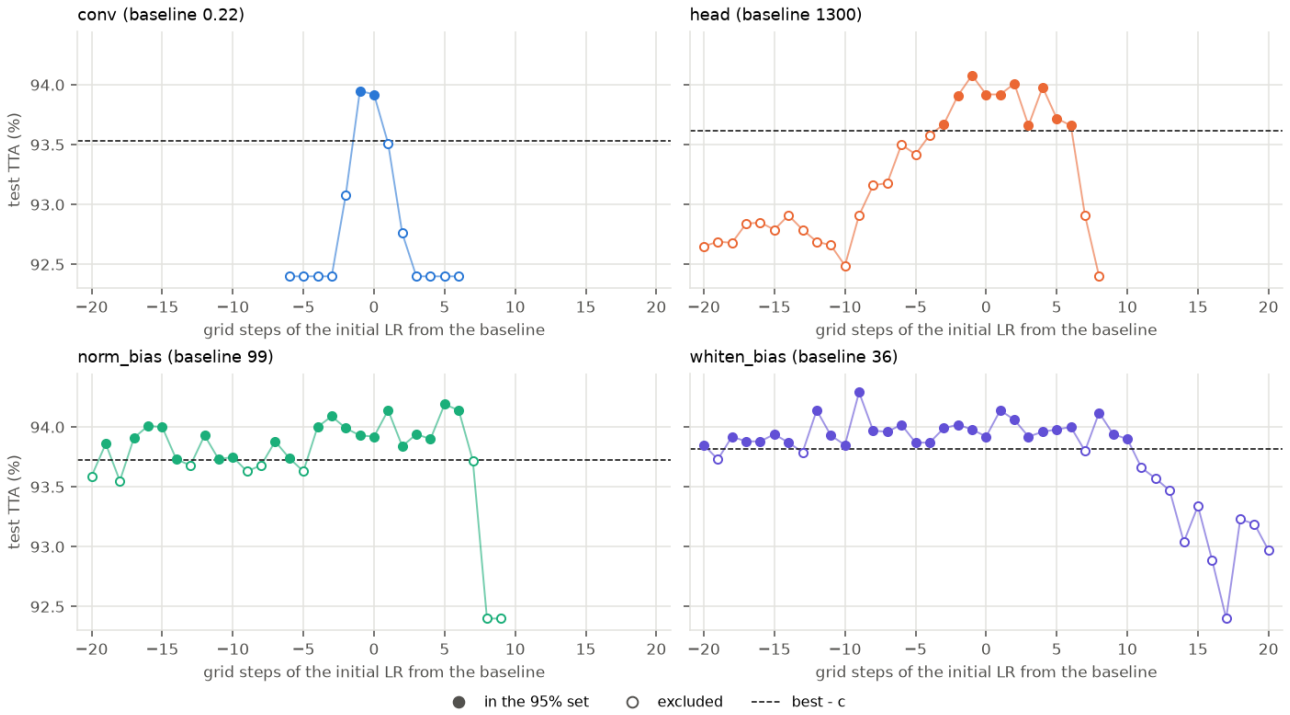


Figure 7. The probes near the top: filled points are in the 95% set (score at least best - c, dashed); points below 92.4 are drawn at 92.4.

Observations

One seed (0); the 10% stop (84.53) is about 80 single-run SDs (Experiment 6) below the baseline, so the stop offsets are not noise; differences under about 0.34 pp between single points are.

Conv has a clear optimum, and the baseline sits on it: 0.13 scores 93.95 and 0.22 (baseline) 93.92; one step further costs 0.4-0.8 pp (0.36: 93.51; 0.078: 93.08). Its 10% range ends at -6 (0.01: 84.03) and +6 (4.6: 83.28), so in full runs conv tolerates a factor of about 165 (0.017 to 2.8) before losing 10%, much wider than in the from-scratch L-step setting of Experiment 4 (5-6 grid points).

Head, norm_bias and whiten_bias never drop by 10% on the smaller side within 20 steps (down to 3.7e-5 x the baseline). Norm_bias and whiten_bias are flat there (all within 93.55-94.29, within about 0.4 pp of the baseline, roughly the single-run noise range); head loses about 1.2 pp once it is below about 8 (92.5-92.9 from 7.7 down to 0.047), still far from 10%.

On the larger side, head stops at +8 (76000: 78.35; 46000 still 92.91) and norm_bias at +9 (9800: 66.44; 5900: 90.16), both after 6-7 steps of no loss: they fail by blowing up, not gradually. whiten_bias never stops: up to 980000 (x27000) it stays above 92.3.

So around the baseline only conv needs tuning; the three other LRs only need to stay below a blow-up edge about 35x above their baseline values (head, norm_bias; the last points without loss are 46000 and 3500), and whiten_bias barely matters at all.

95% confidence sets for the best initial LR (single runs with SD 0.121 pp; cutoff c = 0.43-0.48 pp below the best observed score, wider for more probed points). Conv: 0.13-0.22, the two values at the top (93.95, 93.92); the next ones are excluded (0.36: 93.51, only 0.01 pp under the cutoff 93.52; 0.078: 93.08), so the best conv initial LR is pinned to two grid points, and the baseline's 0.22 is one of them.

Head: 280-27000 (10 of 29 points, contiguous), a factor of about 100 around the best observed 770; below 280 the scores fall off (170: 93.58), and 46000 is 1.0 pp below the baseline (92.91). The baseline's 1300 is inside.

Norm_bias: anything from the smallest probed values (0.006; open, as the probe never dropped 10% on that side) up to 3500, with gaps: the scores below 3500 are within noise of each other, so the data do not locate a best value, only an upper edge. Whiten_bias: likewise from 0.0013 (open) up to 5900; from 9800 upward the scores fall (93.66 and lower) and are excluded.

Experiment 8. Largest LR within the margin, per L (from Experiment 4)

Question

The interval search picks each LR in its first interval as the largest LR scoring within a margin of the best (directional_search with initial_lr_search, initial_dropoff_margin = 0.02). Applied at main interval lengths L = 1, 2, 5, 10, 40 from scratch, does the pick at L = 1 predict the pick at L = 40?

Setup

Item	Value
Data	Experiment 4's probes (no new runs): for each L, one LR at a time on the 0.6^k grid around Experiment 2's center, the other three LRs at the center, TTA right after L steps, seed 0. The probes extend past every point where the rule stops
Rule	As in train_cifar.py: from the center, step up while the score stays within the margin of the best so far, then down the same way (at most 20 steps per side); pick the largest LR within the margin of the best. Margin 0.02 TTA = 2 pp (the code's value); 1 and 0.5 pp shown too

Picks with the code's margin (2 pp): LR (grid steps from the center), and where it lies relative to Experiment 7's full-run 95% range for the best initial LR (last row)

L (steps)	Center TTA	conv	head	norm_bias	whiten_bias
1	25.43	0.36 (+2), above	770 (+5), in	21 (+20)*, in	5900 (+9), in
2	36.89	0.6 (+2), above	460 (+12), in	770 (+12), in	5900 (+3), in
5	52.00	0.13 (+1), in	170 (+20)*, below	5900 (+2), above	9800 (+4), above
10	59.47	0.22 (+2), in	36 (+15), below	2100 (+0), in	2100 (+10), in
40	84.60	0.13 (+1), in	3500 (+1), in	1300 (+3), in	9800 (+3), above
Exp. 7	full run	0.13 - 0.22	280 - 27000	(open) 0.006 - 2100	(open) 0.0013 - 5900

* the upward probe reached the 20-step limit without falling out of the margin, so the pick is the probe limit. in / above / below: inside, above or below the Experiment 7 range ((open): that end of the range is not bounded by the data). Experiment 7 is a different context (full 200-step runs, the other LRs on the baseline schedules), the target a short-horizon pick should predict.

Conv pick by margin

L (steps)	conv, margin 2 pp	conv, margin 1 pp	conv, margin 0.5 pp
1	0.36, above	0.22, in	0.22, in
2	0.6, above	0.36, above	0.22, in
5	0.13, in	0.078, below	0.078, below
10	0.22, in	0.078, below	0.078, below
40	0.13, in	0.078, below	0.078, below
Exp. 7	0.13 - 0.22	0.13 - 0.22	0.13 - 0.22

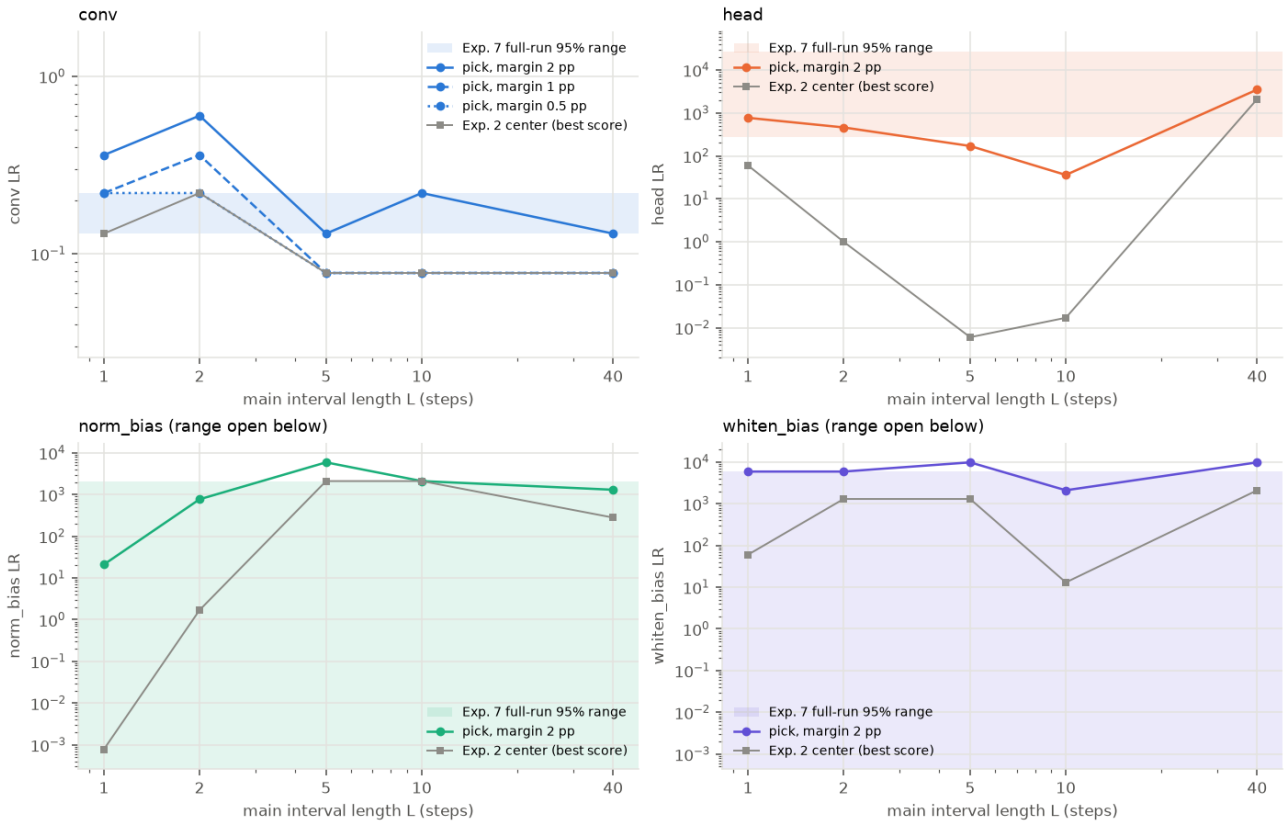


Figure 8. The rule's pick per L (conv at three margins, the others at the code's 2 pp), Experiment 2's best-score center, and the shaded reference: Experiment 7's full-run 95% range for the best initial LR.

Observations

Reference: Experiment 7's full-run 95% ranges for the best initial LR (conv 0.13-0.22, head 280-27000, norm_bias up to 3500, whiten_bias up to 5900; the last two open below, so for them only "above" is a real miss). A good short-horizon pick lands inside.

Conv: with the code's 2 pp margin, L = 1 and L = 2 pick above the range (0.36, 0.6) and L = 5, 10 and 40 inside it (0.13, 0.22, 0.13). So L = 1 does not predict L = 40's pick (2 grid steps apart, 0.36 vs 0.13), and the long-horizon picks are the ones that match the full run. With tighter margins it reverses: at 1 pp and 0.5 pp, L = 1 picks 0.22 (inside) and L = 5-40 pick 0.078 (one step below the range). No single margin puts every L inside.

Why the margin interacts with L: it is absolute, but the score scale is not (the centers score 25.43 at L = 1 and 84.60 at L = 40), and at every L the 2 pp pick sits 1-2 grid steps above that L's best-score center (L = 1: 0.13 -> 0.36; L = 40: 0.078 -> 0.13). The best-score centers alone are inside the range at L = 1 and 2 (0.13, 0.22) and one step below it at L >= 5 (0.078): short horizons favour slightly larger conv LRs than long ones, and the 2 pp rule's upward step compensates at L >= 5 but overshoots at L <= 2.

Head: L = 1 (770), 2 (460) and 40 (3500) pick inside the range; L = 5 (170) and 10 (36) below it, by 1-4 grid steps although the upward probe at L = 5 hit the 20-step limit. norm_bias and whiten_bias: their ranges are open below, so the only misses are picks above the upper edge: norm_bias at L = 5 (5900 > 3500), whiten_bias at L = 5 and 40 (9800 > 5900), each one grid step over. L = 1's picks (21 and 5900) are inside, but their ranges are wide enough that this says little.

So in this data L = 1 lands inside the full-run range for all three of head, norm_bias and whiten_bias (L = 40: two of three), but for conv, the one LR with a narrow range, L = 1 overshoots with the code's margin, while L >= 5 lands inside.

Caveat: in each L the other three LRs sit at that L's own Experiment 2 center, which differs between L (e.g. head 60 at L = 1, 0.006 at L = 5, 2100 at L = 40), so the comparison across L is not in a fixed context, and Experiment 7's context (full runs, baseline schedules) differs from all of them. Running the rule from a common start at every L would remove the first confound; it needs new runs.

Experiment 9. Representation quality of schedule families, noise-aware search

Question

Experiment 3's search scored every candidate on one run (seed 0), so it climbed on seed noise and stopped at schedules that were lucky on seed 0 (e.g. 5 constant intervals: 93.99 on seed 0, 93.62 held-out). With a search that only moves to a neighbour that is statistically better given the seed noise, and adds seeds until it can tell, how close does each family get?

Setup

Item	Value
As Experiment 3	baseline_bs2000, conv only (the others on the baseline); the same families, conditions (no transform, ramp, reverse ramp, wave), grids (LR x0.6, p x0.8) and starts (the oracle projected onto the family); start and final retrained on held-out seeds 100-107
Search	Global neighbour (noisy_family): each round compares the current schedule with all its neighbours (each parameter one grid step up or down; k = 2 for linear, 4 for power and 2 knots, 6 for 3 knots, 10 for 5 intervals and 5 knots). Every point's score is its mean TTA over full runs on search seeds 0, 1, 2, ...
Decision	d = neighbour mean - current mean, SE = 0.12 pp x sqrt(1/n_neighbour + 1/n_current) (the single-run SD of Experiment 6, runs treated as independent). One-sided 80% bounds, Bonferroni over the k neighbours: z = 1.28 / 1.64 / 1.83 / 2.05 for k = 2 / 4 / 6 / 10. Better: d - z SE > 0. Ruled out: d + z SE < 0. Otherwise undecided
Moves and seeds	If any neighbour is better, move to the better one with the highest mean. Else run one more seed on the current schedule and on every undecided neighbour, and repeat. Stop when every neighbour is ruled out, or at 8 seeds per point (undecided neighbours then count as not better)

Held-out TTA of the final schedule (Experiment 3's for comparison; the start; search cost)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	**93.80** (Exp. 3: 93.62; start 93.52; 2 moves, 119 runs)	**93.68** (Exp. 3: 93.65; start 93.32; 2 moves, 110 runs)	**93.81** (Exp. 3: 93.86; start 93.81; 0 moves, 76 runs)	**93.60** (Exp. 3: 93.82; start 93.11; 1 moves, 77 runs)
Linear decay (1 param)	**93.92** (Exp. 3: 93.86; start 93.92; 0 moves, 15 runs)	**93.42** (Exp. 3: 93.42; start 93.42; 0 moves, 5 runs)	**93.86** (Exp. 3: 93.59; start 93.57; 1 moves, 18 runs)	**93.91** (Exp. 3: 93.91; start 93.72; 1 moves, 8 runs)
Power decay (lr, p)	**93.97** (Exp. 3: 93.86; start 93.92; 1 moves, 36 runs)	**93.70** (Exp. 3: 93.95; start 93.42; 1 moves, 21 runs)	**93.86** (Exp. 3: 93.59; start 93.57; 1 moves, 36 runs)	**93.91** (Exp. 3: 93.91; start 93.72; 1 moves, 22 runs)
2 knots (t = 0, 0.5)	**94.03** (Exp. 3: 93.86; start 93.86; 1 moves, 38 runs)	**93.64** (Exp. 3: 93.77; start 93.14; 1 moves, 29 runs)	**93.85** (Exp. 3: 93.88; start 93.85; 0 moves, 34 runs)	**93.79** (Exp. 3: 93.83; start 93.72; 1 moves, 37 runs)
3 knots (t = 0, 1/3, 2/3)	**93.94** (Exp. 3: 93.86; start 93.94; 0 moves, 48 runs)	**93.88** (Exp. 3: 93.68; start 93.74; 1 moves, 55 runs)	**93.90** (Exp. 3: 93.78; start 93.90; 0 moves, 47 runs)	**94.06** (Exp. 3: 94.06; start 93.90; 1 moves, 60 runs)
5 knots (t = 0, 0.2, ..., 0.8)	**93.97** (Exp. 3: 93.94; start 93.97; 0 moves, 79 runs)	**93.91** (Exp. 3: 93.96; start 93.91; 0 moves, 66 runs)	**93.91** (Exp. 3: 93.91; start 93.91; 0 moves, 78 runs)	**93.97** (Exp. 3: 93.94; start 93.97; 0 moves, 84 runs)

Target: the baseline's 93.92 on the held-out seeds; do-nothing references as in Experiment 3 (ramp 93.42, reverse ramp 93.57, wave 93.72).

Final parameter values (seeds behind the final mean; why the search stopped)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	0.13, 0.13, 0.13, 0.078, 0.017 (8 seeds; max seeds)	0.6, 0.22, 0.13, 0.028, 0.006 (8 seeds; max seeds)	0.078, 0.078, 0.13, 0.13, 0.078 (8 seeds; max seeds)	0.13, 0.078, 0.13, 0.13, 0.028 (8 seeds; max seeds)
Linear decay (1 param)	0.22 (7 seeds; none can be better)	0.22 (2 seeds; none can be better)	0.13 (8 seeds; none can be better)	0.13 (3 seeds; none can be better)
Power decay (lr, p)	0.22, 1.2 (8 seeds; max seeds)	0.22, 1.2 (7 seeds; none can be better)	0.13, 1 (8 seeds; max seeds)	0.13, 1 (5 seeds; none can be better)
2 knots (t = 0, 0.5)	0.22, 0.078 (8 seeds; none can be better)	1, 0.078 (8 seeds; max seeds)	0.047, 0.13 (8 seeds; max seeds)	0.13, 0.13 (8 seeds; max seeds)
3 knots (t = 0, 1/3, 2/3)	0.22, 0.13, 0.078 (8 seeds; max seeds)	1, 0.22, 0.028 (8 seeds; max seeds)	0.047, 0.078, 0.13 (8 seeds; max seeds)	0.13, 0.078, 0.13 (8 seeds; max seeds)
5 knots (t = 0, 0.2, ..., 0.8)	0.22, 0.22, 0.13, 0.078, 0.047 (8 seeds; max seeds)	1, 0.36, 0.22, 0.078, 0.017 (8 seeds; max seeds)	0.047, 0.078, 0.078, 0.13, 0.13 (8 seeds; max seeds)	0.22, 0.078, 0.078, 0.13, 0.078 (8 seeds; max seeds)

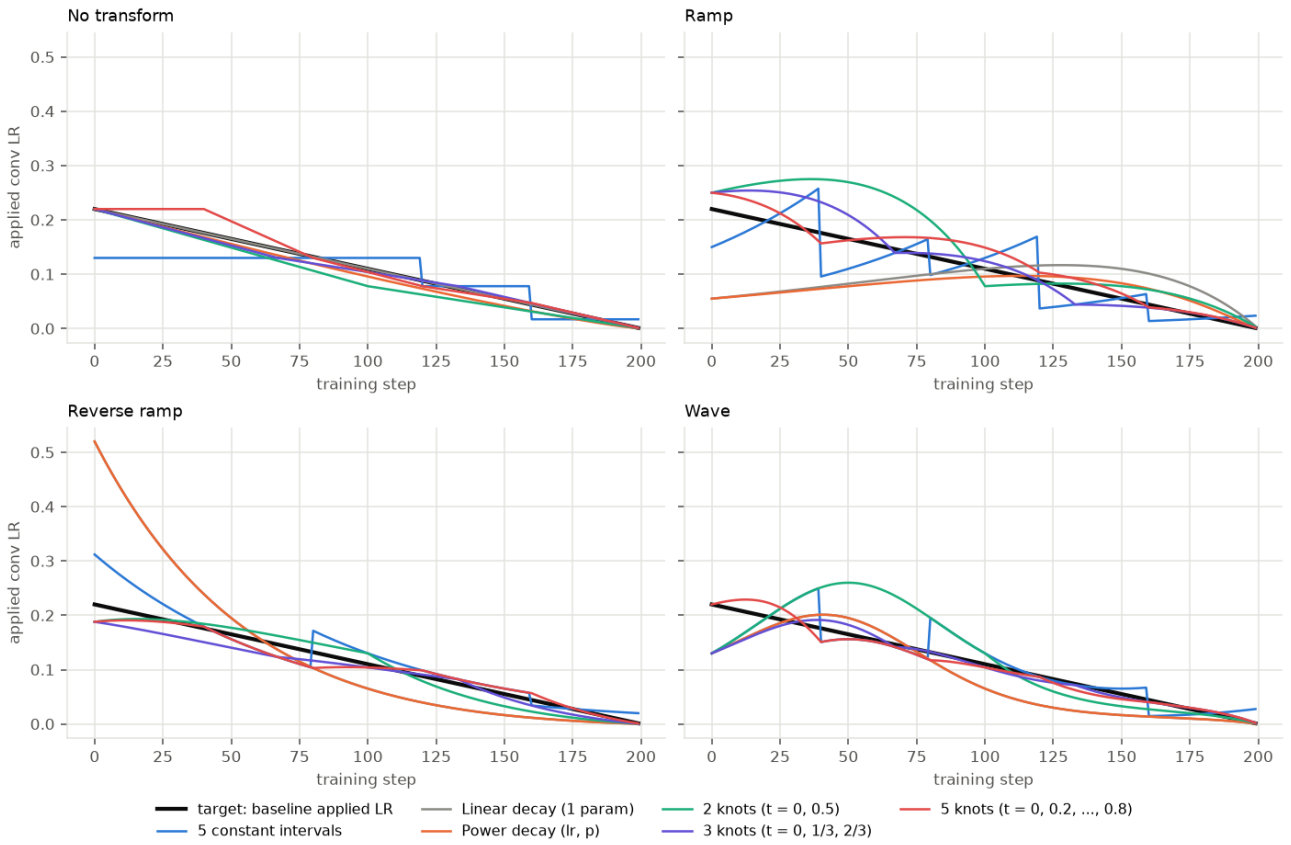


Figure 9. Applied conv LR of each family's final schedule (noise-aware search); the black line is the baseline's applied LR.

Observations

Held-out means over 8 seeds have a standard error of about 0.045 pp, so differences below about 0.1 pp between cells are not resolved. Target: the baseline's 93.92.

The search's own score is now honest. Its final score (the mean over the seeds the search ran it on) is 0.03 pp below the held-out score on average (SD 0.06 over the 24 searches); in Experiment 3 the seed-0 score was 0.15 pp above it (SD 0.15), the winner's curse. Example, 5 constant intervals without a transform: search 93.77, held-out 93.80 (Experiment 3: 93.99 on seed 0, 93.62 held-out).

It does not make the start worse: no final schedule is worse than its start by more than 0.05 pp held-out (mean gain +0.14 pp over the 24 searches); in Experiment 3, 5 of 24 finals were worse than their start by more than 0.05 pp.

It is conservative. It made 0-2 moves per search (Experiment 3: 0-6), and 17 of 24 searches stopped at the 8-seed cap with undecided neighbours: with 8 seeds, a move needs a measured gain of about 0.08-0.12 pp (z = 1.28-2.05 times 0.06 pp), so smaller true gains are left on the table. Against Experiment 3 the held-out results are +0.03 pp

on average: better by more than 0.1 pp in 7 cells (e.g. 5 intervals 93.80 vs 93.62, linear and power under the reverse ramp 93.86 vs 93.59, 2 knots 94.03 vs 93.86), worse in 3 (power under the ramp 93.70 vs 93.95, 5 intervals under the wave 93.60 vs 93.82, 2 knots under the ramp 93.64 vs 93.77), where Experiment 3's longer single-seed walk happened to reach a better region (power, ramp: lr 0.36, p = 2, one and three grid steps from the start).

5 constant intervals without a transform reach 93.80, still below C4's 93.95 (Experiment 5): the search stopped at 0.13, 0.13, 0.13, 0.078, 0.017, three grid steps from C4 (0.13, 0.13, 0.078, 0.047, 0.01), with neighbours still undecided at 8 seeds.

Families: 5 knots is at the target in every condition (93.91-93.97) without moving, as its projected start already was. Linear decay cannot compensate the ramp (93.42, the do-nothing score), as in Experiment 3. The best family per condition: 2 knots 94.03 (no transform), 5 knots 93.91 (ramp, reverse ramp), 3 knots 94.06 (wave).

Cost: 1198 training runs for the 24 searches (Experiment 3: 270), 524 s per search on average (Experiment 3: 114 s), plus 16 held-out runs each.

Experiment 10. Representation quality of schedule families, guided search

Question

Experiment 3's single-seed search walked far but climbed on seed noise; Experiment 9's significance test removed the noise but rarely moved more than one grid step. Can a search that explores deeper on cheap single runs, pools them with a smooth fit, jumps several steps (and several parameters) at once, and accepts a move only on fresh seeds, get both?

Setup

Item	Value
As Experiment 3	baseline_bs2000, conv only (the others on the baseline); the same families, conditions, grids (LR x0.6, p x0.8) and starts; start and final retrained on held-out seeds 100-107
1. Explore	From the current schedule, along each parameter and direction, one grid step at a time, one run each on seed 0, while the run is not clearly worse than the best run on that line (score >= best - 0.84 x 0.12 pp x sqrt(2), one-sided 80%), up to 3 steps
2. Fit	Per parameter, a least-squares quadratic in the grid offset through that line's seed-0 runs (the current schedule's included): the smoothness prior pools 4-7 runs. Predicted gain of an offset = fit there - fit at the current schedule
3. Propose	Each parameter moved alone to its best fitted offset, and the joint move of every parameter with a positive predicted gain (gains summed, a separability prior); the 3 largest predicted gains
4. Verify	On fresh seeds 1-8 (never seed 0, which chose the candidates): better if the lower one-sided 80% bound of (candidate - current) > 0, ruled out if the upper bound < 0, Bonferroni over the candidates (z = 1.50 for 3), SE = 0.12 pp x sqrt(1/n_c + 1/n_current); otherwise one more seed for the current schedule and the undecided candidates, up to 8
Moves	Move to the better candidate with the highest mean and repeat; stop when no parameter is predicted to gain or no candidate proves better

Held-out TTA of the final schedule (Experiments 3 and 9 for comparison; the start; search cost)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	**93.52** (Exp. 3: 93.62; Exp. 9: 93.80; start 93.52; 0 moves, 53 runs)	**93.78** (Exp. 3: 93.65; Exp. 9: 93.68; start 93.32; 2 moves, 91 runs)	**93.73** (Exp. 3: 93.86; Exp. 9: 93.81; start 93.81; 2 moves, 97 runs)	**93.84** (Exp. 3: 93.82; Exp. 9: 93.60; start 93.11; 2 moves, 100 runs)
Linear decay (1 param)	**93.92** (Exp. 3: 93.86; Exp. 9: 93.92; start 93.92; 0 moves, 4 runs)	**93.42** (Exp. 3: 93.42; Exp. 9: 93.42; start 93.42; 0 moves, 4 runs)	**93.86** (Exp. 3: 93.59; Exp. 9: 93.86; start 93.57; 1 moves, 7 runs)	**93.91** (Exp. 3: 93.91; Exp. 9: 93.91; start 93.72; 1 moves, 8 runs)
Power decay (lr, p)	**93.92** (Exp. 3: 93.86; Exp. 9: 93.97; start 93.92; 0 moves, 9 runs)	**93.88** (Exp. 3: 93.95; Exp. 9: 93.70; start 93.42; 2 moves, 29 runs)	**93.85** (Exp. 3: 93.59; Exp. 9: 93.86; start 93.57; 2 moves, 30 runs)	**93.91** (Exp. 3: 93.91; Exp. 9: 93.91; start 93.72; 1 moves, 15 runs)
2 knots (t = 0, 0.5)	**93.86** (Exp. 3: 93.86; Exp. 9: 94.03; start 93.86; 0 moves, 5 runs)	**93.86** (Exp. 3: 93.77; Exp. 9: 93.64; start 93.14; 2 moves, 20 runs)	**93.85** (Exp. 3: 93.88; Exp. 9: 93.85; start 93.85; 0 moves, 16 runs)	**93.95** (Exp. 3: 93.83; Exp. 9: 93.79; start 93.72; 2 moves, 32 runs)
3 knots (t = 0, 1/3, 2/3)	**93.94** (Exp. 3: 93.86; Exp. 9: 93.94; start 93.94; 0 moves, 22 runs)	**93.88** (Exp. 3: 93.68; Exp. 9: 93.88; start 93.74; 1 moves, 25 runs)	**93.94** (Exp. 3: 93.78; Exp. 9: 93.90; start 93.90; 1 moves, 55 runs)	**94.06** (Exp. 3: 94.06; Exp. 9: 94.06; start 93.90; 1 moves, 34 runs)
5 knots (t = 0, 0.2, ..., 0.8)	**93.97** (Exp. 3: 93.94; Exp. 9: 93.97; start 93.97; 0 moves, 30 runs)	**93.91** (Exp. 3: 93.96; Exp. 9: 93.91; start 93.91; 0 moves, 50 runs)	**93.91** (Exp. 3: 93.91; Exp. 9: 93.91; start 93.91; 0 moves, 11 runs)	**93.97** (Exp. 3: 93.94; Exp. 9: 93.97; start 93.97; 0 moves, 22 runs)

Target: the baseline's 93.92 on the held-out seeds; do-nothing references as in Experiment 3 (ramp 93.42, reverse ramp 93.57, wave 93.72).

Final parameter values (fresh seeds behind the final mean, 'not verified' when the search stopped before testing any candidate; why it stopped)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	0.22, 0.13, 0.13, 0.078, 0.028 (8 seeds; none proved better)	0.36, 0.22, 0.078, 0.028, 0.0036 (8 seeds; none proved better)	0.047, 0.078, 0.13, 0.13, 0.047 (8 seeds; none proved better)	0.078, 0.078, 0.13, 0.078, 0.01 (8 seeds; none proved better)
Linear decay (1 param)	0.22 (not verified; no predicted gain)	0.22 (not verified; no predicted gain)	0.13 (1 seeds; no predicted gain)	0.13 (2 seeds; no predicted gain)
Power decay (lr, p)	0.22, 1 (not verified; no predicted gain)	0.36, 1.6 (2 seeds; none proved better)	0.13, 0.64 (3 seeds; none proved better)	0.13, 1 (2 seeds; no predicted gain)
2 knots (t = 0, 0.5)	0.22, 0.13 (not verified; no predicted gain)	0.6, 0.047 (1 seeds; no predicted gain)	0.047, 0.13 (3 seeds; none proved better)	0.017, 0.13 (3 seeds; no predicted gain)
3 knots (t = 0, 1/3, 2/3)	0.22, 0.13, 0.078 (4 seeds; none proved better)	1, 0.22, 0.028 (1 seeds; no predicted gain)	0.047, 0.078, 0.078 (8 seeds; none proved better)	0.13, 0.078, 0.13 (4 seeds; no predicted gain)
5 knots (t = 0, 0.2, ..., 0.8)	0.22, 0.22, 0.13, 0.078, 0.047 (5 seeds; none proved better)	1, 0.36, 0.22, 0.078, 0.017 (8 seeds; none proved better)	0.047, 0.078, 0.078, 0.13, 0.13 (not verified; no predicted gain)	0.22, 0.078, 0.078, 0.13, 0.078 (3 seeds; none proved better)

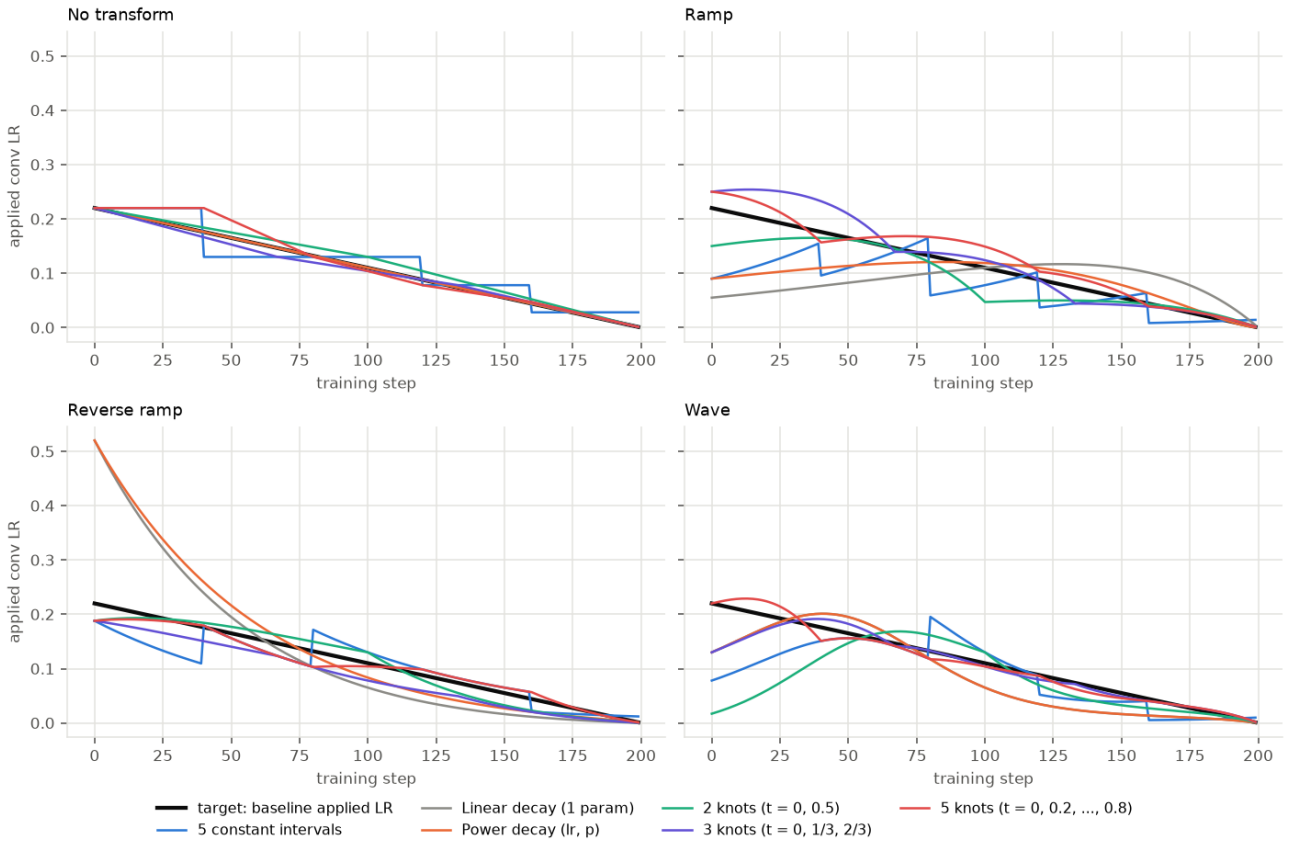


Figure 10. Applied conv LR of each family's final schedule (guided search); the black line is the baseline's applied LR.

Observations

Held-out means over 8 seeds have a standard error of about 0.045 pp, so differences below about 0.1 pp between cells are not resolved. Target: the baseline's 93.92.

Overall the guided search is slightly ahead at lower cost, but not decisively. Mean held-out TTA over the 24 cells: 93.86 (Experiment 9: 93.85, Experiment 3: 93.81); 14 cells within 0.05 pp of the target or above (Experiment 9: 13, Experiment 3: 9). Against Experiment 9 it is better by more than 0.1 pp in 4 cells (5 intervals under the wave 93.84 vs 93.60, power under the ramp 93.88 vs 93.70, 2 knots under the ramp 93.86 vs 93.64 and under the wave 93.95 vs 93.79) and worse in 2 (5 intervals without a transform 93.52 vs 93.80, 2 knots without a transform 93.86 vs 94.03). Cost: 769 training runs for the 24 searches (Experiment 9: 1198, Experiment 3: 270), 337 s per search on average (524 s, 114 s).

Deeper moves happen. Under the ramp, power reached lr 0.36, p = 1.6 (93.88; Experiment 3's lucky walk found lr 0.36, p = 2 at 93.95, Experiment 9 stopped at p = 1.2 with 93.70), and 2 knots reached 0.6, 0.047 (93.86 vs 93.64); 20 accepted moves in total (Experiment 9: 16), several of them multi-step or joint.

The fresh-seed gate keeps the search honest: the final schedule's search score is 0.02 pp above its held-out score on average (SD 0.075, over the 19 searches that verified their final; Experiment 9: -0.03, Experiment 3: +0.15), and only one final is worse than its start by more than 0.05 pp (5 intervals under the reverse ramp, 93.73 vs 93.81).

The weak point is candidate selection. The seed-0 runs along each line carry the same 0.12 pp noise as the effects being measured, so the quadratic fits often follow noise to the end of the explored range. 5 intervals without a transform shows it: the fit sent v0 three steps down to 0.047 on one lucky run (+0.14 pp predicted), the joint move summed four such noisy gains (+0.48 pp predicted), and with v4 to 0.01 these filled all 3 candidate slots; on fresh seeds they measured -0.16, +0.02 and -0.08 pp, so the search stopped at its start (93.52). The first step toward C4, v2 one step down to 0.078, was predicted only +0.05 pp and never tested (v3's line predicted no gain).

Five searches stopped in their first round without testing any candidate (no parameter predicted to gain; 'not verified' in the table); their final is the start.

Likely fixes, not run: rank candidates by predicted gain relative to the fit's own standard error rather than by the raw gain, build the joint move only from parameters whose fitted gain is clearly positive, and test the single-parameter moves before the joint one.

Experiment 11. Representation quality of schedule families, guided search with uncertainty-aware selection

Question

Experiment 10's weak point was candidate selection: quadratic fits through noisy single runs followed noise to the end of the explored range, and a joint move summing those noisy gains crowded out the real improvements. Does ranking by the fit's lower confidence bound, building the joint move only from clearly positive parameters, and testing single moves first fix it?

Setup

Item	Value
As Experiment 10	Same families, conditions, starts, exploration (one seed-0 run per point, up to 3 steps per direction), quadratic fit per parameter, fresh-seed verification (seeds 1-8, one-sided 80%, Bonferroni over the candidates raced together) and held-out evaluation
Fit uncertainty	The SE of each fitted gain (fit at the offset - fit at the current schedule) from the regression with 0.12 pp noise per run: large where the fit extrapolates or rests on few points
Offset choice	Per parameter, the offset (other than the current one) with the highest lower bound, gain - 0.84 SE
Candidates	Single-parameter moves with a positive fitted gain, ranked by that lower bound; the best 3 are raced first. Only if none proves better: the joint move of the parameters whose lower bound is above 0 (at least 2), raced alone

Held-out TTA of the final schedule (Experiments 9 and 10 for comparison; the start; search cost)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	**93.52** (Exp. 9: 93.80; Exp. 10: 93.52; start 93.52; 0 moves, 63 runs)	**93.74** (Exp. 9: 93.68; Exp. 10: 93.78; start 93.32; 2 moves, 100 runs)	**93.73** (Exp. 9: 93.81; Exp. 10: 93.73; start 93.81; 2 moves, 94 runs)	**93.66** (Exp. 9: 93.60; Exp. 10: 93.84; start 93.11; 1 moves, 47 runs)
Linear decay (1 param)	**93.92** (Exp. 9: 93.92; Exp. 10: 93.92; start 93.92; 0 moves, 4 runs)	**93.42** (Exp. 9: 93.42; Exp. 10: 93.42; start 93.42; 0 moves, 4 runs)	**93.86** (Exp. 9: 93.86; Exp. 10: 93.86; start 93.57; 1 moves, 7 runs)	**93.91** (Exp. 9: 93.91; Exp. 10: 93.91; start 93.72; 1 moves, 8 runs)
Power decay (lr, p)	**93.92** (Exp. 9: 93.97; Exp. 10: 93.92; start 93.92; 0 moves, 9 runs)	**93.88** (Exp. 9: 93.70; Exp. 10: 93.88; start 93.42; 2 moves, 29 runs)	**93.85** (Exp. 9: 93.86; Exp. 10: 93.85; start 93.57; 3 moves, 44 runs)	**93.91** (Exp. 9: 93.91; Exp. 10: 93.91; start 93.72; 1 moves, 15 runs)
2 knots (t = 0, 0.5)	**93.86** (Exp. 9: 94.03; Exp. 10: 93.86; start 93.86; 0 moves, 5 runs)	**93.86** (Exp. 9: 93.64; Exp. 10: 93.86; start 93.14; 2 moves, 19 runs)	**93.85** (Exp. 9: 93.85; Exp. 10: 93.85; start 93.85; 0 moves, 16 runs)	**93.93** (Exp. 9: 93.79; Exp. 10: 93.95; start 93.72; 1 moves, 44 runs)
3 knots (t = 0, 1/3, 2/3)	**93.94** (Exp. 9: 93.94; Exp. 10: 93.94; start 93.94; 0 moves, 22 runs)	**93.88** (Exp. 9: 93.88; Exp. 10: 93.88; start 93.74; 1 moves, 25 runs)	**93.94** (Exp. 9: 93.90; Exp. 10: 93.94; start 93.90; 1 moves, 50 runs)	**94.06** (Exp. 9: 94.06; Exp. 10: 94.06; start 93.90; 1 moves, 27 runs)
5 knots (t = 0, 0.2, ..., 0.8)	**93.97** (Exp. 9: 93.97; Exp. 10: 93.97; start 93.97; 0 moves, 30 runs)	**93.93** (Exp. 9: 93.91; Exp. 10: 93.91; start 93.91; 2 moves, 130 runs)	**93.91** (Exp. 9: 93.91; Exp. 10: 93.91; start 93.91; 0 moves, 11 runs)	**93.97** (Exp. 9: 93.97; Exp. 10: 93.97; start 93.97; 0 moves, 22 runs)

Target: the baseline's 93.92 on the held-out seeds; do-nothing references as in Experiment 3 (ramp 93.42, reverse ramp 93.57, wave 93.72).

Final parameter values (fresh seeds behind the final mean, 'not verified' when the search stopped before testing any candidate; why it stopped)

Family	No transform	Ramp	Reverse ramp	Wave
5 constant intervals	0.22, 0.13, 0.13, 0.078, 0.028 (8 seeds; none proved better)	0.6, 0.22, 0.13, 0.028, 0.0036 (8 seeds; none proved better)	0.047, 0.078, 0.13, 0.13, 0.047 (8 seeds; none proved better)	0.13, 0.078, 0.13, 0.13, 0.017 (5 seeds; none proved better)
Linear decay (1 param)	0.22 (not verified; no predicted gain)	0.22 (not verified; no predicted gain)	0.13 (1 seeds; no predicted gain)	0.13 (2 seeds; no predicted gain)
Power decay (lr, p)	0.22, 1 (not verified; no predicted gain)	0.36, 1.6 (2 seeds; none proved better)	0.13, 0.64 (3 seeds; none proved better)	0.13, 1 (2 seeds; no predicted gain)
2 knots (t = 0, 0.5)	0.22, 0.13 (not verified; no predicted gain)	0.6, 0.047 (1 seeds; no predicted gain)	0.047, 0.13 (3 seeds; none proved better)	0.078, 0.13 (8 seeds; none proved better)
3 knots (t = 0, 1/3, 2/3)	0.22, 0.13, 0.078 (4 seeds; none proved better)	1, 0.22, 0.028 (1 seeds; no predicted gain)	0.047, 0.078, 0.078 (8 seeds; none proved better)	0.13, 0.078, 0.13 (3 seeds; no predicted gain)
5 knots (t = 0, 0.2, ..., 0.8)	0.22, 0.22, 0.13, 0.078, 0.047 (5 seeds; none proved better)	0.6, 0.36, 0.22, 0.047, 0.01 (8 seeds; none proved better)	0.047, 0.078, 0.078, 0.13, 0.13 (not verified; no predicted gain)	0.22, 0.078, 0.078, 0.13, 0.078 (3 seeds; none proved better)

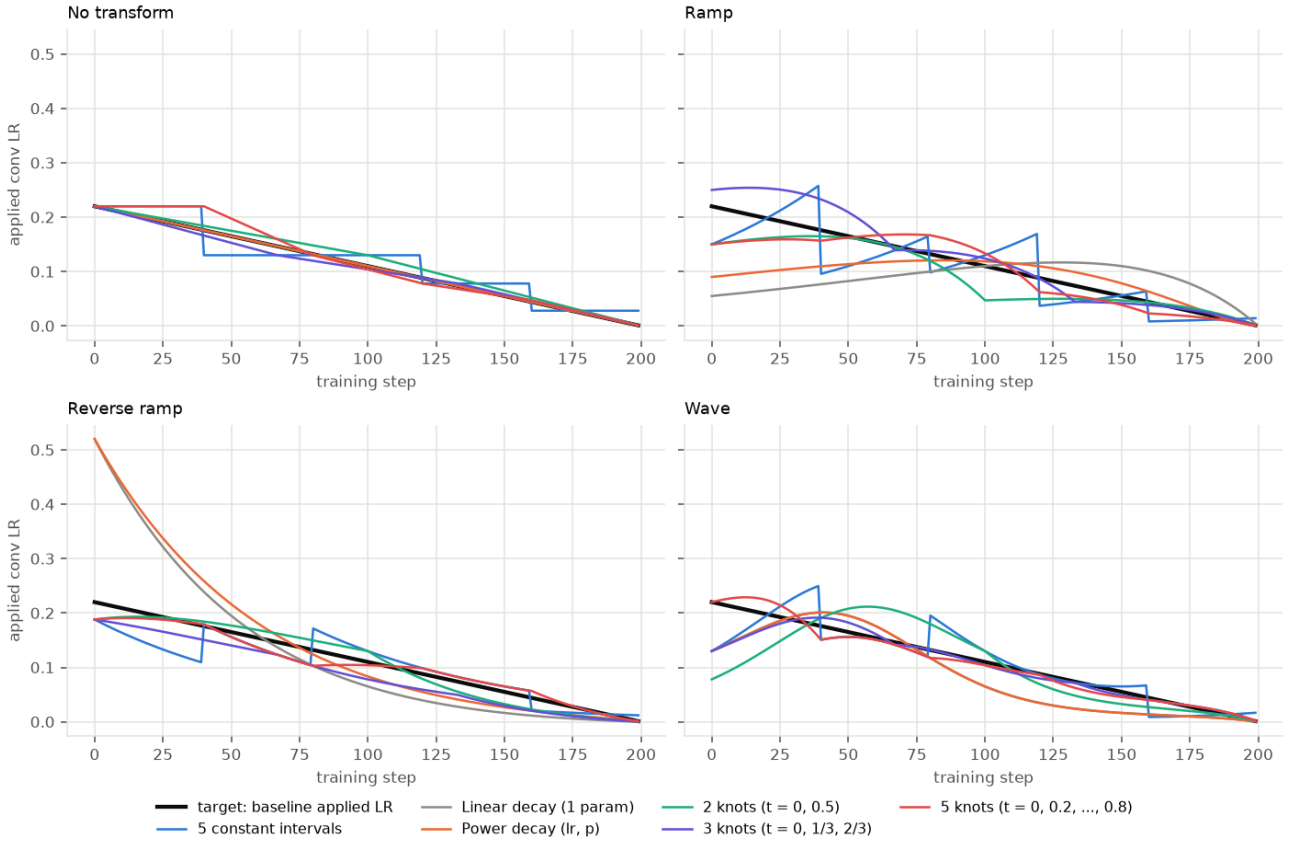


Figure 11. Applied conv LR of each family's final schedule (guided search, uncertainty-aware selection); the black line is the baseline's applied LR.

The 2-day campaign: constant intervals with a cooldown search (Experiments 12 on)

Goal (set by the user on 2026-10-17): a search over constant-interval LR schedules with a cooldown lookahead that matches the baseline's held-out TTA at batch sizes 2000, 500 and 125, under the transforms (ramp, reverse ramp, wave) and with either conv's LR (other groups on the baseline) or all four LRs (from 1.0) searched, using at most 20 full runs' worth of training steps (every trained step counts; held-out evaluation does not). Targets on held-out seeds 100-107: 93.92 (BS 2000), 94.00 (BS 500), 93.86 (BS 125); one held-out mean has a standard error of about 0.045 pp, so 'matching' here means within about 0.1 pp.

The searches are run_ics_search in train_cifar.py (configs ics_v<N>_<a|b>_bs<BS>[_transform], a = conv only, b = 4 LRs); each version is run with 2 search seeds per cell. Experiments 12, 16, 17, 18 and 20 are probes that

shaped the versions; 13-15, 19, 21 and 22 compare the versions.

Campaign summary: the current algorithm (ICS v29)

Step	What it does (budget in full runs; it scales with the run's length)
Representation	During the search each searched LR is 5 constant intervals (spec values; a transform applies on top), on the x0.6 grid. The committed schedule joins the 5 values piecewise linearly through the interval midpoints, the end half-intervals continuing the slope (Experiment 24)
Two searches	The search below runs twice, each from initialization with its own data order and half of the budget; the two 5-interval schedules are averaged (geometric mean). Steps are kept back so each search always finishes within its share
Levels (4 LRs only)	First search, interval 1, from 1.0: conv on a x7.7 grid (best score), then head and both biases together on a x7.7 grid, keeping the largest level within 1 pp of the best, each scored after the interval plus one interval at 0.22 x the value (~4-5 runs); the second search reuses these levels. Later, head and the biases follow conv's interval-to-interval profile
Pass 1	Each interval in order: climb conv from the previous interval's value (smaller values first, moving while the score improves); a candidate's score is the interval plus one interval at 0.22 x the candidate. This finds the schedule's shape cheaply, transform included, but is biased toward small LRs (Experiment 12)
Shift	Pass 1's conv schedule, except its last interval, is moved one grid step up (the bias correction; with 4 LRs the other groups keep their scanned levels)
Pass 2	From the initial state again: each interval, the first included, climbs at most one grid step from the shifted plan, a candidate scored by the interval plus the rest of the run on the plan (the plan's tail unscaled); the last interval averages 2 continuations with fresh data order when the budget allows
Budget	Every trained step counts; at most 20 full runs (the searches use 20)

Held-out TTA of ICS v29 (mean over search seeds; vs the baseline in brackets)

Batch size	none	ramp	reverse ramp	wave
BS 2000, conv only (93.92)	**93.84** (-0.08; 12 seeds)	**93.89** (-0.03; 12 seeds)	**93.87** (-0.05; 12 seeds)	**93.86** (-0.06; 12 seeds)
BS 2000, 4 LRs (93.92)	**93.74** (-0.18; 12 seeds)	**93.85** (-0.07; 12 seeds)	**93.81** (-0.11; 12 seeds)	**93.86** (-0.06; 12 seeds)
BS 500, conv only (94.00)	**93.95** (-0.05; 12 seeds)	**93.94** (-0.05; 12 seeds)	**93.96** (-0.03; 12 seeds)	**93.96** (-0.03; 12 seeds)
BS 500, 4 LRs (94.00)	**94.02** (+0.02; 12 seeds)	**93.96** (-0.04; 12 seeds)	**93.89** (-0.10; 12 seeds)	**93.97** (-0.03; 12 seeds)
BS 125, conv only (93.86)	**93.87** (+0.01; 12 seeds)	**93.89** (+0.03; 12 seeds)	**93.88** (+0.02; 12 seeds)	**93.90** (+0.04; 12 seeds)
BS 125, 4 LRs (93.86)	**93.85** (-0.01; 12 seeds)	**94.06** (+0.20; 12 seeds)	**94.02** (+0.16; 12 seeds)	**93.94** (+0.08; 12 seeds)

Previous summaries: v24 (4 LRs) and v19 (conv only), 10 constant intervals, one search; see Experiments 22-25 for the steps between.

Observations

Where the mandate stands. Within the 20-run budget, v29 matches the baseline (within 0.1 pp of the held-out mean) in all 12 conv-only cells at all three batch sizes and under all three transforms, over 12 search seeds (0.023 pp short on average, worst 0.08 pp) and again on fresh seeds 200-207 (Experiment 30). With all 4 LRs searched from 1.0 it is 0.012 pp short on average and matches in 9 of 12 cells over 12 search seeds (8 of 12 on seeds 200-207); the cells it misses are BS 2000 without a transform (93.74, 0.18 pp short) and under the reverse ramp (93.81) and BS 500 under the reverse ramp (93.89), the last two by 0.11 pp; on the fresh seeds BS 2000 under the ramp also falls 0.11 pp short.

What the 4-LR misses are, and what did not fix them: they come from setting head's and the biases' levels with a short horizon. One common level, the largest within 1 pp after a one-interval cooldown, is right on average (moving head alone x0.36 or x2.78 loses 0.1 pp, Experiment 25), but at BS 2000 head wants a level above the biases' (head x7.7 scores 93.91 / 93.83 without a transform). Scanning head on its own (v35) fixes BS 2000 and wrecks the ramp cells, because a short horizon accepts head levels that blow up late in the run; a rest-of-run head relevel (v31) finds no budget; lowering the common level (v42), a cheaper scan (v34), smoothing, a linear decay for the other groups, a finer second-pass grid (v33), a third search (v32), a trend-started first pass (v38) and 4 or 8 intervals (v40, v41) do not close the gap (Experiments 27-29). Conv only, the search is at the ceiling of what 5 grid values joined linearly can represent (Experiment 26).

Generality: under two transforms held back until v29 was final (Experiment 31, 8 search seeds) it matches in only 3 of 12 cells. It handles a steeper ramp conv only (within 0.14 pp) but not with 4 LRs at BS 2000 and 500 (0.45 and 0.19 pp short), and it fails under the inverted wave conv only (0.18-0.30 pp short, barely above doing nothing) and with 4 LRs at BS 2000 (0.74 pp short), because its first pass's short cooldown sets the interval in the wave's trough too low and the second pass cannot raise it against the plan's tail.

Experiment 12. Which lookahead decides constant intervals like the final result, and how noisy is it?

Question

An interval search commits each constant interval by scoring candidates with a lookahead from the same trained state. Which lookahead ranks the candidates like their true effect on the final score, and how noisy is one seed's comparison of two candidates scored from the same state?

Setup

Item	Value
Plans	conv as 5 constant intervals, the other groups on the baseline. BS 2000: C4 (0.13, 0.13, 0.078, 0.047, 0.01; matches the baseline, Experiment 5); BS 500 and 125: the q = 0.75 staircases of Experiment 16 (0.11, 0.085, 0.058, 0.033, 0.0065 and 0.04, 0.031, 0.021, 0.012, 0.0024)
Candidates	At interval k, from the plan's trained state: the plan's value moved -2..+2 grid steps (x0.6), trained for the interval
Scores	truth: the rest of the run on the plan (what the decision affects); rest_lin: the rest of the run with conv decaying linearly from the candidate to 0; c40_m: one interval (a fifth of the run) at m x candidate (m = 0.6, 0.36, 0.22); l40: one interval decaying linearly to 0
Seeds	BS 2000 and 500: 8 (0-7), BS 125: 4; each seed is its own run from initialization
Decision quality	1-seed hit: how often one seed's best candidate by the score is the candidate with the best mean truth; regret: the mean, over seeds, of the mean truth lost by that pick (pp)

BS 2000 (8 seeds): mean pick; 1-seed hit rate; 1-seed regret (pp of final TTA)

Interval (best by truth)	truth	rest_lin	c40_0.22	c40_0.36	c40_0.6	l40
1 (0.22)	0.22; 0.25; 0.039	0.13; 0.38; 0.001	0.22; 0.38; 0.001	0.13; 0.00; 0.001	0.078; 0.00; 0.032	0.13; 0.00; 0.001
2 (0.13)	0.13; 0.50; 0.028	0.13; 0.88; 0.011	0.078; 0.38; 0.082	0.078; 0.00; 0.115	0.047; 0.00; 0.294	0.078; 0.12; 0.079
3 (0.078)	0.078; 0.62; 0.009	0.078; 0.62; 0.017	0.078; 0.50; 0.046	0.047; 0.12; 0.080	0.028; 0.00; 0.134	0.047; 0.25; 0.068
4 (0.047)	0.047; 0.50; 0.029	0.047; 0.25; 0.050	0.047; 0.50; 0.029	0.028; 0.25; 0.037	0.028; 0.00; 0.083	0.047; 0.25; 0.050
5 (0.01)	0.01; 0.50; 0.027	-	-	-	-	-

BS 500 (8 seeds): mean pick; 1-seed hit rate; 1-seed regret (pp of final TTA)

Interval (best by truth)	truth	rest_lin	c40_0.22	c40_0.36	c40_0.6	l40
1 (0.078)	0.078; 0.38; 0.027	0.078; 0.88; 0.006	0.078; 0.88; 0.006	0.078; 1.00; 0.000	0.047; 0.25; 0.035	0.078; 1.00; 0.000
2 (0.078)	0.078; 0.25; 0.016	0.047; 0.38; 0.013	0.047; 0.00; 0.021	0.047; 0.00; 0.074	0.028; 0.00; 0.126	0.047; 0.00; 0.021
3 (0.028)	0.028; 0.38; 0.019	0.028; 0.25; 0.008	0.028; 0.88; 0.012	0.028; 0.62; 0.024	0.017; 0.25; 0.071	0.028; 0.75; 0.001
4 (0.028)	0.028; 0.75; 0.029	0.028; 0.50; 0.059	0.028; 0.75; 0.019	0.017; 0.50; 0.039	0.017; 0.12; 0.068	0.028; 0.50; 0.059
5 (0.006)	0.006; 0.25; 0.018	-	-	-	-	-

BS 125 (4 seeds): mean pick; 1-seed hit rate; 1-seed regret (pp of final TTA)

Interval (best by truth)	truth	rest_lin	c40_0.22	c40_0.36	c40_0.6	l40
1 (0.028)	0.028; 0.50; 0.017	0.028; 1.00; 0.000	0.028; 0.75; 0.009	0.028; 1.00; 0.000	0.028; 0.75; 0.023	0.028; 1.00; 0.000
2 (0.047)	0.047; 0.50; 0.005	0.028; 0.00; 0.051	0.017; 0.00; 0.132	0.017; 0.00; 0.167	0.01; 0.00; 0.163	0.017; 0.00; 0.132
3 (0.017)	0.017; 0.50; 0.036	0.017; 0.75; 0.018	0.01; 0.00; 0.072	0.01; 0.00; 0.072	0.01; 0.00; 0.089	0.01; 0.00; 0.081
4 (0.01)	0.01; 0.75; 0.017	0.01; 0.75; 0.051	0.01; 0.50; 0.069	0.006; 0.25; 0.052	0.006; 0.00; 0.175	0.01; 0.75; 0.051
5 (0.0036)	0.0036; 0.50; 0.039	-	-	-	-	-

Noise of one seed's comparison of two candidates

Interval	Noise of a paired comparison at BS 2000 (SD over seeds of candidate - plan value, pp): truth / rest_lin
1	0.047: 0.23 / 0.17; 0.078: 0.27 / 0.22; 0.22: 0.24 / 0.15; 0.36: 0.25 / 0.19
2	0.047: 0.20 / 0.17; 0.078: 0.12 / 0.16; 0.22: 0.21 / 0.14; 0.36: 0.16 / 0.25
3	0.028: 0.16 / 0.19; 0.047: 0.14 / 0.19; 0.13: 0.15 / 0.22; 0.22: 0.20 / 0.16
4	0.017: 0.10 / 0.09; 0.028: 0.10 / 0.07; 0.078: 0.17 / 0.13; 0.13: 0.15 / 0.19
5	0.0036: 0.07 / -; 0.006: 0.06 / -; 0.017: 0.10 / -; 0.028: 0.13 / -

A common cooldown level (second probe series, same plans and seeds): 1-seed regret per interval (intervals 1-4) and mean, pp

Batch size	c40_0.22	a40_0.22	a40_0.6	a40_1	rest_lin
BS 2000	0.001 / 0.082 / 0.046 / 0.029 (mean 0.039)	0.001 / 0.045 / 0.068 / 0.029 (mean 0.036)	0.000 / 0.017 / 0.012 / 0.167 (mean 0.049)	0.018 / 0.017 / 0.097 / 0.146 (mean 0.070)	0.001 / 0.011 / 0.017 / 0.050 (mean 0.020)
BS 500	0.006 / 0.021 / 0.012 / 0.019 (mean 0.015)	0.012 / 0.019 / 0.013 / 0.029 (mean 0.018)	0.026 / 0.029 / 0.003 / 0.118 (mean 0.044)	0.040 / 0.039 / 0.023 / 0.203 (mean 0.076)	0.006 / 0.013 / 0.008 / 0.059 (mean 0.021)

a40_m: one interval at m x the plan's value for the interval, the same for every candidate (a candidate-relative cooldown, c40_m, also scales the cooldown with the candidate).

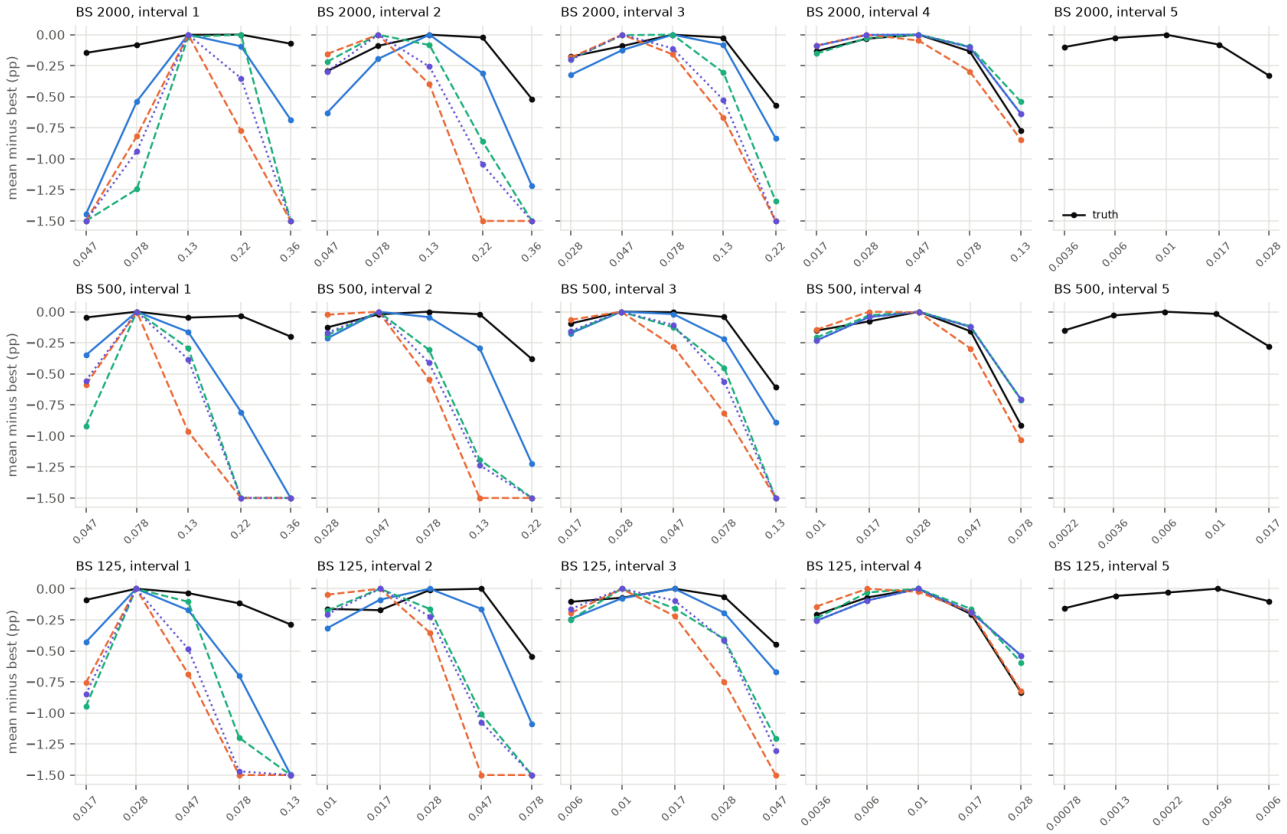


Figure 12. Each score's mean per candidate over seeds, relative to its own best (points below -1.5 drawn at -1.5). A lookahead decides like the truth when its curve peaks where the truth's does.

Observations

The rest-of-run linear lookahead decides like the truth: its 8-seed pick is the truth's best in intervals 2-4 (interval 5 has no lookahead), and in interval 1 it picks 0.13 where the truth ties 0.13 and 0.22 (93.83 both). One seed's pick by it loses 0.001-0.050 pp of final TTA per interval, about what one seed's pick by the truth itself loses (0.009-0.039): the truth is flat near its optimum, so a neighbouring pick costs little.

One-interval (40-step) lookaheads are biased toward small LRs once training is under way: in interval 2 every one of them picks 0.047-0.078 where the truth peaks at 0.13 (regret 0.08-0.29 pp per seed), and c40_0.6 picks 1-2 grid steps below the truth's best in intervals 2-4. The mildest cooldown, c40_0.22, is the least biased (regret 0.03-0.08 pp from interval 2 on) but still loses to rest_lin in intervals 2 and 3.

Scoring candidates from the same trained state does not cancel the seed noise: one seed's difference between two candidates' truths has an SD of 0.12-0.27 pp in intervals 1-2, as large as two independent full runs (0.17), falling to 0.06-0.17 pp in intervals 4-5 as fewer steps remain. Differences of 0.05-0.1 pp between neighbouring candidates are therefore not resolved by one seed, but they also cost little.

Cost at BS 2000: rest_lin costs the rest of the run per candidate (200, 160, 120, 80, 40 steps for intervals 1-5), so about 3 candidates per interval cost 1800 steps = 9 x a run for one searched LR, within the campaign's 20x budget.

At BS 500 (8 seeds) and BS 125 (4 seeds) the picture is the same, with flatter optima. The truth's top two or three candidates in each interval are within about 0.05 pp of each other, so one seed's pick by any good score costs little (rest_lin: 0.006-0.059 pp per interval at BS 500, 0.000-0.051 at BS 125). The short cooldowns again pick low where training is under way: at BS 125, interval 2, they pick 0.01-0.017 where the truth peaks at 0.047 (regret 0.13-0.17 pp), and in interval 3 they pick 0.01 for the truth's 0.017; at BS 500 the 0.22 x cooldown is one step low in interval 2 only (0.047 for 0.078). Over all three batch sizes, one seed's decision costs on average 0.020 pp with rest_lin and 0.036 pp with c40_0.22; picking the largest candidate within 0.1-0.3 pp of the best instead does not reduce either (noise, not bias, dominates single decisions).

A cooldown at a common level for all candidates (a40_m, second probe series) does not remove the short horizon's bias. At 0.22 x the plan's value it decides like the candidate-relative 0.22 x cooldown (mean 1-seed regret 0.036 vs 0.040 pp at BS 2000, 0.018 vs 0.015 at BS 500). A higher common level, 0.6, removes the low bias in the early intervals at BS 2000 (it picks the truth's best in intervals 1-3) but is biased high late (interval 4: 0.078 for the truth's 0.047, regret 0.17 pp) and at BS 500 it is no better early either (interval 1: 0.13 for the truth's 0.078). The

bias depends on the batch size and on where in the run the decision is, so no fixed cooldown level calibrates it; the searches instead correct it by shifting the first pass's plan up a grid step (ICS v16) and refining with the rest-of-run lookahead.

Experiment 13. ICS v1: constant intervals with a rest-of-run lookahead, all batch sizes and transforms

Question

Does the interval-cooldown search, with the lookahead Experiment 12 found faithful, match the baseline at batch sizes 2000, 500 and 125, with and without transforms, searching conv only or all four LRs, within 20 full runs?

Setup

Item	Value
Representation	Each searched LR: 5 constant intervals (spec values; the transform applies on top), on the x0.6 grid
Per interval	Climb the lead LR (conv) from the previous interval's value, smaller values first, moving while the score improves. A candidate's score: train the interval from the committed state, then the rest of the run with every searched LR decaying linearly from its candidate value to 0 (rest_lin); the last interval is scored by the final TTA. Commit the best and continue from its trained state
Conv only (a)	conv from its baseline initial LR; head, norm_bias, whiten_bias on the baseline
4 LRs (b)	All four from 1.0. Interval 1: each LR's level is scanned on a x7.7 grid (both neighbours first, then the better side while improving), scored after the interval plus one interval at 0.36 x the value; then conv is refined on the x0.6 grid with rest_lin. Later intervals: conv is climbed and the other three follow its profile (value_k = value_1 x conv_k / conv_1)
Budget	At most 20 full runs of train steps (every trained step counts); the transform applies to the searched groups
Evaluation	2 search seeds (0, 1) per cell; each committed schedule retrained on held-out seeds 100-107

Held-out TTA (mean over search seeds; vs the baseline; per search seed); cost in full runs

Batch size, scenario (baseline)	none	ramp	reverse ramp	wave
BS 2000, conv only (93.92)	**93.82** (-0.10; 93.82/93.82); 10.0x	**93.15** (-0.77; 93.19/93.11); 10.6x; do-nothing 93.42	**93.80** (-0.12; 93.81/93.79); 11.0x; do-nothing 93.57	**93.54** (-0.38; 93.61/93.46); 9.6x; do-nothing 93.72
BS 2000, 4 LRs (93.92)	**92.85** (-1.07; 93.68/92.01); 17.2x	**91.65** (-2.27; 90.82/92.48); 15.6x; do-nothing 93.25	**93.70** (-0.22; 93.89/93.51); 15.2x; do-nothing 93.45	**92.17** (-1.75; 91.94/92.40); 15.6x; do-nothing 93.68
BS 500, conv only (94.00)	**93.84** (-0.16; 93.75/93.92); 9.4x	**93.40** (-0.60; 93.27/93.53); 10.4x; do-nothing 93.37	**93.88** (-0.11; 93.95/93.82); 11.8x; do-nothing 93.68	**93.50** (-0.50; 93.25/93.75); 10.4x; do-nothing 93.77
BS 500, 4 LRs (94.00)	**93.58** (-0.42; 93.53/93.62); 15.8x	**92.93** (-1.07; 92.79/93.07); 16.6x; do-nothing 93.32	running	running
BS 125, conv only (93.86)	**93.73** (-0.13; 93.70/93.76); 9.6x	running	**93.66** (-0.20; 93.72/93.60); 10.2x; do-nothing 93.68	running
BS 125, 4 LRs (93.86)	running	running	running	running

Cells within 0.1 pp of the baseline (about 2 SE of an 8-seed mean) or above: 1 of 16 finished. * = the search hit its step budget. Do-nothing: the baseline schedule kept under the transform.

Committed schedules (search seed 0)

Cell	Committed schedules (search seed 0)
BS 2000, conv only, none	conv: 0.13, 0.13, 0.13, 0.047, 0.006
BS 2000, conv only, ramp	conv: 0.13, 0.13, 0.047, 0.017, 0.0036
BS 2000, conv only, reverse ramp	conv: 0.078, 0.13, 0.078, 0.078, 0.028
BS 2000, conv only, wave	conv: 0.22, 0.13, 0.13, 0.078, 0.01
BS 2000, 4 LRs, none	conv: 0.13, 0.13, 0.047, 0.028, 0.006; head: 3500, 3500, 1300, 750, 160; norm_bias: 0.13, 0.13, 0.047, 0.028, 0.006; whiten_bias: 460, 460, 170, 99, 21
BS 2000, 4 LRs, ramp	conv: 0.13, 0.13, 0.047, 0.017, 0.0022; head: 1, 1, 0.36, 0.13, 0.017; norm_bias: 1, 1, 0.36, 0.13, 0.017; whiten_bias: 0.13, 0.13, 0.047, 0.017, 0.0022
BS 2000, 4 LRs, reverse ramp	conv: 0.078, 0.078, 0.078, 0.078, 0.028; head: 460, 460, 460, 460, 170; norm_bias: 60, 60, 60, 60, 22; whiten_bias: 1, 1, 1, 1, 0.36
BS 2000, 4 LRs, wave	conv: 0.13, 0.13, 0.078, 0.078, 0.01; head: 1, 1, 0.6, 0.6, 0.077; norm_bias: 1, 1, 0.6, 0.6, 0.077; whiten_bias: 1, 1, 0.6, 0.6, 0.077
BS 500, conv only, none	conv: 0.078, 0.078, 0.047, 0.047, 0.01
BS 500, conv only, ramp	conv: 0.078, 0.078, 0.028, 0.01, 0.0022
BS 500, conv only, reverse ramp	conv: 0.028, 0.047, 0.047, 0.028, 0.017
BS 500, conv only, wave	conv: 0.13, 0.13, 0.078, 0.047, 0.01
BS 500, 4 LRs, none	conv: 0.078, 0.047, 0.047, 0.028, 0.006; head: 460, 280, 280, 170, 35; norm_bias: 0.017, 0.01, 0.01, 0.0061, 0.0013; whiten_bias: 7.7, 4.6, 4.6, 2.8, 0.59
BS 500, 4 LRs, ramp	conv: 0.078, 0.047, 0.028, 0.01, 0.0013; head: 3500, 2100, 1300, 450, 58; norm_bias: 7.7, 4.6, 2.8, 0.99, 0.13; whiten_bias: 1, 0.6, 0.36, 0.13, 0.017
BS 125, conv only, none	conv: 0.028, 0.028, 0.017, 0.006, 0.0036
BS 125, conv only, reverse ramp	conv: 0.017, 0.01, 0.01, 0.01, 0.0036

Observations

Targets (held-out seeds 100-107): baselines 93.92 (BS 2000), 94.00 and 93.86 (BS 500 and 125, from the post-campaign reruns; the table's own baseline runs replace these once they finish). One held-out mean has a standard error of about 0.045 pp, so differences below about 0.1 pp are not resolved.

Conv only without a transform, v1 lands 0.1-0.2 pp short at every batch size: 93.82 (both search seeds) at BS 2000, 93.84 at BS 500 and 93.73 at BS 125, for 9.4-10 full runs of train steps. Its BS 2000 schedules (0.13, 0.13, 0.13, 0.047, 0.006 and 0.22, 0.13, 0.078, 0.047, 0.01) are one or two grid steps from C4 (93.95).

Under transforms the rest-of-run linear lookahead fails: the ramp gives 93.15 (BS 2000) and 93.40 (BS 500), below the do-nothing 93.42 / 93.37, and the wave 93.54 / 93.50. The lookahead decays linearly in the spec schedule, so under a transform its applied shape is distorted: under the ramp the applied LR rises late in the lookahead, so high early candidates look bad and the early intervals stay at 0.13-0.22 where the compensating spec is about 0.9. The reverse ramp, which mostly needs smaller early values, is fine (93.80 / 93.88).

From scratch with all four LRs (b), the level scan fails: 91.65-93.70 at BS 2000 and 92.93-93.58 at BS 500. Scored after one interval, head and norm_bias look flat (87.3% at levels 0.13, 1 and 7.7 in one search), so the scan leaves them near their start of 1.0, where a full run loses about 1 pp for head (Experiment 7). The search seed 1 run without a transform (92.01) kept head and norm_bias at 1.0.

The search's own final score is optimistic by up to 0.2 pp at BS 500 and 125 (e.g. 94.06 own vs 93.92 held-out; 93.94 vs 93.76): its decisions are selected on one seed.

v1 was stopped after these cells (the remaining transformed and 4-LR cells were cancelled) in favour of v2.

Experiment 14. ICS v2: a short-cooldown pass, then a rest-of-run pass on its plan

Question

v1's rest-of-run linear lookahead is defined on the spec schedule, so under a transform its applied shape is distorted and it misjudges early intervals (v1 under the ramp: 93.11-93.19, below doing nothing). Does a first pass with a short, local cooldown, whose schedule then serves as the second pass's lookahead, fix that?

Setup

Item	Value
Pass 1	Every interval in order: climb conv from the previous interval's value, each candidate scored after the interval plus one interval at 0.22 x its value (the least biased short cooldown, Experiment 12; local, so a transform's global shape does not distort it)
Pass 2	From the initial state again: each interval's climb starts at pass 1's value; a candidate is scored after the rest of the run on pass 1's schedule, its tail scaled by candidate / pass-1 value (rest_plan); the last interval by the final TTA
Other	As v1 (5 constant intervals, x0.6 grid, budget 20 full runs, 2 search seeds, held-out seeds 100-107); conv only: v2's 4-LR variant is replaced by v3/v4 (level rule)

Held-out TTA (mean over search seeds; vs the baseline; per search seed); cost in full runs

Batch size, scenario (baseline)	none	ramp	reverse ramp	wave
BS 2000, conv only (93.92)	**93.70** (-0.22; 93.77/93.62); 16.2x	**93.72** (-0.20; 93.68/93.77); 19.8x; do-nothing 93.42	**93.77** (-0.15; 93.83/93.71); 16.6x; do-nothing 93.57	**93.68** (-0.24; 93.84/93.53); 16.0x; do-nothing 93.72
BS 2000, 4 LRs (93.92)	running	running	running	running
BS 500, conv only (94.00)	**93.88** (-0.11; 93.89/93.88); 16.6x	**93.61** (-0.39; 93.54/93.68); 20.2x*; do-nothing 93.37	**93.81** (-0.19; 93.81/93.81); 16.6x; do-nothing 93.68	**93.78** (-0.22; 93.70/93.85); 15.6x; do-nothing 93.77
BS 500, 4 LRs (94.00)	running	running	running	running
BS 125, conv only (93.86)	**93.47** (-0.39; 93.43/93.52); 16.0x	**93.37** (-0.49; 93.50/93.25); 18.0x; do-nothing 93.48	**93.75** (-0.11; 93.72/93.78); 18.8x; do-nothing 93.68	**93.55** (-0.31; 93.40/93.70); 15.6x; do-nothing 93.69
BS 125, 4 LRs (93.86)	running	running	running	running

Cells within 0.1 pp of the baseline (about 2 SE of an 8-seed mean) or above: 0 of 12 finished. * = the search hit its step budget. Do-nothing: the baseline schedule kept under the transform.

Committed schedules (search seed 0)

Cell	Committed schedules (search seed 0)
BS 2000, conv only, none	conv: 0.13, 0.13, 0.078, 0.078, 0.017
BS 2000, conv only, ramp	conv: 0.36, 0.22, 0.047, 0.017, 0.0036
BS 2000, conv only, reverse ramp	conv: 0.078, 0.078, 0.078, 0.028, 0.017
BS 2000, conv only, wave	conv: 0.078, 0.078, 0.078, 0.047, 0.01
BS 500, conv only, none	conv: 0.078, 0.047, 0.047, 0.017, 0.0036
BS 500, conv only, ramp	conv: 0.22, 0.078, 0.017, 0.017, 0.0022
BS 500, conv only, reverse ramp	conv: 0.047, 0.047, 0.028, 0.028, 0.017
BS 500, conv only, wave	conv: 0.047, 0.028, 0.017, 0.028, 0.006
BS 125, conv only, none	conv: 0.028, 0.017, 0.006, 0.01, 0.0022
BS 125, conv only, ramp	conv: 0.13, 0.028, 0.006, 0.0036, 0.00047
BS 125, conv only, reverse ramp	conv: 0.028, 0.017, 0.028, 0.017, 0.006
BS 125, conv only, wave	conv: 0.017, 0.006, 0.01, 0.006, 0.0036

Observations

The short-cooldown first pass fixes v1's transform failure: under the ramp the held-out TTA rises from 93.15 (v1) to 93.72 at BS 2000 and from 93.40 to 93.61 at BS 500, because pass 1's local cooldown lets the early intervals rise (0.36-0.6 at BS 2000, where v1 stayed at 0.13-0.22) and pass 2 then judges candidates against a lookahead with the right, transform-shaped profile.

It is still 0.1-0.5 pp short everywhere: 93.68-93.77 at BS 2000 (baseline 93.92), 93.61-93.88 at BS 500 (94.00) and 93.37-93.75 at BS 125 (93.86), for 15-20 full runs. At BS 125 it is worse than v1 without a transform (93.47 vs 93.73): pass 1 decays faster than v1's rest-of-run lookahead (0.028, 0.017, 0.006, ... vs 0.028, 0.028, 0.017, ...) and pass 2, starting each climb from pass 1's values, does not undo it.

Search-seed spread is large (up to 0.31 pp between the two seeds of one cell), so single-seed decisions still dominate the error (Experiment 17).

Experiment 15. ICS v5: v2 plus kept first interval and replicated late decisions

Question

The late intervals' decisions are worth ~0.1 pp each and one seed gets them wrong about half the time (Experiment 12), while the first interval's rest-of-run candidates cost a full run each. Does keeping pass 1's first interval and scoring the late candidates by several continuations close the remaining gap within budget?

Setup

Item	Value
As v2	Pass 1 with the 0.22 x short cooldown, pass 2 with the rest_plan lookahead
Kept interval	Pass 2 keeps pass 1's first interval (value and trained state, at no cost)
Replicates	In pass 2, a candidate for interval 4 is scored by the mean of 2 continuations and for interval 5 of 3: the first on the run's own data stream (its state is committed), the others restore the pre-interval state, reseed the data order and augmentation (fresh epoch) and train interval + lookahead again
4 LRs	Levels: x7.7 scan right after interval 1 (conv: best score; head and biases: largest within 1 pp of the best), then as conv only with the other groups tied to conv's profile

Held-out TTA (mean over search seeds; vs the baseline; per search seed); cost in full runs

Batch size, scenario (baseline)	none	ramp	reverse ramp	wave
BS 2000, conv only (93.92)	**93.75** (-0.17; 93.95/93.56); 14.6x	**93.58** (-0.34; 93.66/93.51); 17.0x; do-nothing 93.42	**93.81** (-0.11; 93.91/93.71); 18.6x; do-nothing 93.57	**93.79** (-0.13; 93.84/93.75); 15.4x; do-nothing 93.72
BS 2000, 4 LRs (93.92)	running	running	running	running
BS 500, conv only (94.00)	**93.86** (-0.14; 93.83/93.89); 16.2x	**93.65** (-0.35; 93.62/93.68); 19.6x*; do-nothing 93.37	**93.81** (-0.19; 93.81/93.81); 16.0x; do-nothing 93.68	**93.76** (-0.24; 93.68/93.84); 15.0x; do-nothing 93.77
BS 500, 4 LRs (94.00)	running	running	running	running
BS 125, conv only (93.86)	**93.53** (-0.33; 93.45/93.61); 16.8x	**93.42** (-0.44; 93.40/93.43); 16.4x; do-nothing 93.48	**93.72** (-0.14; 93.66/93.79); 14.8x; do-nothing 93.68	**93.61** (-0.25; 93.52/93.70); 15.6x; do-nothing 93.69
BS 125, 4 LRs (93.86)	running	running	running	running

Cells within 0.1 pp of the baseline (about 2 SE of an 8-seed mean) or above: 0 of 12 finished. * = the search hit its step budget. Do-nothing: the baseline schedule kept under the transform.

Committed schedules (search seed 0)

Cell	Committed schedules (search seed 0)
BS 2000, conv only, none	conv: 0.13, 0.13, 0.078, 0.047, 0.01
BS 2000, conv only, ramp	conv: 0.36, 0.22, 0.047, 0.01, 0.0022
BS 2000, conv only, reverse ramp	conv: 0.078, 0.078, 0.078, 0.078, 0.028
BS 2000, conv only, wave	conv: 0.078, 0.078, 0.078, 0.047, 0.006
BS 500, conv only, none	conv: 0.078, 0.047, 0.047, 0.028, 0.0036
BS 500, conv only, ramp	conv: 0.22, 0.078, 0.017, 0.01, 0.0013
BS 500, conv only, reverse ramp	conv: 0.047, 0.047, 0.028, 0.028, 0.017
BS 500, conv only, wave	conv: 0.047, 0.028, 0.017, 0.017, 0.006
BS 125, conv only, none	conv: 0.028, 0.017, 0.006, 0.0036, 0.0013
BS 125, conv only, ramp	conv: 0.078, 0.017, 0.01, 0.0036, 0.00047
BS 125, conv only, reverse ramp	conv: 0.017, 0.01, 0.01, 0.006, 0.006
BS 125, conv only, wave	conv: 0.017, 0.006, 0.01, 0.006, 0.0013

Observations

v5 is v2 made cheaper at the start and less noisy at the end, and it is no better on average: 93.58-93.81 at BS 2000 (baseline 93.92), 93.65-93.86 at BS 500 (94.00) and 93.42-93.72 at BS 125 (93.86), for 14-20 full runs. Its best single result is the C4 schedule itself (0.13, 0.13, 0.078, 0.047, 0.01; 93.95 at BS 2000, search seed 0), so the method can find a matching schedule but does not reliably.

At BS 500 and 125 it is systematically too low: its BS 125 schedules (e.g. 0.028, 0.017, 0.006, 0.0036, 0.0013) sit one to two grid steps below the 5-interval staircase that scores 93.80 (0.04, 0.031, 0.021, 0.012, 0.0024), and its BS 500 schedules start at 0.078 where the staircase starts at 0.11. The first pass's short cooldown picks low, and the second pass does not raise it, probably because its candidates scale the whole remaining plan, so raising a middle interval also raises the end of the run, which was already right (v10 tests this by keeping the tail unscaled).

Replicating the last two intervals' decisions did not show a measurable gain over v2 (same cells, 2 search seeds each), which is consistent with the late decisions costing little either way (Experiment 12).

Experiment 16. How well do constant intervals represent the baseline?

Question

Before asking a search to find a constant-interval schedule, can such a schedule match the baseline at all, at each batch size and under each transform, with 5 or 10 intervals?

Setup

Item	Value
Schedules	conv's schedule replaced by n equal constant intervals, each at the oracle spec (the baseline's applied LR divided by the transform) a fraction q of the way through the interval; the last interval at min(q, 0.95) (the oracle reaches 0 at the end). q = 0.5 is about the interval mean, q = 1 the end value. Exact values (no grid); the other groups on the baseline
Runs	Plain training runs on held-out seeds 100-107 (one standard error about 0.045 pp)

Held-out TTA of the oracle staircases

Batch size, transform	n = 5: q 0.5 / 0.75 / 1	n = 10: q 0.5 / 0.75 / 1	Baseline (do-nothing)
BS 2000, none	93.72 / 93.82 / 93.68	93.91 / 94.01 / 93.88	93.92
BS 2000, ramp	93.53 / 93.78 / 93.53	93.83 / 93.89 / 93.99	93.92 (93.42)
BS 2000, reverse ramp	93.78 / 93.87 / 93.63	93.95 / 93.94 / 93.90	93.92 (93.57)
BS 2000, wave	93.56 / 93.78 / 93.53	93.90 / 93.95 / 93.82	93.92 (93.72)
BS 500, none	93.72 / 93.85 / 93.70	93.95 / 94.00 / 93.88	94.00
BS 500, ramp	93.50 / 93.75 / 93.68	93.89 / 94.05 / 93.89	94.00 (93.37)
BS 500, reverse ramp	93.78 / 93.91 / 93.62	93.95 / 93.88 / 93.84	94.00 (93.68)
BS 500, wave	93.51 / 93.86 / 93.59	93.88 / 93.89 / 93.85	94.00 (93.77)
BS 125, none	93.70 / 93.80 / 93.72	93.89 / 93.81 / 93.84	93.86
BS 125, ramp	93.38 / 93.72 / 93.57	93.80 / 93.90 / 93.84	93.86 (93.48)
BS 125, reverse ramp	93.74 / 93.84 / 93.57	93.97 / 93.86 / 93.71	93.86 (93.68)
BS 125, wave	93.54 / 93.78 / 93.55	93.89 / 93.95 / 93.82	93.86 (93.69)

Observations

Ten constant intervals can represent the baseline at BS 500 and 125; five cannot quite. With n = 10 and q = 0.75 the staircase scores 94.00 / 94.05 / 93.88 / 93.89 at BS 500 (no transform / ramp / reverse ramp / wave; baseline 94.00) and 93.81 / 93.90 / 93.86 / 93.95 at BS 125 (baseline 93.86). With n = 5 the best projection (q = 0.75) scores 93.75-93.91 at BS 500 and 93.72-93.84 at BS 125, 0.1-0.25 pp short.

The interval value should sit a bit past the interval's middle: q = 0.75 beats the end value (q = 1) in all 8 BS 500 / 125 cells with n = 5, by 0.07-0.29 pp (BS 500 reverse ramp: 93.91 vs 93.62). At BS 2000 the 5-interval schedule C4, near the end values, matched the baseline (93.95, Experiment 5).

The q = 0.5 (interval mean) and BS 2000 rows are still running.

Experiment 17. Averaging two searches' schedules

Question

Two search seeds of the same ICS version often commit different schedules, one or two grid steps apart in a few intervals, and score 0.1-0.4 pp apart. Their decision errors are partly independent; does the geometric mean of the two schedules, interval by interval, score better than the two do on average?

Setup

Item	Value
Schedules	For each finished cell of ICS v1, v2 and v5 (conv only): the geometric mean of search seeds 0 and 1's committed conv values, interval by interval (rounded to 2 significant figures, not snapped to the grid)
Runs	Plain training runs on held-out seeds 100-107

Held-out TTA

Cell	Averaged	Parents (seed 0 / 1)	Gain over their mean	Baseline
v1, BS 125, none	**93.77**	93.70 / 93.76	+0.04	93.86
v1, BS 125, reverse ramp	**93.76**	93.72 / 93.60	+0.10	93.86
v1, BS 2000, none	**93.90**	93.82 / 93.82	+0.08	93.92
v1, BS 2000, ramp	**93.16**	93.19 / 93.11	+0.02	93.92
v1, BS 2000, reverse ramp	**93.89**	93.81 / 93.79	+0.10	93.92
v1, BS 2000, wave	**93.63**	93.61 / 93.46	+0.09	93.92
v1, BS 500, none	**93.81**	93.75 / 93.92	-0.03	94.00
v1, BS 500, ramp	**93.43**	93.27 / 93.53	+0.04	94.00
v1, BS 500, reverse ramp	**93.95**	93.95 / 93.82	+0.07	94.00
v1, BS 500, wave	**93.66**	93.25 / 93.75	+0.16	94.00
v2, BS 125, none	**93.66**	93.43 / 93.52	+0.18	93.86
v2, BS 125, ramp	**93.49**	93.50 / 93.25	+0.12	93.86
v2, BS 125, reverse ramp	**93.74**	93.72 / 93.78	-0.01	93.86
v2, BS 125, wave	**93.70**	93.40 / 93.70	+0.15	93.86
v2, BS 2000, none	**93.81**	93.77 / 93.62	+0.12	93.92
v2, BS 2000, ramp	**93.74**	93.68 / 93.77	+0.02	93.92
v2, BS 2000, reverse ramp	**93.78**	93.83 / 93.71	+0.01	93.92
v2, BS 2000, wave	**93.78**	93.84 / 93.53	+0.10	93.92
v2, BS 500, none	**93.90**	93.89 / 93.88	+0.02	94.00
v2, BS 500, ramp	**93.66**	93.54 / 93.68	+0.05	94.00
v2, BS 500, reverse ramp	**93.92**	93.81 / 93.81	+0.11	94.00
v2, BS 500, wave	**93.82**	93.70 / 93.85	+0.04	94.00
v5, BS 2000, none	**93.75**	93.95 / 93.56	-0.01	93.92
v5, BS 2000, ramp	**93.62**	93.66 / 93.51	+0.04	93.92
v5, BS 2000, reverse ramp	**93.86**	93.91 / 93.71	+0.06	93.92
v5, BS 2000, wave	**93.85**	93.84 / 93.75	+0.06	93.92

Mean gain over the parents' mean: +0.066 pp over 26 cells (23 positive).

Observations

Averaging two search seeds' schedules helps on average: the averaged schedule beats the mean of its two parents by +0.066 pp over 26 cells (v1, v2 and v5, conv only), positive in 23 of them, by up to +0.18 pp (v2 at BS 125). It mostly recovers the better parent: when one seed made a costly mistake, the average sits between the two choices, and the score curves are flat enough near the optimum that the midpoint costs little.

This is decision noise being averaged out: the search's single-seed decisions err by a grid step in some intervals (Experiment 12), and two independent searches err in different intervals. Two v1 searches averaged (about 20 full runs together) reach 93.90 at BS 2000 without a transform and 93.89 under the reverse ramp, against 93.75 and

93.81 for one v5 search (about 15 full runs); averaging cannot fix a shared bias, though (v1 under the ramp stays at 93.16).

Experiment 18. Expanding 5-interval schedules to 10 intervals

Question

Ten intervals represent the baseline at BS 500 and 125 where five fall short (Experiment 16), but a 10-interval search makes twice the noisy decisions. Does a 5-interval schedule, expanded to 10 intervals by a fixed rule, score like a 10-interval one?

Setup

Item	Value
Expansion	Each interval's value v is split into two halves: v x (previous / v)^(1/4) and v x (next / v)^(1/4) (the first interval's first half stays v; the last interval's second half continues the decay, v x (v / previous)^(1/4)). A quarter of the way, in log, toward each neighbour: the staircase becomes twice as fine and follows the trend
Schedules	5-interval oracle staircases (q = 0.75, Experiment 16), searched schedules (ICS v2, v5) and averaged ones (Experiment 17); held-out seeds 100-107

Held-out TTA

5-interval schedule	As 5 intervals	Expanded to 10	Gain	Baseline
averaged v1, BS 2000, none	93.90	**93.88**	-0.02	93.92
averaged v2, BS 125, none	93.66	**93.68**	+0.02	93.86
averaged v2, BS 500, none	93.90	**93.99**	+0.08	94.00
averaged v2, BS 500, wave	93.82	**93.79**	-0.02	94.00
averaged v5, BS 2000, none	93.75	**93.78**	+0.03	93.92
oracle staircase q 0.75, BS 125, none	93.80	**93.95**	+0.14	93.86
oracle staircase q 0.75, BS 125, wave	93.78	**93.96**	+0.18	93.86
oracle staircase q 0.75, BS 2000, none	93.82	**93.86**	+0.04	93.92
oracle staircase q 0.75, BS 2000, ramp	93.78	**93.87**	+0.09	93.92
oracle staircase q 0.75, BS 2000, reverse ramp	93.87	**93.90**	+0.03	93.92
oracle staircase q 0.75, BS 2000, wave	93.78	**93.94**	+0.16	93.92
oracle staircase q 0.75, BS 500, none	93.85	**94.03**	+0.18	94.00
oracle staircase q 0.75, BS 500, ramp	93.75	**94.00**	+0.25	94.00
v2 seed 0, BS 2000, none	93.77	**93.83**	+0.06	93.92
v2 seed 1, BS 2000, none	93.62	**93.83**	+0.21	93.92
v2 seed 0, BS 500, none	93.89	**93.87**	-0.02	94.00
v2 seed 1, BS 500, none	93.88	**93.91**	+0.03	94.00
v5 seed 0, BS 2000, none	93.95	**93.98**	+0.03	93.92
v5 seed 1, BS 2000, none	93.56	**93.61**	+0.05	93.92
v5 seed 0, BS 500, none	93.83	**93.90**	+0.07	94.00
v5 seed 1, BS 500, none	93.89	**94.00**	+0.11	94.00

Mean gain +0.082 pp over 21 schedules (18 positive).

Observations

Expansion closes the representation gap: the 5-interval oracle staircases gain 0.14-0.25 pp and reach the baseline (BS 500: 93.85 -> 94.03, ramp 93.75 -> 94.00; BS 125: 93.80 -> 93.95, wave 93.78 -> 93.96), as high as the 10-interval staircases of Experiment 16.

Searched schedules gain less but rarely lose: v5's BS 500 seed 1 goes from 93.89 to 94.00 and seed 0 from 93.83 to 93.90, v2's BS 2000 seed 1 from 93.62 to 93.83; the few losses are 0.02 pp. A searched schedule's errors are not the staircase's coarseness, which expansion fixes, but its decisions, which it does not.

So the search can stay at 5 intervals (half the decisions of a 10-interval search, so less decision noise and lower cost: 10-interval searches tried in development, ICS v7 and v8, scored 93.64-93.83 on 2 held-out seeds) and expand its result for free.

Experiment 19. ICS v9-v11: 5-interval search expanded to 10 intervals, with a scaled or fixed plan tail

Question

Searching 5 intervals and expanding the result to 10 (Experiment 18), which second-pass lookahead works: the previous pass's tail scaled by candidate / plan value (v9), or left as it is so a candidate changes only its own interval (v10, v11)? And should the budget go to replicated decisions (v10) or wider climbs (v11)?

Setup

Item	Value
Common	5 constant intervals; pass 1: climb each interval from the previous one's value with a one-interval cooldown at 0.22 x the candidate; pass 2: from the initial state, keep interval 1, climb intervals 2-5 from pass 1's values with a rest-of-run lookahead on pass 1's schedule; the result expanded to 10 intervals (Experiment 18). 4 LRs from 1.0: a joint x7.7 level scan of head and the biases (largest within 1 pp after a one-interval cooldown), then each alone at most two x7.7 steps up; the other groups follow conv's profile. Budget 20 full runs; 2 search seeds; held-out seeds 100-107
v9	Pass-2 tail scaled by candidate / pass-1 value; climbs at most 1 grid step from pass 1; decisions replicated over 2 continuations (3 in the last interval; 4 LRs: only intervals 4-5)
v10	As v9 with the tail unscaled (rest_fixed)
v11	As v10 with replicates only in intervals 4-5 and climbs of up to 2 grid steps

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v9	v10	v11
BS 2000, conv only, none (93.92)	**93.79** (93.80/93.79); 18x	**93.89** (93.86/93.92); 17x	**93.94** (93.97/93.91); 15x
BS 2000, conv only, ramp (93.92; 93.42)	-	**93.82** (93.82/93.82); 20x*	**93.80** (93.75/93.85); 19x
BS 2000, conv only, reverse ramp (93.92; 93.57)	-	**93.78** (93.69/93.88); 19x	**93.88** (93.89/93.88); 17x
BS 2000, conv only, wave (93.92; 93.72)	-	**93.88** (93.89/93.88); 19x	**93.88** (93.89/93.88); 16x
BS 2000, 4 LRs, none (93.92)	-	**93.40** (93.75/93.06); 19x	**93.39** (93.74/93.04); 20x*
BS 2000, 4 LRs, ramp (93.92; 93.25)	-	**93.26** (93.42/93.10); 20x*	**93.26** (93.42/93.10); 21x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	-	**93.75** (93.81/93.70); 17x	**93.75** (93.81/93.70); 20x*
BS 2000, 4 LRs, wave (93.92; 93.68)	-	**93.62** (93.64/93.60); 20x	**93.62** (93.64/93.60); 20x*
BS 500, conv only, none (94.00)	-	**94.00** (94.00/94.00); 19x	**93.92** (93.84/94.00); 16x
BS 500, conv only, ramp (94.00; 93.37)	-	**93.72** (93.66/93.77); 20x*	**93.69** (93.66/93.72); 18x
BS 500, conv only, reverse ramp (94.00; 93.68)	-	**93.85** (93.88/93.82); 19x	**93.85** (93.88/93.82); 16x
BS 500, conv only, wave (94.00; 93.77)	-	**93.87** (93.85/93.89); 19x	**93.81** (93.73/93.89); 15x
BS 500, 4 LRs, none (94.00)	-	**93.35** (93.47/93.22); 20x	**93.35** (93.47/93.22); 20x
BS 500, 4 LRs, ramp (94.00; 93.32)	-	**92.92** (92.86/92.98); 20x*	**92.92** (92.86/92.98); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	-	**93.66** (93.42/93.90); 19x	**93.65** (93.40/93.90); 20x*
BS 500, 4 LRs, wave (94.00; 93.83)	-	**93.66** (93.68/93.65); 20x	-
BS 125, conv only, none (93.86)	-	**93.72** (93.72/93.71); 20x	**93.58** (93.64/93.52); 16x
BS 125, conv only, ramp (93.86; 93.48)	-	**93.70** (93.76/93.63); 20x	**93.51** (93.36/93.66); 16x
BS 125, conv only, reverse ramp (93.86; 93.68)	-	**93.77** (93.69/93.84); 18x	**93.78** (93.69/93.87); 15x
BS 125, conv only, wave (93.86; 93.69)	-	**93.76** (93.69/93.82); 19x	**93.69** (93.55/93.82); 15x
BS 125, 4 LRs, none (93.86)	-	**93.30** (93.44/93.17); 20x	-
BS 125, 4 LRs, ramp (93.86; 93.26)	-	**93.26** (93.49/93.03); 20x*	-
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	-	**93.16** (92.73/93.60); 18x	-
BS 125, 4 LRs, wave (93.86; 93.70)	-	**93.67** (93.48/93.86); 19x	-

Within 0.1 pp of the baseline or above (finished cells): v9: 0 of 1; v10: 5 of 24; v11: 5 of 19. * = the search hit its step budget.

Observations

Keeping the plan's tail unscaled is what made the 5-interval search work: v9 (scaled tail) scored 93.79 at BS 2000 without a transform, v10 (unscaled) 93.89, and in development the same change lifted BS 500 from 93.87 to 94.13 (2 held-out seeds). With the tail scaled, raising a middle interval also raised the end of the run, so the second pass could not correct a first pass that ended too low.

Conv only, v10 and v11 are within about 0.1 pp of the baseline on average: v10 is 0.113 pp short over the 12 cells (all three batch sizes, all four transforms), v11 0.111 pp over the 8 finished ones, with 5 of 24 and 4 of 12 cells within 0.1 pp. The ramp is the hardest cell at BS 500 (v10 93.72, v11 93.69, 0.28-0.30 short), and BS 125 is 0.09-0.16 short in every condition. v10 (replicated decisions, one-step climbs) and v11 (replicates only late, two-step climbs, cheaper: 15-19 vs 17-20 full runs) are equal within noise: v11 is better at BS 2000 (93.94 vs 93.89 without a transform, 93.88 vs 93.78 under the reverse ramp) and worse at BS 500 (93.92 vs 94.00 without, 93.81 vs 93.87 under the wave).

With 4 LRs both stay 0.2-1.1 pp short (v10: 93.26-93.75 at BS 2000, 92.92-93.66 at BS 500; Experiment 20 traces this to the head/bias levels), and v10 hits the budget in the ramp cells.

Experiment 20. Why the 4-LR search falls short

Question

From scratch with all four LRs, ICS v12/v13 score 93.3-93.8 at BS 2000 without a transform, below the conv-only searches. Is the conv schedule or the other groups' levels at fault?

Setup

Item	Value
Schedules	The two committed 10-interval schedules of ICS v13 with 4 LRs at BS 2000, no transform (search seeds 0 and 1, head / norm_bias / whiten_bias levels 460 / 60 / 460 and 460 / 60 / 3500, each tied to conv's profile), and variants with parts replaced
Runs	Plain training runs on held-out seeds 100-107

Held-out TTA (baseline 93.92)

Variant	Search seed 0	Search seed 1
searched schedule, all four groups	93.67	93.37
its conv schedule; head, norm_bias, whiten_bias on the baseline	93.83	93.76
head back on the baseline (the others as searched)	93.73	93.51
norm_bias back on the baseline	93.75	93.29
whiten_bias back on the baseline	93.59	93.59
whiten_bias one x7.7 step lower	-	93.61
conv replaced by C4 expanded; the others as searched	-	93.66

Observations

The conv search works with 4 LRs; the other groups' levels do not. Each search's conv schedule with head and the biases on the baseline scores 93.83 and 93.76, as good as the conv-only searches, while the full searched schedules score 93.67 and 93.37: the searched levels of head, norm_bias and whiten_bias cost 0.16 and 0.39 pp.

The cost is spread over the groups and depends on the level each landed on. In the worse search (whiten_bias 3500), putting whiten_bias back on the baseline recovers 0.22 pp and lowering it one x7.7 step recovers 0.24 pp; head recovers 0.14 pp. In the better search (whiten_bias 460) no single group accounts for more than 0.08 pp, and its tied whiten_bias profile beats the baseline's (93.67 vs 93.59 with it restored). Tying the groups to conv's profile is therefore not the problem; the levels chosen in the first interval are.

A short horizon cannot rank these levels (Experiment 12-style probes, research/level_horizon.py: head, norm_bias and whiten_bias are flat at short horizons below a blow-up edge, while over a full run whiten_bias loses 0.5 pp at 3500 at BS 125 and head loses 0.3-1 pp well below its optimum), and a single-seed rest-of-run comparison of one level step (ICS v13's relevel) is too noisy to fix them: it rejected lowering whiten_bias from 3500 to 460 in the search where that gains 0.24 pp.

Experiment 21. ICS v14-v17: fixing the first pass's bias and the second pass's noise

Question

v11's remaining error has two visible causes: the first pass's short cooldown is biased toward small LRs (one grid step in the middle intervals, more under the ramp and at BS 125; Experiment 12) and the second pass's single-seed decisions are too noisy to undo it. Which fix helps?

Setup

Item	Value
v11 (reference)	Short-cooldown pass 1; rest-of-run pass 2 on pass 1's schedule, tail unscaled, climbs up to 2 grid steps, replicates only in intervals 4-5; expanded to 10 intervals
v14	v11 + the second pass carries its correction forward: an interval's climb starts at pass 1's value times the previous interval's pass-2 / pass-1 ratio
v15	v11 with a two-interval cooldown in pass 1 (a longer horizon, less biased in principle)
v16	v11 + pass 1's schedule shifted one grid step up (all but the last interval) before pass 2
v17	v11 with pass 2 run twice from pass 1's schedule (different data order, no replicates), the two schedules averaged (geometric mean)
4 LRs	v14-v17 also lower the head/bias levels one x7.7 step after the scan and try each one step lower again in pass 2 (v13's relevel); v17 runs conv only (two second passes do not fit with the level scan)

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v11	v14	v15	v16	v17
BS 2000, conv only, none (93.92)	**93.94** (93.97/93.91); 15x	-	**93.63** (93.58/93.67); 17x	**93.84** (93.84/93.85); 15x	**93.98** (93.98); 19x
BS 2000, conv only, ramp (93.92; 93.42)	**93.80** (93.75/93.85); 19x	-	**93.56** (93.64/93.48); 20x	**93.93** (93.93/93.93); 17x	-
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.88** (93.89/93.88); 17x	**93.88** (93.89/93.88); 16x	**93.87** (93.85/93.88); 17x	**93.77** (93.80/93.75); 16x	-
BS 2000, conv only, wave (93.92; 93.72)	**93.88** (93.89/93.88); 16x	-	**93.77** (93.81/93.74); 17x	**93.85** (93.76/93.95); 16x	-
BS 2000, 4 LRs, none (93.92)	**93.39** (93.74/93.04); 20x*	-	-	**93.64** (93.80/93.48); 20x*	-
BS 2000, 4 LRs, ramp (93.92; 93.25)	**93.26** (93.42/93.10); 21x*	-	-	**93.56** (93.43/93.69); 21x*	-
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.75** (93.81/93.70); 20x*	-	-	**93.58** (93.66/93.50); 20x	-
BS 2000, 4 LRs, wave (93.92; 93.68)	**93.62** (93.64/93.60); 20x*	-	-	**93.84** (93.73/93.95); 20x*	-
BS 500, conv only, none (94.00)	**93.92** (93.84/94.00); 16x	-	**93.86** (93.84/93.87); 16x	**93.93** (93.88/93.98); 15x	-
BS 500, conv only, ramp (94.00; 93.37)	**93.69** (93.66/93.72); 18x	**93.69** (93.66/93.72); 18x	**93.51** (93.36/93.67); 20x	**93.81** (93.79/93.82); 17x	-
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.85** (93.88/93.82); 16x	-	**93.84** (93.88/93.81); 18x	**93.90** (93.97/93.84); 16x	-
BS 500, conv only, wave (94.00; 93.77)	**93.81** (93.73/93.89); 15x	-	**93.87** (93.82/93.92); 17x	**93.92** (93.93/93.90); 15x	-
BS 500, 4 LRs, none (94.00)	**93.35** (93.47/93.22); 20x	-	-	**93.90** (93.97/93.83); 20x*	-
BS 500, 4 LRs, ramp (94.00; 93.32)	**92.92** (92.86/92.98); 20x*	-	-	**93.78** (93.81/93.75); 21x*	-
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**93.65** (93.40/93.90); 20x*	-	-	**93.70** (93.56/93.85); 20x*	-
BS 500, 4 LRs, wave (94.00; 93.83)	-	-	-	**93.98** (93.92/94.05); 20x*	-
BS 125, conv only, none (93.86)	**93.58** (93.64/93.52); 16x	**93.58** (93.64/93.52); 16x	**93.76** (93.64/93.88); 18x	**93.77** (93.92/93.62); 16x	-
BS 125, conv only, ramp (93.86; 93.48)	**93.51** (93.36/93.66); 16x	-	**93.46** (93.19/93.73); 19x	**93.87** (93.86/93.88); 17x	-
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.78** (93.69/93.87); 15x	-	**93.71** (93.62/93.79); 18x	**93.77** (93.75/93.78); 15x	-

Cell (baseline; do-nothing)	v11	v14	v15	v16	v17
BS 125, conv only, wave (93.86; 93.69)	**93.69** (93.55/93.82); 15x	-	**93.87** (93.91/93.82); 16x	**93.77** (93.83/93.71); 16x	-
BS 125, 4 LRs, none (93.86)	-	-	-	-	-
BS 125, 4 LRs, ramp (93.86; 93.26)	-	-	-	-	-
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	-	-	-	-	-
BS 125, 4 LRs, wave (93.86; 93.70)	-	-	-	-	-

Within 0.1 pp of the baseline or above (finished cells): v11: 5 of 19; v14: 1 of 3; v15: 2 of 12; v16: 13 of 20; v17: 1 of 1. * = the search hit its step budget.

Observations

Correcting the bias helps; the other two fixes do not. Over the conv-only cells, v16 (pass 1's plan shifted one grid step up before pass 2) is 0.081 pp short of the baseline on average with 10 of 12 cells within 0.1 pp, against 0.111 pp and 4 of 8 for v11. The gain is largest where the bias is largest, under the ramp: 93.93 vs 93.80 at BS 2000, 93.81 vs 93.69 at BS 500, and 93.87 at BS 125 (v10: 93.70; baseline 93.86). Its two misses are BS 500 under the ramp (93.81, 0.19 short) and BS 2000 under the reverse ramp (93.77, 0.15 short).

v15's longer first-pass cooldown (two intervals) is worse, 0.200 pp short on average (2 of 12 within 0.1 pp): at BS 2000 it scores 93.63 without a transform and 93.56 under the ramp. A longer cooldown in the first pass does not remove the small-LR bias, and its extra cost leaves less budget for the second pass. v14's carried correction is also worse where tested (0.205 pp short over 3 cells; BS 125: 93.58 vs v10's 93.72): pass 2's corrections are mostly noise, and carrying them forward compounds it.

Experiment 22. ICS v16-v24: the shifted plan, with an ensemble, joint 4-LR levels or a third pass

Question

Starting from v16 (the best of Experiment 21), does averaging two second passes (v18), a simpler and cheaper 4-LR level rule (v19) or a third rest-of-run pass (v23) close the remaining gap, and does the result hold over four search seeds?

Setup

Item	Value
v16	Short-cooldown pass 1, its plan shifted one grid step up (all but the last interval), rest-of-run pass 2 (tail unscaled, climbs up to 2 grid steps, replicates in intervals 4-5), expanded to 10 intervals. 4 LRs: joint x7.7 level scan of head and the biases, each alone at most two steps up, one step back, and one step lower again in pass 2 if that scores higher
v18	v16 with pass 2 run twice (different data order, no replicates) and the two schedules averaged
v19	Conv only: as v16. 4 LRs: the joint level only (no individual climbs, no back-off, no relevel), then shifted with the plan; 4 search seeds (0-3)
v23	v19 with a third pass repeating pass 2 on pass 2's schedule; passes 2-3 climb one grid step at most, only pass 3 replicates (its last interval)
v24	v19 whose shift moves only conv (4 LRs: head and the biases keep their scanned levels); conv only it is v19

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v16	v18	v19	v23	v24
BS 2000, conv only, none (93.92)	**93.84** (93.84/93.85); 15x	**93.84** (93.89/93.80); 19x	**93.88** (93.84/93.85/94.02/93.83); 15x	**93.88** (93.92/93.85); 19x	-
BS 2000, conv only, ramp (93.92; 93.42)	**93.93** (93.93/93.93); 17x	**93.87** (93.87/93.87); 20x*	**93.85** (93.93/93.93/93.87/93.66); 17x	**93.90** (93.93/93.87); 20x*	-
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.77** (93.80/93.75); 16x	**93.71** (93.63/93.79); 20x	**93.77** (93.80/93.75/93.74/93.80); 16x	**93.74** (93.73/93.75); 19x	-
BS 2000, conv only, wave (93.92; 93.72)	**93.85** (93.76/93.95); 16x	**93.89** (93.89/93.89); 19x	**93.82** (93.76/93.95/93.76/93.80); 16x	**93.89** (93.84/93.95); 18x	-
BS 2000, 4 LRs, none (93.92)	**93.64** (93.80/93.48); 20x*	-	**93.87** (93.91/93.84); 18x	**93.85** (93.91/93.79); 20x*	**93.82** (93.85/93.80); 18x
BS 2000, 4 LRs, ramp (93.92; 93.25)	**93.56** (93.43/93.69); 21x*	-	**93.65** (93.72/93.58); 20x*	**93.62** (93.73/93.52); 21x*	**93.71** (93.62/93.79); 20x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.58** (93.66/93.50); 20x	-	**93.23** (93.39/93.07); 18x	**93.26** (93.42/93.09); 20x*	**93.64** (93.82/93.46); 18x
BS 2000, 4 LRs, wave (93.92; 93.68)	**93.84** (93.73/93.95); 20x*	-	**93.89** (93.93/93.86); 17x	**93.89** (93.93/93.86); 20x*	**93.76** (93.92/93.60); 18x
BS 500, conv only, none (94.00)	**93.93** (93.88/93.98); 15x	**93.98** (93.99/93.96); 19x	**93.90** (93.88/93.98/93.94/93.81); 15x	**93.98** (93.98/93.98); 18x	-
BS 500, conv only, ramp (94.00; 93.37)	**93.81** (93.79/93.82); 17x	**93.82** (93.78/93.86); 20x*	**93.86** (93.79/93.82/93.93/93.88); 18x	**93.82** (93.79/93.84); 20x*	-
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.90** (93.97/93.84); 16x	**93.96** (93.96/93.95); 19x	**93.86** (93.97/93.84/93.85/93.78); 16x	**93.94** (93.97/93.92); 18x	-
BS 500, conv only, wave (94.00; 93.77)	**93.92** (93.93/93.90); 15x	**93.90** (93.94/93.86); 19x	**93.88** (93.93/93.90/93.78/93.91); 15x	**93.90** (93.92/93.87); 19x	-
BS 500, 4 LRs, none (94.00)	**93.90** (93.97/93.83); 20x*	-	**94.00** (94.01/93.99); 17x	**93.98** (93.97/93.99); 20x*	**94.06** (94.12/94.01); 17x
BS 500, 4 LRs, ramp (94.00; 93.32)	**93.78** (93.81/93.75); 21x*	-	**93.61** (93.46/93.75); 20x*	**93.51** (93.38/93.63); 21x*	**93.73** (93.61/93.84); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**93.70** (93.56/93.85); 20x*	-	**92.47** (92.42/92.52); 19x	**92.71** (92.91/92.52); 21x*	**93.83** (93.89/93.77); 19x
BS 500, 4 LRs, wave (94.00; 93.83)	**93.98** (93.92/94.05); 20x*	-	**93.87** (93.85/93.89); 18x	**93.87** (93.84/93.89); 20x*	**93.95** (93.96/93.95); 18x
BS 125, conv only, none (93.86)	**93.77** (93.92/93.62); 16x	**93.81** (93.92/93.71); 20x*	**93.83** (93.92/93.62/93.89/93.90); 16x	**93.74** (93.89/93.58); 19x	-
BS 125, conv only, ramp (93.86; 93.48)	**93.87** (93.86/93.88); 17x	**93.82** (93.73/93.91); 20x*	**93.87** (93.86/93.88/93.84/93.91); 17x	**93.86** (93.82/93.89); 20x	-
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.77** (93.75/93.78); 15x	**93.76** (93.75/93.77); 19x	**93.77** (93.75/93.78/93.72/93.82); 16x	**93.73** (93.75/93.71); 19x	-

Cell (baseline; do-nothing)	v16	v18	v19	v23	v24
BS 125, conv only, wave (93.86; 93.69)	**93.77** (93.83/93.71); 16x	**93.79** (93.85/93.74); 20x*	**93.72** (93.83/93.71/93.71/93.64); 16x	**93.78** (93.91/93.65); 19x	-
BS 125, 4 LRs, none (93.86)	-	-	**93.18** (93.02/93.34); 20x	**93.18** (93.02/93.34); 21x*	**93.81** (93.80/93.83); 19x
BS 125, 4 LRs, ramp (93.86; 93.26)	-	-	**93.92** (93.93/93.92); 20x	**93.91** (93.93/93.89); 20x*	**94.01** (94.01/94.00); 20x*
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	-	-	**93.87** (93.91/93.83); 17x	**93.87** (93.91/93.83); 20x*	**93.94** (93.98/93.89); 17x
BS 125, 4 LRs, wave (93.86; 93.70)	-	-	**93.85** (93.81/93.88); 18x	**93.88** (93.87/93.88); 20x*	**93.88** (93.91/93.85); 19x

Within 0.1 pp of the baseline or above (finished cells): v16: 13 of 20; v18: 10 of 12; v19: 12 of 24; v23: 13 of 24; v24: 7 of 12. * = the search hit its step budget.

Observations

Conv only, nothing beats v16, and the extra search seeds show why: the remaining gap is search noise, not a bias left to fix. v18 (two second passes averaged) is 0.080 pp short of the baseline on average over 12 cells (9 within 0.1 pp), the same as v16's 0.081 (10 of 12). v19 is v16 for conv only, yet over 4 search seeds it is 0.102 pp short on the 8 finished cells (4 within 0.1 pp): BS 2000 93.88 / 93.85 / 93.77 / 93.82 without a transform / ramp / reverse ramp / wave, against v16's 93.84 / 93.93 / 93.77 / 93.85 on 2 seeds. Cells move by up to 0.08 pp between the 2-seed and 4-seed estimates, so a 2-seed cell mean resolves differences of about 0.1 pp at best.

With 4 LRs, the level rule decides the result. v19 (the joint level only, then shifted with conv's plan) matches the baseline in 6 of 12 cells but fails badly in three: 92.47 at BS 500 and 93.23 at BS 2000 under the reverse ramp, and 93.18 at BS 125 without a transform (mean 0.307 pp short). The shift raises head and the biases with conv, by up to one x7.7 level step where the scan already chose the largest level that did not lose. v24 shifts conv only and keeps the scanned levels: 0.081 pp short on average with 7 of 12 cells within 0.1 pp, worst 0.28 pp (BS 500 ramp, 93.73); all four BS 125 cells match (93.81-94.01, baseline 93.86).

v24's misses are search-seed spread, not a level error: in every 4-LR cell head and the biases end on the same level in both seeds, but the conv schedules differ. Under the reverse ramp at BS 2000, seed 0 holds conv flat at 0.078 for 7 of 10 intervals (93.82) while seed 1 dips to 0.061 and climbs back to 0.11 (93.46); at BS 2000 with the wave the two seeds score 93.92 and 93.60, at BS 500 under the ramp 93.61 and 93.84. This is the case for averaging independent searches (Experiment 17), which v26 tests.

v23 (a third rest-of-run pass) has one finished cell so far, BS 500 under the ramp at 93.79 (v16: 93.81); a third pass costs the budget the second pass would use for replicates, and no gain is visible yet.

Experiment 23. ICS v25-v27: refining from interval 1, and averaging two independent half-budget searches

Question

v24's misses are spread between search seeds (Experiment 22). Does refining every interval in the second pass (v25), or running the whole search twice at half the budget from different data orders and averaging the two schedules (v26; v27 with one shared 4-LR level scan), close the gap within the same 20-run budget?

Setup

Item	Value
v19 / v24	References (Experiment 22): v19 for conv only, v24 for 4 LRs
v25	v24 with the second pass refining every interval from interval 1 (only interval 0 kept), replicates only in the last interval
v26	Two whole v24-style searches (short-cooldown pass 1, shifted plan, rest-of-run pass 2 climbing one grid step, replicates only in the last interval), each with half the budget and its own data order; the two 5-interval schedules averaged (geometric mean) and expanded to 10 intervals. Steps are kept back so the search always finishes within budget
v27	v26 whose second search reuses the first one's 4-LR level scan (one scan, the rest of the budget split evenly); conv only it is v26

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v19	v24	v25	v26	v27
BS 2000, conv only, none (93.92)	**93.88** (93.84/93.85/94.02/93.83); 15x	-	**93.87** (93.89/93.85); 16x	**93.86** (93.88/93.84); 20x*	-
BS 2000, conv only, ramp (93.92; 93.42)	**93.85** (93.93/93.93/93.87/93.66); 17x	-	-	**93.84** (93.84/93.84); 20x*	-
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.77** (93.80/93.75/93.74/93.80); 16x	-	**93.86** (93.84/93.88); 16x	**93.71** (93.70/93.72); 20x*	-
BS 2000, conv only, wave (93.92; 93.72)	**93.82** (93.76/93.95/93.76/93.80); 16x	-	-	**93.85** (93.78/93.92); 20x*	-
BS 2000, 4 LRs, none (93.92)	**93.87** (93.91/93.84); 18x	**93.82** (93.85/93.80); 18x	-	-	**93.68** (93.74/93.62); 20x*
BS 2000, 4 LRs, ramp (93.92; 93.25)	**93.65** (93.72/93.58); 20x*	**93.71** (93.62/93.79); 20x*	-	-	**93.66** (93.62/93.70); 20x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.23** (93.39/93.07); 18x	**93.64** (93.82/93.46); 18x	-	-	**93.84** (93.97/93.71); 20x*
BS 2000, 4 LRs, wave (93.92; 93.68)	**93.89** (93.93/93.86); 17x	**93.76** (93.92/93.60); 18x	-	-	**93.81** (93.86/93.77); 20x*
BS 500, conv only, none (94.00)	**93.90** (93.88/93.98/93.94/93.81); 15x	-	-	**93.94** (93.88/94.00); 20x*	-
BS 500, conv only, ramp (94.00; 93.37)	**93.86** (93.79/93.82/93.93/93.88); 18x	-	**93.82** (93.76/93.88); 18x	**93.86** (93.88/93.84); 20x*	-
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.86** (93.97/93.84/93.85/93.78); 16x	-	-	**93.88** (93.88/93.88); 20x*	-
BS 500, conv only, wave (94.00; 93.77)	**93.88** (93.93/93.90/93.78/93.91); 15x	-	-	**93.98** (93.98/93.97); 20x*	-
BS 500, 4 LRs, none (94.00)	**94.00** (94.01/93.99); 17x	**94.06** (94.12/94.01); 17x	-	-	**93.95** (93.96/93.94); 20x*
BS 500, 4 LRs, ramp (94.00; 93.32)	**93.61** (93.46/93.75); 20x*	**93.73** (93.61/93.84); 20x*	-	-	**93.74** (93.78/93.71); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**92.47** (92.42/92.52); 19x	**93.83** (93.89/93.77); 19x	-	**93.93** (93.93); 20x*	**93.85** (93.90/93.80); 20x*
BS 500, 4 LRs, wave (94.00; 93.83)	**93.87** (93.85/93.89); 18x	**93.95** (93.96/93.95); 18x	-	-	**93.97** (93.99/93.94); 20x*
BS 125, conv only, none (93.86)	**93.83** (93.92/93.62/93.89/93.90); 16x	-	**93.77** (93.89/93.65); 17x	**93.87** (93.86/93.89); 20x*	-
BS 125, conv only, ramp (93.86; 93.48)	**93.87** (93.86/93.88/93.84/93.91); 17x	-	-	**93.76** (93.79/93.73); 20x*	-
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.77** (93.75/93.78/93.72/93.82); 16x	-	-	**93.83** (93.89/93.76); 20x*	-

Cell (baseline; do-nothing)	v19	v24	v25	v26	v27
BS 125, conv only, wave (93.86; 93.69)	**93.72** (93.83/93.71/93.71/93.64); 16x	-	-	**93.84** (93.89/93.78); 20x*	-
BS 125, 4 LRs, none (93.86)	**93.18** (93.02/93.34); 20x	**93.81** (93.80/93.83); 19x	-	-	**93.76** (93.81/93.70); 20x*
BS 125, 4 LRs, ramp (93.86; 93.26)	**93.92** (93.93/93.92); 20x	**94.01** (94.01/94.00); 20x*	-	-	**93.97** (93.96/93.98); 20x*
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	**93.87** (93.91/93.83); 17x	**93.94** (93.98/93.89); 17x	-	-	**93.93** (93.98/93.88); 20x*
BS 125, 4 LRs, wave (93.86; 93.70)	**93.85** (93.81/93.88); 18x	**93.88** (93.91/93.85); 19x	-	-	**93.91** (93.89/93.94); 20x*

Within 0.1 pp of the baseline or above (finished cells): v19: 12 of 24; v24: 7 of 12; v25: 3 of 4; v26: 9 of 13; v27: 6 of 12. * = the search hit its step budget.

Observations

Averaging two independent half-budget searches removes search noise but not the gap. Conv only, v26 is 0.073 pp short of the baseline on average over the 12 cells (8 within 0.1 pp, worst BS 2000 under the reverse ramp at 93.71), against 0.081 pp for v16 and 0.106 pp for v19 over its 8 cells with 4 seeds. Yet the spread between its two search seeds is half v19's: the mean within-cell SD of the held-out score is 0.041 pp for v26 against 0.079 pp for v19. What is left is the same in every search: a systematic error, not noise. BS 125 is v26's best batch size (93.87 / 93.76 / 93.83 / 93.84 without a transform / ramp / reverse ramp / wave; baseline 93.86).

With 4 LRs, the two searches cannot both afford the level scan (about 4.8 full runs at BS 500): in v26 the second pass of each search ran out of budget before its first decision. v27 scans once and shares the levels, but is no better than v24: 0.086 pp short on average (6 of 12 within 0.1 pp) against 0.081 pp (7 of 12). It gains under the reverse ramp at BS 2000 (93.84 vs 93.64) and loses without a transform at BS 2000 (93.68 vs 93.82) and BS 500 (93.95 vs 94.06); with each search's second pass cut to a few decisions, the averaging buys stability at the cost of refinement.

v25 (the second pass refines every interval but the first) is 0.094 pp short over its 4 cells; it is the only version near the baseline at BS 2000 under the reverse ramp (93.86, 2 seeds; v19 93.77 over 4) but is lower at BS 125 without a transform (93.77 vs 93.83).

The searched LRs do lie below the oracle from the middle of the run on: across all 175 conv-only 10-interval schedules searched since v9, log2(searched / oracle) is -0.4 to -1.1 in intervals 5-9 at BS 2000 without a transform and -0.8 to -2.2 at BS 500 under the ramp; and relative to the shifted plan, the second pass's climbs keep the value in 66% of 342 decisions, step down in 27% and up in only 7%. But Experiment 24 shows that scaling the searched schedules up loses on held-out seeds; the systematic error is the staircase shape, not the scale.

Experiment 24. Is the searched schedule too small, or the staircase the wrong shape?

Question

From the middle of the run on, the searched conv LRs lie 1.3-4.6x below the oracle (Experiment 23). Are they too small, so that scaling them up scores higher? And how much does committing a staircase cost, compared with a smooth schedule through the same values?

Setup

Item	Value
Scaled	v26's conv-only searched schedules (10 constant intervals) x1/0.6 everywhere, x1/0.36 everywhere, and x(1/0.6)^(2i/9) in interval i (x1 rising to x2.8)
Oracle	The baseline conv schedule divided by the transform: its 10 interval means as constant steps, and joined linearly
Linear	A schedule's values joined piecewise linearly through the interval midpoints, the end half-intervals continuing the neighbouring slope (clipped at 0); a linear schedule's interval means give it back exactly. Linear (10): from the 10-interval expanded schedule; linear (5): from the two searches' averaged 5-interval schedule, without the expansion. 4 LRs: all four groups
Runs	research/eval_schedule.py on held-out seeds 100-107 (the seeds of the searches' own held-out scores, so differences are paired); means over search seeds 0-1; bold = within 0.1 pp of the baseline or above

Scaled conv-only schedules: held-out TTA

Cell (baseline)	v26 steps	x1.67	x2.78	graded	oracle steps
BS 2000, none (93.92)	**93.86**	93.52	92.64	93.48	**93.92**
BS 2000, ramp (93.92)	**93.84**	**93.83**	93.33	**93.83**	93.80
BS 2000, reverse ramp (93.92)	93.71	93.64	93.19	93.73	**93.86**
BS 2000, wave (93.92)	**93.85**	93.53	92.95	93.63	**93.87**
BS 500, none (94.00)	**93.94**	93.70	93.11	93.75	93.86
BS 500, ramp (94.00)	93.86	**93.98**	93.61	93.83	**93.96**
BS 500, reverse ramp (94.00)	93.88	93.75	93.28	93.80	**94.02**
BS 500, wave (94.00)	**93.98**	-	-	-	**93.93**
BS 125, none (93.86)	**93.87**	-	-	-	-
BS 125, ramp (93.86)	93.76	-	-	-	-
BS 125, reverse ramp (93.86)	**93.83**	-	-	-	-
BS 125, wave (93.86)	**93.84**	-	-	-	-

Paired difference to the searched schedule: x1.67: -0.143 +- 0.050 pp (3 of 14 higher); x2.78: -0.689 +- 0.095 pp (0 of 14 higher); graded: -0.128 +- 0.044 pp (3 of 14 higher).

Committed shape, conv only: held-out TTA

Cell (baseline)	oracle steps	oracle linear	v26 steps	v26 linear (10)	v26 linear (5)
BS 2000, none (93.92)	**93.92**	**93.90**	**93.86**	**93.86**	93.78
BS 2000, ramp (93.92)	93.80	**93.92**	**93.84**	**93.87**	**93.90**
BS 2000, reverse ramp (93.92)	**93.86**	**93.96**	93.71	93.81	93.79
BS 2000, wave (93.92)	**93.87**	**93.96**	**93.85**	**93.91**	**93.85**
BS 500, none (94.00)	93.86	**94.02**	**93.94**	**93.93**	**93.90**
BS 500, ramp (94.00)	**93.96**	**93.99**	93.86	93.85	**93.98**
BS 500, reverse ramp (94.00)	**94.02**	**94.01**	93.88	**93.95**	93.85
BS 500, wave (94.00)	**93.93**	**94.01**	**93.98**	**93.98**	**93.98**
BS 125, none (93.86)	-	**93.92**	**93.87**	**93.83**	**93.79**
BS 125, ramp (93.86)	-	**93.93**	93.76	**93.82**	**93.86**
BS 125, reverse ramp (93.86)	-	**93.88**	**93.83**	**93.82**	**93.85**
BS 125, wave (93.86)	-	**93.97**	**93.84**	**93.91**	**93.93**

Paired difference to the searched steps: v26 linear (10): +0.028 +- 0.013 pp (15 of 24 higher); v26 linear (5): +0.020 +- 0.016 pp (14 of 24 higher).

Committed shape, 4 LRs: held-out TTA

Cell (baseline)	v27 steps	v27 linear (10)	v27 linear (5)
BS 2000, none (93.92)	93.68	93.74	93.70
BS 2000, ramp (93.92)	93.66	93.82	**93.85**
BS 2000, reverse ramp (93.92)	**93.84**	**93.83**	93.78
BS 2000, wave (93.92)	93.81	**93.85**	**93.89**
BS 500, none (94.00)	**93.95**	**94.01**	**94.01**
BS 500, ramp (94.00)	93.74	93.79	**93.96**
BS 500, reverse ramp (94.00)	93.85	**93.93**	93.89
BS 500, wave (94.00)	**93.97**	**94.01**	**94.10**
BS 125, none (93.86)	93.76	**93.91**	**93.87**
BS 125, ramp (93.86)	**93.97**	**93.94**	**94.11**
BS 125, reverse ramp (93.86)	**93.93**	**93.98**	**93.97**
BS 125, wave (93.86)	**93.91**	**93.88**	**93.96**

Paired difference to the searched steps: v27 linear (10): +0.050 +- 0.015 pp (17 of 24 higher); v27 linear (5): +0.085 +- 0.017 pp (21 of 24 higher).

Observations

The searched schedules are not too small: scaling them up loses. Over the 14 search seeds probed so far (BS 2000 and BS 500), x1.67 everywhere costs 0.143 +- 0.050 pp (3 of 14 higher), x2.78 costs 0.69 +- 0.10 pp (none higher), and the graded x1 to x2.8 costs 0.128 +- 0.044 pp (3 of 14 higher). Only the ramp cells gain from x1.67 (BS 500: 93.88 / 93.84 to 93.97 / 93.98), where the oracle's early LRs are 3-4x the baseline's. The correlation of Experiment 23 (larger than the cell's average, higher score) does not hold up as a cause: it compares searches that differ in more than scale.

The staircase is what costs. The oracle's 10 interval means as constant steps score 93.92 at BS 2000 but 93.86 at BS 500, 0.14 pp below the baseline they come from; joined linearly they score at or above the baseline in every cell (93.88-94.02; 0.071 pp above the steps on average over the 8 cells with both). The same holds for the searched schedules: joined linearly, v26's conv-only schedules score 0.028 +- 0.013 pp higher than as steps (15 of 24 search seeds), and v27's 4-LR schedules 0.050 +- 0.015 pp higher (17 of 24).

Joining the averaged 5-interval schedule directly (without the expansion to 10 intervals) is as good conv only (+0.020 +- 0.016 pp, 14 of 24) and better with 4 LRs (+0.085 +- 0.017 pp, 21 of 24): as cell means over search seeds 0-1, v27's 4-LR search is then 0.001 pp short of the baseline on average (9 of 12 cells within 0.1 pp; worst BS 2000 without a transform, 93.70), against 0.086 pp short as steps; conv only, v26 is 0.054 pp short (9 of 12; 0.046 and 10 of 12 joined from 10 intervals) against 0.073 pp. A linear interpolation of 5 values is smoother than the expansion's 10 tilted steps; with 4 LRs the head and bias levels decay in the same shape, so all four groups gain.

ICS v28 commits this way (v27 with final_shape linear and no expansion; its search is v27's, so the linear (5) columns are v28's held-out scores for search seeds 0-1). BS 2000 is the batch size left short: without a transform with 4 LRs (93.70) and under the reverse ramp conv only (93.79).

Experiment 25. ICS v28-v30: the linear commit, and refining the first interval

Question

v28 commits the averaged schedule linearly (Experiment 24) but keeps pass 1's shifted first interval, which overshoots under the reverse ramp at BS 2000 (0.13 in all four search seeds; the oracle's first fifth averages 0.065). Does refining the first interval in pass 2 too fix BS 2000, with two half-budget searches (v29) or one full-budget search (v30)?

Setup

Item	Value
v28	v27 (two half-budget searches, shared 4-LR levels) committing the averaged 5 values linearly; its search is v27's, so seeds 0-1 are Experiment 24's linear (5) column; this table shows search seeds 2-3
v29	v28 whose pass 2 also refines interval 1 (one grid step at most, rest-of-run lookahead)
v30	One full-budget search (v25: interval 1 refined, climbs up to 2 grid steps, the last interval averaged over 2 continuations) committed linearly

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v28	v29	v30
BS 2000, conv only, none (93.92)	**93.82** (93.84/93.80); 20x*	**93.84** (93.84/93.85/93.90/93.97/93.52/93.81/93.97/93.84/93.87/93.78/93.89/93.88); 20x*	**93.84** (93.86/93.82); 16x
BS 2000, conv only, ramp (93.92; 93.42)	**93.82** (93.88/93.75); 20x*	**93.89** (93.88/93.91/93.88/93.85/93.97/93.86/93.81/93.82/93.90/93.97/93.81/93.98); 20x*	**93.96** (94.00/93.92); 18x
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.80** (93.83/93.77); 20x*	**93.87** (93.85/93.87/93.90/93.88/93.89/93.72/93.92/93.85/93.85/93.95/93.85/93.90); 20x*	**93.86** (93.82/93.89); 16x
BS 2000, conv only, wave (93.92; 93.72)	**93.80** (93.77/93.84); 20x*	**93.86** (93.90/94.02/93.77/93.94/93.83/93.90/93.92/93.80/93.76/93.69/93.92/93.86); 20x*	**93.84** (93.86/93.82); 17x
BS 2000, 4 LRs, none (93.92)	**93.79** (93.77/93.81); 20x*	**93.74** (93.70/93.71/93.77/93.81/93.81/93.91/93.81/93.53/93.70/93.83/93.65/93.61); 20x*	**93.85** (93.90/93.79); 19x
BS 2000, 4 LRs, ramp (93.92; 93.25)	**93.85** (93.83/93.88); 20x*	**93.85** (93.86/93.84/93.83/93.88/93.72/93.98/93.82/93.73/93.77/93.93/93.93/93.90); 20x*	**93.81** (93.80/93.82); 20x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.57** (93.61/93.53); 20x*	**93.81** (93.91/93.91/93.61/93.53/93.82/93.77/93.94/93.62/93.93/93.82/93.85/94.00); 20x*	**93.91** (93.79/94.03); 19x
BS 2000, 4 LRs, wave (93.92; 93.68)	**93.85** (93.76/93.93); 20x*	**93.86** (93.98/93.82/93.69/93.93/93.71/93.85/93.80/93.93/93.86/93.93/93.92/93.88); 20x*	**93.97** (93.95/94.00); 19x
BS 500, conv only, none (94.00)	**93.95** (93.93/93.97); 20x*	**93.95** (93.92/93.88/93.96/93.95/93.96/93.98/94.02/93.91/93.93/93.97/94.00/93.94); 20x*	**93.89** (93.78/94.01); 16x
BS 500, conv only, ramp (94.00; 93.37)	**93.96** (93.97/93.95); 20x*	**93.94** (93.97/93.98/93.97/93.88/93.92/93.95/93.98/93.93/93.90/94.00/93.94/93.89); 20x*	**93.92** (93.82/94.01); 18x
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.89** (93.91/93.87); 20x*	**93.96** (94.04/93.97/94.07/93.91/93.89/93.92/93.98/94.02/93.89/93.99/93.95/93.92); 20x*	**93.97** (93.94/94.00); 17x
BS 500, conv only, wave (94.00; 93.77)	**93.98** (93.91/94.06); 20x*	**93.96** (93.94/94.03/93.97/94.00/93.93/93.94/93.93/93.96/93.96/93.95/94.02/93.92); 20x*	**93.98** (94.00/93.97); 17x
BS 500, 4 LRs, none (94.00)	**94.02** (94.08/93.96); 20x*	**94.02** (94.06/93.97/94.08/94.11/93.98/93.97/94.03/93.95/94.08/93.99/93.95/94.03); 20x*	**94.03** (94.01/94.04); 18x
BS 500, 4 LRs, ramp (94.00; 93.32)	**93.97** (93.99/93.95); 20x*	**93.96** (93.92/94.01/93.99/93.95/93.99/93.95/94.10/93.88/93.93/93.84/93.84/94.12); 20x*	**93.78** (93.78/93.78); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**93.93** (94.00/93.85); 20x*	**93.89** (93.92/93.81/94.00/93.93/93.99/93.81/93.90/93.87/93.95/93.84/93.76/93.93); 20x*	**93.87** (93.92/93.81); 19x
BS 500, 4 LRs, wave (94.00; 93.83)	**94.04** (94.05/94.02); 20x*	**93.97** (93.90/93.97/94.05/94.02/93.92/94.10/93.88/93.91/94.00/93.94/93.88/94.02); 20x*	**93.75** (93.54/93.95); 19x
BS 125, conv only, none (93.86)	**93.82** (93.83/93.80); 20x*	**93.87** (93.87/93.93/93.91/93.87/93.79/93.88/93.84/93.85/93.88/93.76/93.84/93.99); 20x*	**93.84** (93.94/93.75); 17x
BS 125, conv only, ramp (93.86; 93.48)	**93.92** (93.92/93.92); 20x*	**93.89** (93.86/93.93/93.92/93.92/93.89/93.87/93.79/93.88/93.89/93.92/93.93/93.94); 20x*	**93.78** (93.78/93.78); 17x
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.88** (93.88/93.87); 20x*	**93.88** (93.90/93.85/93.91/93.95/93.74/93.86/93.90/93.90/93.86/93.92/93.85/93.95); 20x*	**93.85** (93.84/93.86); 16x

Cell (baseline; do-nothing)	v28	v29	v30
BS 125, conv only, wave (93.86; 93.69)	**93.78** (93.75/93.80); 20x*	**93.90** (93.97/93.88/93.75/93.94 /94.05/93.91/93.95/93.92/93.93 /93.81/93.81/93.92); 20x*	**93.90** (93.98/93.82); 17x
BS 125, 4 LRs, none (93.86)	**93.84** (93.80/93.88); 20x*	**93.85** (93.90/93.84/93.80/93.88 /93.85/93.88/93.88/93.82/93.88 /93.79/93.90/93.83); 20x*	**93.72** (93.73/93.71); 20x
BS 125, 4 LRs, ramp (93.86; 93.26)	**94.06** (94.03/94.09); 20x*	**94.06** (94.08/94.14/94.03/94.09 /94.05/94.14/93.95/93.99/94.11 /94.08/94.08/93.95); 20x*	**94.03** (94.02/94.03); 20x*
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	**94.01** (94.01/94.00); 20x*	**94.02** (94.11/94.05/93.98/94.07 /94.09/93.88/94.03/94.00/94.02 /94.00/94.03/93.98); 20x*	**93.82** (93.81/93.83); 19x
BS 125, 4 LRs, wave (93.86; 93.70)	**93.99** (93.97/94.00); 20x*	**93.94** (93.91/93.93/93.97/94.01 /94.07/93.82/94.01/94.04/93.85 /93.84/94.03/93.82); 20x*	**93.97** (93.98/93.96); 20x

Within 0.1 pp of the baseline or above (finished cells): v28: 17 of 24; v29: 21 of 24; v30: 18 of 24. * = the search hit its step budget.

Observations

Refining the first interval closes BS 2000. On search seeds 0-1, v29 is within 0.1 pp of the baseline in 22 of 24 cells: conv only in all 12 (0.007 pp short on average, worst 0.09; BS 2000 93.84 / 93.90 / 93.86 / 93.96 without a transform / ramp / reverse ramp / wave, against v28's 93.80-93.82 on seeds 2-3), with 4 LRs in 10 of 12 (0.001 pp above on average). The reverse-ramp cell with 4 LRs at BS 2000 goes from 93.57 (v28) to 93.91. The two misses are with 4 LRs: BS 2000 without a transform (93.71) and BS 500 under the reverse ramp (93.86).

v30's single full-budget search is weaker conv only: 0.039 pp short on average (11 of 12 within 0.1 pp), lowest at BS 125 under the ramp (93.78). With the linear commit, two half-budget searches averaged beat one search with twice the budget per decision.

v30's single search is also weaker with 4 LRs (0.088 pp short on its 8 finished cells, 4 within 0.1 pp; BS 500 93.78 under the ramp and 93.75 with the wave).

v29's two 4-LR misses are level errors, in opposite directions (held-out probes of its two linear schedules per cell, seeds 0 / 1, research/eval_schedule.py). At BS 2000 without a transform (searched 93.70 / 93.71), head is too low: the common level of head and the biases is 460 while the baseline's head starts at 1300, and head x2.78 scores 93.84 / 93.78; all three groups x1.67 score 93.79 / 93.79, and conv's searched schedule with the other groups on the baseline 93.80 / 93.75. At BS 500 under the reverse ramp (93.92 / 93.81) the common level sits one x0.6 step below divergence: x1.67 scores 92.39 / 92.17, x2.78 diverges (41 / 48), while x0.6 scores 94.04 / 93.96 and norm_bias alone x0.22 94.04 / 93.97. The "largest level within 1 pp" rule lands next to the stability edge under the reverse ramp (the transform multiplies the start by 4), and a single common level cannot give head (baseline 1300 at BS 2000) and the biases (99 and 36) their own.

Search seeds 2-3 confirm v29 (cell means over 4 search seeds, campaign summary table): conv only all 12 cells within 0.1 pp (0.008 pp short on average, worst 0.07 pp: BS 500 without a transform, 93.93); with 4 LRs 10 of 12 (0.004 pp short on average; BS 125 93.85-94.08). The 4-LR misses left are both at BS 2000: without a transform (93.75) and under the reverse ramp (93.74, where seeds 2-3 scored lower than 0-1). BS 500 under the reverse ramp averages 93.91 over the 4 seeds.

Is head's level the fix? Over all 4-LR cells (v29's linear schedules, search seeds 0-1, 23 of 24 probed), moving head alone loses on average either way: x0.36 by 0.096 +- 0.016 pp (3 of 23 higher), x2.78 by 0.098 +- 0.047 pp (7 of 23). x7.7 diverges or collapses under the ramps (BS 2000 reverse ramp 58-59%, BS 500 reverse ramp 28-34%, ramp 89.5-92.0%) but gains without a transform at BS 2000 (93.91 / 93.83 against 93.70 / 93.71) and BS 500 (94.10 / 94.04 against 94.06 / 93.97). The common level is about right except where head's own optimum lies far above the biases' (BS 2000: head 1300, norm_bias 99, whiten_bias 36 in the baseline). A short first-interval horizon cannot tell these cases apart (under the ramp head's LR grows x4 late in the run); ICS v31 tries head's whole profile x2.78 higher with pass 2's rest-of-run lookahead instead, keeping it only if it scores higher.

v31 did not get to try it: in all 48 relevel decisions (24 searches x 2 members) the candidate found no budget left (score null; often the base point too), so every v31 search committed exactly v29's schedule and scored v29's held-out value to the last digit (a reproducibility check: the same seed and config give the same result). With the budget split between two searches, each search's second pass already spends its share on the per-interval climbs; a rest-of-run head relevel (about 0.8 full runs per member at interval 2) would have to replace some of

them.

Experiment 26. What does the committed representation allow, and what does the grid cost?

Question

With the linear commit, ICS v29 matches the baseline in most cells but stays about 0.1 pp short at BS 2000. Is that the search, or the representation it commits: 5 values on the x0.6 grid, joined linearly?

Setup

Item	Value
Schedules	Conv only: the oracle (baseline conv schedule divided by the transform) reduced to its 10 or 5 interval means (2 significant figures), and the 5 means snapped to the x0.6 grid (what a single search can commit), each joined linearly through the interval midpoints
Runs	research/eval_schedule.py on held-out seeds 100-107; ICS v29 = mean over its search seeds

Held-out TTA, conv only

Cell (baseline)	Oracle linear (10)	Oracle linear (5)	Oracle linear (5), x0.6 grid	ICS v29
BS 2000, none (93.92)	93.90	93.96	93.84	93.84
BS 2000, ramp (93.92)	93.92	93.93	93.76	93.89
BS 2000, reverse ramp (93.92)	93.96	93.94	93.95	93.87
BS 2000, wave (93.92)	93.96	93.96	93.81	93.86
BS 500, none (94.00)	94.02	93.92	93.88	93.95
BS 500, ramp (94.00)	93.99	93.94	93.83	93.94
BS 500, reverse ramp (94.00)	94.01	93.98	93.89	93.96
BS 500, wave (94.00)	94.01	94.01	93.86	93.96
BS 125, none (93.86)	93.92	93.87	93.84	93.87
BS 125, ramp (93.86)	93.93	93.84	93.74	93.89
BS 125, reverse ramp (93.86)	93.88	93.91	93.77	93.88
BS 125, wave (93.86)	93.97	93.90	93.92	93.90

Snapping the 5 interval means to the x0.6 grid costs 0.088 pp on average over the 12 cells.

Observations

Five values joined linearly are enough: the oracle's 5 interval means, joined linearly, score at or above the baseline at BS 2000 in every cell (93.93-93.96) and within 0.08 pp of it at BS 500 and 125 (93.84-94.01), as good as 10 means. The grid is what costs: snapped to the x0.6 grid, the same 5 means lose 0.09 pp on average and up to 0.17 pp (BS 2000 under the ramp, 93.76), because a x0.6 step moves a value by up to x1.29 from where it should be. ICS v29 scores about as well as the grid-snapped oracle (BS 2000: 93.81-93.89 against 93.76-93.95), so its search is near the ceiling of what it commits; its two averaged searches already put values between grid points, but only where they disagree.

Experiment 27. ICS v32-v33: a third search instead of the second pass, and a finer second-pass grid

Question

With 4 LRs v29's second passes get almost no budget; would a third independent first pass use it better (v32)? And does a second pass climbing on a grid twice as fine recover what the x0.6 grid costs (v33, Experiment 26)?

Setup

Item	Value
v29	Reference (campaign summary)
v32	Three independent short-cooldown searches (one pass each, a third of the budget after the shared 4-LR level scan), each shifted one grid step up at the end, averaged and committed linearly
v33	v29 whose second passes climb on a x0.6^0.5 = x0.775 grid, up to 2 steps (v29's range)

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v29	v32	v33
BS 2000, conv only, none (93.92)	**93.84** (93.84/93.85/93.90/93.97/93.52/93.81/93.97/93.84/93.87/93.78/93.89/93.88); 20x*	**93.86** (93.87/93.84); 18x	**93.88** (93.96/93.81); 20x*
BS 2000, conv only, ramp (93.92; 93.42)	**93.89** (93.88/93.91/93.88/93.85/93.97/93.86/93.81/93.82/93.90/93.97/93.81/93.98); 20x*	**93.80** (93.87/93.73); 20x*	**93.90** (93.88/93.91); 20x*
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.87** (93.85/93.87/93.90/93.88/93.89/93.72/93.92/93.85/93.85/93.95/93.85/93.90); 20x*	**93.83** (93.83/93.82); 19x	**93.85** (93.90/93.80); 20x*
BS 2000, conv only, wave (93.92; 93.72)	**93.86** (93.90/94.02/93.77/93.94/93.83/93.90/93.92/93.80/93.76/93.69/93.92/93.86); 20x*	**93.87** (93.78/93.95); 19x*	**93.88** (93.83/93.93); 20x*
BS 2000, 4 LRs, none (93.92)	**93.74** (93.70/93.71/93.77/93.81/93.81/93.91/93.81/93.53/93.70/93.83/93.65/93.61); 20x*	**93.83** (93.81/93.85); 20x*	**93.69** (93.70/93.67); 20x*
BS 2000, 4 LRs, ramp (93.92; 93.25)	**93.85** (93.86/93.84/93.83/93.88/93.72/93.98/93.82/93.73/93.77/93.93/93.93/93.90); 20x*	**90.48** (90.48/90.48); 20x*	**93.85** (93.86/93.84); 20x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.81** (93.91/93.91/93.61/93.53/93.82/93.77/93.94/93.62/93.93/93.82/93.85/94.00); 20x*	**93.79** (93.91/93.68); 20x*	**93.85** (93.91/93.79); 20x*
BS 2000, 4 LRs, wave (93.92; 93.68)	**93.86** (93.98/93.82/93.69/93.93/93.71/93.85/93.80/93.93/93.86/93.93/93.92/93.88); 20x*	**93.94** (93.95/93.92); 20x*	**93.91** (93.94/93.88); 20x*
BS 500, conv only, none (94.00)	**93.95** (93.92/93.88/93.96/93.95/93.96/93.98/94.02/93.91/93.93/93.97/94.00/93.94); 20x*	**93.94** (93.95/93.93); 18x	**93.88** (93.88/93.88); 20x*
BS 500, conv only, ramp (94.00; 93.37)	**93.94** (93.97/93.98/93.97/93.88/93.92/93.95/93.98/93.93/93.90/94.00/93.94/93.89); 20x*	**93.64** (93.56/93.72); 20x*	**93.98** (93.97/93.98); 20x*
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.96** (94.04/93.97/94.07/93.91/93.89/93.92/93.98/94.02/93.89/93.99/93.95/93.92); 20x*	**93.94** (93.94/93.94); 20x*	**93.94** (93.91/93.98); 20x*
BS 500, conv only, wave (94.00; 93.77)	**93.96** (93.94/94.03/93.97/94.00/93.93/93.94/93.93/93.96/93.96/93.95/94.02/93.92); 20x*	**93.97** (94.00/93.95); 19x	**94.01** (94.07/93.95); 20x*
BS 500, 4 LRs, none (94.00)	**94.02** (94.06/93.97/94.08/94.11/93.98/93.97/94.03/93.95/94.08/93.99/93.95/94.03); 20x*	**94.03** (94.02/94.04); 20x*	**94.00** (94.05/93.96); 20x*
BS 500, 4 LRs, ramp (94.00; 93.32)	**93.96** (93.92/94.01/93.99/93.95/93.99/93.95/94.10/93.88/93.93/93.84/93.84/94.12); 20x*	**92.46** (93.19/91.72); 20x*	**93.97** (93.92/94.01); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**93.89** (93.92/93.81/94.00/93.93/93.99/93.81/93.90/93.87/93.95/93.84/93.76/93.93); 20x*	**93.86** (93.96/93.77); 20x*	**93.86** (93.92/93.81); 20x*
BS 500, 4 LRs, wave (94.00; 93.83)	**93.97** (93.90/93.97/94.05/94.02/93.92/94.10/93.88/93.91/94.00/93.94/93.88/94.02); 20x*	**94.03** (94.05/94.02); 20x*	**93.94** (93.90/93.97); 20x*
BS 125, conv only, none (93.86)	**93.87** (93.87/93.93/93.91/93.87/93.79/93.88/93.84/93.85/93.88/93.76/93.84/93.99); 20x*	**93.85** (93.81/93.90); 19x*	**93.88** (93.87/93.90); 20x*
BS 125, conv only, ramp (93.86; 93.48)	**93.89** (93.86/93.93/93.92/93.92/93.89/93.87/93.79/93.88/93.89/93.92/93.93/93.94); 20x*	**93.54** (93.82/93.26); 20x*	**93.90** (93.86/93.93); 20x*
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.88** (93.90/93.85/93.91/93.95/93.74/93.86/93.90/93.90/93.86/93.92/93.85/93.95); 20x*	**93.86** (93.91/93.81); 19x*	**93.88** (93.88/93.88); 20x*

Cell (baseline; do-nothing)	v29	v32	v33
BS 125, conv only, wave (93.86; 93.69)	**93.90** (93.97/93.88/93.75/93.94 /94.05/93.91/93.95/93.92/93.93 /93.81/93.81/93.92); 20x*	**93.84** (93.94/93.75); 20x*	**93.91** (93.97/93.84); 20x*
BS 125, 4 LRs, none (93.86)	**93.85** (93.90/93.84/93.80/93.88 /93.85/93.88/93.88/93.82/93.88 /93.79/93.90/93.83); 20x*	**93.79** (93.68/93.91); 20x*	**93.87** (93.90/93.84); 20x*
BS 125, 4 LRs, ramp (93.86; 93.26)	**94.06** (94.08/94.14/94.03/94.09 /94.05/94.14/93.95/93.99/94.11 /94.08/94.08/93.95); 20x*	**93.66** (93.55/93.77); 20x*	**94.11** (94.08/94.14); 20x*
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	**94.02** (94.11/94.05/93.98/94.07 /94.09/93.88/94.03/94.00/94.02 /94.00/94.03/93.98); 20x*	**93.92** (93.97/93.86); 20x	**94.02** (94.03/94.01); 20x*
BS 125, 4 LRs, wave (93.86; 93.70)	**93.94** (93.91/93.93/93.97/94.01 /94.07/93.82/94.01/94.04/93.85 /93.84/94.03/93.82); 20x*	**94.01** (94.10/93.93); 20x*	**93.92** (93.91/93.93); 20x*

Within 0.1 pp of the baseline or above (finished cells): v29: 21 of 24; v32: 16 of 24; v33: 21 of 24. * = the search hit its step budget.

Observations

v32 fails under the ramp: without a second pass, the shifted first passes leave the ramp's steep early decline unrefined (4 LRs: BS 2000 90.48, BS 500 92.46; conv only: BS 500 93.64, BS 125 93.54). Over its cells v32 is 0.097 pp short conv only and 0.55 pp with 4 LRs; v29's second pass, even when it can afford only its first interval, is needed.

A finer second-pass grid does not recover the grid's cost: paired with v29 on the same search seeds (which share their first passes), v33 scores 0.011 +- 0.007 pp lower (45 pairs); conv only it is 0.018 pp short of the baseline on average (11 of 12 within 0.1 pp) against v29's 0.016. Averaging two searches already puts the committed values between grid points wherever the searches disagree, and a finer second-pass climb gets single-seed decisions over smaller differences. v29 stays the algorithm.

Smoothing the committed values does not help either: replacing each interior value of v29's averaged 5-interval schedule by the log-space average 1/4, 1/2, 1/4 of it and its neighbours (endpoints kept; held-out probes of search seeds 0-3, 90 pairs) changes the held-out score by -0.016 +- 0.008 pp (38 of 90 higher). It helps without a transform (+0.032 pp; with 4 LRs at BS 2000 +0.108, to 93.85) and hurts under the wave (-0.074 pp; 4 LRs at BS 500 -0.151), whose optimum is genuinely non-monotone.

A cheaper 4-LR level scan costs more than it saves (ICS v34: the level candidates scored right after interval 1, without the one-interval cooldown, to leave the second passes more budget): paired with v29 it scores 0.106 +- 0.042 pp lower (24 searches; 5 of 12 cells within 0.1 pp). Without the cooldown the scan picks the lower level (60 instead of 460) in 11 of 24 searches, at BS 125 and 500 where v29 matched (BS 125 under the ramp 93.57), while the BS 2000 misses stay (93.75 and 93.78). The cooldown is what lets the short horizon rank these levels.

Scanning head's level apart from the biases' (ICS v35) fixes v29's two misses and breaks most other cells. At BS 2000 head lands one x7.7 step above the biases (3500 against 460) and the search scores 93.96 without a transform and 93.91 under the reverse ramp (v29: 93.76 and 93.76 over 8 search seeds; baseline 93.92). Elsewhere head runs to the top of what the short horizon accepts, 27000 or 210000, and the full run pays for it late: 92.27 at BS 2000 under the ramp, 93.19 at BS 500 under the reverse ramp, 73.3 in one BS 125 reverse-ramp search; paired with v29, -1.20 +- 0.86 pp (24 searches, 4 of 12 cells within 0.1 pp). Capping head at one x7.7 step above the common level would not help: head x7.7 on v29's schedules already loses 2-4 pp under the ramp (Experiment 25). With a short horizon, head's level can only be set safely together with the biases'; v29's two BS 2000 misses are the cost.

Lowering the common level does not help on average either: v29's committed 4-LR schedules with head and both biases x0.6 score -0.007 +- 0.016 pp against the searched ones (held-out probes of search seeds 0-3, 44 pairs, 21 higher), and ICS v42 (v29 with the joint level lowered one x0.6 step after the scan, so conv is searched at the lower level too) is 0.029 pp short of the baseline (9 of 12 cells within 0.1 pp; v29: 0.012 pp, 10 of 12). It fixes BS 500 under the reverse ramp (94.02) and gains at BS 125 without a transform (94.02) but loses about as much elsewhere (BS 2000 with the wave 93.67, BS 125 under the ramp 93.90); the two BS 2000 misses stay (93.73, 93.81).

Tying head and the biases to conv's profile is right: with conv as searched but the other three groups decaying linearly from their committed level to 0 (the baseline's shape), the held-out score drops by 0.154 +- 0.045 pp (48

probes of search seeds 0-3, 12 higher), most under the ramp (BS 500 92.94, BS 125 93.59), where following conv's profile is what compensates the transform for the other groups too.

Experiment 28. How much of the 20-run budget does ICS v29 need?

Question

The mandate allows at most 20 full runs of training per search. Does v29 still match the baseline with less, and does starting each first-pass climb on the previous intervals' trend make it robust to a smaller budget?

Setup

Item	Value
v36	v29 with a budget of 10 full runs (each of its two searches gets 5, minus the 4-LR level scan)
v37	v29 with a budget of 15 full runs
v39	v37 whose first-pass climbs start at the previous value times the last two intervals' ratio (trend_start; clipped to x0.36..x1.67), 15 full runs
v38	v29 with trend_start, 20 full runs
v29	The algorithm, 20 full runs (search seeds 0-7)

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v36	v37	v39	v38	v29
BS 2000, conv only, none (93.92)	**93.23** (93.12/93.34); 10x*	**93.81** (93.87/93.76); 15x*	**93.86** (93.96/93.76); 15x*	**93.91** (93.97/93.85); 20x*	**93.84** (93.84/93.85/93.90/93.97/93.52/93.81/93.97/93.84/93.87/93.78/93.89/93.88); 20x*
BS 2000, conv only, ramp (93.92; 93.42)	**76.66** (79.88/73.43); 10x*	**93.63** (93.53/93.73); 15x*	**93.90** (93.89/93.91); 15x*	**93.85** (93.79/93.91); 20x*	**93.89** (93.88/93.91/93.88/93.85/93.97/93.86/93.81/93.82/93.90/93.97/93.81/93.98); 20x*
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.83** (93.83/93.83); 10x*	**93.77** (93.72/93.82); 15x*	**93.80** (93.72/93.87); 15x*	**93.86** (93.85/93.87); 20x*	**93.87** (93.85/93.87/93.90/93.88/93.89/93.72/93.92/93.85/93.85/93.95/93.85/93.90); 20x*
BS 2000, conv only, wave (93.92; 93.72)	**93.17** (92.87/93.48); 10x*	**93.90** (93.82/93.97); 15x*	**93.89** (93.82/93.95); 15x*	**93.93** (93.84/94.02); 20x*	**93.86** (93.90/94.02/93.77/93.94/93.83/93.90/93.92/93.80/93.76/93.69/93.92/93.86); 20x*
BS 2000, 4 LRs, none (93.92)	**91.23** (90.64/91.82); 10x*	**93.71** (93.81/93.61); 15x*	**93.88** (93.79/93.97); 15x*	**93.81** (93.70/93.92); 20x*	**93.74** (93.70/93.71/93.77/93.81/93.81/93.91/93.81/93.53/93.70/93.83/93.65/93.61); 20x*
BS 2000, 4 LRs, ramp (93.92; 93.25)	**13.45** (13.45/13.45); 10x*	**79.90** (79.70/80.10); 15x*	**93.84** (93.82/93.86); 15x*	**93.82** (93.82/93.81); 20x*	**93.85** (93.86/93.84/93.83/93.88/93.72/93.98/93.82/93.73/93.77/93.93/93.93/93.90); 20x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.70** (93.83/93.57); 10x*	**93.83** (93.95/93.71); 15x*	**93.71** (93.79/93.63); 15x*	**93.76** (93.88/93.65); 20x*	**93.81** (93.91/93.91/93.61/93.53/93.82/93.77/93.94/93.62/93.93/93.82/93.85/94.00); 20x*
BS 2000, 4 LRs, wave (93.92; 93.68)	**92.74** (92.69/92.79); 10x*	**93.76** (93.89/93.62); 15x*	**92.97** (93.89/92.05); 15x*	**93.89** (93.94/93.84); 20x*	**93.86** (93.98/93.82/93.69/93.93/93.71/93.85/93.80/93.93/93.86/93.93/93.92/93.88); 20x*
BS 500, conv only, none (94.00)	**93.30** (93.13/93.48); 10x*	**93.90** (93.92/93.88); 15x*	**93.90** (93.91/93.88); 15x*	**93.90** (93.91/93.88); 20x*	**93.95** (93.92/93.88/93.96/93.95/93.96/93.98/94.02/93.91/93.93/93.97/94.00/93.94); 20x*
BS 500, conv only, ramp (94.00; 93.37)	**84.68** (84.68/84.68); 10x*	**93.70** (93.67/93.72); 15x*	**93.98** (93.96/94.00); 15x*	**93.96** (93.97/93.95); 20x*	**93.94** (93.97/93.98/93.97/93.88/93.92/93.95/93.98/93.93/93.90/94.00/93.94/93.89); 20x*

Cell (baseline; do-nothing)	v36	v37	v39	v38	v29
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.96** (93.94/93.98); 10x*	**94.00** (94.00/94.00); 15x*	**93.92** (93.86/93.99); 15x*	**94.01** (94.04/93.97); 20x*	**93.96** (94.04/93.97/94.07/93.91/93.89/93.92/93.98/94.02/93.89/93.99/93.95/93.92); 20x*
BS 500, conv only, wave (94.00; 93.77)	**93.58** (93.66/93.49); 10x*	**94.02** (94.01/94.03); 15x*	**93.83** (93.57/94.08); 15x*	**93.98** (93.94/94.03); 20x*	**93.96** (93.94/94.03/93.97/94.00/93.93/93.94/93.93/93.96/93.96/93.95/94.02/93.92); 20x*
BS 500, 4 LRs, none (94.00)	**90.59** (89.94/91.25); 10x*	**93.83** (93.78/93.88); 15x*	**93.97** (93.94/93.99); 15x*	**93.99** (94.05/93.92); 20x*	**94.02** (94.06/93.97/94.08/94.11/93.98/93.97/94.03/93.95/94.08/93.99/93.95/94.03); 20x*
BS 500, 4 LRs, ramp (94.00; 93.32)	**10.09** (10.17/10.00); 10x*	**89.30** (89.98/88.62); 15x*	**94.02** (93.88/94.15); 15x*	**93.93** (93.91/93.94); 20x*	**93.96** (93.92/94.01/93.99/93.95/93.99/93.95/94.10/93.88/93.93/93.84/93.84/94.12); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**93.80** (93.90/93.69); 10x*	**93.88** (93.97/93.79); 15x*	**93.88** (93.97/93.79); 15x*	**93.86** (93.92/93.81); 20x*	**93.89** (93.92/93.81/94.00/93.93/93.99/93.81/93.90/93.87/93.95/93.84/93.76/93.93); 20x*
BS 500, 4 LRs, wave (94.00; 93.83)	**92.24** (92.24/92.24); 10x*	**93.83** (93.69/93.96); 15x*	**93.86** (93.93/93.79); 15x*	**94.02** (94.06/93.97); 20x*	**93.97** (93.90/93.97/94.05/94.02/93.92/94.10/93.88/93.91/94.00/93.94/93.88/94.02); 20x*
BS 125, conv only, none (93.86)	**93.43** (93.50/93.35); 10x*	**93.88** (93.87/93.89); 15x*	**93.91** (93.95/93.88); 15x*	**93.87** (93.88/93.85); 20x*	**93.87** (93.87/93.93/93.91/93.87/93.79/93.88/93.84/93.85/93.88/93.76/93.84/93.99); 20x*
BS 125, conv only, ramp (93.86; 93.48)	**84.51** (85.61/83.41); 10x*	**93.52** (93.48/93.56); 15x*	**93.89** (93.86/93.91); 15x*	**93.90** (93.89/93.91); 20x*	**93.89** (93.86/93.93/93.92/93.92/93.89/93.87/93.79/93.88/93.89/93.92/93.93/93.94); 20x*
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.80** (93.82/93.77); 10x*	**93.88** (93.86/93.91); 15x*	**93.81** (93.86/93.77); 15x*	**93.91** (93.90/93.92); 20x*	**93.88** (93.90/93.85/93.91/93.95/93.74/93.86/93.90/93.90/93.86/93.92/93.85/93.95); 20x*
BS 125, conv only, wave (93.86; 93.69)	**93.56** (93.58/93.53); 10x*	**93.90** (93.97/93.83); 15x*	**93.33** (92.82/93.85); 15x*	**93.91** (93.93/93.88); 20x*	**93.90** (93.97/93.88/93.75/93.94/94.05/93.91/93.95/93.92/93.93/93.81/93.81/93.92); 20x*

Cell (baseline; do-nothing)	v36	v37	v39	v38	v29
BS 125, 4 LRs, none (93.86)	**88.20** (88.20/88.20); 10x*	**93.38** (93.26/93.51); 15x*	**93.86** (93.87/93.85); 15x*	**93.87** (93.91/93.84); 20x*	**93.85** (93.90/93.84/93.80/93.88/93.85/93.88/93.88/93.82/93.88/93.79/93.90/93.83); 20x*
BS 125, 4 LRs, ramp (93.86; 93.26)	**58.27** (58.27/58.27); 10x*	**90.90** (91.36/90.45); 15x*	**94.09** (94.11/94.08); 15x*	**94.11** (94.08/94.14); 20x*	**94.06** (94.08/94.14/94.03/94.09/94.05/94.14/93.95/93.99/94.11/94.08/94.08/93.95); 20x*
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	**93.95** (94.04/93.86); 10x*	**93.95** (94.02/93.88); 15x*	**93.97** (94.07/93.88); 15x*	**93.99** (94.07/93.91); 20x*	**94.02** (94.11/94.05/93.98/94.07/94.09/93.88/94.03/94.00/94.02/94.00/94.03/93.98); 20x*
BS 125, 4 LRs, wave (93.86; 93.70)	**92.94** (93.29/92.60); 10x*	**93.83** (93.83/93.83); 15x*	**93.34** (92.73/93.95); 15x*	**93.92** (93.91/93.93); 20x*	**93.94** (93.91/93.93/93.97/94.01/94.07/93.82/94.01/94.04/93.85/93.84/94.03/93.82); 20x*

Within 0.1 pp of the baseline or above (finished cells): v36: 4 of 24; v37: 10 of 24; v39: 16 of 24; v38: 20 of 24; v29: 21 of 24. * = the search hit its step budget.

Observations

v29 needs its whole budget, and the transformed cells fail first when it is cut. At 15 full runs (v37) conv only is 0.099 pp short of the baseline on average (7 of 12 cells within 0.1 pp; BS 125 under the ramp 93.52, BS 500 under the ramp 93.70), against 0.023 pp and 12 of 12 at 20 runs; with 4 LRs, where the level scan takes about 4 runs first, the ramp cells collapse (BS 2000 79.90, BS 500 89.30, BS 125 90.90). At 10 runs (v36) the searches fail almost everywhere (conv only 3.3 pp short on average, 4 LRs 18 pp, some runs diverged).

The failure is in the first pass: when a search runs out of budget there, each remaining interval is trained at the value its climb starts from, the previous interval's, with no evaluation. Under the ramp the schedule must fall by about x0.4 per fifth of the run, so held values are several grid steps too high late in the run. A budget below 20 runs would need a different fallback (for example continuing the previous intervals' trend), not just fewer decisions.

Starting each first-pass climb on the trend removes the collapse: at 15 runs v39's 4-LR ramp cells score 93.84 / 94.02 / 94.09 at BS 2000 / 500 / 125 (v37: 79.90 / 89.30 / 90.90), and v39 is 0.091 pp short conv only (9 of 12 within 0.1 pp) and 0.108 pp with 4 LRs (7 of 11); the trend overshoots where the schedule turns, under the wave (BS 2000 with 4 LRs 92.97). At 20 runs it changes nothing measurable: v38 is 0.011 pp short conv only (12 of 12) and 0.012 pp with 4 LRs (8 of 12), paired with v29 -0.009 +- 0.013 pp. v29 keeps the plain start; trend_start is the change to make if the budget must be cut.

Experiment 29. How many constant intervals should ICS v29 search?

Question

With the linear commit, 5 values are enough to represent the oracle (Experiment 26). Would 4 intervals (fewer decisions, each with more budget) or 8 (finer shape, more decisions on the same budget) do better?

Setup

Item	Value
v40	v29 with 4 intervals (the last decision averaged over 2 continuations)
v29	5 intervals (search seeds 0-7)
v41	v29 with 8 intervals (6 does not divide the runs' step counts)

Held-out TTA (mean over search seeds; per seed); cost in full runs

Cell (baseline; do-nothing)	v40	v29	v41
BS 2000, conv only, none (93.92)	**93.93** (93.89/93.96); 20x*	**93.84** (93.84/93.85/93.90/93.97/93.52/93.81/93.97/93.84/93.87/93.78/93.89/93.88); 20x*	**93.75** (93.79/93.71); 20x*
BS 2000, conv only, ramp (93.92; 93.42)	**93.85** (93.77/93.92); 20x*	**93.89** (93.88/93.91/93.88/93.85/93.97/93.86/93.81/93.82/93.90/93.97/93.81/93.98); 20x*	**93.87** (93.87/93.87); 20x*
BS 2000, conv only, reverse ramp (93.92; 93.57)	**93.90** (93.91/93.89); 20x*	**93.87** (93.85/93.87/93.90/93.88/93.89/93.72/93.92/93.85/93.85/93.95/93.85/93.90); 20x*	**93.68** (93.57/93.78); 20x*
BS 2000, conv only, wave (93.92; 93.72)	**93.83** (93.93/93.72); 20x*	**93.86** (93.90/94.02/93.77/93.94/93.83/93.90/93.92/93.80/93.76/93.69/93.92/93.86); 20x*	**93.86** (93.77/93.94); 20x*
BS 2000, 4 LRs, none (93.92)	**93.73** (93.77/93.68); 20x*	**93.74** (93.70/93.71/93.77/93.81/93.81/93.91/93.81/93.53/93.70/93.83/93.65/93.61); 20x*	**93.77** (93.79/93.75); 20x*
BS 2000, 4 LRs, ramp (93.92; 93.25)	**93.93** (93.94/93.92); 20x*	**93.85** (93.86/93.84/93.83/93.88/93.72/93.98/93.82/93.73/93.77/93.93/93.93/93.90); 20x*	**92.93** (93.84/92.02); 20x*
BS 2000, 4 LRs, reverse ramp (93.92; 93.45)	**93.78** (93.66/93.91); 20x*	**93.81** (93.91/93.91/93.61/93.53/93.82/93.77/93.94/93.62/93.93/93.82/93.85/94.00); 20x*	**93.56** (93.59/93.53); 20x*
BS 2000, 4 LRs, wave (93.92; 93.68)	**93.95** (93.95/93.96); 20x*	**93.86** (93.98/93.82/93.69/93.93/93.71/93.85/93.80/93.93/93.86/93.93/93.92/93.88); 20x*	**93.81** (93.79/93.83); 20x*
BS 500, conv only, none (94.00)	**93.86** (93.85/93.88); 20x*	**93.95** (93.92/93.88/93.96/93.95/93.96/93.98/94.02/93.91/93.93/93.97/94.00/93.94); 20x*	**93.83** (93.82/93.85); 20x*
BS 500, conv only, ramp (94.00; 93.37)	**94.06** (94.07/94.04); 20x*	**93.94** (93.97/93.98/93.97/93.88/93.92/93.95/93.98/93.93/93.90/94.00/93.94/93.89); 20x*	**93.91** (93.85/93.98); 20x*
BS 500, conv only, reverse ramp (94.00; 93.68)	**93.89** (93.95/93.83); 20x*	**93.96** (94.04/93.97/94.07/93.91/93.89/93.92/93.98/94.02/93.89/93.99/93.95/93.92); 20x*	**93.91** (93.98/93.84); 20x*
BS 500, conv only, wave (94.00; 93.77)	**93.97** (94.01/93.93); 20x*	**93.96** (93.94/94.03/93.97/94.00/93.93/93.94/93.93/93.96/93.96/93.95/94.02/93.92); 20x*	**93.95** (93.95/93.94); 20x*
BS 500, 4 LRs, none (94.00)	**94.01** (94.03/93.99); 20x*	**94.02** (94.06/93.97/94.08/94.11/93.98/93.97/94.03/93.95/94.08/93.99/93.95/94.03); 20x*	**93.93** (93.94/93.92); 20x*
BS 500, 4 LRs, ramp (94.00; 93.32)	**93.97** (93.95/93.99); 20x*	**93.96** (93.92/94.01/93.99/93.95/93.99/93.95/94.10/93.88/93.93/93.84/93.84/94.12); 20x*	**93.48** (93.58/93.39); 20x*
BS 500, 4 LRs, reverse ramp (94.00; 93.60)	**93.92** (93.95/93.90); 20x*	**93.89** (93.92/93.81/94.00/93.93/93.99/93.81/93.90/93.87/93.95/93.84/93.76/93.93); 20x*	**93.89** (93.85/93.93); 20x*
BS 500, 4 LRs, wave (94.00; 93.83)	**93.94** (94.09/93.80); 20x*	**93.97** (93.90/93.97/94.05/94.02/93.92/94.10/93.88/93.91/94.00/93.94/93.88/94.02); 20x*	**93.98** (94.07/93.89); 20x*
BS 125, conv only, none (93.86)	**93.80** (93.80/93.80); 20x*	**93.87** (93.87/93.93/93.91/93.87/93.79/93.88/93.84/93.85/93.88/93.76/93.84/93.99); 20x*	**93.83** (93.86/93.80); 20x*
BS 125, conv only, ramp (93.86; 93.48)	**93.88** (93.92/93.84); 20x*	**93.89** (93.86/93.93/93.92/93.92/93.89/93.87/93.79/93.88/93.89/93.92/93.93/93.94); 20x*	**93.73** (93.76/93.70); 20x*
BS 125, conv only, reverse ramp (93.86; 93.68)	**93.93** (93.91/93.95); 20x*	**93.88** (93.90/93.85/93.91/93.95/93.74/93.86/93.90/93.90/93.86/93.92/93.85/93.95); 20x*	**93.79** (93.77/93.82); 20x*

Cell (baseline; do-nothing)	v40	v29	v41
BS 125, conv only, wave (93.86; 93.69)	**93.95** (93.97/93.94); 20x*	**93.90** (93.97/93.88/93.75/93.94 /94.05/93.91/93.95/93.92/93.93 /93.81/93.81/93.92); 20x*	**93.87** (93.94/93.80); 20x*
BS 125, 4 LRs, none (93.86)	**93.82** (93.72/93.93); 20x*	**93.85** (93.90/93.84/93.80/93.88 /93.85/93.88/93.88/93.82/93.88 /93.79/93.90/93.83); 20x*	**93.82** (93.85/93.79); 20x*
BS 125, 4 LRs, ramp (93.86; 93.26)	**93.99** (94.06/93.92); 20x*	**94.06** (94.08/94.14/94.03/94.09 /94.05/94.14/93.95/93.99/94.11 /94.08/94.08/93.95); 20x*	**93.94** (93.89/93.99); 20x*
BS 125, 4 LRs, reverse ramp (93.86; 93.68)	**93.99** (94.04/93.93); 20x*	**94.02** (94.11/94.05/93.98/94.07 /94.09/93.88/94.03/94.00/94.02 /94.00/94.03/93.98); 20x*	**93.88** (93.97/93.79); 20x*
BS 125, 4 LRs, wave (93.86; 93.70)	**93.91** (93.92/93.91); 20x*	**93.94** (93.91/93.93/93.97/94.01 /94.07/93.82/94.01/94.04/93.85 /93.84/94.03/93.82); 20x*	**93.73** (93.50/93.96); 20x*

Within 0.1 pp of the baseline or above (finished cells): v40: 20 of 24; v29: 21 of 24; v41: 13 of 24. * = the search hit its step budget.

Observations

Five intervals is the right number; four do as well on average, eight do worse. v40 (4 intervals) is 0.022 pp short of the baseline conv only (10 of 12 cells within 0.1 pp) and 0.012 pp with 4 LRs (10 of 12), the same as v29 (0.023 and 0.012 pp; 12 of 12 and 10 of 12), with the same two 4-LR misses at BS 2000 (93.73 without a transform, 93.78 under the reverse ramp). v41 (8 intervals) is 0.094 pp short conv only (8 of 12) and 0.198 pp with 4 LRs (5 of 11): more decisions on the same budget leave the first passes short under the ramp (4 LRs: BS 2000 92.93, BS 500 93.48) and the second passes even less room. The remaining gap is not the interval count.

Experiment 30. Does ICS v29 hold on fresh seeds?

Question

Every version was scored on the same held-out seeds 100-107, and v29 was picked as the best of about 30. Do its committed schedules still match the baseline on seeds that played no part in that choice?

Setup

Item	Value
Schedules	v29's committed schedules from its search seeds (linear through the 5 averaged values), all 24 cells; the three baselines
Runs	Seeds 200-207 (research/eval_schedule.py; the baselines via train_cifar.py)

Held-out TTA on seeds 200-207 (mean over the search seeds evaluated), and the same searches on seeds 100-107

Cell	Baseline 200-207	v29 200-207	diff	v29 100-107 (same searches)	diff
BS 2000, conv only, none	93.93	**93.85**	-0.08	93.84	-0.08
BS 2000, conv only, ramp	93.93	**93.86**	-0.07	93.87	-0.05
BS 2000, conv only, reverse ramp	93.93	**93.90**	-0.03	93.86	-0.06
BS 2000, conv only, wave	93.93	**93.93**	-0.00	93.88	-0.04
BS 2000, 4 LRs, none	93.93	93.79	-0.14	93.76	-0.16
BS 2000, 4 LRs, ramp	93.93	93.82	-0.11	93.83	-0.09
BS 2000, 4 LRs, reverse ramp	93.93	93.81	-0.12	93.76	-0.16
BS 2000, 4 LRs, wave	93.93	**93.85**	-0.08	93.84	-0.08
BS 500, conv only, none	93.99	**93.99**	+0.00	93.95	-0.05
BS 500, conv only, ramp	93.99	**94.01**	+0.02	93.95	-0.05
BS 500, conv only, reverse ramp	93.99	**93.94**	-0.05	93.97	-0.02
BS 500, conv only, wave	93.99	**93.97**	-0.02	93.96	-0.04
BS 500, 4 LRs, none	93.99	**94.05**	+0.06	94.02	+0.02
BS 500, 4 LRs, ramp	93.99	**93.90**	-0.09	93.97	-0.02
BS 500, 4 LRs, reverse ramp	93.99	93.86	-0.13	93.90	-0.09
BS 500, 4 LRs, wave	93.99	**93.92**	-0.07	93.97	-0.03
BS 125, conv only, none	93.90	**93.85**	-0.05	93.87	+0.01
BS 125, conv only, ramp	93.90	**93.90**	-0.00	93.88	+0.02
BS 125, conv only, reverse ramp	93.90	**93.88**	-0.02	93.88	+0.02
BS 125, conv only, wave	93.90	**93.89**	-0.01	93.92	+0.06
BS 125, 4 LRs, none	93.90	**93.87**	-0.03	93.86	-0.00
BS 125, 4 LRs, ramp	93.90	**94.00**	+0.10	94.06	+0.20
BS 125, 4 LRs, reverse ramp	93.90	**94.04**	+0.14	94.03	+0.17
BS 125, 4 LRs, wave	93.90	**93.98**	+0.09	93.97	+0.11

Mean difference to the fresh baseline: conv only -0.025 pp (12 of 12 within 0.1 pp); 4 LRs -0.032 pp (8 of 12 within 0.1 pp).

Observations

v29 holds on fresh seeds, and choosing it among about 30 versions on seeds 100-107 inflated its scores only slightly. Over all 8 search seeds, on seeds 200-207 its conv-only schedules are 0.025 pp short of the baseline on average with all 12 cells within 0.1 pp (the same searches on seeds 100-107: 0.023 pp, 12 of 12), and its 4-LR schedules 0.032 pp short with 8 of 12 within 0.1 pp (seeds 100-107: 0.012 pp, 10 of 12). The fresh baselines are 93.93 / 93.99 / 93.90 at BS 2000 / 500 / 125 (seeds 100-107: 93.92 / 94.00 / 93.86).

The 4-LR misses on fresh seeds are all within 0.15 pp: BS 2000 without a transform (93.79), under the ramp (93.82) and under the reverse ramp (93.81), and BS 500 under the reverse ramp (93.86). BS 2000 with 4 LRs is the one place the algorithm is reliably short, by 0.1-0.15 pp, in line with seeds 100-107; BS 125 with 4 LRs stays above the baseline under both ramps.

Experiment 31. Does ICS v29 generalize to transforms it was not developed on?

Question

v29 was developed on three transforms (ramp, reverse ramp, wave). Does it match the baseline under two transforms held back until it was final: the wave inverted (x0.52 early, x1.93 at 70-80% of the run) and a steeper ramp (x1/8 rising to x8)?

Setup

Item	Value
Transforms	waveinv: 2 ** sin(2 pi (x + 0.5)); ramp8: 8 ** (2x - 1), x = step / steps; applied to the searched groups as before
Runs	v29 unchanged, search seeds 0-1, budget 20, held-out seeds 100-107; do-nothing = the baseline schedules under the transform; oracle = the baseline conv schedule divided by the transform, its 5 interval means joined linearly (conv only)
v43	v29 whose second-pass climbs may move 2 grid steps (developed after seeing v29 fail under the inverted wave, so the inverted wave is no longer unseen for it)

Held-out TTA (mean over search seeds; bold = within 0.1 pp of the baseline or above)

Cell (baseline)	Do-nothing	Oracle linear (5)	Oracle (5), x0.6 grid	v29	v43
BS 2000, conv only, inverted wave (93.92)	93.42	93.88	93.86	93.62 (8)	93.53 (2)
BS 2000, 4 LRs, inverted wave (93.92)	93.42	-	-	93.18 (8)	93.45 (2)
BS 500, conv only, inverted wave (94.00)	93.52	93.87	93.83	93.74 (8)	93.73 (2)
BS 500, 4 LRs, inverted wave (94.00)	93.48	-	-	93.85 (8)	93.87 (2)
BS 125, conv only, inverted wave (93.86)	93.53	93.87	93.74	93.68 (8)	93.56 (2)
BS 125, 4 LRs, inverted wave (93.86)	93.49	-	-	93.74 (8)	**93.80** (2)
BS 2000, conv only, ramp x1/8 -> x8 (93.92)	92.59	-	-	93.78 (8)	**93.83** (2)
BS 2000, 4 LRs, ramp x1/8 -> x8 (93.92)	92.36	-	-	93.47 (8)	93.77 (2)
BS 500, conv only, ramp x1/8 -> x8 (94.00)	92.53	-	-	**93.91** (8)	**93.92** (2)
BS 500, 4 LRs, ramp x1/8 -> x8 (94.00)	92.42	-	-	93.80 (8)	93.84 (2)
BS 125, conv only, ramp x1/8 -> x8 (93.86)	92.76	-	-	**93.83** (8)	**93.79** (2)
BS 125, 4 LRs, ramp x1/8 -> x8 (93.86)	92.53	-	-	**93.94** (8)	**93.95** (2)

Mean difference to the baseline: v29 -0.214 pp (3 of 12 within 0.1 pp); v43 -0.172 pp (5 of 12 within 0.1 pp).

Observations

v29 generalizes only partly to transforms it was not developed on (cell means over 8 search seeds). Under the steeper ramp it recovers most of what the transform costs (do-nothing 92.4-92.8, 1.1-1.6 pp below the baselines): conv only it is 0.14 / 0.08 / 0.03 pp short at BS 2000 / 500 / 125; with 4 LRs it is 0.45 / 0.19 pp short at BS 2000 / 500 and 0.08 pp above at BS 125. Under the inverted wave it is 0.18-0.30 pp short conv only (93.62 / 93.74 / 93.68), barely above doing nothing (93.42 / 93.52 / 93.53), and with 4 LRs 0.74 pp short at BS 2000 (93.18) and 0.12-0.15 pp at BS 500 and 125. Over the 12 held-back cells it matches in 3 (2 conv only, 1 with 4 LRs), against 22 of 24 under the transforms it was developed on; BS 2000 with 4 LRs fails worst under both.

The representation is not the problem: the oracle's 5 interval means joined linearly score 93.87-93.88 under the inverted wave, 93.74-93.86 snapped to the x0.6 grid. The search is: the oracle holds interval 2 as high as interval 1 (BS 2000: 0.29, 0.29, 0.12, 0.037, 0.014) and falls only after the wave's trough, while v29's first pass already drops at interval 2 (0.13-0.17; at BS 500 0.061-0.078 against 0.17), 1.5-2 grid steps too low: the short cooldown's small-LR bias, larger here because interval 2 lies in the trough (x0.52-0.67). Its second pass does not undo this. Allowing its climbs two grid steps (v43) changes nothing (paired with v29 -0.008 +- 0.008 pp on these cells, +0.000 on the 24 standard ones): the climbs never take a second step, because a candidate is scored with the rest of the run held at the plan's low values, against which raising interval 2 alone does not pay.

Scoring the second pass's candidates with the rest of the run decaying linearly from the candidate (v44, so the tail rises with it) does not fix it either: under the held-back transforms it scores as v29 (paired -0.002 +- 0.005 pp conv only, +0.000 with 4 LRs), and on the 24 standard cells it is a wash (conv only +0.017 +- 0.009 pp, 12 of 12 within 0.1 pp; 4 LRs -0.010 +- 0.011 pp, 9 of 12). The inverted wave's loss is made in the first pass, whose short cooldown sets interval 2 too low in the trough; a uniform larger correction of that bias loses elsewhere (Experiment 24). v29 stays the algorithm; the inverted wave is its known failure case.

A milder first-pass cooldown (v45: 0.36 x the candidate instead of 0.22) is worse everywhere: paired with v29, -0.058 +- 0.020 pp conv only and -0.070 +- 0.036 pp with 4 LRs on the 24 standard cells, and -0.18 / -0.36 pp under the held-back transforms (inverted wave conv only 93.40 / 93.53 / 93.57). The cooldown and the one-grid-step plan shift are tuned as a pair; softening one breaks it.

An unbiased first pass does not fix it either. v46, one full-budget search whose first pass scores candidates with the rest of the run decaying linearly from them (rest_lin, no plan shift), then v29's second pass, is worse everywhere: paired with v29, -0.093 +- 0.031 pp conv only and -0.17 +- 0.08 pp with 4 LRs on the 24 standard cells (6 and 8 of 12 within 0.1 pp), and -0.17 / -0.86 pp under the held-back transforms. A rest-of-run lookahead costs several times a short one per candidate, so the first pass makes fewer, coarser decisions; the bias it removes is smaller than what it loses. The inverted wave remains v29's known failure.

Experiment 32. Which one-interval lookahead ranks interval candidates like the final result, for each LR?

Question

Experiment 12 compared lookaheads for conv on a 5-interval constant plan. With the baseline run itself as the plan, and for each of the four LRs: does one interval of cooldown after a candidate interval pick the candidate that the rest of the run on the plan (the truth) picks, when the cooldown is linear to zero or a searched constant, applied to the main LR alone or to all LRs?

Setup

Item	Value
Plan	The BS 2000 baseline run (every LR on its configured linear decay), 5 intervals of 40 steps. Under a transform (applied to all four LRs), the plan is the oracle: each LR's baseline divided by the transform, step by step
Candidates	For main LR g and interval k (1-4): g constant at c on the x0.6 grid, c = the grid value nearest the plan's mean of g over interval k and 1, 2 grid steps either side (whitening bias, 0 in the plan from step 75: around its step-0 plan value); trained for the interval from the plan's state
Truth	The final score with the rest of the run on the plan
Lookaheads (one interval)	lin_main: g linear from c to 0, the others on the plan; lin_all: every LR linear to 0 (the others from their plan value); s_main: g at m c; s_tied: g at m c, the other three at m_o x their plan mean over interval k (one tied m_o); s_each: every LR at its own m
m search	0.6^k grid (2 significant figures), unbounded, from 0.22; coordinate search moving each m to its best k+-1 / k+-2 neighbour while that improves; every probe logged
Runs	Seed 0 (one seed), BS 2000, transforms none, ramp, reverse ramp, wave, inverted wave, ramp x1/8 -> x8 (research/hparam_lookahead.py; analysis research/hparam_lookahead_study.py)

Conv: the truth's best candidate and each lookahead's pick (in brackets: the truth the pick loses, pp; bold = the truth's pick)

Transform, interval	Truth's best (range, pp)	linear to 0, main LR	linear to 0, all LRs	searched m, main LR	searched m main + tied m others	searched m each LR
none, 1	0.078 (0.21)	0.13 (0.05)	0.13 (0.05)	0.13 (0.05)	0.13 (0.05)	0.13 (0.05)
none, 2	0.13 (0.49)	0.078 (0.26)	0.078 (0.26)	0.078 (0.26)	0.078 (0.26)	0.078 (0.26)
none, 3	0.078 (1.23)	**0.078 (0.00)**	0.047 (0.21)	0.047 (0.21)	0.047 (0.21)	0.047 (0.21)
none, 4	0.078 (1.76)	0.028 (0.29)	0.028 (0.29)	0.047 (0.21)	**0.078 (0.00)**	0.047 (0.21)
ramp, 1	0.6 (0.42)	0.36 (0.25)	0.36 (0.25)	0.36 (0.25)	0.36 (0.25)	0.36 (0.25)
ramp, 2	0.13 (0.46)	**0.13 (0.00)**	**0.13 (0.00)**	**0.13 (0.00)**	**0.13 (0.00)**	**0.13 (0.00)**
ramp, 3	0.047 (1.54)	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**
ramp, 4	0.028 (2.55)	**0.028 (0.00)**	**0.028 (0.00)**	**0.028 (0.00)**	**0.028 (0.00)**	**0.028 (0.00)**
reverse ramp, 1	0.078 (0.47)	**0.078 (0.00)**	**0.078 (0.00)**	0.047 (0.35)	**0.078 (0.00)**	**0.078 (0.00)**
reverse ramp, 2	0.028 (0.31)	0.047 (0.15)	0.047 (0.15)	0.047 (0.15)	0.047 (0.15)	0.047 (0.15)
reverse ramp, 3	0.047 (1.33)	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**
reverse ramp, 4	0.078 (1.67)	**0.078 (0.00)**	**0.078 (0.00)**	**0.078 (0.00)**	**0.078 (0.00)**	**0.078 (0.00)**
wave, 1	0.13 (0.37)	0.078 (0.02)	0.078 (0.02)	**0.13 (0.00)**	**0.13 (0.00)**	**0.13 (0.00)**
wave, 2	0.078 (0.32)	0.047 (0.11)	0.047 (0.11)	0.047 (0.11)	0.047 (0.11)	0.047 (0.11)
wave, 3	0.047 (1.14)	0.078 (0.12)	0.078 (0.12)	0.078 (0.12)	**0.047 (0.00)**	**0.047 (0.00)**
wave, 4	0.078 (1.27)	**0.078 (0.00)**	**0.078 (0.00)**	0.13 (0.14)	0.13 (0.14)	0.13 (0.14)
inverted wave, 1	0.13 (0.43)	0.22 (0.18)	0.22 (0.18)	0.22 (0.18)	0.22 (0.18)	0.22 (0.18)
inverted wave, 2	0.22 (0.82)	0.13 (0.18)	0.13 (0.18)	0.13 (0.18)	0.13 (0.18)	0.13 (0.18)
inverted wave, 3	0.078 (1.35)	0.047 (0.16)	0.047 (0.16)	0.047 (0.16)	0.047 (0.16)	0.047 (0.16)
inverted wave, 4	0.017 (2.46)	**0.017 (0.00)**	**0.017 (0.00)**	**0.017 (0.00)**	**0.017 (0.00)**	**0.017 (0.00)**
ramp x1/8 -> x8, 1	1 (0.68)	0.6 (0.06)	0.6 (0.06)	0.6 (0.06)	0.6 (0.06)	0.6 (0.06)
ramp x1/8 -> x8, 2	0.13 (0.56)	**0.13 (0.00)**	**0.13 (0.00)**	0.22 (0.02)	0.22 (0.02)	0.22 (0.02)
ramp x1/8 -> x8, 3	0.047 (1.52)	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**	**0.047 (0.00)**
ramp x1/8 -> x8, 4	0.028 (1.64)	0.017 (0.12)	0.017 (0.12)	0.01 (0.08)	0.01 (0.08)	0.01 (0.08)


All LRs, over the 6 transforms x intervals 1-4: picks equal to the truth's, mean truth lost (pp), and mean grid steps by which the pick lies below the truth's best (positive = too small)

LR	Truth range (pp)	linear to 0, main LR	linear to 0, all LRs	searched m, main LR	searched m main + tied m others	searched m each LR
conv (24 cells)	1.04	11/24, 0.081, +0.25	10/24, 0.090, +0.29	8/24, 0.105, +0.21	11/24, 0.077, +0.17	10/24, 0.086, +0.21
head (24 cells)	0.24	7/24, 0.122, -0.54	3/24, 0.119, -0.42	6/24, 0.117, -0.58	3/24, 0.103, -0.33	3/24, 0.129, -0.79
norm bias (24 cells)	0.21	10/24, 0.091, +0.21	8/24, 0.060, +0.38	6/24, 0.107, -0.46	6/24, 0.103, -0.54	5/24, 0.097, -0.79
whitening bias (24 cells)	0.26	10/24, 0.099, +0.08	9/24, 0.069, +0.04	12/24, 0.081, -0.42	6/24, 0.111, -0.08	2/24, 0.127, -0.54

Searched multipliers over all candidates (how often 0.22, then the most common others)

Main LR	s_main: m	s_tied: main m	s_tied: others' m	s_each: main m
conv	0.22: 24/120; 0.13: 29, 0.078: 27, 0.36: 22	0.22: 26/120; 0.078: 31, 0.13: 25, 0.36: 24	0.22: 28/120; 0.6: 20, 0.36: 18, 1: 11	0.22: 24/120; 0.078: 33, 0.13: 25, 0.36: 24
head	0.22: 26/120; 0.6: 23, 0.078: 22, 0.13: 17	0.22: 21/120; 0.36: 26, 0.13: 14, 0.6: 13	0.22: 34/120; 0.078: 29, 0.36: 25, 0.047: 16	0.22: 19/120; 0.6: 25, 0.36: 24, 0.078: 18
norm bias	0.22: 27/120; 0.36: 26, 0.6: 16, 0.078: 16	0.22: 24/120; 0.13: 22, 0.6: 15, 0.36: 14	0.22: 33/120; 0.078: 33, 0.36: 26, 0.047: 13	0.22: 22/120; 0.36: 22, 0.6: 22, 0.13: 19
whitening bias	0.22: 28/120; 0.13: 24, 0.6: 19, 0.078: 16	0.22: 21/120; 0.6: 25, 0.36: 20, 0.13: 16	0.22: 28/120; 0.078: 36, 0.36: 30, 0.047: 13	0.22: 28/120; 0.6: 27, 0.36: 22, 0.13: 14

No transform, all LRs (score minus its own best per candidate; rows = main LR, columns = interval)

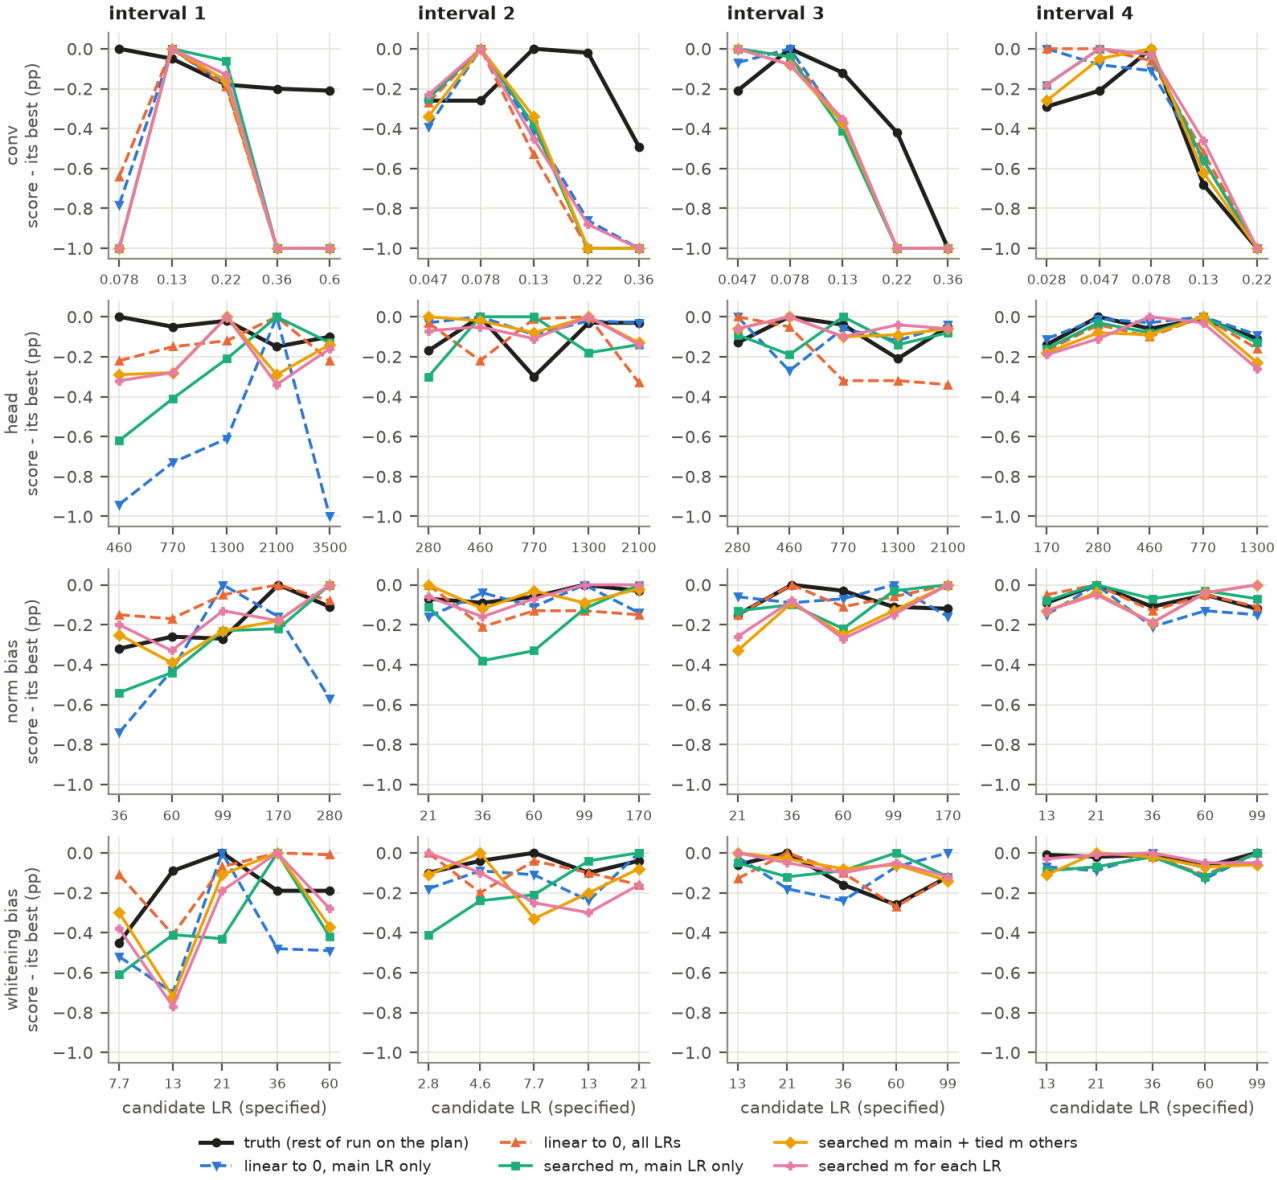

Observations

One seed per cell, so a pick within about 0.15 pp of another candidate is a coin flip (single-run SD 0.12 pp; Experiment 6). The conv cells are informative: across candidates spanning x7.7 the truth varies by 0.21-2.55 pp (mean 1.04). The head and bias cells mostly are not: their truth varies by only 0.07-0.56 pp (mean 0.21-0.26), so whichever candidate a lookahead picks costs about as much as one run's noise (mean truth lost 0.06-0.13 pp).

Conv: which cooldown is used matters much less than where the decision is made. In 16 of the 24 cells all five lookaheads pick the same candidate. They match the truth's pick in 8-11 of 24 cells and lose 0.077-0.105 pp of truth on average; the tied cooldown (s_tied) is best by a small margin (11 hits, 0.077 pp). On average the picks lie

0.17-0.29 grid steps below the truth's best, a much weaker small-LR bias than Experiment 12 found on the constant plan.

The bias is concentrated in one place: without a transform, intervals 2-4. In interval 2 every lookahead picks 0.078 against the truth's 0.13 (0.26 pp lost); in interval 3 all but lin_main pick 0.047 against 0.078; in interval 4 only s_tied picks the truth's 0.078. Under the ramp, the reverse ramp and the steeper ramp, intervals 2-4 are mostly picked right, where the truth is steep (up to 2.6 pp across the candidates). In interval 1 the error has no consistent sign: picks are one grid step too small under the ramp, the steeper ramp and the wave (linear cooldowns), and one step too large without a transform and under the inverted wave.

The searched cooldown multipliers are not concentrated at 0.22. Over all transforms and candidates, 0.22 is chosen for 16-28% of the searched multipliers, with the rest spread over 0.047-1 (conv's own m: 0.13 29, 0.078 27, 0.22 24, 0.36 22 and 0.6 8 of 120). The exception is the tied multiplier of the other three LRs without a transform when head or a bias is the main LR: 0.22 in 16, 19 and 17 of 20 candidates. Over all transforms it is 0.22 in 23-28% of candidates.

Experiment 33. Capacity of the 5-constant-interval conv schedule: joint neighbourhood search

Question

How well can 5 constant intervals of the conv LR on the x0.6 grid do, under each transform, when the schedule is searched jointly with full runs rather than interval by interval?


Setup

Item	Value
Schedule	Conv only (the other LRs on the baseline); conv's specified schedule = 5 constant intervals of 40 steps on the x0.6 grid; the transform multiplies conv's applied LR
Search	Start: the oracle (baseline / transform) reduced to its 5 interval means, snapped to the grid. Each iteration trains all 3^5 - 1 = 242 joint neighbours (every interval -1, 0 or +1 grid step) as full runs, moves to the best if it beats the current schedule, and repeats until none does; each schedule is trained once (cached)
Runs	BS 2000, seed 0 (search and score), all six transforms (research/joint_search.py). The result is the winner's search score (no replay); baseline and do-nothing are single runs on seed 0

Result (TTA, seed 0; baseline 93.92)

Transform	Do-nothing	Start (grid oracle)	Converged	vs baseline	Moves, runs
none	93.92	0.22, 0.13, 0.13, 0.078, 0.028 (93.53)	**0.078, 0.13, 0.078, 0.047, 0.01 (94.09)**	+0.17	3, 682
ramp	93.31	0.6, 0.22, 0.13, 0.047, 0.01 (93.13)	**0.36, 0.36, 0.078, 0.047, 0.006 (93.88)**	-0.04	1, 438
reverse ramp	93.47	0.078, 0.078, 0.13, 0.13, 0.078 (93.61)	**0.078, 0.078, 0.047, 0.047, 0.017 (94.17)**	+0.25	3, 711
wave	93.68	0.13, 0.078, 0.13, 0.13, 0.047 (93.19)	**0.078, 0.078, 0.13, 0.13, 0.017 (93.93)**	+0.01	2, 531
inverted wave	93.24	0.36, 0.36, 0.13, 0.047, 0.017 (93.73)	**0.36, 0.36, 0.078, 0.028, 0.01 (94.03)**	+0.11	1, 414
ramp x1/8 -> x8	92.47	1, 0.36, 0.13, 0.028, 0.006 (93.07)	**1, 0.22, 0.078, 0.01, 0.0013 (93.84)**	-0.08	3, 744

Applied conv LR of the start and the best schedule against the baseline (top), best score over the runs (bottom; dotted: baseline)

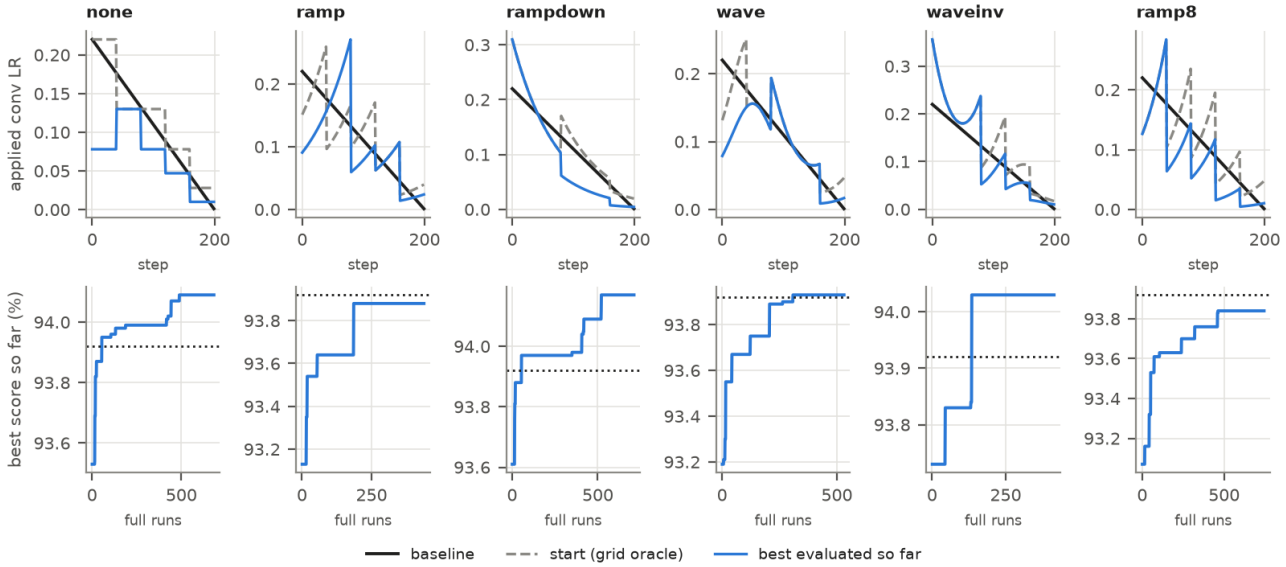

Observations

Five constant conv intervals on the x0.6 grid can match the baseline under every transform: each search converged within 0.25 pp of the seed-0 baseline (93.92). By transform: none 94.09, ramp 93.88, reverse ramp 94.17, wave 93.93, inverted wave 94.03, ramp x1/8 -> x8 93.84. Each is the best of 414-744 single runs on one seed, so the small gains above the baseline are partly selection on noise (SD 0.12 pp per run); the two shortfalls (-0.04, -0.08 pp) are within noise.

The searches move far from where they start. The grid-snapped oracle (the 5 interval means of baseline / transform) scores 93.07-93.73. In three of the six transforms (none, ramp, wave) that is below doing nothing (the baseline's specified schedule under the transform). Converging took 1-3 moves (414-744 full runs, 0.8-1.5 x 10^5 training steps).

The converged schedules leave the oracle's shape where it is costly. Without a transform the winner starts low and peaks in interval 2 (0.078, 0.13, 0.078, 0.047, 0.01), unlike the linear decay from 0.22. This agrees with Experiment 32's truth, whose best conv candidate in interval 1 is 0.078. Under the ramp and the inverted wave the winners hold 0.36 for the first two intervals; under the steeper ramp the first interval ends at 1.0.

Experiment 34. Conv interval 2: other cooldown shapes and lengths

Question

In Experiment 32 (no transform), every one-interval lookahead picks 0.078 for conv in interval 2, where the truth peaks at 0.13. Does a different cooldown shape, or a longer or shorter cooldown, pick 0.13?


Setup

Item	Value
Cell	Experiment 32's no-transform conv interval 2 (steps 40-80): candidates 0.047-0.36, seed 0, BS 2000; the truth is recomputed in every job
New shapes (conv only)	power c (1-t)^p, p searched (p = 1 is linear to 0); exponential c q^t (from c to q c), q searched; power to end q: c (q + (1-q)(1-t)^p), p and q searched jointly; t = i / length over the cooldown's steps
Old shapes	the five of Experiment 32
Lengths	20, 40, 60 and 80 steps, for every shape, starting at step 80
Search	p from 1, q and m from 0.22, 0.6^k grid, unbounded k+-1 / k+-2 coordinate search (research/cooldown_shapes.py)

Pick per cooldown and length (truth lost by the pick, pp; margin of the pick over the cooldown's second-best candidate, pp); bold = the truth's pick. Truth: 0.047: 93.84, 0.078: 93.84, 0.13: 94.10, 0.22: 94.08, 0.36: 93.61

Cooldown	20 steps	40 steps	60 steps	80 steps
truth	**0.13 (0.00; by 0.02)**	**0.13 (0.00; by 0.02)**	**0.13 (0.00; by 0.02)**	**0.13 (0.00; by 0.02)**
linear to 0, main LR	0.047 (0.26; by 0.05)	0.078 (0.26; by 0.39)	0.078 (0.26; by 0.23)	0.078 (0.26; by 0.32)
linear to 0, all LRs	0.047 (0.26; by 0.06)	0.078 (0.26; by 0.27)	0.078 (0.26; by 0.27)	0.078 (0.26; by 0.12)
searched m, main LR	0.047 (0.26; by 0.05)	0.078 (0.26; by 0.25)	0.078 (0.26; by 0.07)	0.078 (0.26; by 0.13)
searched m main + tied m others	0.047 (0.26; by 0.02)	0.078 (0.26; by 0.34)	0.078 (0.26; by 0.19)	0.078 (0.26; by 0.06)
searched m each LR	0.078 (0.26; by 0.06)	0.078 (0.26; by 0.23)	0.078 (0.26; by 0.15)	0.078 (0.26; by 0.06)
power (1-t)^p	0.047 (0.26; by 0.05)	0.078 (0.26; by 0.28)	0.078 (0.26; by 0.22)	0.078 (0.26; by 0.20)
exponential q^t	0.078 (0.26; by 0.10)	0.078 (0.26; by 0.29)	**0.13 (0.00; by 0.02)**	**0.13 (0.00; by 0.01)**
power to end q	0.078 (0.26; by 0.12)	0.078 (0.26; by 0.33)	0.078 (0.26; by 0.15)	**0.13 (0.00; by 0.03)**

Score per candidate minus its own best, per cooldown length (dashed: Experiment 32's shapes)

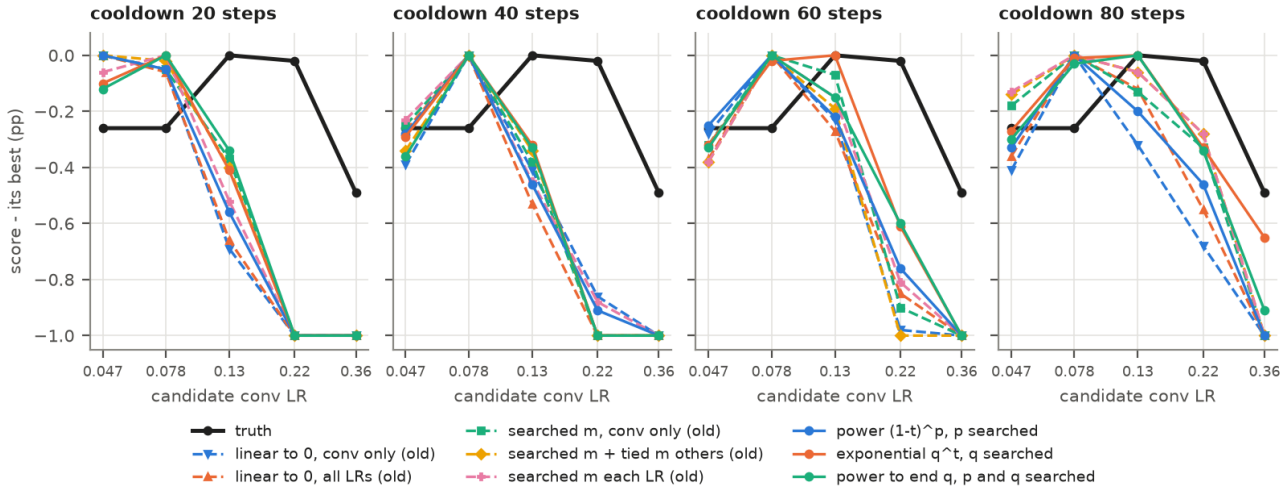

Observations

No cooldown shape picks the truth's candidate reliably, at any length. The truth is 94.10 at 0.13 and 94.08 at 0.22 (tied), and 0.26 pp lower at 0.047 and 0.078. Of the 32 shape-length pairs, 29 pick 0.047 or 0.078. The three that pick 0.13 (exponential at 60 and 80 steps, power to end q at 80) win by 0.01-0.03 pp, well below single-run noise. Every cooldown at every length scores 0.22 at least 0.28 pp below its pick, so none reproduces the truth's tie between 0.13 and 0.22.

Length matters more than shape. At 20 steps every cooldown rates 0.13 between 0.34 and 0.69 pp below its best candidate, and five of eight pick 0.047. At 80 steps exponential and power to end q rate 0.078 and 0.13 equal, the old shapes still rate 0.13 0.06-0.32 pp lower, and the large candidates are hurt much less (0.36: 0.65 pp below the best with the exponential, at least 1.05 pp with the old shapes). Even the longest cooldown ends at step 160 of 200, and its best score (93.64) stays 0.46 pp below the truth's.

The searched shapes decay early and steeply rather than linearly: power p mostly 1.7, exponential q mostly 0.028-0.13, power to end q with p 1.7-4.6 and q 0.047-0.22. Constant cooldowns (searched m) are the worst shape at 60-80 steps. One seed: individual margins are noisy, but the direction with length holds for all eight shapes.

Experiment 35. 5-constant-interval conv schedule: interval-by-interval refinement against the joint search

Question

Experiment 33's exhaustive joint search used 414-744 full runs. How close does ICS's second pass get, refining one interval at a time around the plan, from the same start? Does a wider candidate rule (both sides, then an unbounded climb) or a second refinement pass close the gap?

Setup

Item	Value
Schedule	As Experiment 33: conv only, 5 constant intervals of 40 steps on the x0.6 grid, the transform on conv's applied LR
Plan	Experiment 33's start column (oracle interval means snapped to the grid), no shift
Pass	For each interval in order, interval 0 included, from the state after the committed intervals, score candidates by the interval at the candidate plus the rest of the run on the plan (a full run's TTA) and commit the best. No two-continuation average for the last interval
One step	The plan's value, then one grid step smaller and, only if that is not better, one step larger (ICS pass 2's climb, at most one step)
Both sides + climb	The plan's value and both one-step neighbours; if the better neighbour beats the plan, keep stepping that way while the score improves (no step limit)
2 passes	A second pass from initialisation whose plan (candidates' centre and lookahead tail) is the first pass's committed schedule; it starts from the first pass's result, so it cannot end lower
Runs	BS 2000, seed 0, all six transforms (research/plan_refine_search.py; --climb, --passes 2). Result = the last committed score (no replay). Best in box = the best of the 243 schedules within one grid step of the plan, all trained in Experiment 33's first iteration


Result (TTA, seed 0; in brackets: full runs = training steps / 200, a 2-pass search's including its first pass; the joint search's: schedules trained)

Transform	Do-nothing	Plan	One step, 1 pass	One step, 2 passes	Both sides + climb, 1 pass	Both sides + climb, 2 passes	Best in ±1 box	Joint search (Exp. 33)
none	93.92	93.53	**93.99** (7.0)	**93.99** (16.0)	**93.99** (11.8)	**93.99** (20.8)	93.99	94.09 (682)
ramp	93.31	93.13	**93.52** (6.6)	**93.90** (14.8)	**93.41** (10.4)	**93.68** (20.8)	93.88	93.88 (438)
reverse ramp	93.47	93.61	**93.95** (7.2)	**93.95** (16.2)	**94.03** (11.2)	**94.10** (20.6)	93.97	94.17 (711)
wave	93.68	93.19	**93.89** (7.4)	**93.93** (16.2)	**93.84** (10.4)	**93.93** (21.4)	93.89	93.93 (531)
inverted wave	93.24	93.73	**93.81** (8.4)	**94.03** (16.8)	**93.81** (9.6)	**94.03** (19.2)	94.03	94.03 (414)
ramp x1/8 -> x8	92.47	93.07	**93.52** (7.0)	**93.70** (15.4)	**93.36** (11.2)	**93.70** (22.6)	93.70	93.84 (744)

Committed schedules (conv LR per interval)

Transform	One step, 1 pass	One step, 2 passes	Both sides + climb, 1 pass	Both sides + climb, 2 passes	Joint search (Exp. 33)
none	0.13, 0.22, 0.078, 0.047, 0.028	0.13, 0.22, 0.078, 0.047, 0.028	0.13, 0.22, 0.078, 0.047, 0.028	0.13, 0.22, 0.078, 0.047, 0.028	0.078, 0.13, 0.078, 0.047, 0.01
ramp	0.36, 0.13, 0.13, 0.028, 0.006	0.36, 0.13, 0.078, 0.028, 0.0036	1, 0.22, 0.13, 0.047, 0.0036	0.6, 0.22, 0.13, 0.028, 0.0036	0.36, 0.36, 0.078, 0.047, 0.006
reverse ramp	0.047, 0.047, 0.13, 0.13, 0.078	0.047, 0.047, 0.13, 0.13, 0.078	0.028, 0.078, 0.13, 0.13, 0.047	0.028, 0.078, 0.13, 0.078, 0.047	0.078, 0.078, 0.047, 0.047, 0.017
wave	0.078, 0.078, 0.13, 0.078, 0.028	0.078, 0.078, 0.13, 0.078, 0.017	0.22, 0.078, 0.13, 0.13, 0.017	0.078, 0.078, 0.13, 0.13, 0.017	0.078, 0.078, 0.13, 0.13, 0.017
inverted wave	0.36, 0.36, 0.13, 0.028, 0.01	0.36, 0.36, 0.078, 0.028, 0.01	0.36, 0.36, 0.13, 0.028, 0.01	0.36, 0.36, 0.078, 0.028, 0.01	0.36, 0.36, 0.078, 0.028, 0.01
ramp x1/8 -> x8	0.6, 0.22, 0.13, 0.028, 0.0036	0.6, 0.22, 0.078, 0.028, 0.0036	0.36, 0.36, 0.13, 0.028, 0.0036	0.6, 0.22, 0.078, 0.028, 0.0036	1, 0.22, 0.078, 0.01, 0.0013

Applied conv LR: baseline, plan, the 2-pass refinements and the joint winner

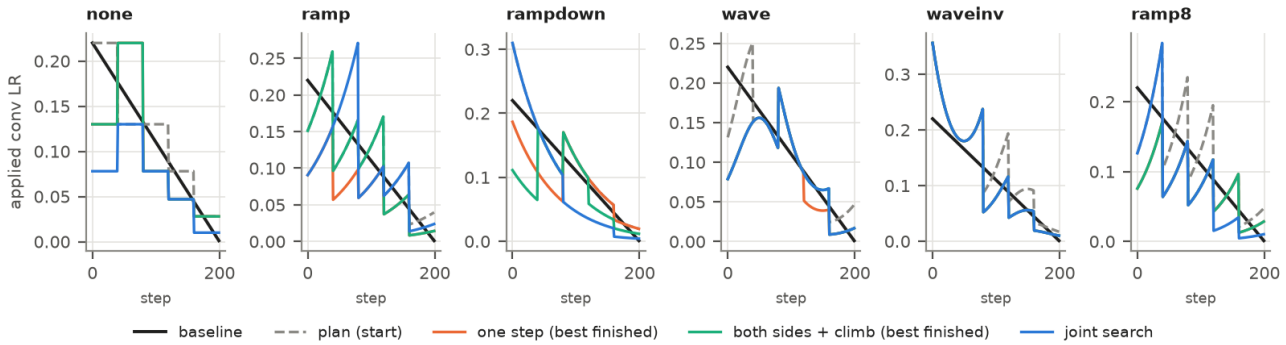

Observations

A second pass closes most of the gap to the exhaustive joint search. With ICS's one-step rule the mean over the six transforms is 93.78 after one pass, 93.92 after two, and 93.99 for the joint search. With both sides + climb it is 93.74 and 93.90. Two one-step passes cost 14.8-16.8 full runs, against the joint search's 414-744. Every score is a single run on one seed (SD 0.12 pp per run), and the joint search picks the best of hundreds of runs, so its remaining lead is partly selection on noise.

Two one-step passes match or beat the joint search in three transforms. Under the ramp the result is 93.90 against 93.88: the schedule (0.36, 0.13, 0.078, 0.028, 0.0036) is one the joint search never trained. Under the wave and the inverted wave it is 93.93 and 94.03, tying the joint search; under the inverted wave the schedule is the joint winner itself. It falls 0.10 pp short without a transform and 0.14 pp short under the steep ramp, where it reaches the best schedule within one grid step of the plan (93.70). It falls 0.22 pp short under the reverse ramp, where the joint winner lies 2-3 grid steps below the plan late in the run.

The second pass helps where the first was misled by the plan's tail. Pass 1 scores each candidate with the plan's later values, so it cannot see that a later interval will move too. Pass 2 scores with pass 1's result instead. Pass 2 gained +0.04 to +0.38 pp in four transforms and changed nothing in the other two (none and the reverse ramp, already fixed points). It mostly kept pass 1's values: 25 of 30 one-step commitments kept them and 5 moved one step smaller. Its main fix is interval 2, from 0.13 to 0.078, under the ramp, the inverted wave and the steep ramp.

The wider rule does not help a single pass. Scoring both sides and climbing without a limit gave a mean of 93.74 against 93.78 for one step, at 9.6-11.8 runs against 6.6-8.4. It was better only under the reverse ramp (94.03 vs 93.95). It overshot early intervals under the ramp (interval 0 at 1.0, -0.11 pp), the steep ramp (interval 0 two steps down to 0.36, -0.16 pp) and the wave (interval 0 at 0.22, -0.05 pp). These early moves score best when the rest of the run follows the plan; the second pass moved all three back. The climb never went beyond two grid steps: in pass 1, 4 of 30 commitments moved two steps, 10 moved one and 16 kept the plan.

After two passes the rule hardly matters (93.92 vs 93.90). The second climbing pass undid the first pass's overshoots: the ramp's interval 0 went back to 0.6, the steep ramp's to 0.6, the wave's to 0.078. Under the reverse ramp the climb's two-step moves reached 94.10, 0.15 pp above one step and 0.07 pp below the joint search.

The training is deterministic: every refinement run scores exactly what Experiment 33 got for the same schedule, and the first pass of each 2-pass search reproduces the 1-pass search.