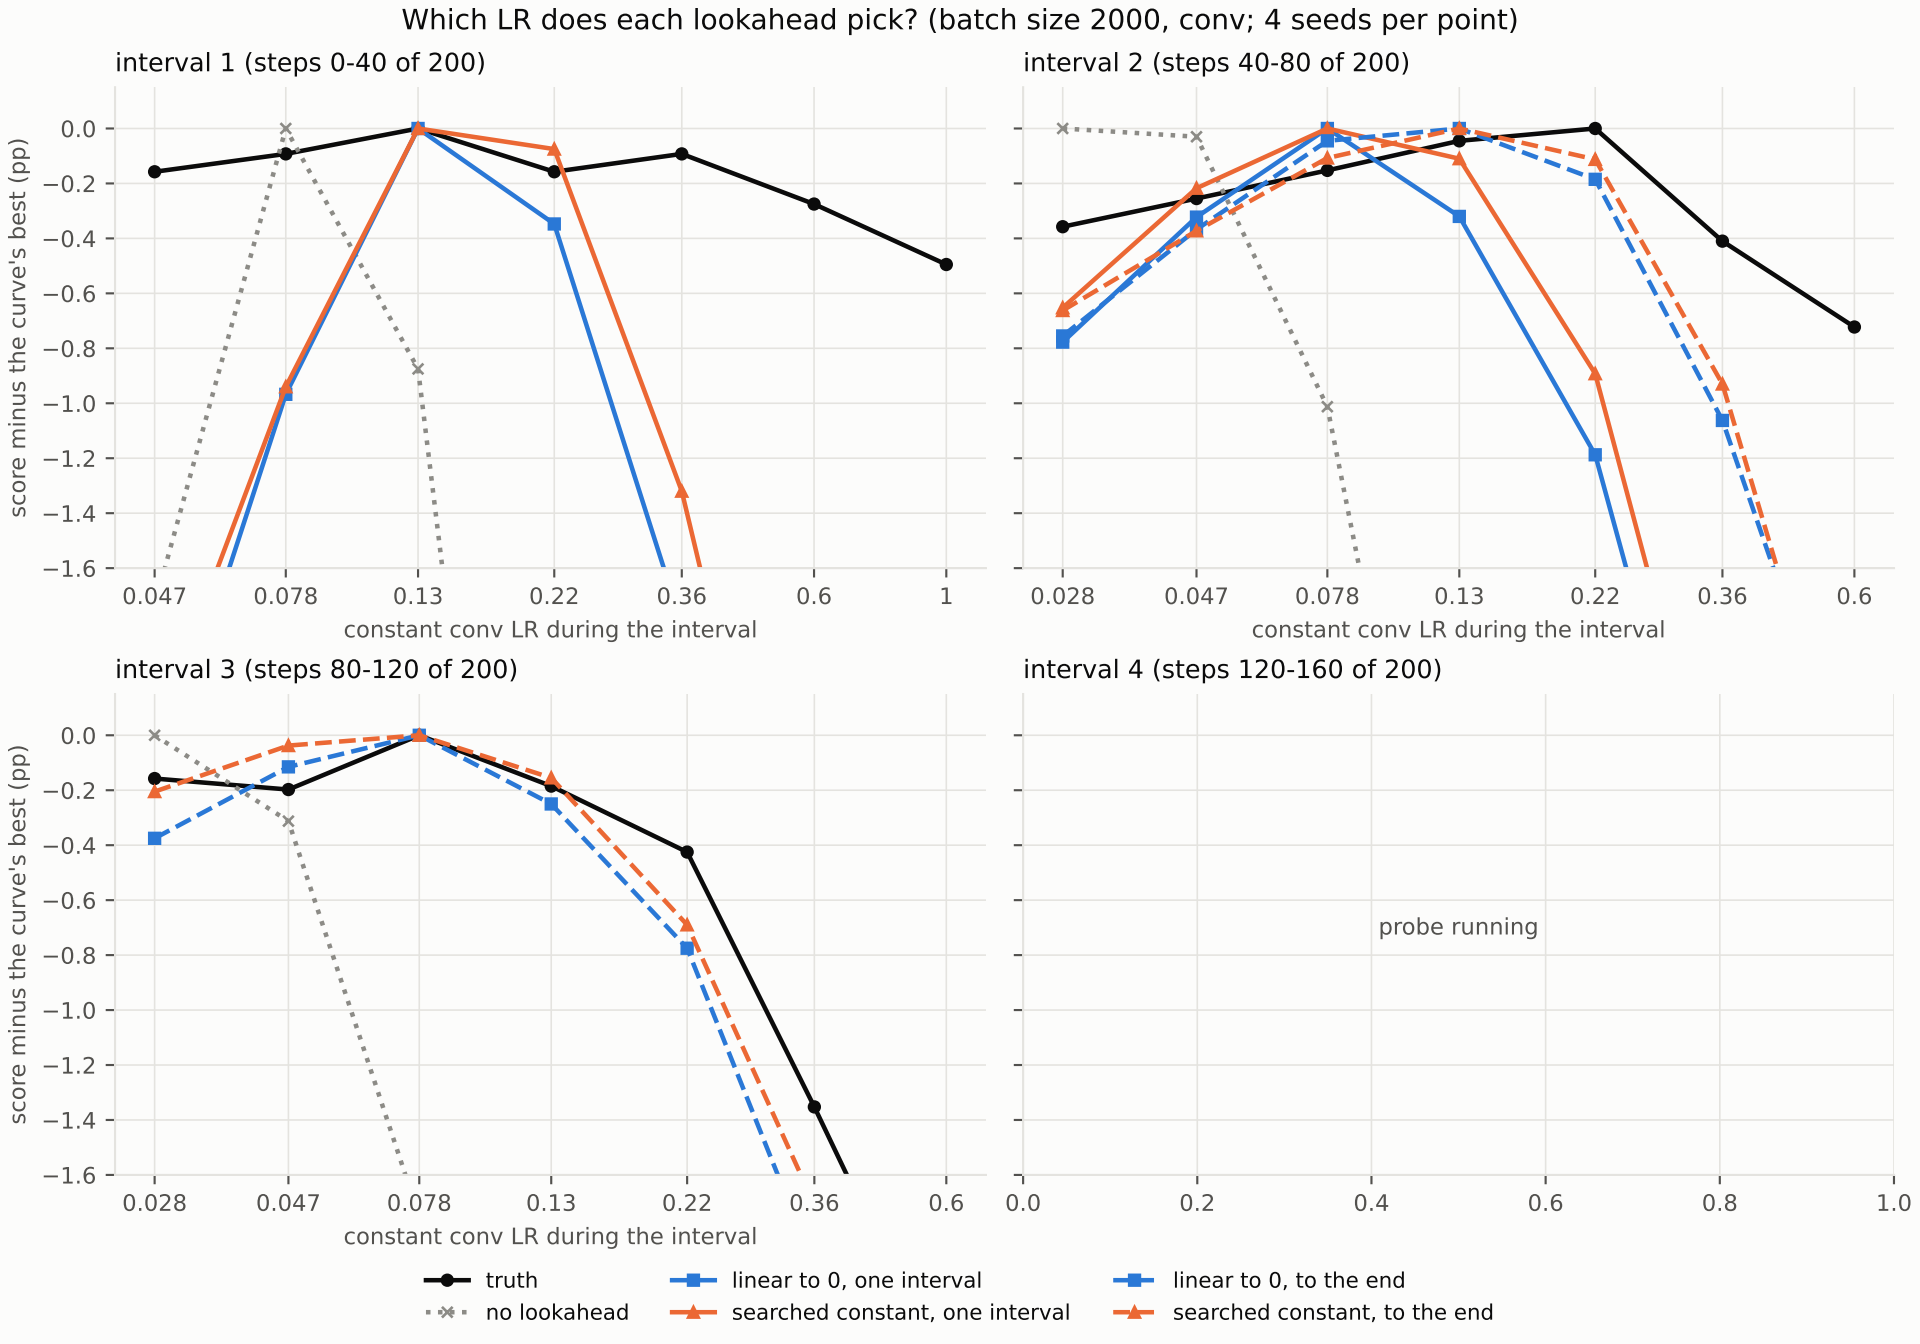
Which LR does each lookahead pick? (batch size 2000, conv; 4 seeds per point)
interval 1 (steps 0-40 of 200)
interval 2 (steps 40-80 of 200)
interval 3 (steps 80-120 of 200)
interval 4 (steps 120-160 of 200)
score minus the curve's best (pp)
constant conv LR during the interval
probe running
truth
no lookahead
linear to 0, one interval
searched constant, one interval
linear to 0, to the end
searched constant, to the end