UNIVERSIDAD MAYOR DE SAN ANDRÉS
CARRERA DE INFORMÁTICA

PROGRAMACIÓN WEB III
INF-133



PRACTICA NRO 1

AUXILIATURA

Estudiante:	Aruquipa Mamani Rolando Freddy	4903793
Docente:	Lic. Marcelo Aruquipa	
Auxliar	Univ. Enrique Rafael Fernandes Chiri	
Fecha:	18 de Octubre de 2026	

LA PAZ – BOLIVIA

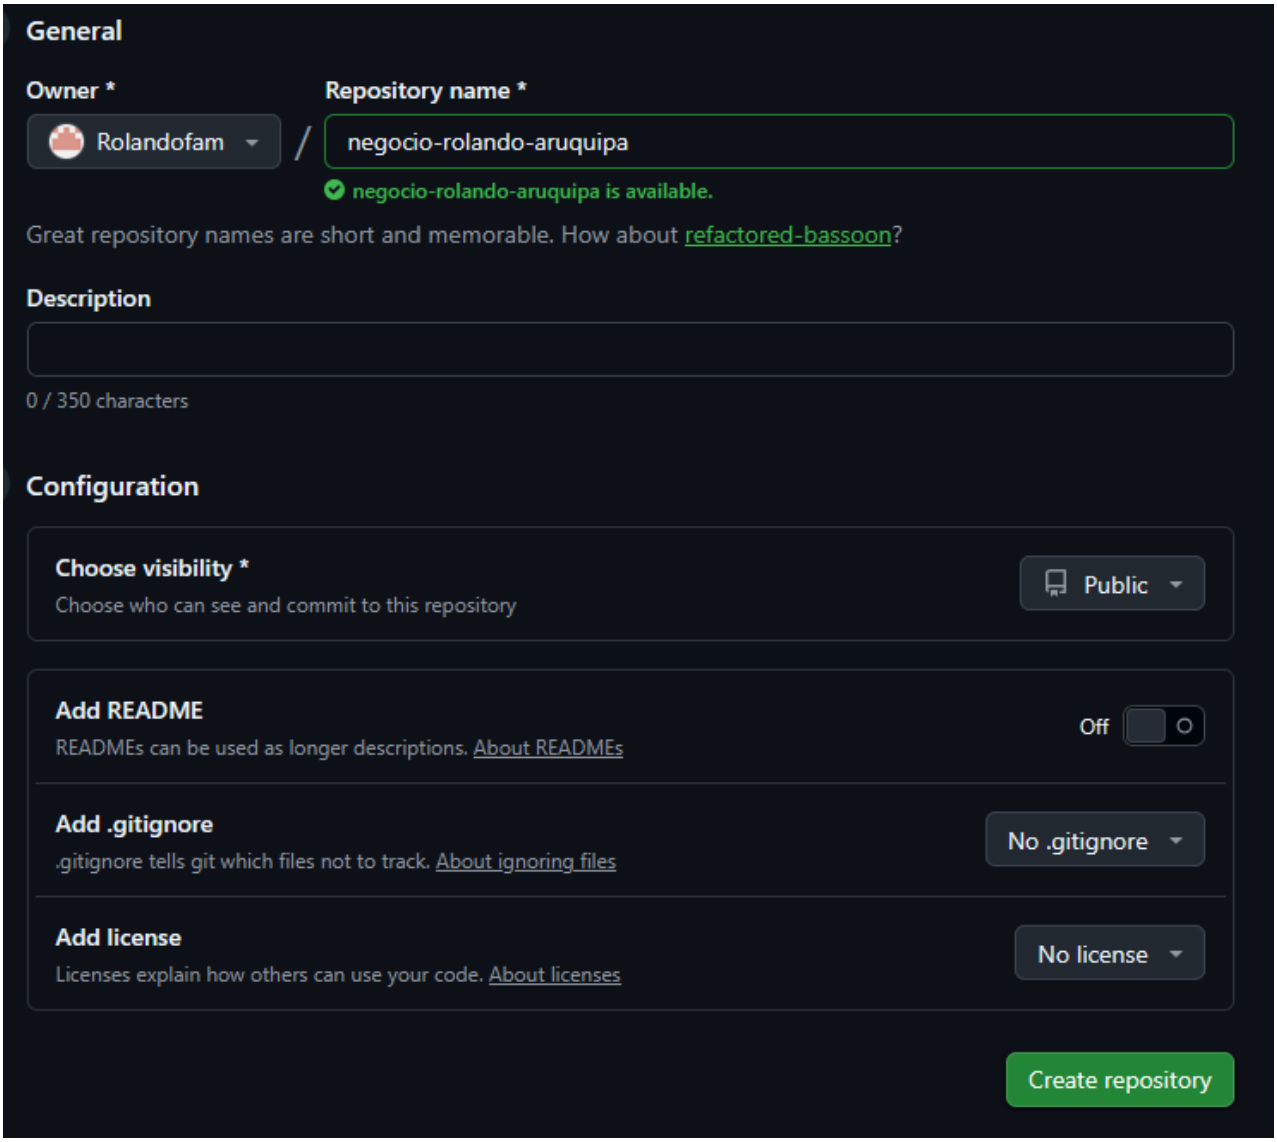
2026

Indice

1 GIT Y GITHUB (PROYECTO POKEAPI)....2
1.1 REPOSITORIO....2
1.2 RAMAS....3
1.3 COMMITS....4
1.3.1 CARPETA DB....4
1.3.2 CARPETA POKEAPI....4
1.3.3 CARPETA DOC....8
1.3.4 CONFLICTO....11
1.4 PULL REQUESTS....12
1.5 CONFLICTOS CONTROLADOS....25
2 BASE DE DATOS SQL....26
2.1 SCHEMA.SQL....26
2.2 SEED.SQL....27
2.3 CONSULTA.SQL....28
3 METODOS HTTP....34
3.1 GET....34
3.2 POST....35
3.3 PUT....36
3.4 PATCH....37
3.5 DELETE....38
4 FETCH A UNA API PUBLICA....39
4.1 FRONTEND....39
4.2 BACKEND....42

1 GIT Y GITHUB (PROYECTO POKEAPI)

1.1 REPOSITORIO



```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133
$ ls -lapR && git init && git status -s && git add . && git commit -m "Inicio" -m "Inicio de la estructura para la practica" && git log --oneline
.:
total 18
drwxr-xr-x 1 KuroiKage 197121    0 Oct 18 20:32 ./
drwxr-xr-x 1 KuroiKage 197121    0 Oct 18 19:46 ../
-rw-r--r-- 1 KuroiKage 197121 3172 Oct 18 20:06 .gitignore
-rw-r--r-- 1 KuroiKage 197121  118 Sep 30 09:09 01_Practica-133.code-workspace
-rw-r--r-- 1 KuroiKage 197121   57 Oct 18 20:07 README.md
drwxr-xr-x 1 KuroiKage 197121    0 Oct 18 19:55 db/
drwxr-xr-x 1 KuroiKage 197121    0 Oct 18 20:30 docs/
drwxr-xr-x 1 KuroiKage 197121    0 Oct 18 19:56 pokeapi/

./db:
total 4
drwxr-xr-x 1 KuroiKage 197121 0 Oct 18 19:55 ./
drwxr-xr-x 1 KuroiKage 197121 0 Oct 18 20:32 ../

./docs:
total 8
drwxr-xr-x 1 KuroiKage 197121 0 Oct 18 20:30 ./
drwxr-xr-x 1 KuroiKage 197121 0 Oct 18 20:32 ../

./pokeapi:
total 4
drwxr-xr-x 1 KuroiKage 197121 0 Oct 18 19:56 ./
drwxr-xr-x 1 KuroiKage 197121 0 Oct 18 20:32 ../
Initialized empty Git repository in D:/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133/.git/
?? .gitignore
?? 01_Practica-133.code-workspace
?? README.md
[main (root-commit) 014a367] Inicio
 3 files changed, 180 insertions(+)
 create mode 100644 .gitignore
 create mode 100644 01_Practica-133.code-workspace
 create mode 100644 README.md
014a367 (HEAD -> main) Inicio
```

1.2 RAMAS

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (main)
$ git checkout -b 1-readme && git checkout main && git checkout -b 2-readme && git checkout main && git checkout -b 3-schemaseed && git checkout main && git che
ckout -b 4-query && git checkout main && git checkout -b 5-http && git checkout main && git checkout -b 6-frontend && git checkout main && git checkout -b 7-bac
kend && git checkout main && git checkout -b 8-doc && git checkout main && git branch
Switched to a new branch '1-readme'
Switched to branch 'main'
Switched to a new branch '2-readme'
Switched to branch 'main'
Switched to a new branch '3-schemaseed'
Switched to branch 'main'
Switched to a new branch '4-query'
Switched to branch 'main'
Switched to a new branch '5-http'
Switched to branch 'main'
Switched to a new branch '6-frontend'
Switched to branch 'main'
Switched to a new branch '7-backend'
Switched to branch 'main'
Switched to a new branch '8-doc'
Switched to branch 'main'
  1-readme
  2-readme
  3-schemaseed
  4-query
  5-http
  6-frontend
  7-backend
  8-doc
* main
```

1.3 COMMITS

1.3.1 CARPETA DB

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git checkout 3-schemaseed
Switched to branch '3-schemaseed'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (3-schemaseed)
$ git status -s && git add . && git status -s && git commit -m "SchemaSeed" -m "Se creo el esquema de la base de datos y los datos de cada tabla." && git log --
oneline
?? db/
A  db/schema.sql
A  db/seed.sql
[3-schemaseed 6482b35] SchemaSeed
 2 files changed, 548 insertions(+)
 create mode 100644 db/schema.sql
 create mode 100644 db/seed.sql
6482b35 (HEAD -> 3-schemaseed) SchemaSeed
014a367 (main, 7-backend, 6-frontend, 5-http, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (3-schemaseed)
$ git checkout 4-query
Switched to branch '4-query'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (4-query)
$ git status -s && git add . && git status -s && git commit -m "Query" -m "Se creo el archivo donde se responden las 7 consultas SQL." && git log --oneline
?? db/
A  db/Venta.png
A  db/consulta.sql
[4-query c8a33dc] Query
 2 files changed, 74 insertions(+)
 create mode 100644 db/Venta.png
 create mode 100644 db/consulta.sql
c8a33dc (HEAD -> 4-query) Query
014a367 (main, 7-backend, 6-frontend, 5-http, 2-readme, 1-readme) Inicio
```

1.3.2 CARPETA POKEAPI

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git checkout 6-frontend
Switched to branch '6-frontend'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (6-frontend)
$ git status -s && git add . && git status -s && git commit -m "Frontend" -m "Se adiciono las librerias necesarias para el desarrollo de la pagina." && git log
--oneline
?? pokeapi/
warning: in the working copy of 'pokeapi/assets/template/DataTables/datatables.css', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'pokeapi/assets/template/DataTables/datatables.js', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'pokeapi/assets/template/DataTables/datatables.min.css', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'pokeapi/assets/template/DataTables/datatables.min.js', LF will be replaced by CRLF the next time Git touches it
A  pokeapi/assets/css/main.css
A  pokeapi/assets/template/DataTables/datatables.css
A  pokeapi/assets/template/DataTables/datatables.js
A  pokeapi/assets/template/DataTables/datatables.min.css
A  pokeapi/assets/template/DataTables/datatables.min.js
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.css
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.css.map
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.min.css
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.min.css.map
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.rtl.css
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.rtl.css.map
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.rtl.min.css
A  pokeapi/assets/template/bootstrap/css/bootstrap-grid.rtl.min.css.map
A  pokeapi/assets/template/bootstrap/css/bootstrap-reboot.css
A  pokeapi/assets/template/bootstrap/css/bootstrap-reboot.css.map
A  pokeapi/assets/template/bootstrap/css/bootstrap-reboot.min.css
A  pokeapi/assets/template/bootstrap/css/bootstrap-reboot.min.css.map
A  pokeapi/assets/template/bootstrap/css/bootstrap-reboot.rtl.css
 create mode 100644 pokeapi/assets/template/js/jquery.prettyPhoto.js
 create mode 100644 pokeapi/assets/template/js/jquery.stellar.min.js
 create mode 100644 pokeapi/assets/template/js/jquery.sticky.js
 create mode 100644 pokeapi/assets/template/js/menu.js
 create mode 100644 pokeapi/assets/template/js/modernizr-2.8.3.min.js
 create mode 100644 pokeapi/assets/template/js/scripts.js
 create mode 100644 pokeapi/assets/template/js/scrolltopcontrol.js
 create mode 100644 pokeapi/assets/template/js/slick.min.js
 create mode 100644 pokeapi/assets/template/js/tabla.js
 create mode 100644 pokeapi/assets/template/js/wow.min.js
 create mode 100644 pokeapi/assets/template/owlcarousel/css/owl.carousel.css
 create mode 100644 pokeapi/assets/template/owlcarousel/css/owl.theme.css
 create mode 100644 pokeapi/assets/template/owlcarousel/css/owl.transitions.css
 create mode 100644 pokeapi/assets/template/owlcarousel/js/owl.carousel.js
 create mode 100644 pokeapi/assets/template/owlcarousel/js/owl.carousel.min.js
a2ed124 (HEAD -> 6-frontend) Frontend
014a367 (main, 7-backend) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (6-frontend)
$ git status -s && git add . && git status -s && git commit -m "Frontend" -m "Se adiciono el codigo para la pagina principal en index.html." && git log --onelin
e
?? pokeapi/index.html
A  pokeapi/index.html
[6-frontend 4486449] Frontend
 1 file changed, 258 insertions(+)
 create mode 100644 pokeapi/index.html
4486449 (HEAD -> 6-frontend) Frontend
a2ed124 Frontend
014a367 (main, 7-backend) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (6-frontend)
$ git status -s && git add . && git status -s && git commit -m "Frontend" -m "Se modifico el codigo para mostrar datos estaticos de un pokemon en la pagina prin
cipal, tambien se modifico las hojas de estilo." && git log --oneline
 M pokeapi/assets/css/main.css
 M pokeapi/assets/template/css/menu.css
 M pokeapi/index.html
M  pokeapi/assets/css/main.css
M  pokeapi/assets/template/css/menu.css
M  pokeapi/index.html
[6-frontend 6f138b9] Frontend
 3 files changed, 59 insertions(+), 118 deletions(-)
6f138b9 (HEAD -> 6-frontend) Frontend
4486449 Frontend
a2ed124 Frontend
014a367 (main, 7-backend) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (6-frontend)
$ git status -s && git add . && git status -s && git commit -m "Frontend" -m "Se modifico el codigo pagina principal." && git log --oneline
 M pokeapi/index.html
M  pokeapi/index.html
[6-frontend 6cc1025] Frontend
 1 file changed, 3 insertions(+), 16 deletions(-)
6cc1025 (HEAD -> 6-frontend) Frontend
6f138b9 Frontend
4486449 Frontend
a2ed124 Frontend
014a367 (main, 7-backend) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (6-frontend)
$ git checkout 7-backend
Switched to branch '7-backend'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (7-backend)
$ git status -s && git add . && git status -s && git commit -m "Backend" -m "Se creo el codigo para recuperar datos utilizando el metodo GET de la pagina https:
//pokeapi.co y tamvien se creo el archivo pokeapi.http para realizar las pruebas con el metodo GET." && git log --oneline
?? pokeapi/
A  pokeapi/assets/js/app.js
A  pokeapi/assets/js/pokeapi.http
[7-backend a11a443] Backend
 2 files changed, 67 insertions(+)
 create mode 100644 pokeapi/assets/js/app.js
 create mode 100644 pokeapi/assets/js/pokeapi.http
a11a443 (HEAD -> 7-backend) Backend
014a367 (main) Inicio
```

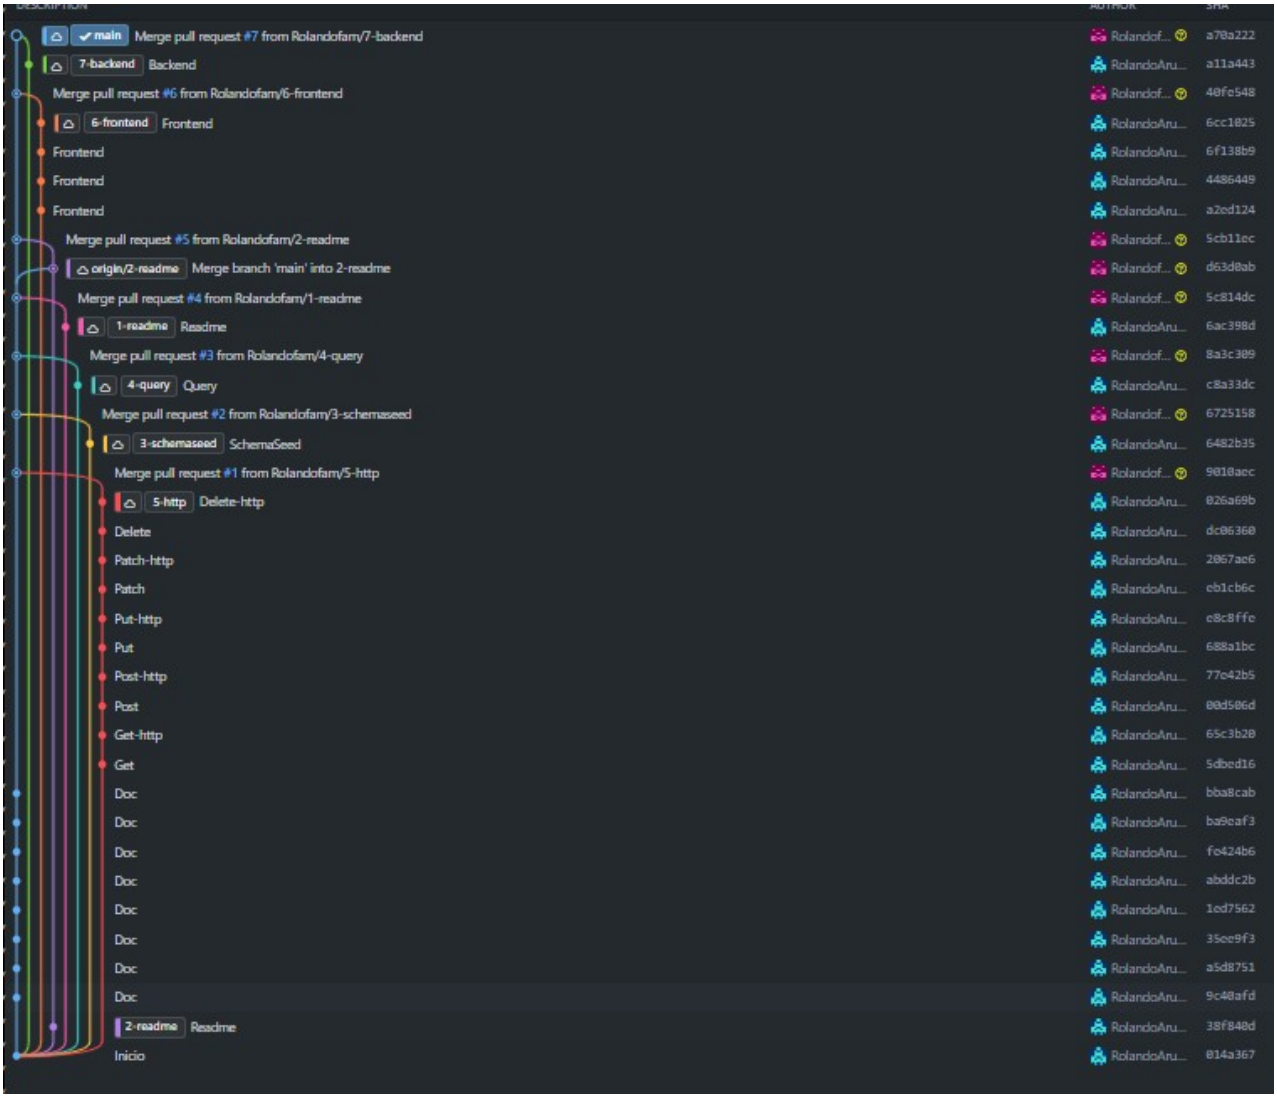
```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (7-backend)
$ git checkout 8-doc
Switched to branch '8-doc'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las capturas de Frontend, Backend y una captura de documentacion." && git l
og --oneline
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc bba8cab] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
bba8cab (HEAD -> 8-doc) Doc
ba9eaf3 Doc
fe424b6 Doc
abddc2b Doc
1ed7562 Doc
35ee9f3 Doc
a5d8751 Doc
9c40afd Doc
014a367 (main) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (main)
$ git checkout main && git log --graph --all --color=always --abbrev-commit --decorate --date=relative  --pretty=medium && git pull
Already on 'main'
Your branch is behind 'origin/main' by 27 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)
*   commit a70a222 (origin/main, origin/HEAD)
|\  Merge: 40fe548 a11a443
| | Author: Rolandofam <miabccuenta@gmail.com>
| | Date:   in the future
| |
| |     Merge pull request #7 from Rolandofam/7-backend
| |
| |     Se realiza el Merge de 7-backend a main
| |
| * commit a11a443 (origin/7-backend, 7-backend)
| | Author: RolandoAruquipa <rfaruquipa02@gmail.com>
| | Date:   59 minutes ago
| |
| |     Backend
| |
| |     Se creo el codigo para recuperar datos utilizando el metodo GET de la pagina https://pokeapi.co y tamvien se creo el archivo pok
las pruebas con el metodo GET.
| |
* |   commit 40fe548
|\ \  Merge: 5cb11ec 6cc1025
| | | Author: Rolandofam <miabccuenta@gmail.com>
| | | Date:   in the future
| | |
| | |     Merge pull request #6 from Rolandofam/6-frontend
| | |
| | |     Se realiza el Merge de 6-frontend a main
| | |
| * | commit 6cc1025 (origin/6-frontend, 6-frontend)
| | | Author: RolandoAruquipa <rfaruquipa02@gmail.com>
| | | Date:   66 minutes ago
| | |
| | |     Frontend
| | |
| | |     Se modifico el codigo pagina principal.
| | |
| * | commit 6f138b9
| | | Author: RolandoAruquipa <rfaruquipa02@gmail.com>
| | | Date:   3 hours ago
| | |
| | |     Frontend
| | |
| | |     Se modifico el codigo para mostrar datos estaticos de un pokemon en la pagina principal, tambien se modifico las hojas de esti
| | |
* | | commit 9c40afd
|/ /  Author: RolandoAruquipa <rfaruquipa02@gmail.com>
| |   Date:   21 hours ago
| |
| |       Doc
| |
| |       Se Crea el archivo ODT, que contiene la documentacion de la practica.
| |
| * commit 38f840d (2-readme)
|/  Author: RolandoAruquipa <rfaruquipa02@gmail.com>
|   Date:   7 hours ago
|
|       Readme
|
|       Se adiciono los datos personales.
|
* commit 014a367
  Author: RolandoAruquipa <rfaruquipa02@gmail.com>
  Date:   21 hours ago

      Inicio

      Inicio de la estructura para la practica
Updating bba8cab..a70a222
Fast-forward
 README.md                                          |    13 +-
 db/Venta.png                                       |   Bin 0 -> 11848 bytes
 db/consulta.sql                                    |    74 +
 db/schema.sql                                      |   347 +
 db/seed.sql                                        |   201 +
 docs/metodos.http                                  |    63 +
 docs/metodos_http.md                               |   244 +
 pokeapi/assets/css/main.css                        |    89 +
 pokeapi/assets/js/app.js                           |    51 +
 pokeapi/assets/js/pokeapi.http                     |    16 +
 pokeapi/assets/template/DataTables/datatables.css  |  3407 ++
 pokeapi/assets/template/DataTables/datatables.js   | 36570 ++++++++++++++++++++
 .../assets/template/DataTables/datatables.min.css  |    57 +
 .../assets/template/DataTables/datatables.min.js   |   161 +
 .../template/bootstrap/css/bootstrap-grid.css      |  4124 +++
create mode 100644 pokeapi/assets/template/js/jquery.flexslider-min.js
create mode 100644 pokeapi/assets/template/js/jquery.magnific-popup.min.js
create mode 100644 pokeapi/assets/template/js/jquery.mb.YTPlayer.min.js
create mode 100644 pokeapi/assets/template/js/jquery.mixitup.js
create mode 100644 pokeapi/assets/template/js/jquery.prettyPhoto.js
create mode 100644 pokeapi/assets/template/js/jquery.stellar.min.js
create mode 100644 pokeapi/assets/template/js/jquery.sticky.js
create mode 100644 pokeapi/assets/template/js/menu.js
create mode 100644 pokeapi/assets/template/js/modernizr-2.8.3.min.js
create mode 100644 pokeapi/assets/template/js/scripts.js
create mode 100644 pokeapi/assets/template/js/scrolltopcontrol.js
create mode 100644 pokeapi/assets/template/js/slick.min.js
create mode 100644 pokeapi/assets/template/js/tabla.js
create mode 100644 pokeapi/assets/template/js/wow.min.js
create mode 100644 pokeapi/assets/template/owlcarousel/css/owl.carousel.css
create mode 100644 pokeapi/assets/template/owlcarousel/css/owl.theme.css
create mode 100644 pokeapi/assets/template/owlcarousel/css/owl.transitions.css
create mode 100644 pokeapi/assets/template/owlcarousel/js/owl.carousel.js
create mode 100644 pokeapi/assets/template/owlcarousel/js/owl.carousel.min.js
create mode 100644 pokeapi/index.html
```


main Merge pull request #7 from Rolandofam/7-backend
7-backend Backend
Merge pull request #6 from Rolandofam/6-frontend
6-frontend Frontend
Frontend
Frontend
Frontend
Merge pull request #5 from Rolandofam/2-readme
origin/2-readme Merge branch 'main' into 2-readme
Merge pull request #4 from Rolandofam/1-readme
1-readme Readme
Merge pull request #3 from Rolandofam/4-query
4-query Query
Merge pull request #2 from Rolandofam/3-schemaseed
3-schemaseed SchemaSeed
Merge pull request #1 from Rolandofam/5-http
5-http Delete-http
Delete
Patch-http
Patch
Put-http
Put
Post-http
Post
Get-http
Get
Doc
Doc
Doc
Doc
Doc
Doc
Doc
Doc
2-readme Readme
Inicio

1.3.3 CARPETA DOC

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (main)
$ git checkout 8-doc
Switched to branch '8-doc'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se Crea el archivo ODT, que contiene la documentacion de la practica." && git log --one
line
?? docs/
A  docs/Practica.odt
[8-doc 9c40afd] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 docs/Practica.odt
9c40afd (HEAD -> 8-doc) Doc
014a367 (main, 7-backend, 6-frontend, 5-http, 4-query, 3-schemaseed, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las imagenes de repositorio, ramas y commmits de doc." && git log --oneline
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc 843b7d3] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
843b7d3 (HEAD -> 8-doc) Doc
9c40afd Doc
014a367 (main, 7-backend, 6-frontend, 5-http, 4-query, 3-schemaseed, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (3-schemaseed)
$ git checkout 8-doc
Switched to branch '8-doc'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las capturas de schema, seed y de doc." && git log --oneline
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc 35ee9f3] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
35ee9f3 (HEAD -> 8-doc) Doc
a5d8751 Doc
9c40afd Doc
014a367 (main, 7-backend, 6-frontend, 5-http, 4-query, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las capturas de schema, seed, consultas y de doc." && git log --oneline
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc 1ed7562] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
1ed7562 (HEAD -> 8-doc) Doc
35ee9f3 Doc
a5d8751 Doc
9c40afd Doc
014a367 (main, 7-backend, 6-frontend, 5-http, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git checkout 5-http
Switched to branch '5-http'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Get" -m "Se creo el archivo donde metodos_http.rm, que contiene la descrpcion del metodo get y u
n ejemplor en javascrip." && git log --oneline
?? docs/
A  docs/metodos_http.md
[5-http 5dbed16] Get
 1 file changed, 19 insertions(+)
 create mode 100644 docs/metodos_http.md
5dbed16 (HEAD -> 5-http) Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Get-http" -m "Se creo el archivo donde metodo.http, que contiene el codigo para obtener el posts
 con id 1 de https://jsonplaceholder.typicode.com." && git log --oneline
?? docs/metodos.http
A  docs/metodos.http
[5-http 65c3b20] Get-http
 1 file changed, 16 insertions(+)
 create mode 100644 docs/metodos.http
65c3b20 (HEAD -> 5-http) Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Post" -m "Se adiciono al archivo metodos_http.rm, la descrpcion del metodo Post y un ejemplo en
javascript." && git log --oneline
 M docs/metodos_http.md
M  docs/metodos_http.md
[5-http 00d506d] Post
 1 file changed, 56 insertions(+), 1 deletion(-)
00d506d (HEAD -> 5-http) Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Post-http" -m "Se adiciono al archivo metodo.http, el codigo para adicionar un nuevo posts." &&
git log --oneline
 M docs/metodos.http
M  docs/metodos.http
[5-http 77e42b5] Post-http
 1 file changed, 16 insertions(+)
77e42b5 (HEAD -> 5-http) Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
$ git status -s && git add . && git status -s && git commit -m "Put" -m "Se adiciono al archivo metodos_http.rm, la descrpcion del metodo Put y un ejemplo en ja
vascript." && git log --oneline
 M docs/metodos_http.md
M  docs/metodos_http.md
[5-http 688a1bc] Put
 1 file changed, 50 insertions(+), 1 deletion(-)
688a1bc (HEAD -> 5-http) Put
77e42b5 Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Put-http" -m "Se adiciono al archivo metodo.http, el codigo para actualizar el post con id 1." 
& git log --oneline
 M docs/metodos.http
M  docs/metodos.http
[5-http e8c8ffe] Put-http
 1 file changed, 12 insertions(+)
e8c8ffe (HEAD -> 5-http) Put-http
688a1bc Put
77e42b5 Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Patch" -m "Se adiciono al archivo metodos_http.rm, la descrpcion del metodo Patch y un ejemplo e
n javascript." && git log --oneline
 M docs/metodos_http.md
M  docs/metodos_http.md
[5-http eb1cb6c] Patch
 1 file changed, 55 insertions(+)
eb1cb6c (HEAD -> 5-http) Patch
e8c8ffe Put-http
688a1bc Put
77e42b5 Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Patch-http" -m "Se adiciono al archivo metodo.http, el codigo para actualizar solo uno o varios
campo en especifico del post con id 1." && git log --oneline
 M docs/metodos.http
M  docs/metodos.http
[5-http 2067ae6] Patch-http
 1 file changed, 13 insertions(+)
2067ae6 (HEAD -> 5-http) Patch-http
eb1cb6c Patch
e8c8ffe Put-http
688a1bc Put
77e42b5 Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Delete" -m "Se adiciono al archivo metodos_http.md, la descrpcion del metodo Delete y un ejemplo
 en javascript." && git log --oneline
 M docs/metodos_http.md
M  docs/metodos_http.md
[5-http dc06360] Delete
 1 file changed, 67 insertions(+), 1 deletion(-)
dc06360 (HEAD -> 5-http) Delete
2067ae6 Patch-http
eb1cb6c Patch
e8c8ffe Put-http
688a1bc Put
77e42b5 Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git status -s && git add . && git status -s && git commit -m "Delete-http" -m "Se adiciono al archivo metodo.http, el codigo para eliminar el post con id 1."
&& git log --oneline
 M docs/metodos.http
M  docs/metodos.http
[5-http 026a69b] Delete-http
 1 file changed, 6 insertions(+)
026a69b (HEAD -> 5-http) Delete-http
dc06360 Delete
2067ae6 Patch-http
eb1cb6c Patch
e8c8ffe Put-http
688a1bc Put
77e42b5 Post-http
00d506d Post
65c3b20 Get-http
5dbed16 Get
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (5-http)
$ git checkout 8-doc
Switched to branch '8-doc'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las capturas de Metodos http y de doc." && git log --oneline
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc abddc2b] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
abddc2b (HEAD -> 8-doc) Doc
1ed7562 Doc
35ee9f3 Doc
a5d8751 Doc
9c40afd Doc
014a367 (main, 7-backend, 6-frontend, 2-readme, 1-readme) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (main)
$ git checkout 8-doc
Switched to branch '8-doc'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las capturas de Readme.md de las ramas 1-readme, 2-readme y se adiciono el
indice a la documentacion." && git log --oneline
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc fe424b6] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
fe424b6 (HEAD -> 8-doc) Doc
abddc2b Doc
1ed7562 Doc
35ee9f3 Doc
a5d8751 Doc
9c40afd Doc
014a367 (main, 7-backend, 6-frontend) Inicio
```

```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (6-frontend)
$ git checkout 8-doc
Switched to branch '8-doc'

KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (8-doc)
$ git status -s && git add . && git status -s && git commit -m "Doc" -m "Se adiciono las capturas de Frontend y una captura de documentacion." && git log --onel
ine
 M docs/Practica.odt
M  docs/Practica.odt
[8-doc ba9eaf3] Doc
 1 file changed, 0 insertions(+), 0 deletions(-)
ba9eaf3 (HEAD -> 8-doc) Doc
fe424b6 Doc
abddc2b Doc
1ed7562 Doc
35ee9f3 Doc
a5d8751 Doc
9c40afd Doc
014a367 (main, 7-backend) Inicio
```

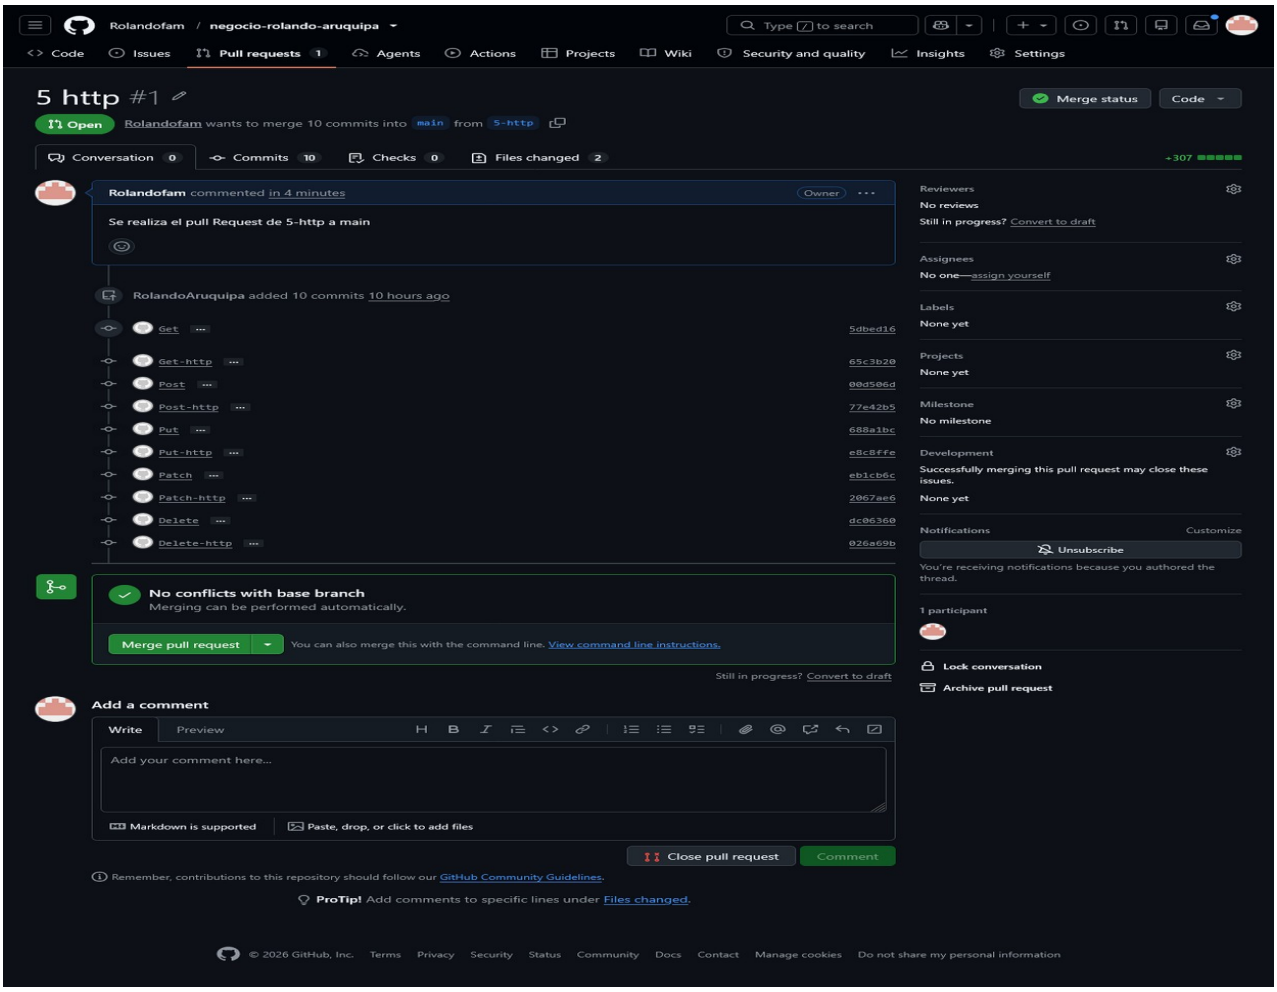
1.3.4 CONFLICTO

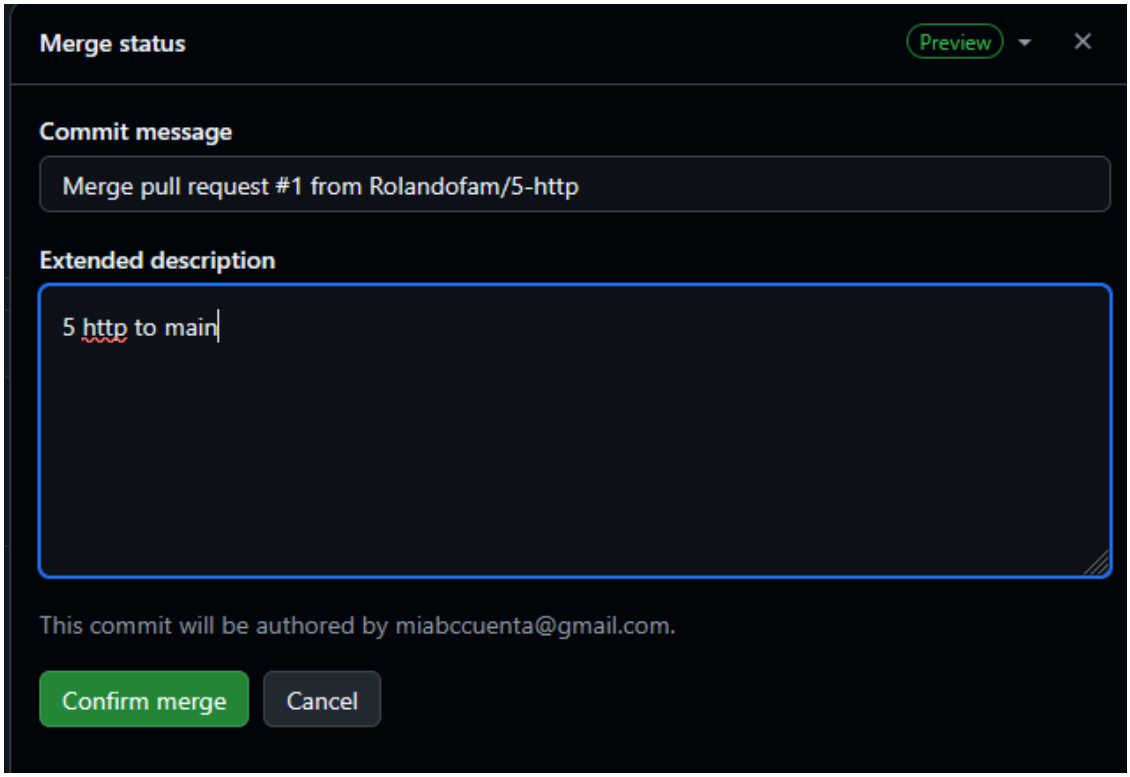
```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (1-readme)
$ git status -s && git add . && git status -s && git commit -m "Readme" -m "Se adiciono los objetivos de la practica." && git log --oneline
 M README.md
M  README.md
[1-readme 6ac398d] Readme
 1 file changed, 6 insertions(+), 1 deletion(-)
6ac398d (HEAD -> 1-readme) Readme
014a367 (main, 7-backend, 6-frontend, 2-readme) Inicio
```

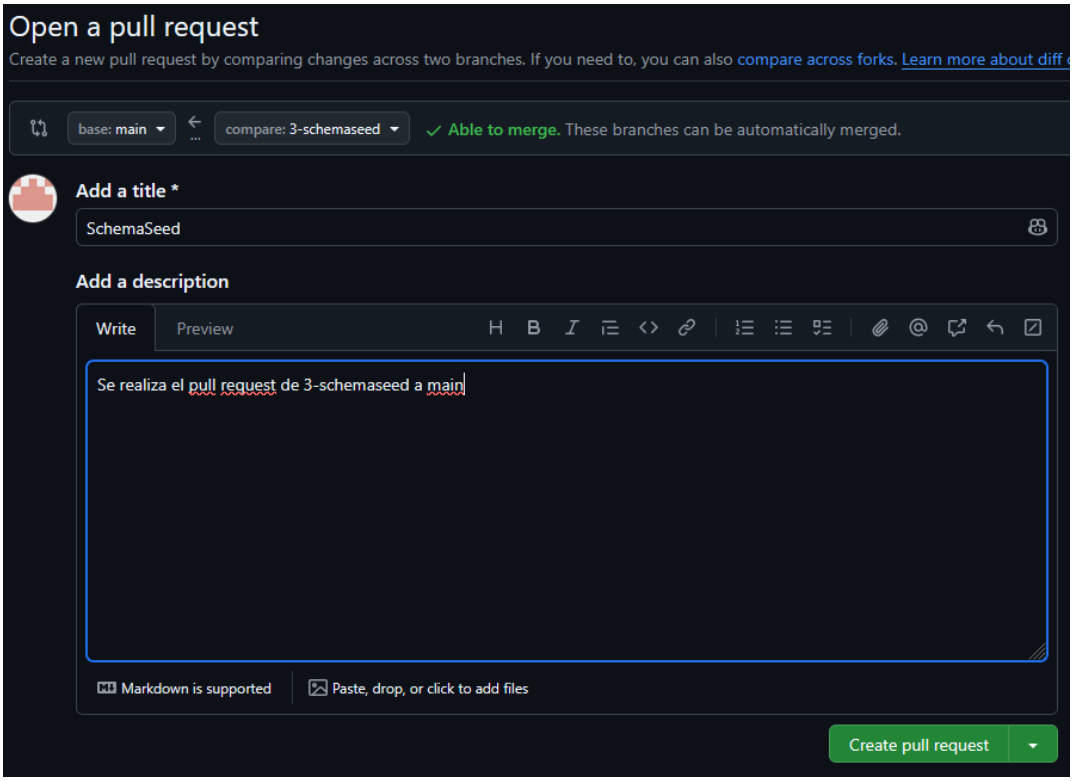
```
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (1-readme)
$ git checkout 2-readme
Switched to branch '2-readme'

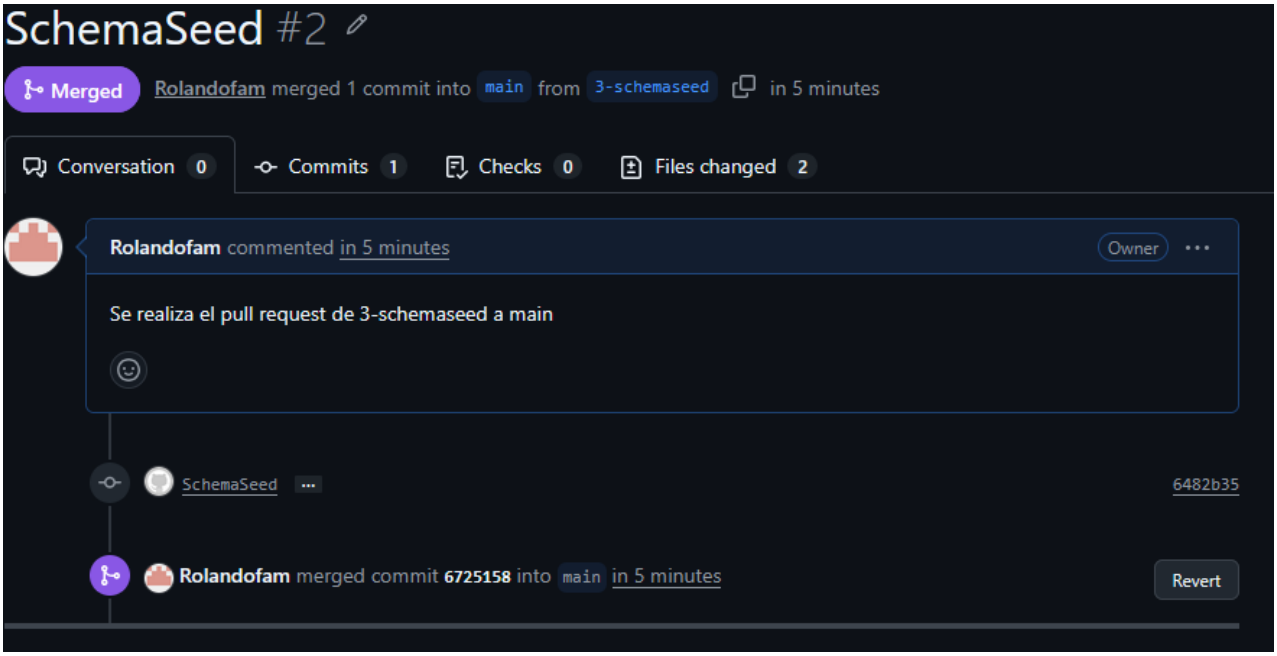
KuroiKage@DESKTOP-EJJ3JBB MINGW64 /d/Materia/UMSA/2026/INF-133/Auxi/01_Practica-133 (2-readme)
$ git status -s && git add . && git status -s && git commit -m "Readme" -m "Se adiciono los datos personales." && git log --oneline
 M README.md
M  README.md
[2-readme 38f840d] Readme
 1 file changed, 7 insertions(+), 1 deletion(-)
38f840d (HEAD -> 2-readme) Readme
014a367 (main, 7-backend, 6-frontend) Inicio
```

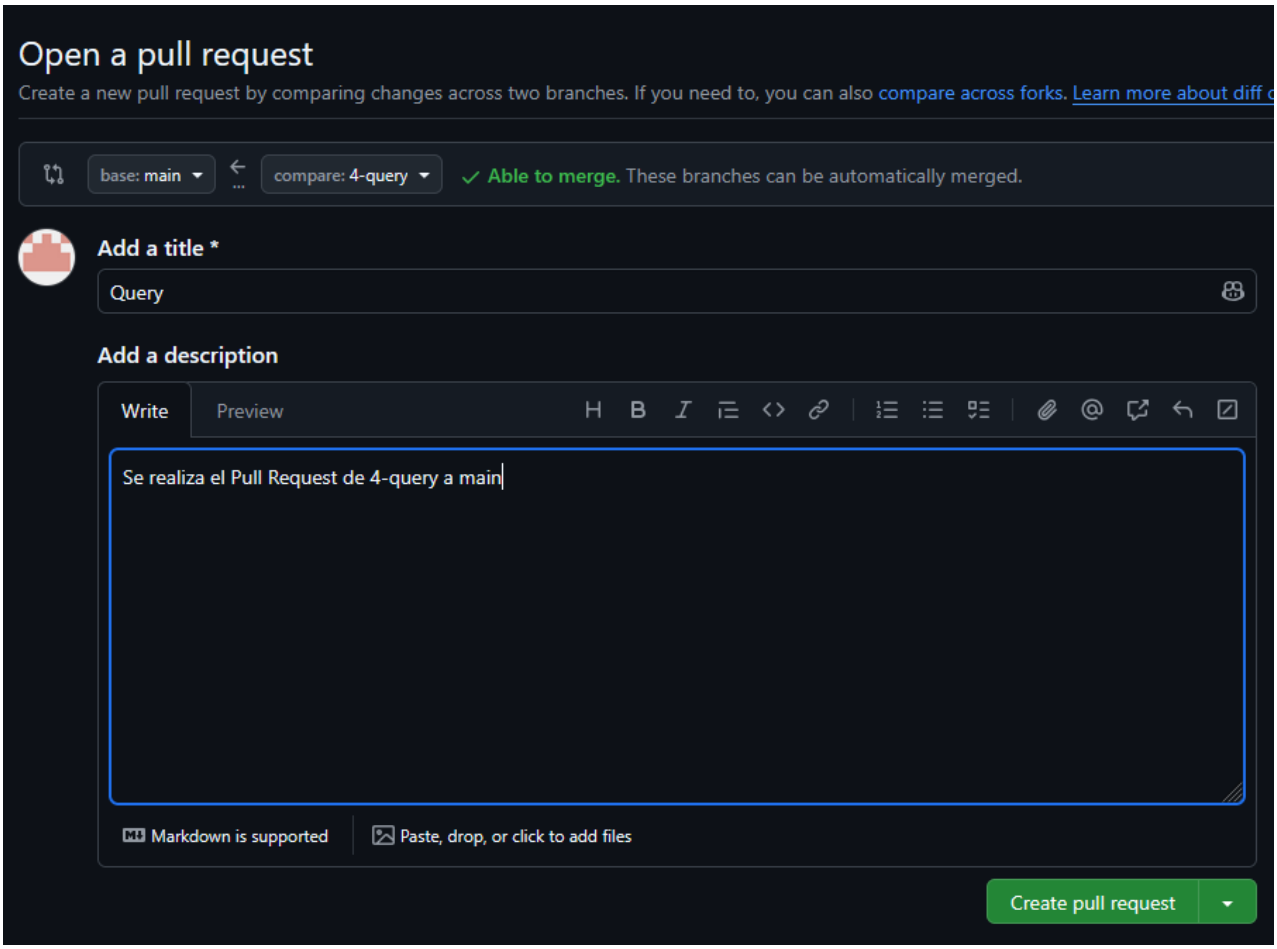
1.4 PULL REQUESTS

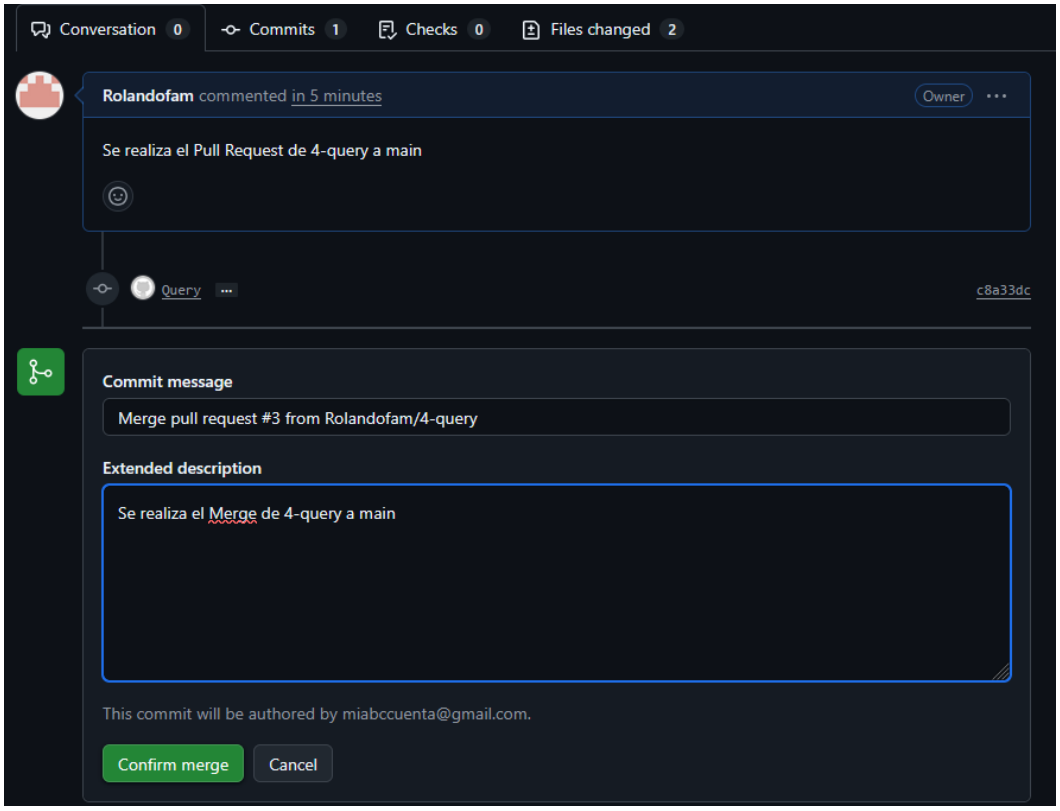


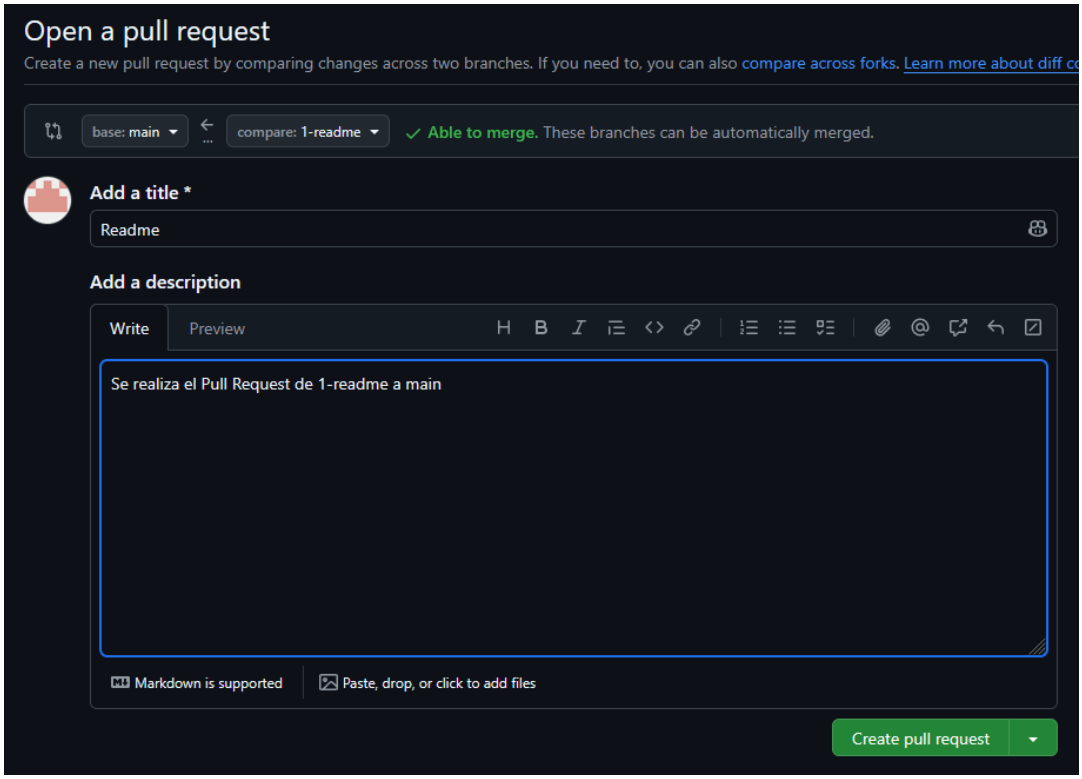

Merge status
Preview
Commit message
Merge pull request #1 from Rolandofam/5-http
Extended description
5 http to main
This commit will be authored by miabccuenta@gmail.com.
Confirm merge
Cancel

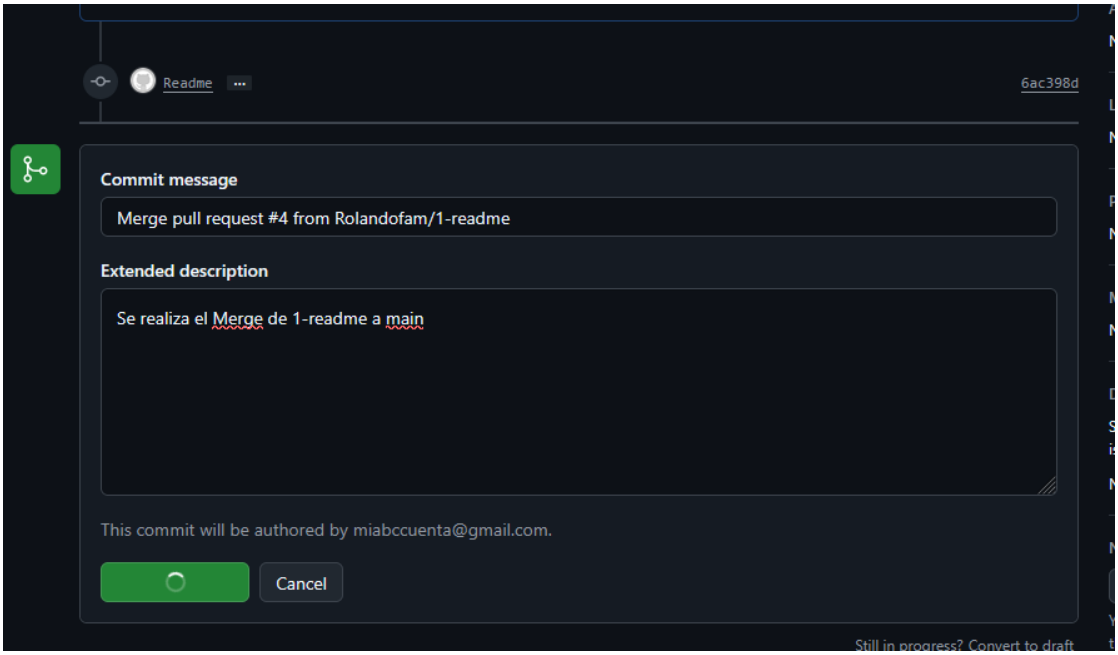

Open a pull request
Create a new pull request by comparing changes across two branches. If you need to, you can also compare across forks. Learn more about diff
base: main
compare: 3-schemaseed
Able to merge. These branches can be automatically merged.
Add a title *
SchemaSeed
Add a description
Write
Preview
Se realiza el pull request de 3-schemaseed a main
Markdown is supported
Paste, drop, or click to add files
Create pull request

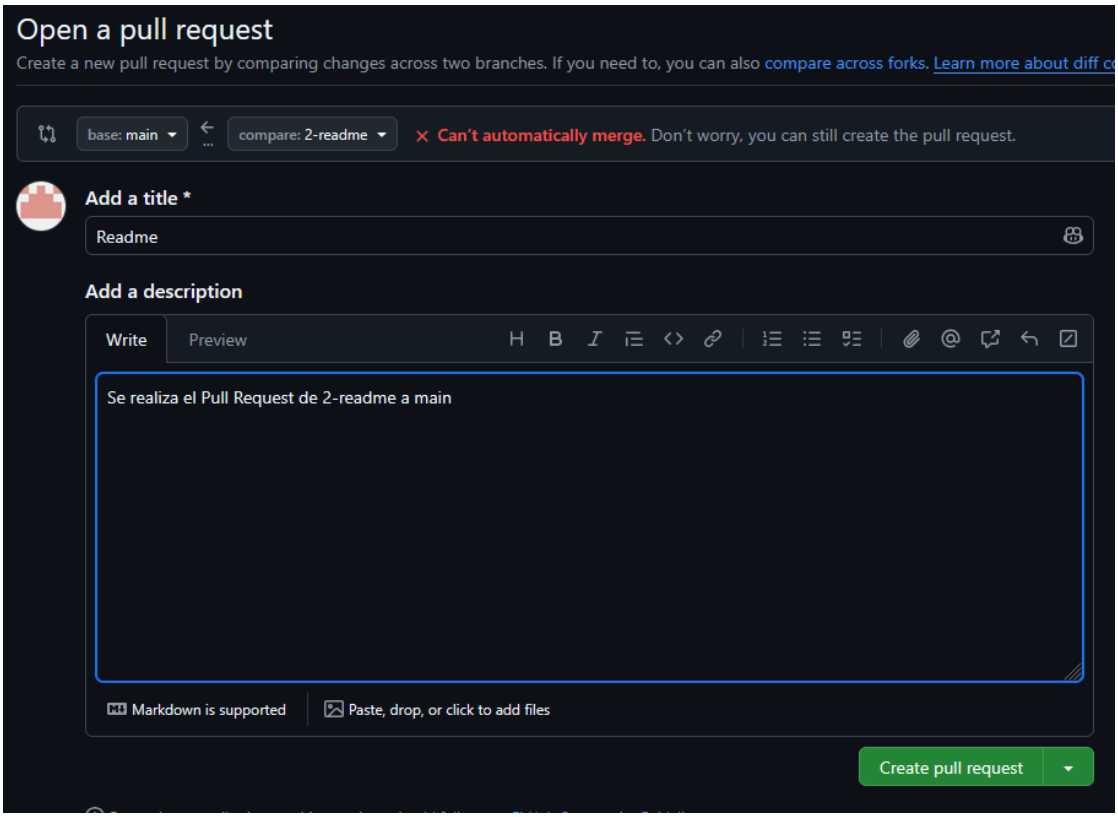

SchemaSeed #2
Merged
Rolandofam merged 1 commit into main from 3-schemaseed in 5 minutes
Conversation 0
Commits 1
Checks 0
Files changed 2
Rolandofam commented in 5 minutes
Owner
Se realiza el pull request de 3-schemaseed a main
SchemaSeed
6482b35
Rolandofam merged commit 6725158 into main in 5 minutes
Revert

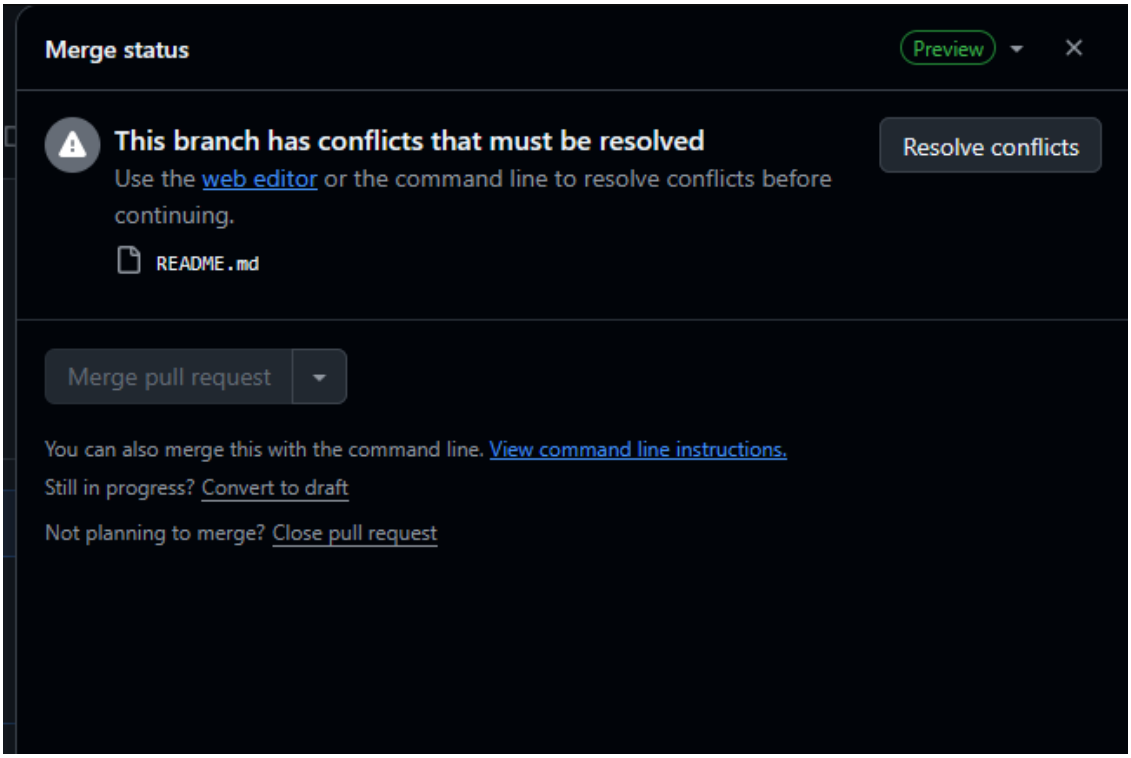

Open a pull request
Create a new pull request by comparing changes across two branches. If you need to, you can also compare across forks. Learn more about diff
base: main
compare: 4-query
Able to merge. These branches can be automatically merged.
Add a title *
Query
Add a description
Write
Preview
Se realiza el Pull Request de 4-query a main
Markdown is supported
Paste, drop, or click to add files
Create pull request


Conversation 0
Commits 1
Checks 0
Files changed 2
Rolandofam commented in 5 minutes
Owner
Se realiza el Pull Request de 4-query a main
Query
c8a33dc
Commit message
Merge pull request #3 from Rolandofam/4-query
Extended description
Se realiza el Merge de 4-query a main
This commit will be authored by miabccuenta@gmail.com.
Confirm merge
Cancel


Open a pull request
Create a new pull request by comparing changes across two branches. If you need to, you can also compare across forks. Learn more about diff c
base: main
compare: 1-readme
Able to merge. These branches can be automatically merged.
Add a title *
Readme
Add a description
Write
Preview
Se realiza el Pull Request de 1-readme a main
Markdown is supported
Paste, drop, or click to add files
Create pull request

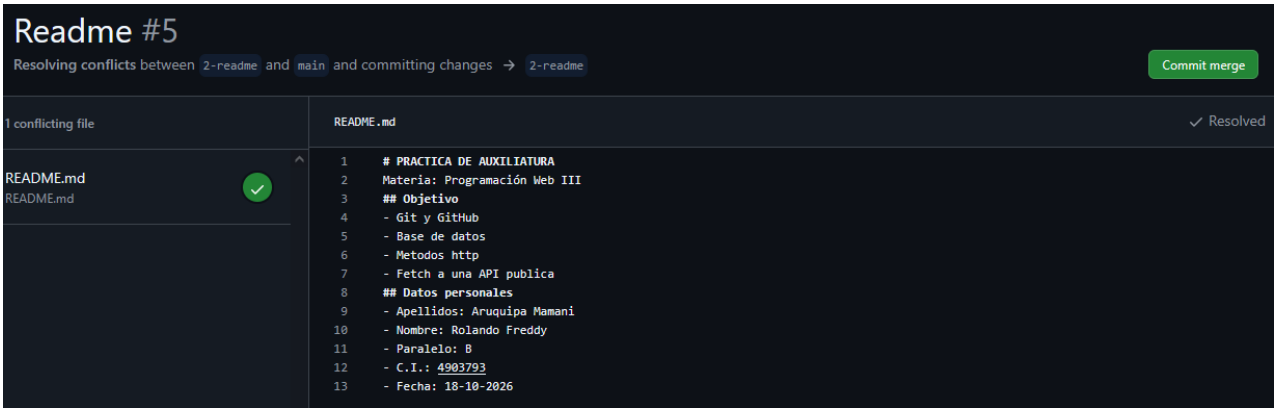

Readme
6ac398d
Commit message
Merge pull request #4 from Rolandofam/1-readme
Extended description
Se realiza el Merge de 1-readme a main
This commit will be authored by miabccuenta@gmail.com.
Cancel
Still in progress? Convert to draft

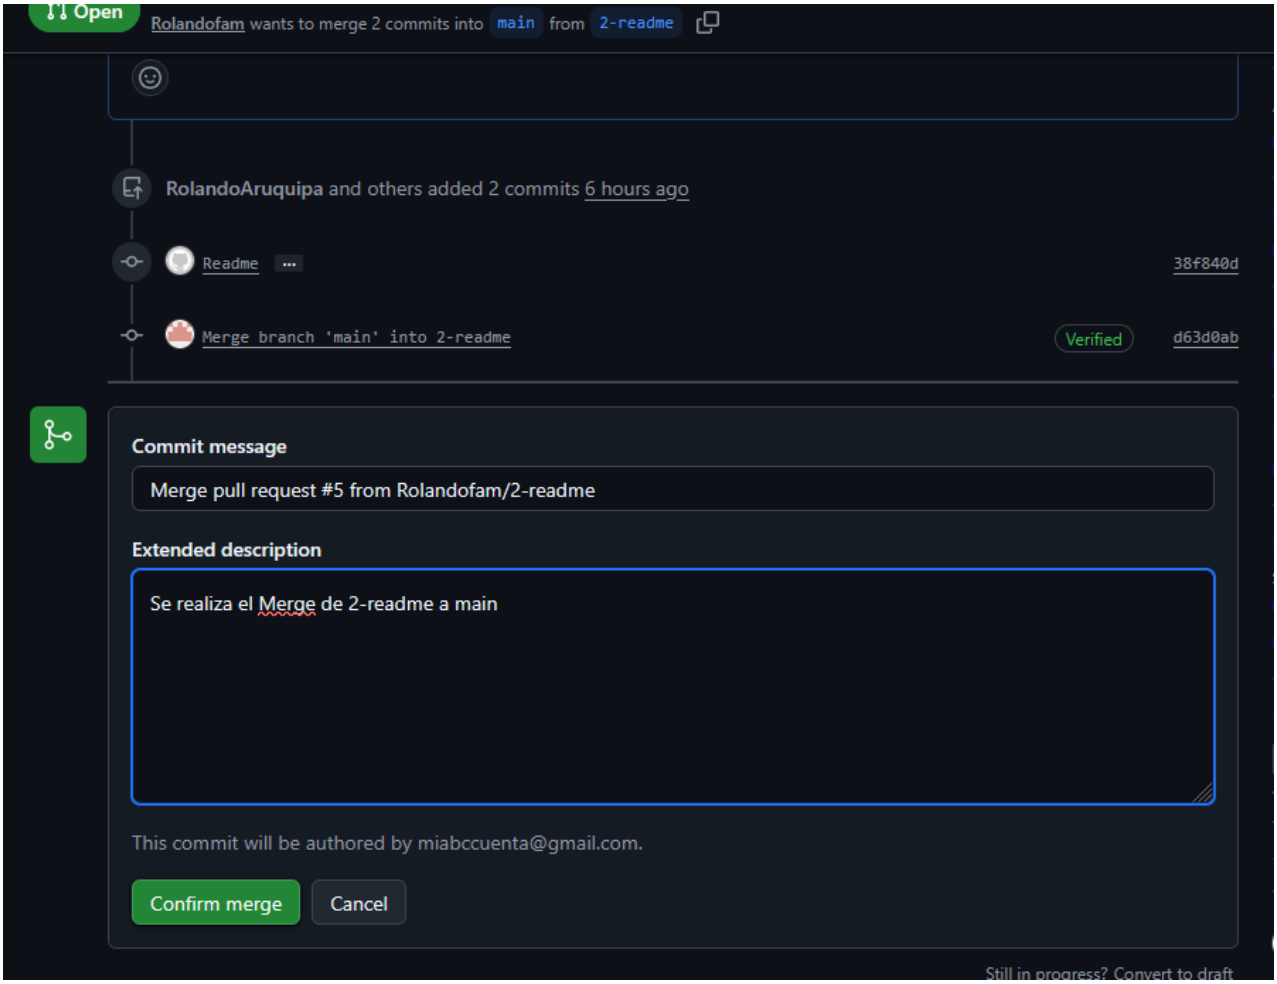

Open a pull request
Create a new pull request by comparing changes across two branches. If you need to, you can also compare across forks. Learn more about diff c
base: main
compare: 2-readme
Can't automatically merge. Don't worry, you can still create the pull request.
Add a title *
Readme
Add a description
Write
Preview
Se realiza el Pull Request de 2-readme a main
Markdown is supported
Paste, drop, or click to add files
Create pull request

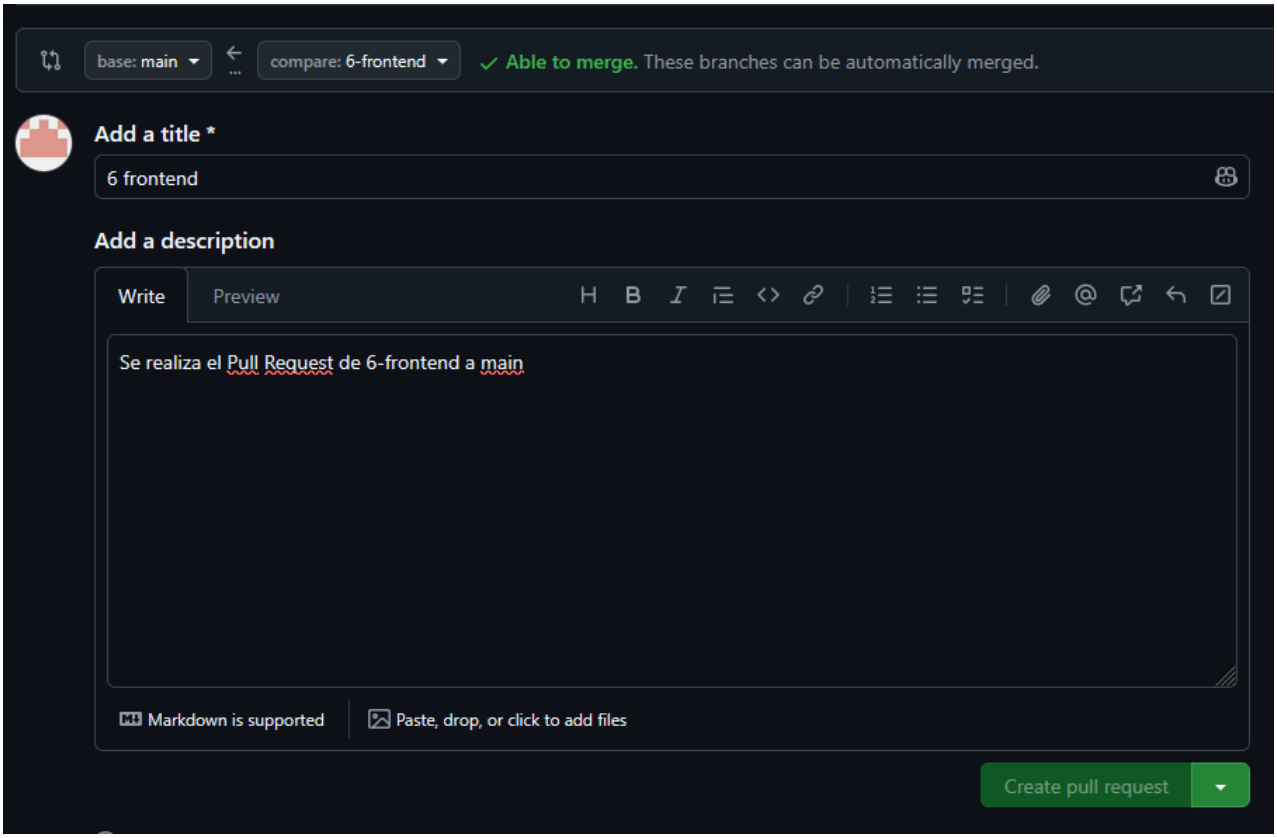


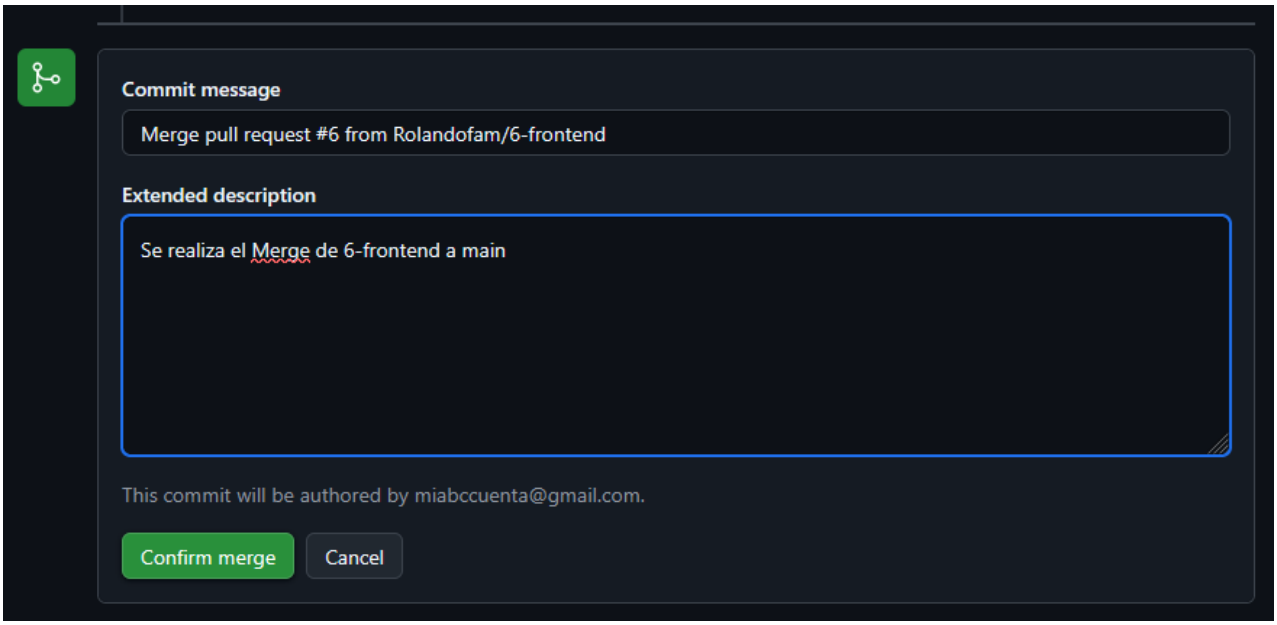
README.md — 1 conflict

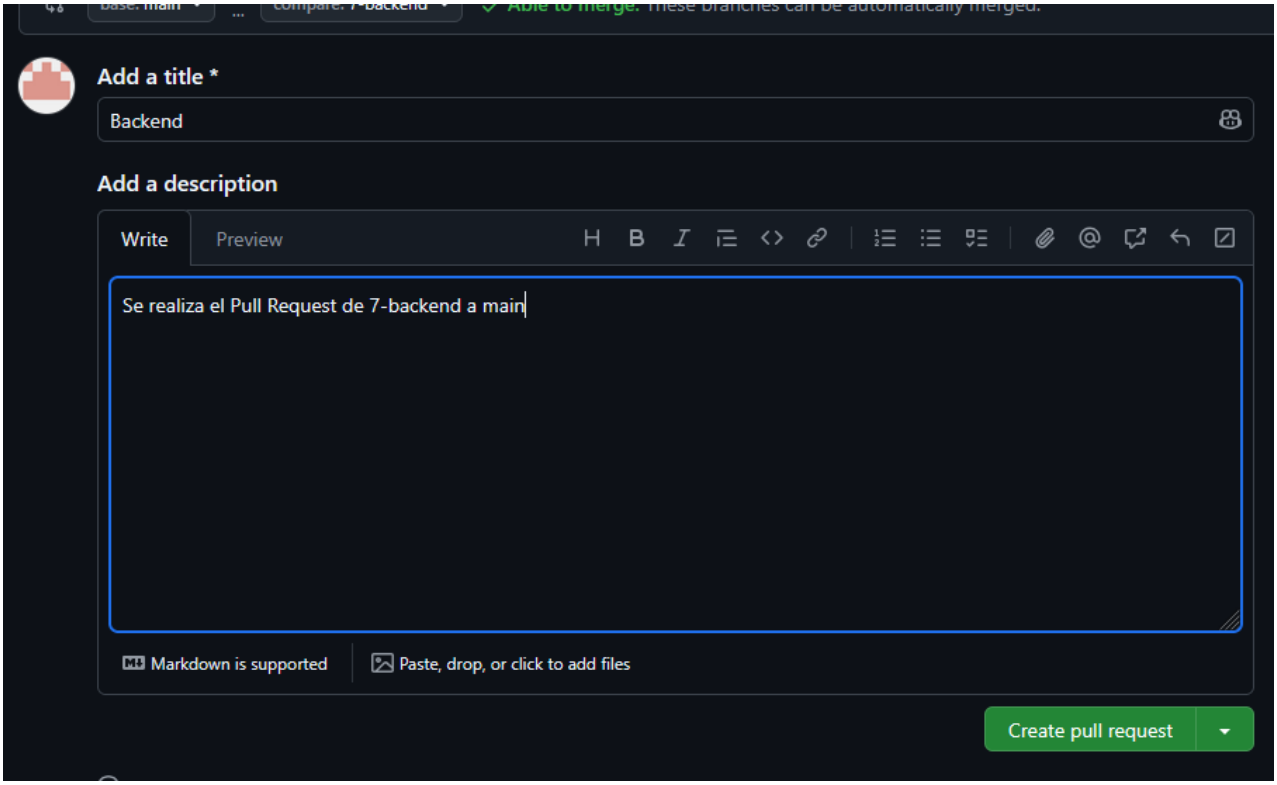
```
# PRACTICA DE AUXILIATURA
Materia: Programación Web III
Accept current change | Accept incoming change | Accept both changes
<<<<<<< 2-readme (Current change)
## Datos personales
- Apellidos: Aruquipa Mamani
- Nombre: Rolando Freddy
- Paralelo: B
- C.I.: 4903793
- Fecha: 18-10-2026
=======
## Objetivo
- Git y GitHub
- Base de datos
- Metodos http
- Fetch a una API publica
>>>>>>> main (Incoming change)
```

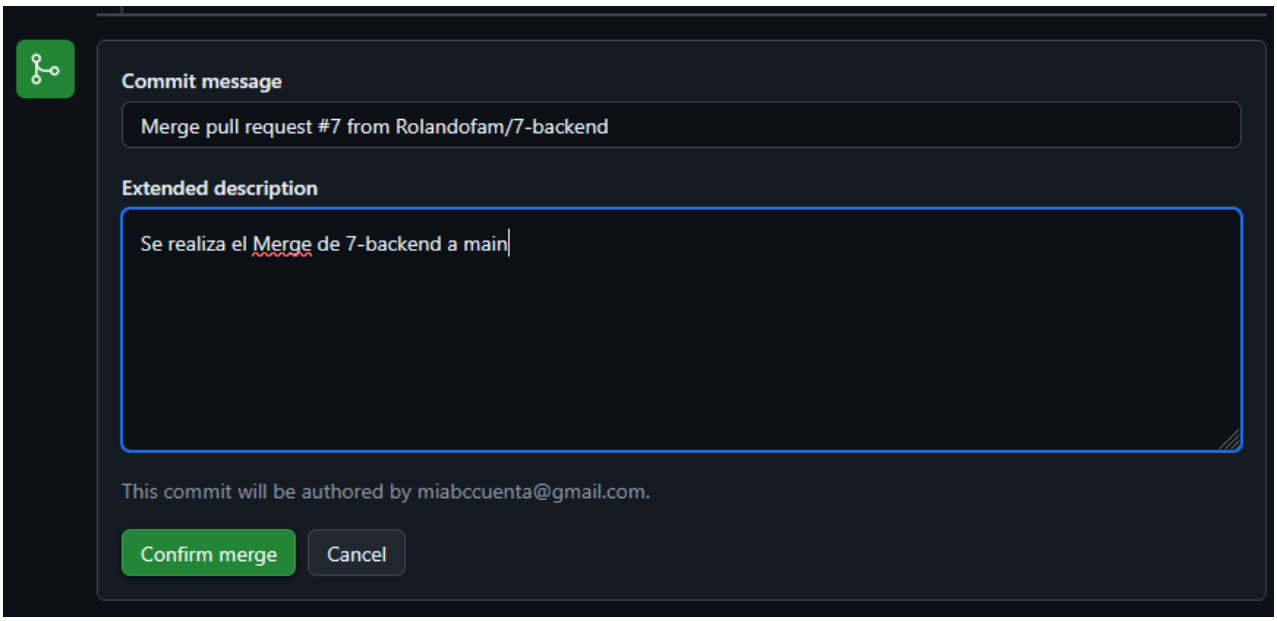

Readme #5
Resolving conflicts between 2-readme and main and committing changes → 2-readme
Commit merge
1 conflicting file
README.md
Resolved
README.md
README.md
1 # PRACTICA DE AUXILIATURA
2 Materia: Programación Web III
3 ## Objetivo
4 - Git y GitHub
5 - Base de datos
6 - Metodos http
7 - Fetch a una API publica
8 ## Datos personales
9 - Apellidos: Aruquipa Mamani
10 - Nombre: Rolando Freddy
11 - Paralelo: B
12 - C.I.: 4903793
13 - Fecha: 18-10-2026


Open
Rolandofam wants to merge 2 commits into main from 2-readme
RolandoAruquipa and others added 2 commits 6 hours ago
Readme
38f840d
Merge branch 'main' into 2-readme
Verified
d63d0ab
Commit message
Merge pull request #5 from Rolandofam/2-readme
Extended description
Se realiza el Merge de 2-readme a main
This commit will be authored by miabccuenta@gmail.com.
Confirm merge
Cancel
Still in progress? Convert to draft

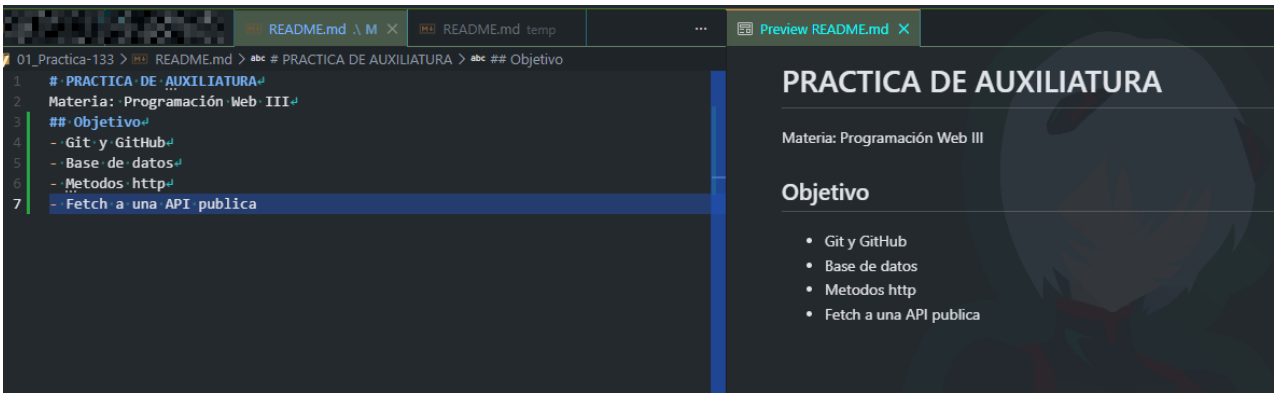

base: main
compare: 6-frontend
Able to merge. These branches can be automatically merged.
Add a title *
6 frontend
Add a description
Write
Preview
Se realiza el Pull Request de 6-frontend a main
Markdown is supported
Paste, drop, or click to add files
Create pull request

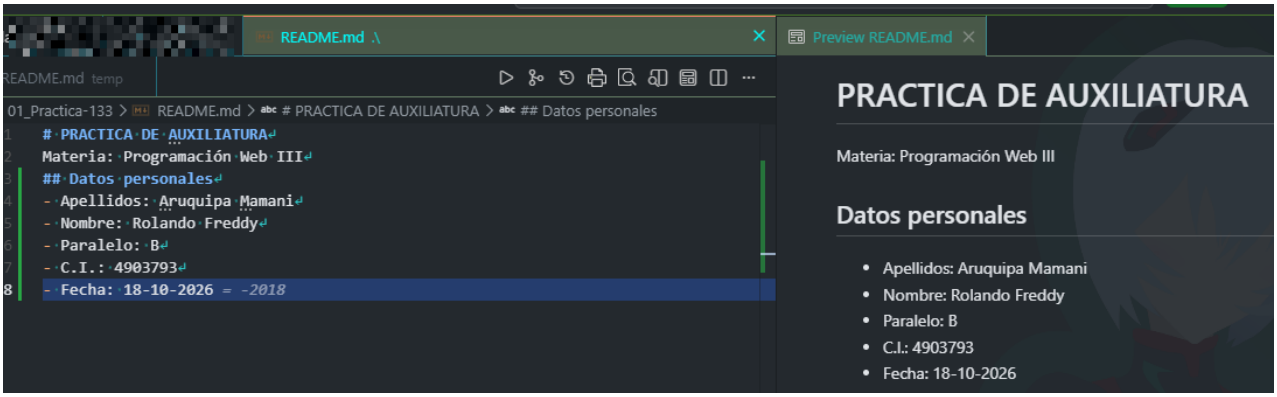

Commit message
Merge pull request #6 from Rolandofam/6-frontend
Extended description
Se realiza el Merge de 6-frontend a main
This commit will be authored by miabccuenta@gmail.com.
Confirm merge
Cancel


Add a title *
Backend
Add a description
Write
Preview
Se realiza el Pull Request de 7-backend a main
Markdown is supported
Paste, drop, or click to add files
Create pull request


Commit message
Merge pull request #7 from Rolandofam/7-backend
Extended description
Se realiza el Merge de 7-backend a main
This commit will be authored by miabccuenta@gmail.com.
Confirm merge
Cancel

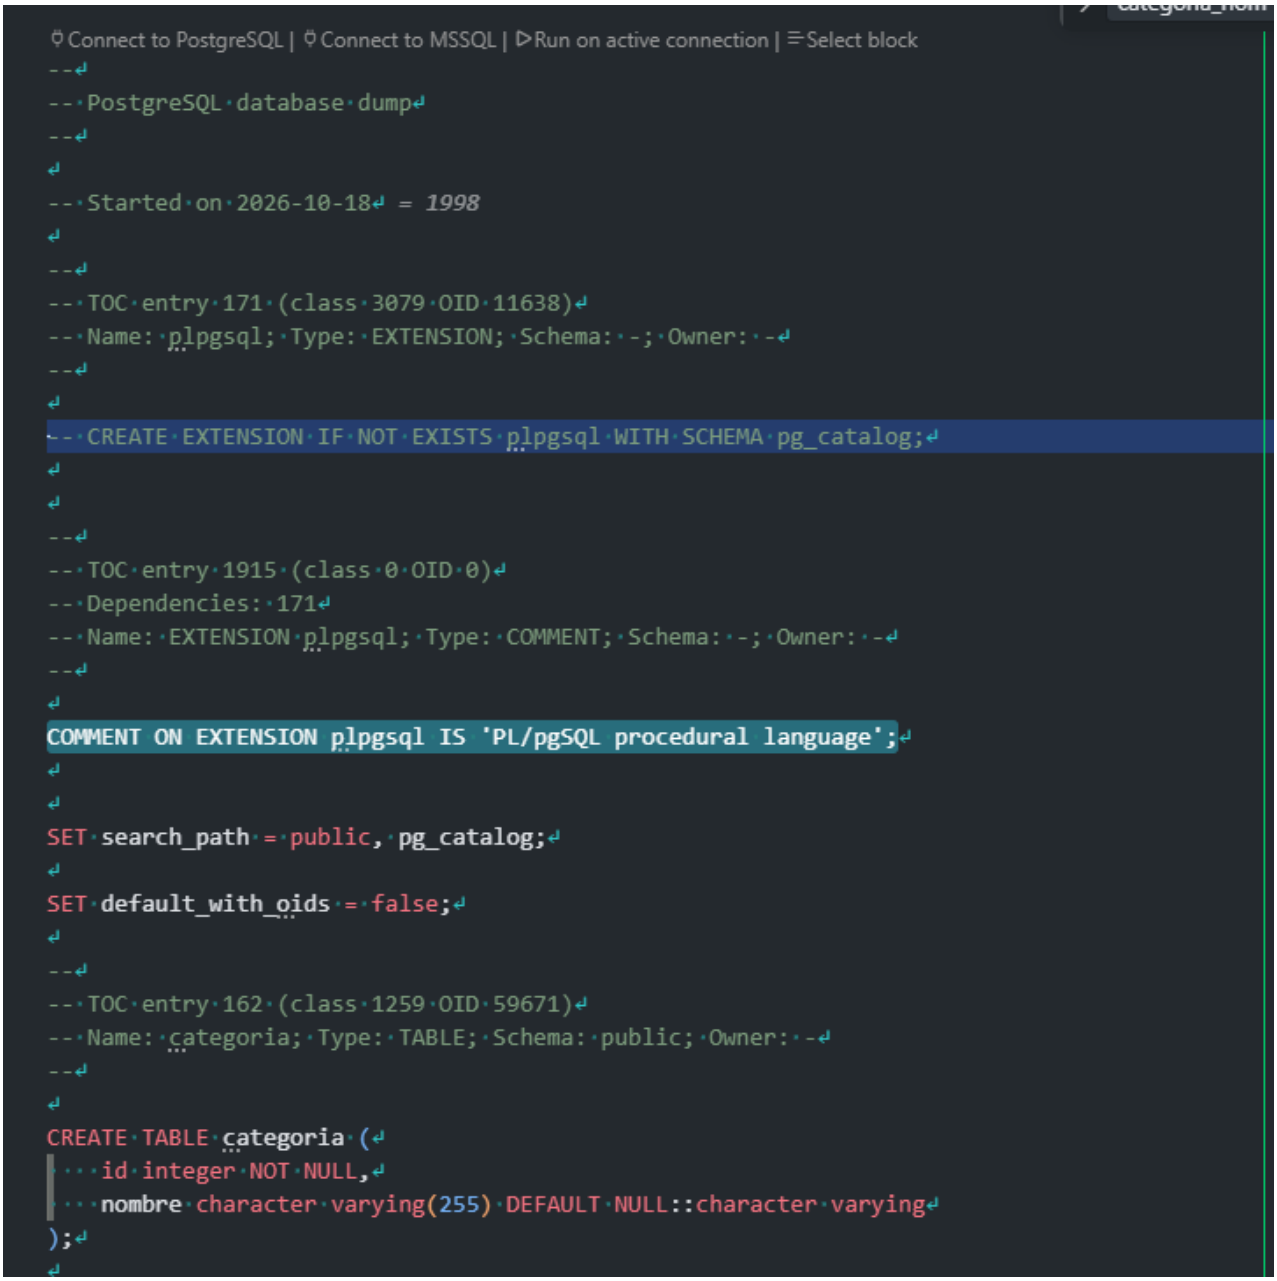
1.5 CONFLICTOS CONTROLADOS





2 BASE DE DATOS SQL

2.1 SCHEMA.SQL



```
Connect to PostgreSQL | Connect to MSSQL | Run on active connection | Select block
--
-- PostgreSQL database dump
--

-- Started on 2026-10-18 = 1998

--
-- TOC entry 171 (class 3079 OID 11638)
-- Name: plpgsql; Type: EXTENSION; Schema: -; Owner: -
--

-- CREATE EXTENSION IF NOT EXISTS plpgsql WITH SCHEMA pg_catalog;


--
-- TOC entry 1915 (class 0 OID 0)
-- Dependencies: 171
-- Name: EXTENSION plpgsql; Type: COMMENT; Schema: -; Owner: -
--

COMMENT ON EXTENSION plpgsql IS 'PL/pgSQL procedural language';


SET search_path = public, pg_catalog;

SET default_with_oids = false;

--
-- TOC entry 162 (class 1259 OID 59671)
-- Name: categoria; Type: TABLE; Schema: public; Owner: -
--

CREATE TABLE categoria (
    id integer NOT NULL,
    nombre character varying(255) DEFAULT NULL::character varying
);
```

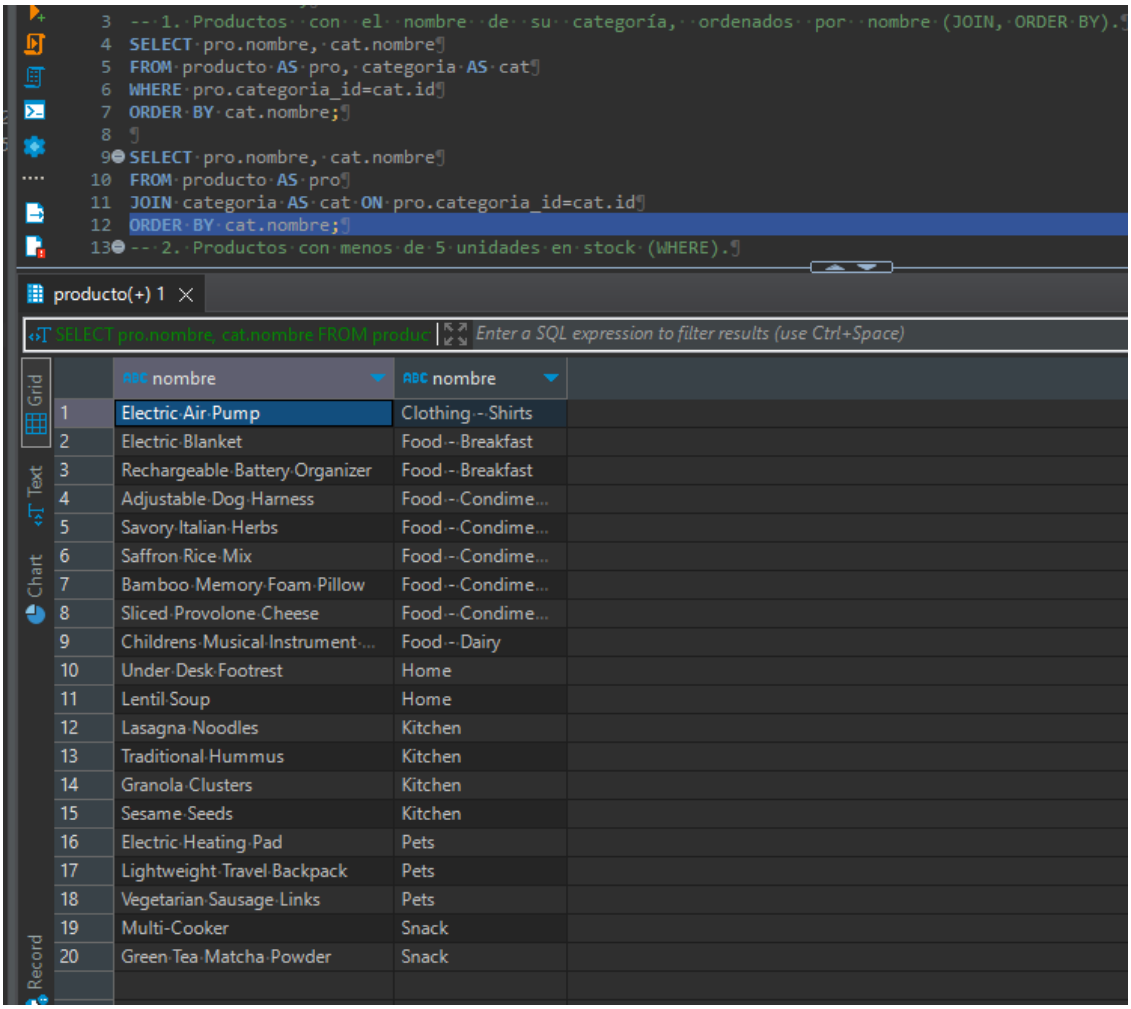
2.2 SEED.SQL

```sql
INSERT INTO categoria (nombre) VALUES
('Food - Spices'),
('Food - Dairy'),
('Clothing - Shirts'),
('Food - Snack'),
('Snack'),
('Food - Condiments'),
('Pets'),
('Food - Breakfast'),
('Home'),
('Kitchen');

INSERT INTO producto (nombre, precio, stock, categoria_id) VALUES
('Childrens Musical Instrument Set', 134, 88, 2),
('Multi-Cooker', 988, 36, 5),
('Electric Air Pump', 271, 70, 3),
('Green Tea Matcha Powder', 598, 19, 5),
('Lightweight Travel Backpack', 164, 75, 7),
('Granola Clusters', 970, 16, 10),
('Electric Heating Pad', 904, 64, 7),
('Sliced Provolone Cheese', 617, 45, 6),
('Electric Blanket', 889, 17, 8),
('Lentil Soup', 933, 74, 9),
('Under Desk Footrest', 790, 96, 9),
('Bamboo Memory Foam Pillow', 773, 37, 6),
('Saffron Rice Mix', 340, 91, 6),
('Rechargeable Battery Organizer', 467, 68, 8),
('Sesame Seeds', 882, 93, 10),
('Adjustable Dog Harness', 305, 51, 6),
('Traditional Hummus', 117, 81, 10),
('Vegetarian Sausage Links', 176, 41, 7),
('Savory Italian Herbs', 775, 88, 6),
('Lasagna Noodles', 881, 73, 10);

INSERT INTO cliente (nombre, telefono, email) VALUES
('Mariam Winstone', 73971965, 'mwinstone0@weebly.com'),
('Tibold Western', 69949586, 'twestern1@answers.com'),
('Mela Atyeo', 60623152, 'matyeo2@nymag.com'),
('Gwendolen Foale', 65538354, 'gfoale3@bandcamp.com'),
```

2.3 CONSULTA.SQL



```
3  --1. Productos con el nombre de su categoría, ordenados por nombre (JOIN, ORDER BY).
4  SELECT pro.nombre, cat.nombre
5  FROM producto AS pro, categoria AS cat
6  WHERE pro.categoria_id=cat.id
7  ORDER BY cat.nombre;
8
9  SELECT pro.nombre, cat.nombre
10 FROM producto AS pro
11 JOIN categoria AS cat ON pro.categoria_id=cat.id
12 ORDER BY cat.nombre;
13 --2. Productos con menos de 5 unidades en stock (WHERE).
```

producto(+) 1

SELECT pro.nombre, cat.nombre FROM produc | Enter a SQL expression to filter results (use Ctrl+Space)

	nombre	nombre
1	Electric Air Pump	Clothing - Shirts
2	Electric Blanket	Food - Breakfast
3	Rechargeable Battery Organizer	Food - Breakfast
4	Adjustable Dog Harness	Food - Condime...
5	Savory Italian Herbs	Food - Condime...
6	Saffron Rice Mix	Food - Condime...
7	Bamboo Memory Foam Pillow	Food - Condime...
8	Sliced Provolone Cheese	Food - Condime...
9	Childrens Musical Instrument ...	Food - Dairy
10	Under Desk Footrest	Home
11	Lentil Soup	Home
12	Lasagna Noodles	Kitchen
13	Traditional Hummus	Kitchen
14	Granola Clusters	Kitchen
15	Sesame Seeds	Kitchen
16	Electric Heating Pad	Pets
17	Lightweight Travel Backpack	Pets
18	Vegetarian Sausage Links	Pets
19	Multi-Cooker	Snack
20	Green Tea Matcha Powder	Snack

```
15  --·2.·Productos·con·menos·de·5·unidades·en·stock·(WHERE).¶
16  SELECT·nombre,·precio,·stock¶
17  FROM·producto¶
18  WHERE·stock<5;¶
19  ¶
20  --·3.·Precio·promedio·por·categoría·(GROUP·BY,·A·VG).¶
21  --·4.·Pedidos·de·un·cliente·con·su·fecha·y·estado·(JOIN,·WHERE).¶
22  --·5.·T·otal·en·dinero·de·cada·pedido·(SUM,·GROUP·BY).¶
23  --·6.·Clientes·con·más·de·2·pedidos·(GROUP·BY,·HA·VING).¶
```

producto 1

SELECT nombre, precio, stock FROM producto

Enter a SQL expression to filter results (use

Grid

nombre	prec	stocl

```
20  --·3.·Precio·promedio·por·categoría·(GROUP·BY,·A·VG).¶
21  SELECT·cat.nombre,·AVG(precio)·AS·promedio¶
22  FROM·producto·AS·pro·INNER·JOIN·categoria·AS·cat·ON·pro.categoria_id=cat.id¶
23  GROUP·BY·cat.nombre¶
24  ¶
25  SELECT·cat.nombre,·temp1.promedio¶
26  FROM·categoria·AS·cat,¶
27  ····(SELECT·categoria_id,·AVG(precio)·AS·promedio¶
28  ····FROM·producto¶
29  ····GROUP·BY·categoria_id)·AS·temp1¶
30  WHERE·temp1.categoria_id=cat.id¶
31  ¶
32  --·4.·Pedidos·de·un·cliente·con·su·fecha·y·estado·(JOIN,·WHERE).¶
```

categoria 1

SELECT cat.nombre, temp1.promedio FROM ca

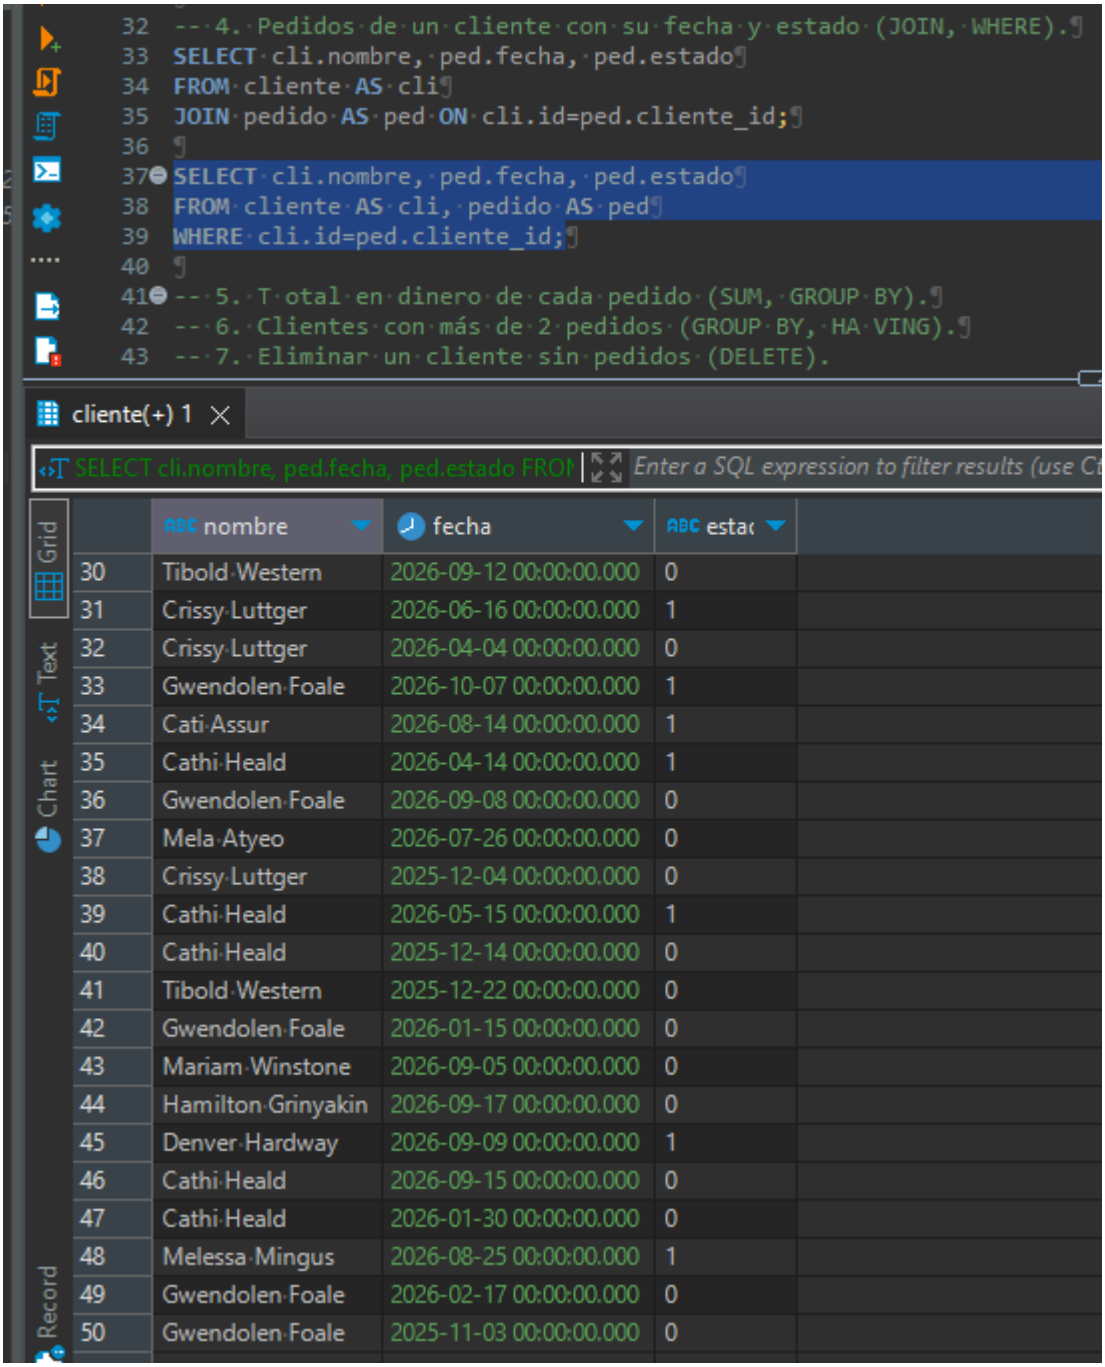
Enter a SQL expression to filter results (use Ctrl+Space)

Grid

Text

Chart

	nombre	promedi
1	Food·-·Breakfast	678
2	Snack	793
3	Clothing·-·Shirts	271
4	Kitchen	712,5
5	Home	861,5
6	Food·-·Condime...	562
7	Food·-·Dairy	134
8	Pets	414,6666666667



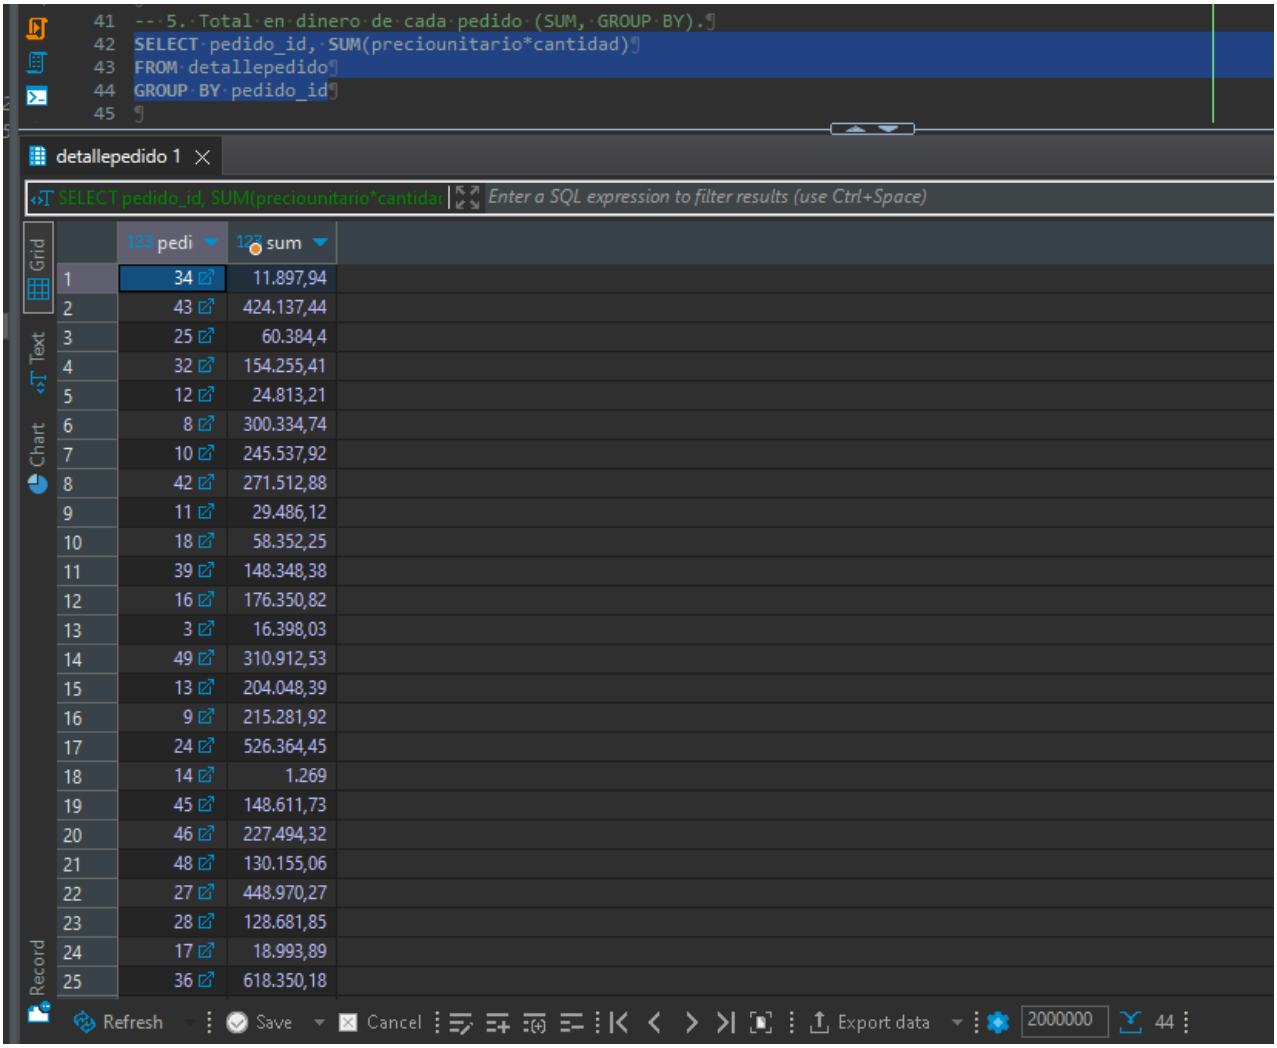
```
32  --4. Pedidos de un cliente con su fecha y estado (JOIN, WHERE).
33  SELECT cli.nombre, ped.fecha, ped.estado
34  FROM cliente AS cli
35  JOIN pedido AS ped ON cli.id=ped.cliente_id;
36
37  SELECT cli.nombre, ped.fecha, ped.estado
38  FROM cliente AS cli, pedido AS ped
39  WHERE cli.id=ped.cliente_id;
40
41  --5. Total en dinero de cada pedido (SUM, GROUP BY).
42  --6. Clientes con más de 2 pedidos (GROUP BY, HAVING).
43  --7. Eliminar un cliente sin pedidos (DELETE).
```

cliente(+) 1

SELECT cli.nombre, ped.fecha, ped.estado FROM | Enter a SQL expression to filter results (use Ct

Grid | Text | Chart | Record

	nombre	fecha	estac
30	Tibold Western	2026-09-12 00:00:00.000	0
31	Crissy Luttger	2026-06-16 00:00:00.000	1
32	Crissy Luttger	2026-04-04 00:00:00.000	0
33	Gwendolen Foale	2026-10-07 00:00:00.000	1
34	Cati Assur	2026-08-14 00:00:00.000	1
35	Cathi Heald	2026-04-14 00:00:00.000	1
36	Gwendolen Foale	2026-09-08 00:00:00.000	0
37	Mela Atyeo	2026-07-26 00:00:00.000	0
38	Crissy Luttger	2025-12-04 00:00:00.000	0
39	Cathi Heald	2026-05-15 00:00:00.000	1
40	Cathi Heald	2025-12-14 00:00:00.000	0
41	Tibold Western	2025-12-22 00:00:00.000	0
42	Gwendolen Foale	2026-01-15 00:00:00.000	0
43	Mariam Winstone	2026-09-05 00:00:00.000	0
44	Hamilton Grinyakin	2026-09-17 00:00:00.000	0
45	Denver Hardway	2026-09-09 00:00:00.000	1
46	Cathi Heald	2026-09-15 00:00:00.000	0
47	Cathi Heald	2026-01-30 00:00:00.000	0
48	Melessa Mingus	2026-08-25 00:00:00.000	1
49	Gwendolen Foale	2026-02-17 00:00:00.000	0
50	Gwendolen Foale	2025-11-03 00:00:00.000	0


41 --5. Total en dinero de cada pedido (SUM, GROUP BY).
42 SELECT pedido_id, SUM(preciounitario*cantidad)
43 FROM detallepedido
44 GROUP BY pedido_id
45
detallepedido 1
SELECT pedido_id, SUM(preciounitario*cantidad
Enter a SQL expression to filter results (use Ctrl+Space)
Grid
Text
Chart
Record
pedi
sum
1 34 11.897,94
2 43 424.137,44
3 25 60.384,4
4 32 154.255,41
5 12 24.813,21
6 8 300.334,74
7 10 245.537,92
8 42 271.512,88
9 11 29.486,12
10 18 58.352,25
11 39 148.348,38
12 16 176.350,82
13 3 16.398,03
14 49 310.912,53
15 13 204.048,39
16 9 215.281,92
17 24 526.364,45
18 14 1.269
19 45 148.611,73
20 46 227.494,32
21 48 130.155,06
22 27 448.970,27
23 28 128.681,85
24 17 18.993,89
25 36 618.350,18
Refresh
Save
Cancel
Export data
2000000
44

```sql
-- 6. Clientes con más de 2 pedidos (GROUP BY, HAVING).
SELECT cli.nombre, COUNT(ped.cliente_id) AS cantidad
FROM pedido AS ped
INNER JOIN cliente AS cli ON cli.id=ped.cliente_id
GROUP BY cli.nombre
HAVING COUNT(ped.cliente_id)>2

SELECT cli.nombre, temp1.cantidad
FROM cliente AS cli,
    (SELECT cliente_id, COUNT(cliente_id) AS cantidad
    FROM pedido
    GROUP BY cliente_id) AS temp1
WHERE cli.id=temp1.cliente_id AND temp1.cantidad>2

SELECT cli.nombre, temp1.cantidad
FROM cliente AS cli,
    (SELECT cliente_id, COUNT(cliente_id) AS cantidad
    FROM pedido
    GROUP BY cliente_id
    HAVING COUNT(cliente_id)>2) AS temp1
WHERE cli.id=temp1.cliente_id

-- 7. Eliminar un cliente sin pedidos (DELETE).
```

iente 1

ELECT cli.nombre, temp1.cantidad FROM clier | Enter a SQL expression to filter results (use Ctrl+Space)

nombre	cant
Hamilton Grinyakin	3
Gwendolen Foale	8
Melessa Mingus	3
Cati Assur	6
Denver Hardway	4
Audie Tubbs	3
Crissy Luttger	6
Tibold Western	4
Cathi Heald	7

```sql
-- 7. Eliminar un cliente sin pedidos (DELETE).
SELECT cliente_id
FROM pedido
WHERE cliente_id NOT IN (SELECT id
                         FROM cliente)

DELETE FROM cliente WHERE id=13;
```

pedido 1

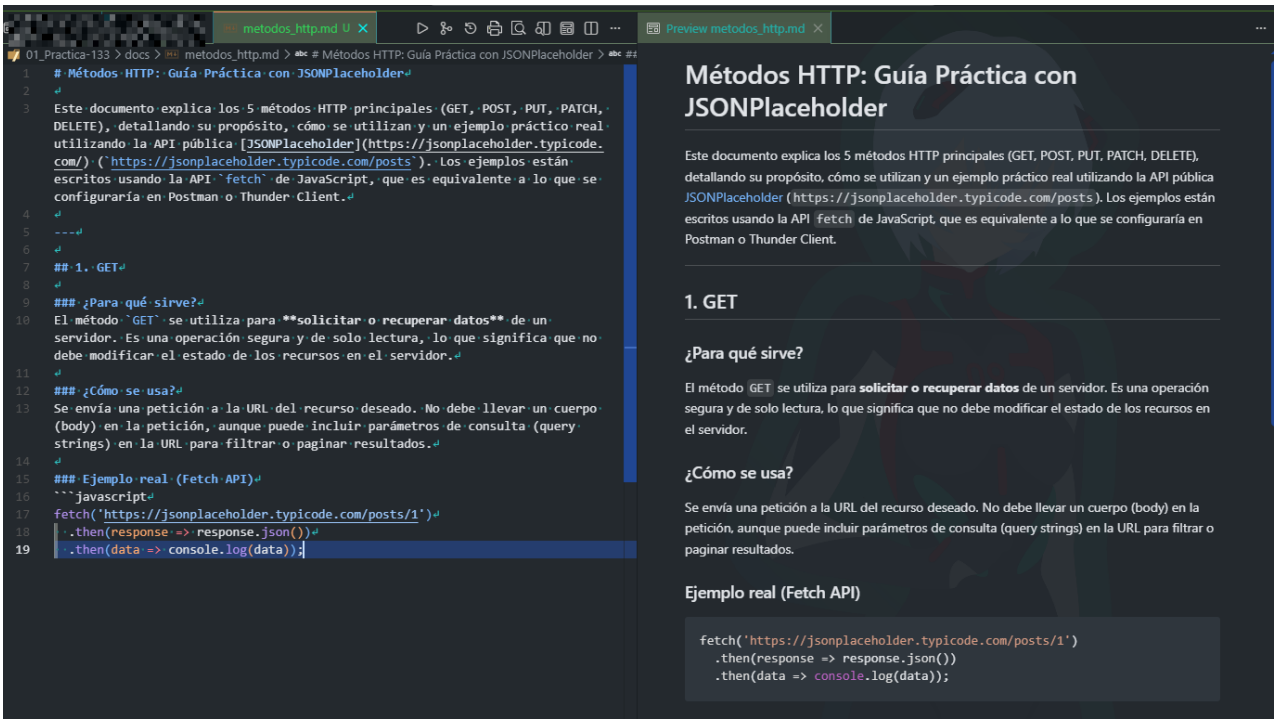
SELECT cliente_id FROM pedido WHERE cliente_ | Enter a SQL expression

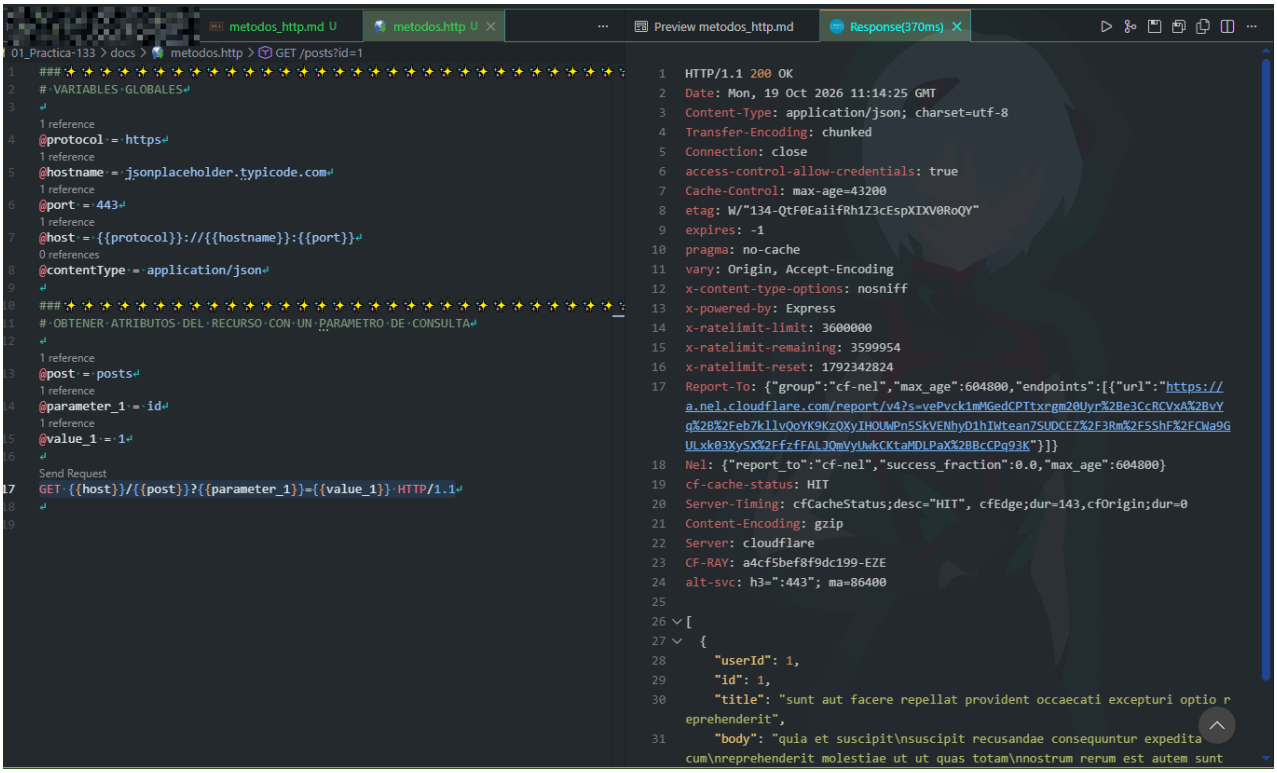
Grid

clien

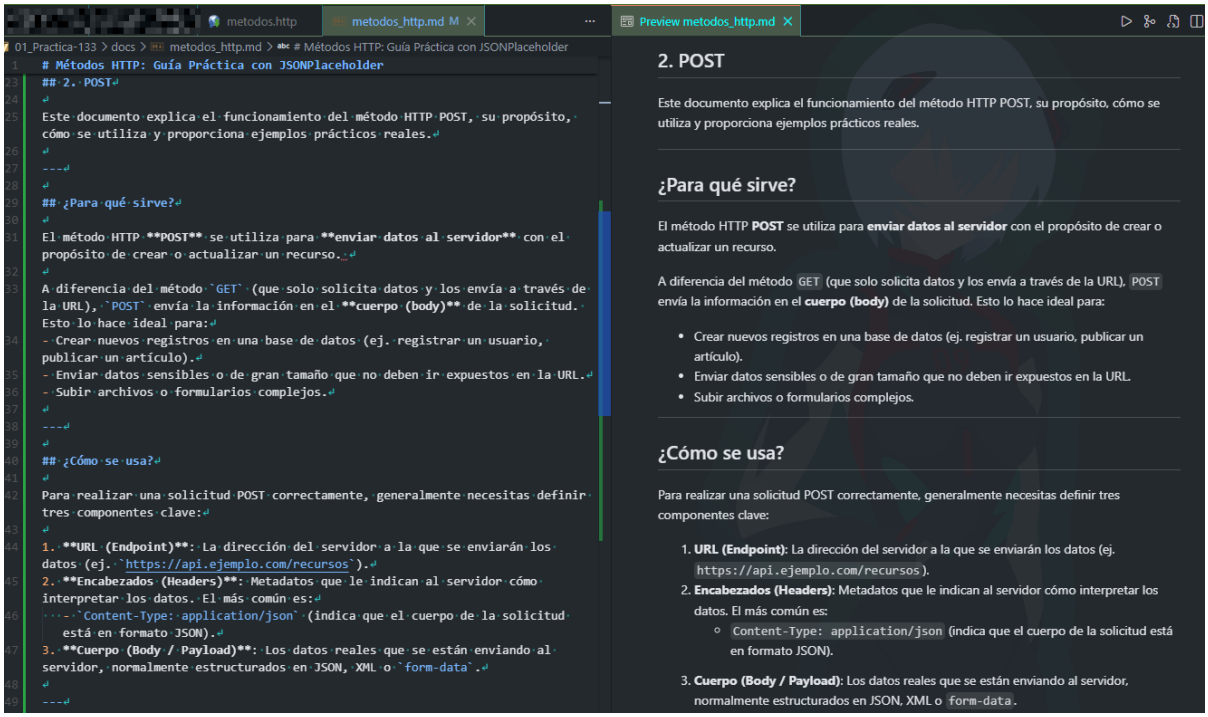
3 METODOS HTTP

3.1 GET



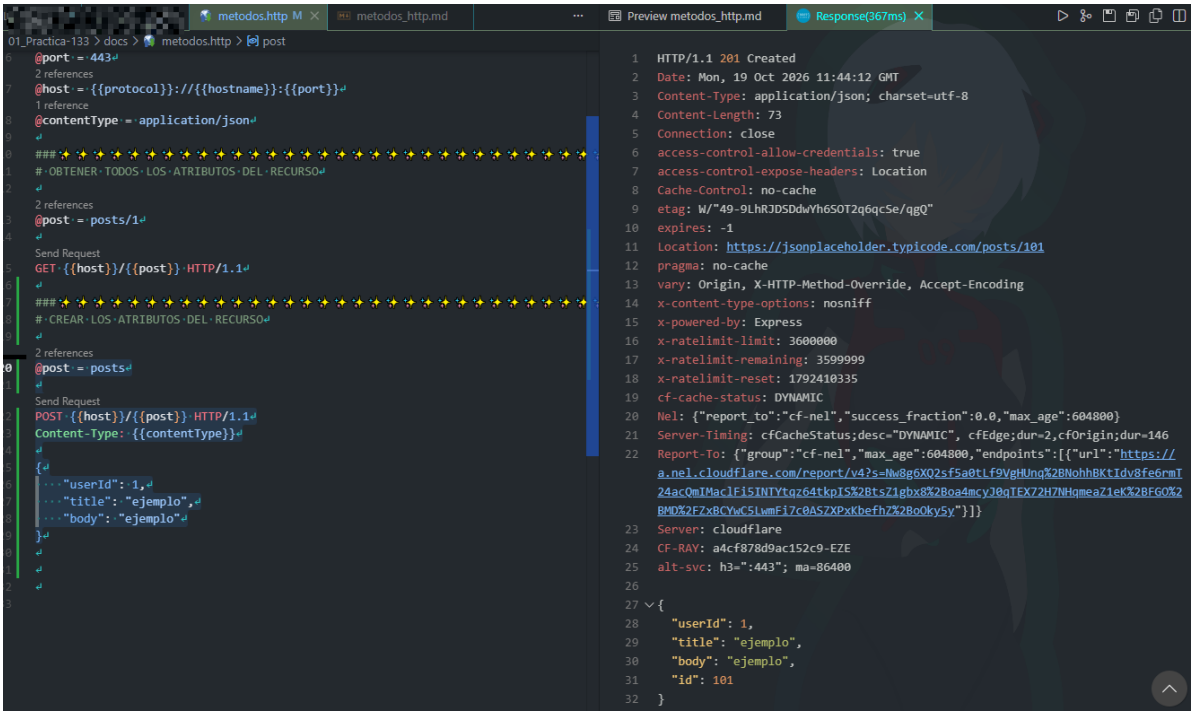

metodos_http.md U
metodos.http U
Preview metodos_http.md
Response(370ms)
01_Practica-133 > docs > metodos.http > GET /posts?id=1
✨✨✨

3.2 POST

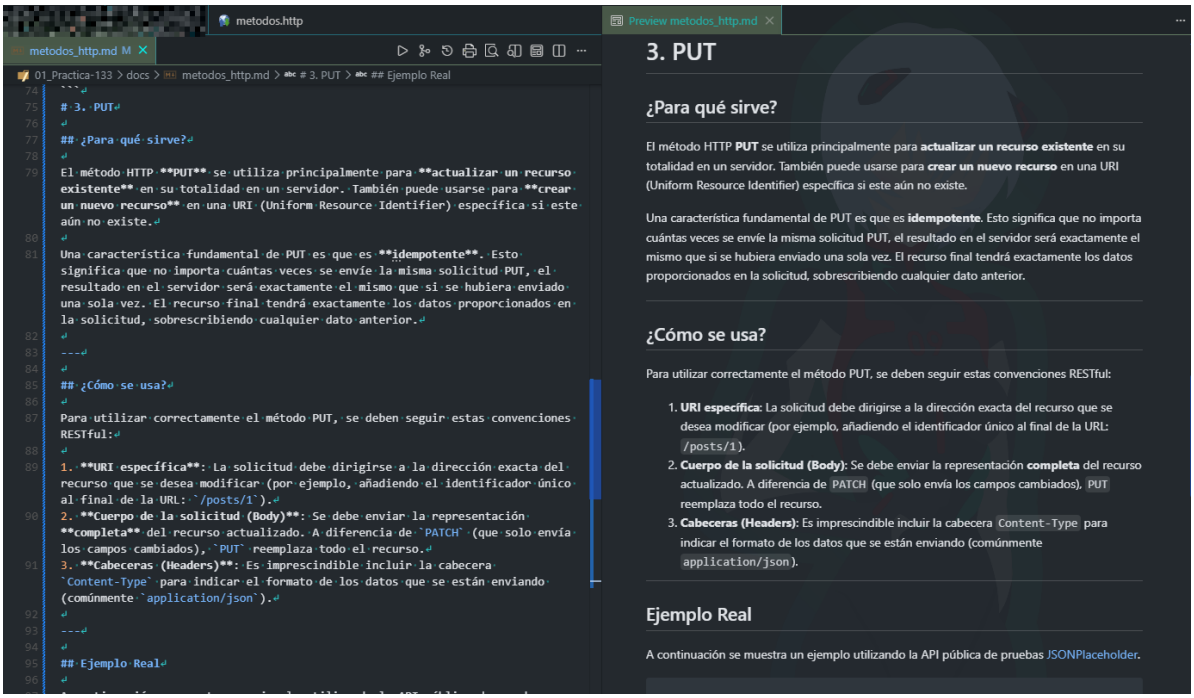

metodos.http
metodos_http.md M
Preview metodos_http.md
01_Practica-133 > docs > metodos_http.md > # Métodos HTTP: Guía Práctica con JSONPlaceholder
Métodos HTTP: Guía Práctica con JSONPlaceholder
2. POST
Este documento explica el funcionamiento del método HTTP POST, su propósito, cómo se utiliza y proporciona ejemplos prácticos reales.

¿Para qué sirve?
El método HTTP **POST** se utiliza para **enviar datos al servidor** con el propósito de crear o actualizar un recurso.
A diferencia del método `GET` (que solo solicita datos y los envía a través de la URL), `POST` envía la información en el **cuerpo (body)** de la solicitud. Esto lo hace ideal para:
- Crear nuevos registros en una base de datos (ej. registrar un usuario, publicar un artículo).
- Enviar datos sensibles o de gran tamaño que no deben ir expuestos en la URL.
- Subir archivos o formularios complejos.

¿Cómo se usa?
Para realizar una solicitud POST correctamente, generalmente necesitas definir tres componentes clave:
1. **URL (Endpoint)**: La dirección del servidor a la que se enviarán los datos (ej. `https://api.ejemplo.com/recursos`).
2. **Encabezados (Headers)**: Metadatos que le indican al servidor cómo interpretar los datos. El más común es:
- `Content-Type: application/json` (indica que el cuerpo de la solicitud está en formato JSON).
3. **Cuerpo (Body / Payload)**: Los datos reales que se están enviando al servidor, normalmente estructurados en JSON, XML o `form-data`.
---
2. POST
Este documento explica el funcionamiento del método HTTP POST, su propósito, cómo se utiliza y proporciona ejemplos prácticos reales.
¿Para qué sirve?
El método HTTP POST se utiliza para enviar datos al servidor con el propósito de crear o actualizar un recurso.
A diferencia del método GET (que solo solicita datos y los envía a través de la URL), POST envía la información en el cuerpo (body) de la solicitud. Esto lo hace ideal para:
Crear nuevos registros en una base de datos (ej. registrar un usuario, publicar un artículo).
Enviar datos sensibles o de gran tamaño que no deben ir expuestos en la URL.
Subir archivos o formularios complejos.
¿Cómo se usa?
Para realizar una solicitud POST correctamente, generalmente necesitas definir tres componentes clave:
1. URL (Endpoint): La dirección del servidor a la que se enviarán los datos (ej. https://api.ejemplo.com/recursos).
2. Encabezados (Headers): Metadatos que le indican al servidor cómo interpretar los datos. El más común es:
Content-Type: application/json (indica que el cuerpo de la solicitud está en formato JSON).
3. Cuerpo (Body / Payload): Los datos reales que se están enviando al servidor, normalmente estructurados en JSON, XML o form-data.

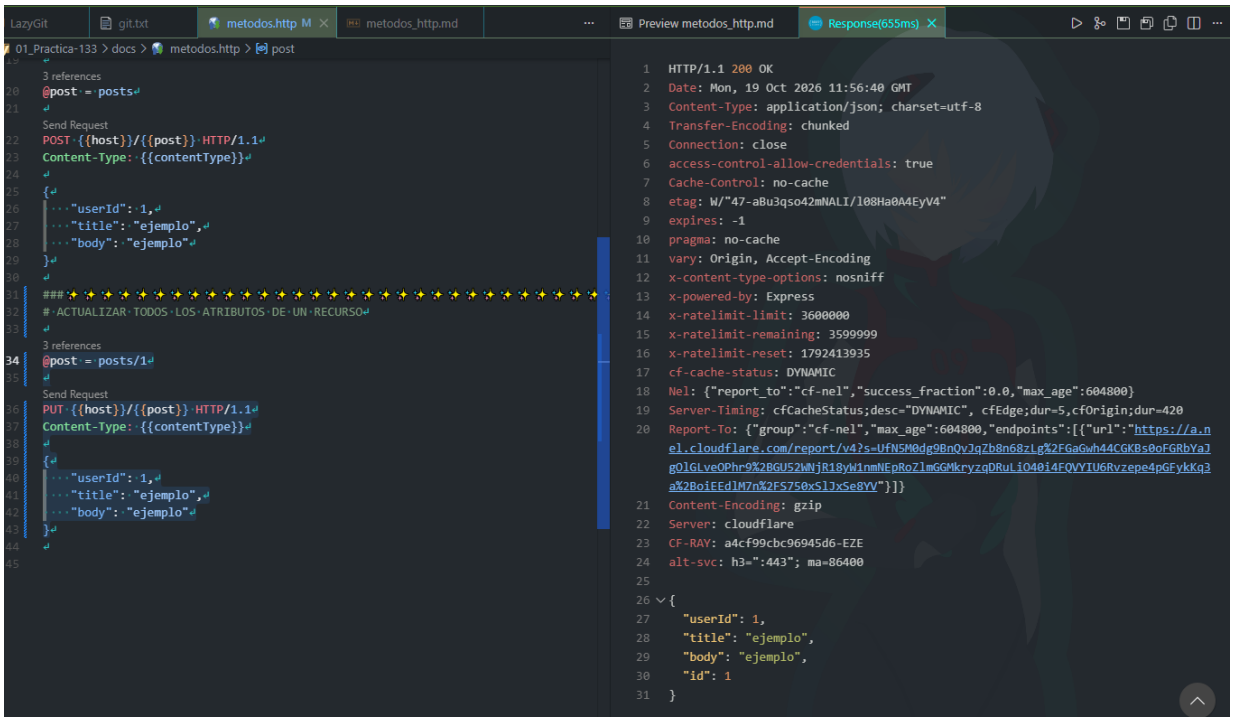

metodos.http M
metodos_http.md
Preview metodos_http.md
Response(367ms)
01_Practica-133 > docs > metodos.http > post
@port = 443
@host = {{protocol}}://{{hostname}}:{{port}}
@contentType = application/json
OBTENER TODOS LOS ATRIBUTOS DEL RECURSO
@post = posts/1
Send Request
GET {{host}}/{{post}} HTTP/1.1
CREAR LOS ATRIBUTOS DEL RECURSO
@post = posts
Send Request
POST {{host}}/{{post}} HTTP/1.1
Content-Type: {{contentType}}
{
"userId": 1,
"title": "ejemplo",
"body": "ejemplo"
}
HTTP/1.1 201 Created
Date: Mon, 19 Oct 2026 11:44:12 GMT
Content-Type: application/json; charset=utf-8
Content-Length: 73
Connection: close
access-control-allow-credentials: true
access-control-expose-headers: Location
Cache-Control: no-cache
etag: W/"49-9LhRJDSDdwYh6SOT2q6qcSe/qgQ"
expires: -1
Location: https://jsonplaceholder.typicode.com/posts/101
pragma: no-cache
vary: Origin, X-HTTP-Method-Override, Accept-Encoding
x-content-type-options: nosniff
x-powered-by: Express
x-ratelimit-limit: 3600000
x-ratelimit-remaining: 3599999
x-ratelimit-reset: 1792410335
cf-cache-status: DYNAMIC
Nel: {"report_to":"cf-nel","success_fraction":0.0,"max_age":604800}
Server-Timing: cfCacheStatus;desc="DYNAMIC", cfEdge;dur=2,cfOrigin;dur=146
Report-To: {"group":"cf-nel","max_age":604800,"endpoints":[{"url":"https://a.nel.cloudflare.com/report/v4?s=Nw8g6XQ2sf5a0tLf9VgHUnq%2BNohhBKtIdv8fe6rmT24acQmIMaclFi5INTYtqz64tkpIS%2BtsZ1gbx8%2Boa4mcyJ0qTEX72H7NHqmeaZ1eK%2BFGO%2BMD%2FZxBCYwC5LwmFi7c0ASZXPxKhefhZ%2BoOky5y"}]}
Server: cloudflare
CF-RAY: a4cf878d9ac152c9-EZE
alt-svc: h3=":443"; ma=86400
{
"userId": 1,
"title": "ejemplo",
"body": "ejemplo",
"id": 101
}

3.3 PUT

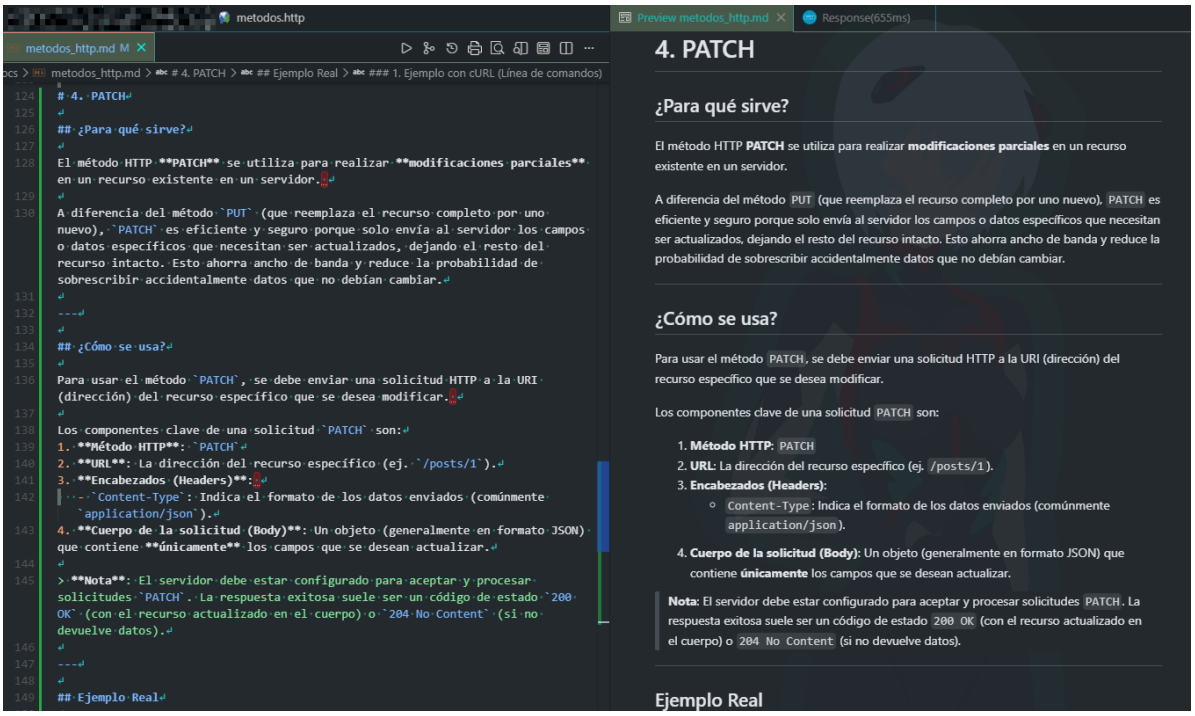

metodos.http
metodos_http.md M
01_Practica-133 > docs > metodos_http.md > # 3. PUT > ## Ejemplo Real
3. PUT
¿Para qué sirve?
El método HTTP **PUT** se utiliza principalmente para **actualizar un recurso existente** en su totalidad en un servidor. También puede usarse para **crear un nuevo recurso** en una URI (Uniform Resource Identifier) específica si este aún no existe.
Una característica fundamental de PUT es que es **idempotente**. Esto significa que no importa cuántas veces se envíe la misma solicitud PUT, el resultado en el servidor será exactamente el mismo que si se hubiera enviado una sola vez. El recurso final tendrá exactamente los datos proporcionados en la solicitud, sobrescribiendo cualquier dato anterior.

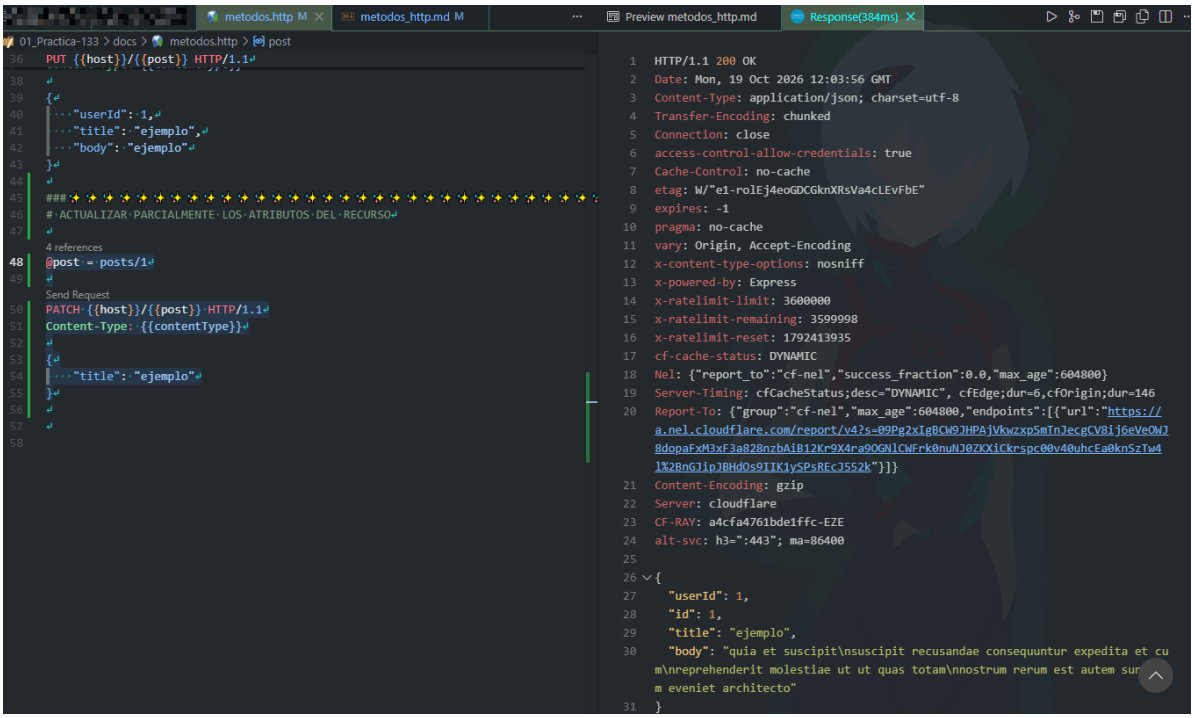
¿Cómo se usa?
Para utilizar correctamente el método PUT, se deben seguir estas convenciones RESTful:
1. **URI específica**: La solicitud debe dirigirse a la dirección exacta del recurso que se desea modificar (por ejemplo, añadiendo el identificador único al final de la URL: `/posts/1`).
2. **Cuerpo de la solicitud (Body)**: Se debe enviar la representación **completa** del recurso actualizado. A diferencia de `PATCH` (que solo envía los campos cambiados), `PUT` reemplaza todo el recurso.
3. **Cabeceras (Headers)**: Es imprescindible incluir la cabecera `Content-Type` para indicar el formato de los datos que se están enviando (comúnmente `application/json`).

Ejemplo Real
Preview metodos_http.md
3. PUT
¿Para qué sirve?
El método HTTP PUT se utiliza principalmente para actualizar un recurso existente en su totalidad en un servidor. También puede usarse para crear un nuevo recurso en una URI (Uniform Resource Identifier) específica si este aún no existe.
Una característica fundamental de PUT es que es idempotente. Esto significa que no importa cuántas veces se envíe la misma solicitud PUT, el resultado en el servidor será exactamente el mismo que si se hubiera enviado una sola vez. El recurso final tendrá exactamente los datos proporcionados en la solicitud, sobrescribiendo cualquier dato anterior.
¿Cómo se usa?
Para utilizar correctamente el método PUT, se deben seguir estas convenciones RESTful:
1. URI específica: La solicitud debe dirigirse a la dirección exacta del recurso que se desea modificar (por ejemplo, añadiendo el identificador único al final de la URL: /posts/1).
2. Cuerpo de la solicitud (Body): Se debe enviar la representación completa del recurso actualizado. A diferencia de PATCH (que solo envía los campos cambiados), PUT reemplaza todo el recurso.
3. Cabeceras (Headers): Es imprescindible incluir la cabecera Content-Type para indicar el formato de los datos que se están enviando (comúnmente application/json).
Ejemplo Real
A continuación se muestra un ejemplo utilizando la API pública de pruebas JSONPlaceholder.

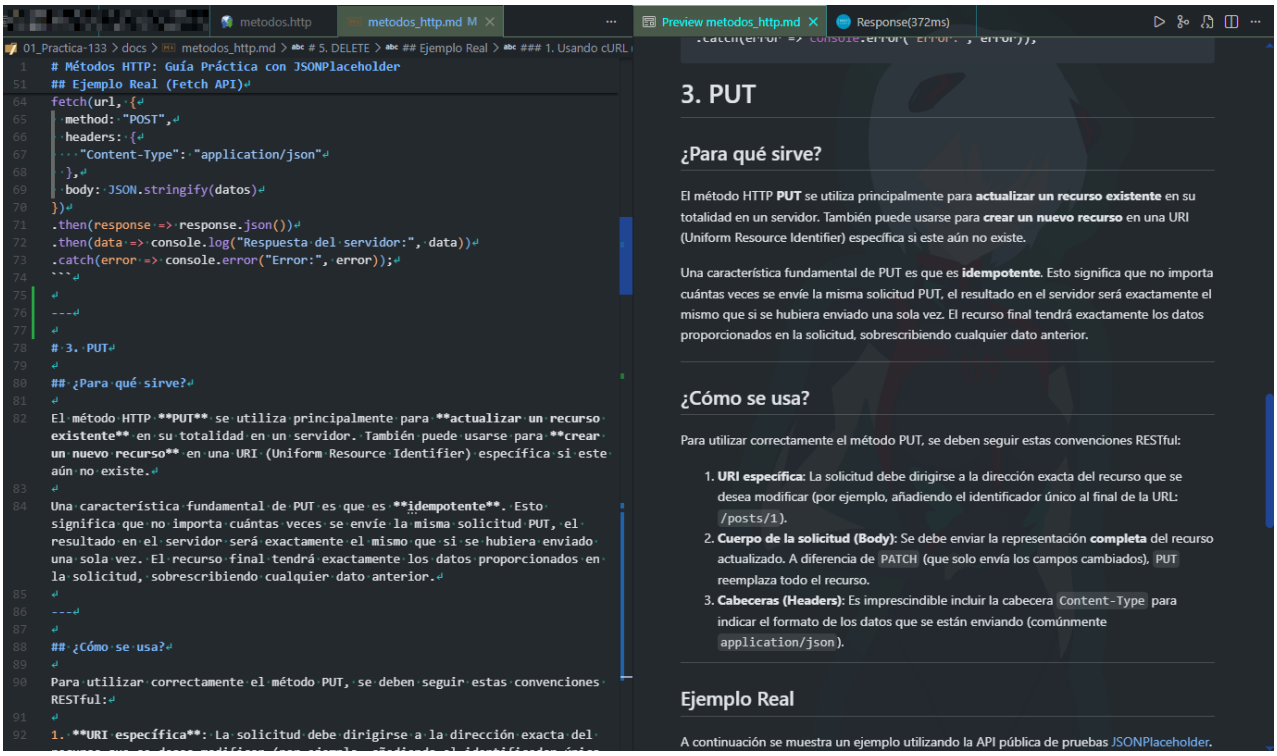

LazyGit
git.txt
metodos.http M
metodos_http.md
Preview metodos_http.md
Response(655ms)
01_Practica-133 > docs > metodos.http > post
3 references
@post = posts
Send Request
POST {{host}}/{{post}} HTTP/1.1
Content-Type: {{contentType}}
{
"userId": 1,
"title": "ejemplo",
"body": "ejemplo"
}
ACTUALIZAR TODOS LOS ATRIBUTOS DE UN RECURSO
3 references
@post = posts/1
Send Request
PUT {{host}}/{{post}} HTTP/1.1
Content-Type: {{contentType}}
{
"userId": 1,
"title": "ejemplo",
"body": "ejemplo"
}
HTTP/1.1 200 OK
Date: Mon, 19 Oct 2026 11:56:40 GMT
Content-Type: application/json; charset=utf-8
Transfer-Encoding: chunked
Connection: close
access-control-allow-credentials: true
Cache-Control: no-cache
etag: W/"47-aBu3qso42mNALI/l08Ha0A4EyV4"
expires: -1
pragma: no-cache
vary: Origin, Accept-Encoding
x-content-type-options: nosniff
x-powered-by: Express
x-ratelimit-limit: 3600000
x-ratelimit-remaining: 3599999
x-ratelimit-reset: 1792413935
cf-cache-status: DYNAMIC
Nel: {"report_to":"cf-nel","success_fraction":0.0,"max_age":604800}
Server-Timing: cfCacheStatus;desc="DYNAMIC", cfEdge;dur=5,cfOrigin;dur=420
Report-To: {"group":"cf-nel","max_age":604800,"endpoints":[{"url":"https://a.nel.cloudflare.com/report/v4?s=UfN5M0dg9BnQvJqZb8n68zLg%2FGaGwh44CGKBs0oFGRbYaJgOlGLveOPhr0%2BGU52WNjR18yW1nmNEpRoZlmGGMkryzqDRuLiQ40i4FQVYIU6Rvzepe4pGFykKq3a%2BoiFEdlM7n%2FS750xSlJxSe8YV"}]}
Content-Encoding: gzip
Server: cloudflare
CF-RAY: a4cf99cbc96945d6-EZE
alt-svc: h3=":443"; ma=86400
{
"userId": 1,
"title": "ejemplo",
"body": "ejemplo",
"id": 1
}

3.4 PATCH

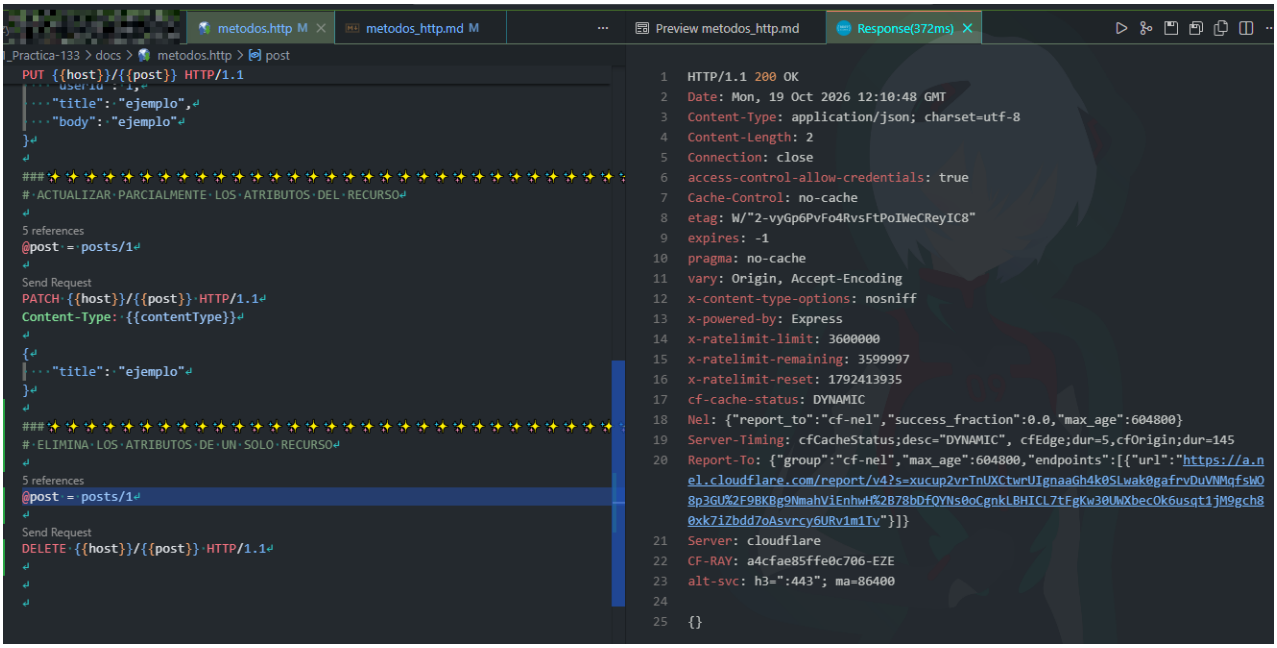

metodos.http
metodos_http.md M
Preview metodos_http.md
Response(655ms)
4. PATCH
¿Para qué sirve?
El método HTTP PATCH se utiliza para realizar modificaciones parciales en un recurso existente en un servidor.
A diferencia del método PUT (que reemplaza el recurso completo por uno nuevo), PATCH es eficiente y seguro porque solo envía al servidor los campos o datos específicos que necesitan ser actualizados, dejando el resto del recurso intacto. Esto ahorra ancho de banda y reduce la probabilidad de sobrescribir accidentalmente datos que no debían cambiar.
¿Cómo se usa?
Para usar el método PATCH, se debe enviar una solicitud HTTP a la URI (dirección) del recurso específico que se desea modificar.
Los componentes clave de una solicitud PATCH son:
1. Método HTTP: PATCH
2. URL: La dirección del recurso específico (ej. /posts/1).
3. Encabezados (Headers):
Content-Type: Indica el formato de los datos enviados (comúnmente application/json).
4. Cuerpo de la solicitud (Body): Un objeto (generalmente en formato JSON) que contiene únicamente los campos que se desean actualizar.
Nota: El servidor debe estar configurado para aceptar y procesar solicitudes PATCH. La respuesta exitosa suele ser un código de estado 200 OK (con el recurso actualizado en el cuerpo) o 204 No Content (si no devuelve datos).
Ejemplo Real


metodos.http M
metodos_http.md M
Preview metodos_http.md
Response(384ms)
PUT {{host}}/{{post}} HTTP/1.1
{
"userId": 1,
"title": "ejemplo",
"body": "ejemplo"
}
ACTUALIZAR PARCIALMENTE LOS ATRIBUTOS DEL RECURSO
@post = posts/1
Send Request
PATCH {{host}}/{{post}} HTTP/1.1
Content-Type: {{contentType}}
{
"title": "ejemplo"
}
HTTP/1.1 200 OK
Date: Mon, 19 Oct 2026 12:03:56 GMT
Content-Type: application/json; charset=utf-8
Transfer-Encoding: chunked
Connection: close
access-control-allow-credentials: true
Cache-Control: no-cache
etag: W/"e1-rolEj4eoGDCGknXRsVa4cLEvFbE"
expires: -1
pragma: no-cache
vary: Origin, Accept-Encoding
x-content-type-options: nosniff
x-powered-by: Express
x-ratelimit-limit: 3600000
x-ratelimit-remaining: 3599998
x-ratelimit-reset: 1792413935
cf-cache-status: DYNAMIC
Nel: {"report_to":"cf-nel","success_fraction":0.0,"max_age":604800}
Server-Timing: cfCacheStatus;desc="DYNAMIC", cfEdge;dur=6,cfOrigin;dur=146
Report-To: {"group":"cf-nel","max_age":604800,"endpoints":[{"url":"https://a.nel.cloudflare.com/report/v4?s=09Pg2xIgBCW9JHPAjVkwzxpSmTnJecgCV8ij6eVeOWJ8dopaFxM3xF3a828nzbAiB12Kr9X4ra9OGNlCWFrk0nuNJ0ZKXiCkrspc00v40uhcEa0knSzTw4I%2BnGJipJBHdOs9IIK1ySPsREcJ552k"}]}
Content-Encoding: gzip
Server: cloudflare
CF-RAY: a4cfa4761bde1ffc-EZE
alt-svc: h3=":443"; ma=86400
{
"userId": 1,
"id": 1,
"title": "ejemplo",
"body": "quia et suscipit\nsuscipit recusandae consequuntur expedita et cum\nreprehenderit molestiae ut ut quas totam\nnostrum rerum est autem sunt rem eveniet architecto"
}

3.5 DELETE

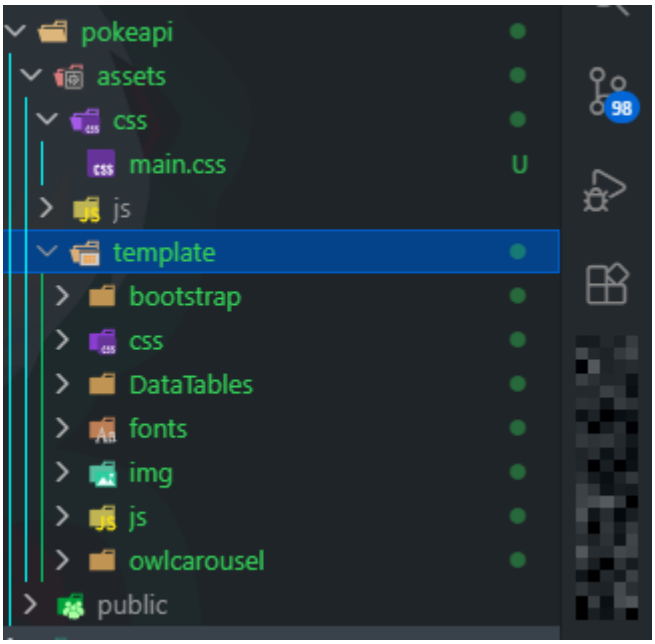

metodos.http
metodos_http.md M
Preview metodos_http.md
Response(372ms)
01_Practica-133 > docs > metodos_http.md > # 5. DELETE > ## Ejemplo Real > ### 1. Usando cURL
Métodos HTTP: Guía Práctica con JSONPlaceholder
Ejemplo Real (Fetch API)
fetch(url, {
method: "POST",
headers: {
"Content-Type": "application/json"
},
body: JSON.stringify(datos)
})
.then(response => response.json())
.then(data => console.log("Respuesta del servidor:", data))
.catch(error => console.error("Error:", error));
---
3. PUT
¿Para qué sirve?
El método HTTP **PUT** se utiliza principalmente para **actualizar un recurso existente** en su totalidad en un servidor. También puede usarse para **crear un nuevo recurso** en una URI (Uniform Resource Identifier) específica si este aún no existe.
Una característica fundamental de PUT es que es **idempotente**. Esto significa que no importa cuántas veces se envíe la misma solicitud PUT, el resultado en el servidor será exactamente el mismo que si se hubiera enviado una sola vez. El recurso final tendrá exactamente los datos proporcionados en la solicitud, sobrescribiendo cualquier dato anterior.

¿Cómo se usa?
Para utilizar correctamente el método PUT, se deben seguir estas convenciones RESTful:
1. **URI específica**: La solicitud debe dirigirse a la dirección exacta del recurso que se desea modificar (por ejemplo, añadiendo el identificador único al final de la URL: /posts/1).
2. **Cuerpo de la solicitud (Body)**: Se debe enviar la representación **completa** del recurso actualizado. A diferencia de PATCH (que solo envía los campos cambiados), PUT reemplaza todo el recurso.
3. **Cabeceras (Headers)**: Es imprescindible incluir la cabecera Content-Type para indicar el formato de los datos que se están enviando (comúnmente application/json).
Ejemplo Real
A continuación se muestra un ejemplo utilizando la API pública de pruebas JSONPlaceholder.


metodos.http M
metodos_http.md M
Preview metodos_http.md
Response(372ms)
Practica-133 > docs > metodos.http > post
PUT {{host}}/{{post}} HTTP/1.1
"title": "ejemplo",
"body": "ejemplo"
}
ACTUALIZAR PARCIALMENTE LOS ATRIBUTOS DEL RECURSO
5 references
@post = posts/1
Send Request
PATCH {{host}}/{{post}} HTTP/1.1
Content-Type: {{contentType}}
{
"title": "ejemplo"
}
ELIMINA LOS ATRIBUTOS DE UN SOLO RECURSO
5 references
@post = posts/1
Send Request
DELETE {{host}}/{{post}} HTTP/1.1
HTTP/1.1 200 OK
Date: Mon, 19 Oct 2026 12:10:48 GMT
Content-Type: application/json; charset=utf-8
Content-Length: 2
Connection: close
access-control-allow-credentials: true
Cache-Control: no-cache
etag: W/"2-vyGp6PvFo4RvsFtPoIWeCReyIC8"
expires: -1
pragma: no-cache
vary: Origin, Accept-Encoding
x-content-type-options: nosniff
x-powered-by: Express
x-ratelimit-limit: 3600000
x-ratelimit-remaining: 3599997
x-ratelimit-reset: 1792413935
cf-cache-status: DYNAMIC
Nel: {"report_to":"cf-nel","success_fraction":0.0,"max_age":604800}
Server-Timing: cfCacheStatus;desc="DYNAMIC", cfEdge;dur=5,cfOrigin;dur=145
Report-To: {"group":"cf-nel","max_age":604800,"endpoints":[{"url":"https://a.nel.cloudflare.com/report/v4?s=xucup2vrTnUXCtwrUIgnaaGh4k0SLwak0gafrvDuVNMqfsWO8p3GU%2F9BKBg9NmahViEnhwH%2B78bDfQYNs0oCgnkLBHICL7tFgKw30UWXbecOk6usqt1jM9gch80xk7iZbdd7oAsvrcy6URv1m1Tv"}]}
Server: cloudflare
CF-RAY: a4cfae85ffe0c706-EZE
alt-svc: h3=":443"; ma=86400
{}

4 FETCH A UNA API PUBLICA

4.1 FRONTEND




Tienda
TIENDA WEB
Practica GitHub
Repositorio publicado correctamente
Teclado Gamer
Precio 150 Bs
COMPRAR
ENLACES
Tienda
Gosun © 2026 Todos Los Derechos Reservados. Realizado Por Rolando Freddy Aruquipa Mamani

Poke-Api

POKE - API

Ej.: bulbasaur

BUSCAR

BULBASAUR



Tipo: **Grass** Peso: **69** Altura: **2 Baths**

ENLACES

Poke-Api

Gosun © 2026 Todos Los Derechos Reservados. Realizado Por Rolando Freddy Aruquipa Mamani

4.2 BACKEND

```
const URL = "https://pokeapi.co";

function buscarPokemon() {
    let idPokemon = document.getElementById("idPokemon").value;
    console.log(idPokemon);
    fetch(`${URL}/api/v2/pokemon/${idPokemon}`)
        .then((response) => {
            if (!response.ok) {
                throw new Error(`HTTP error! Estado: ${response.status}`);
            } else {
                console.log(`Estado: ${response.status}`);
                // console.log(response);
            }
            return response.json();
        })
        .then((data) => {
            // console.log("Exito:", data);
            cardPokemon(data);
            document.getElementById("idPokemon").value = "";
        })
        .catch((error) => {
            // console.log(response.status);
            // console.error("mensaje", error.message);
            let pokemon = document.getElementById("pokemon");
            pokemon.innerHTML = `<div class="card shadow-lg p-3 mb-5 bg-white rounded">
                                    <div class="card-header">
                                        <h3 class="card-title text-center">NO EXISTE EL POKEMON</h3>
                                    </div>
                                </div>`;
        });
}

function cardPokemon(datos) {
    // usuario.clear();
    console.log(`${ datos.name }`);
    console.log(`${datos.sprites.front_default}`);
    let pokemon = document.getElementById("pokemon");
    pokemon.innerHTML = `<div class="card shadow-lg p-3 mb-5 bg-white rounded">
                            <div class="card-header">
                                <h3 class="card-title text-center">${datos.name.toUpperCase()}</h3>
                                <img class="img-fluid"
                                    src="${datos.sprites.other.home.front_default}"
                                    alt="" srcset="">
                                <div class="single_property_description text-center">
                                    <span>Tipo: <strong>${datos.types[0].type.name.toUpperCase()}</strong></span>
                                    <span>Peso: <strong>${(datos.weight * 0.1).toFixed(2)} kg.</strong></span>
                                    <span>Altura: <strong>${(datos.height * 0.1).toFixed(2)} m.</strong></span>
                                </div>
                            </div>
                        </div>`;
```