

HTML EVENTS

What is an HTML Event?

- ▶ An **event** is something that happens in the browser, usually due to user interaction.
- ▶ Examples: clicking a button, moving the mouse, typing in a form, loading a page.
- ▶ Events allow you to execute JavaScript code when the event occurs.

Common HTML Event Types

► Event Types

1. Mouse Events
2. Keyboard Events
3. Form Events
4. Media Events
5. Window / Document Events

1. Mouse Events

Example	Description
<code>onclick</code>	user clicks an element
<code>ondblclick</code>	double click
<code>onmouseover</code>	mouse moves over an element
<code>onmouseout</code>	mouse moves away

2. Keyboard Events

Example	Description
onkeydown	key is pressed
onkeyup	key is released
onkeypress	key is pressed and released

3. Form Events

Example	Description
onfocus	input field gets focus
onblur	input field loses focus
onchange	value of input changes
onsubmit	form is submitted
onreset	form is reset

4. Window / Document Events

Example	Description
onload	page finishes loading
onunload	page is unloaded
onscroll	page is scrolled
onresize	window is resized

5. Media Events

Example	Description
onplay	Media (audio/video) starts playing
onpause	Media (audio/video) pauses playing
onended	Media finishes playing.
onvolumechange	Volume of media changes

Other Events

Example	Description
<code>onerror</code>	error occurs (e.g., image not found)

How to Use Events in HTML

► 1. Inline Event Handler

```
< button onclick="alert('Hello!')" > Click Me </button>
```

2. Using JavaScript Property

```
<button id="btn" >Click Me</button>
```

```
<script>
```

```
document.getElementById("btn").onclick = function() {  
    alert("Hello!");  
}
```

```
</script>
```

► 3. Using addEventListener() (Recommended)

```
<button id="btn">Click Me</button>
```

```
<script>
```

```
document.getElementById("btn").addEventListener("click", function() {
```

```
    alert("Hello!");
```



```
});
```

```
</script>
```

Examples



► Inline Event Handler

```
inline.html X
C: > Users > GROSSK > Desktop > <> inline.html > html > head
1  <!DOCTYPE html>
2  <html>
3  <head>
4  | <title>Inline Event Example</title>
5  </head>
6  <body>
7  | <button onclick="alert('Hello from Inline!')">Click Me (Inline)</button>
8  </body>
9  </html>
10
```

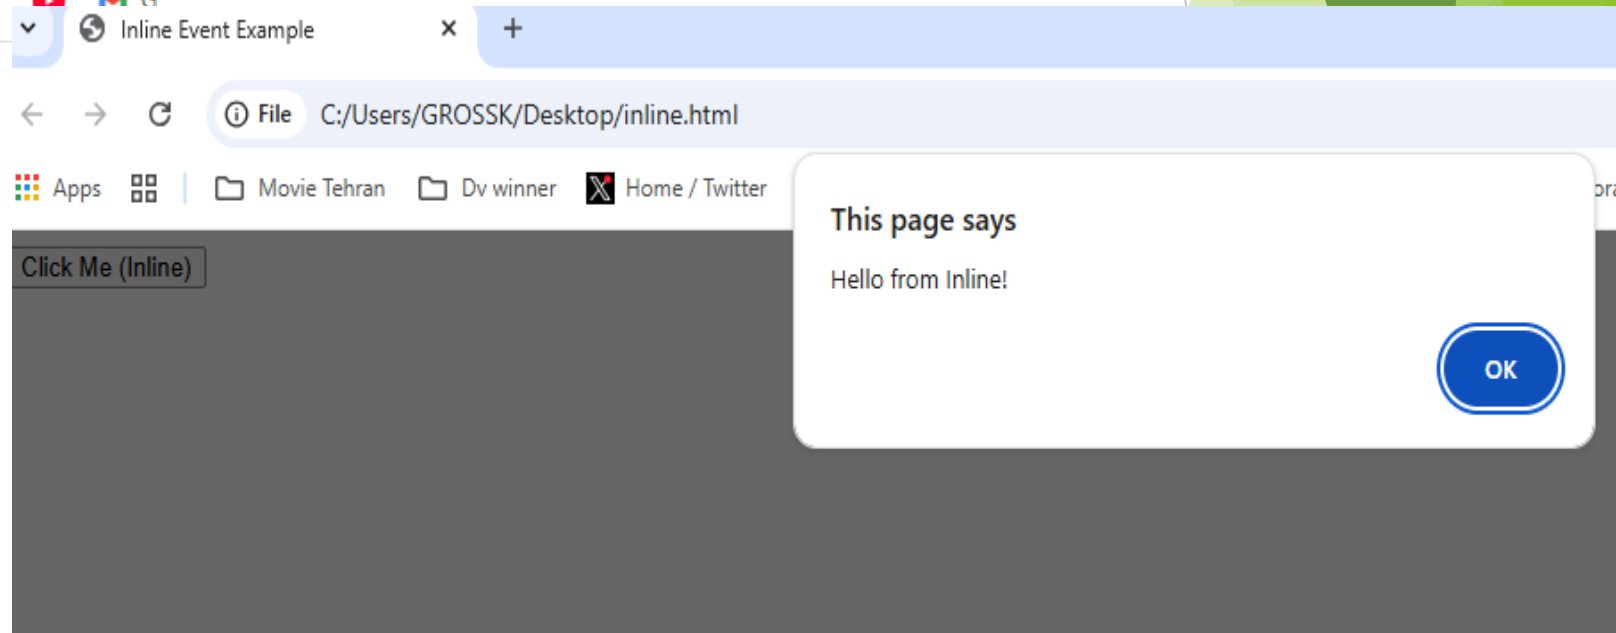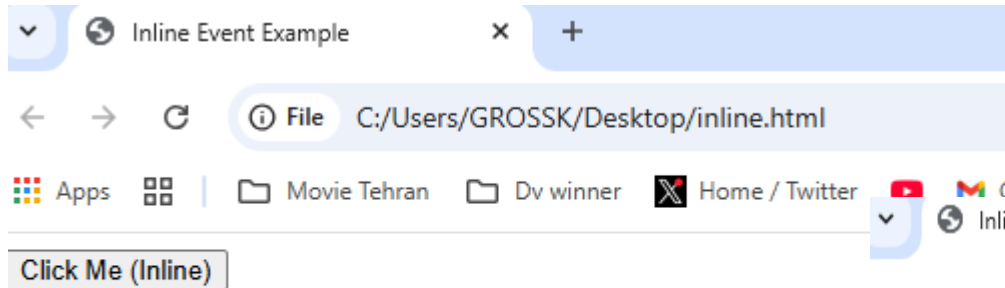

Using JavaScript Property

```
example.html X
C: > Users > GROSSK > Desktop > example.html > ...
1  <!DOCTYPE html>
2  <html>
3  <head>
4  |   <title>JS Property Example</title>
5  </head>
6  <body>
7  |   <button id="btnProperty">Click Me (JS Property)</button>
8
9  |   <script>
10 |       // Access the button and assign a function to onclick
11 |       document.getElementById("btnProperty").onclick = function() {
12 |           alert("Hello from JS Property!");
13 |       }
14 |   </script>
15 </body>
16 </html>
17
```

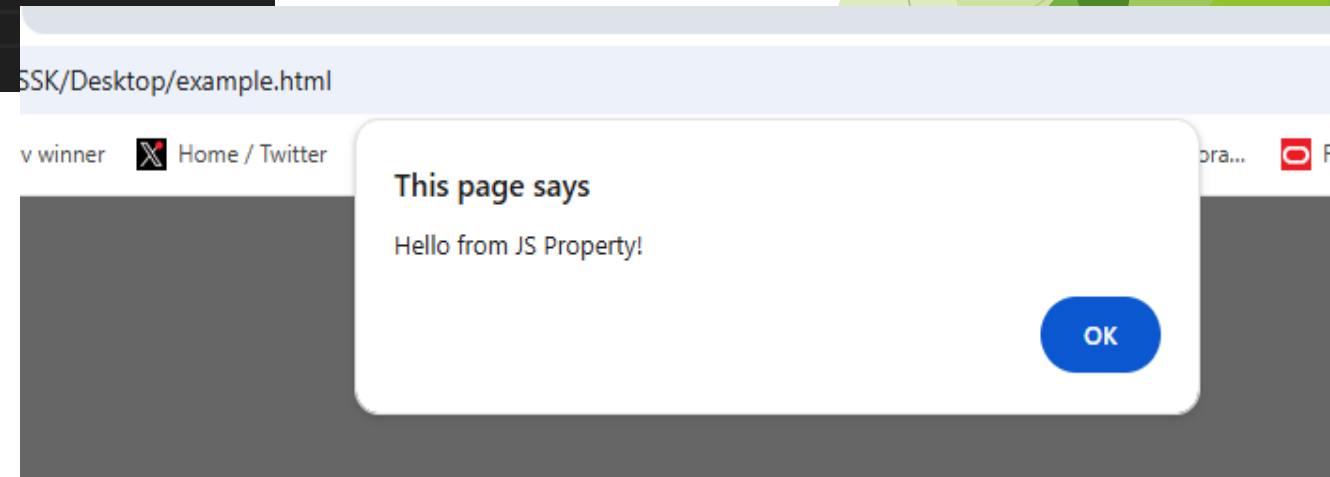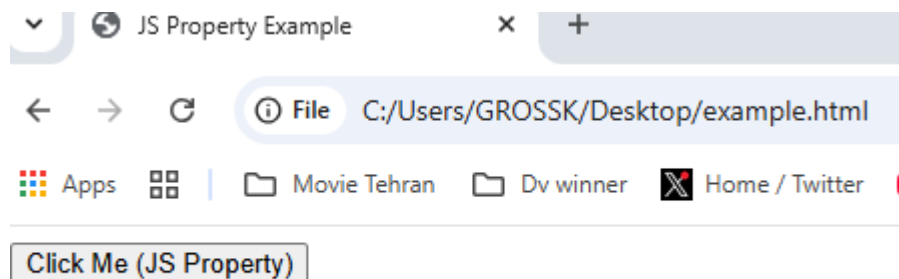

Using addEventListener() (Recommended)

```
example.html X
C: > Users > GROSSK > Desktop > example.html > ...
1  <!DOCTYPE html>
2  <html>
3  <head>
4  |   <title>addEventListener Example</title>
5  </head>
6  <body>
7  |   <button id="btnListener">Click Me (addEventListener)</button>
8
9  |   <script>
10 |       // Attach a click event using addEventListener
11 |       document.getElementById("btnListener").addEventListener("click", function() {
12 |           alert("Hello from addEventListener!");
13 |       });
14 |   </script>
15 </body>
16 </html>
17
```

