



UNIVERSITÉ CATHOLIQUE DE LOUVAIN

LINGI2172 - DATABASES

Mission 3 - Database Design

Auteur :

Baugnies Benjamin (6020-10-00)

Colson Olivier (5039-10-00)

Vanwelde Romain (3143-10-00)

Superviseurs :

Pr. Bernard Lambeau

Antoine Cailliau

Group 3

16 mai 2014

1 Introduction

Telling a story is challenging. Indeed, in order to build a “good” scenario, one must think of a lot of different aspects and ensure coherence between all these points.

Some can manage it using diagrams, other can rely on tons of paper sheets referencing each other or, more reasonably, use a computer to store all their documents. However, with all these ways of working, the same problem arises : as the storyline and background get denser, it becomes more and more difficult to ensure that no contradiction appears. This is a big problem, since contradictions ruin the feeling of reality that must always be given by a good scenario. How about asking the computer to gather, interpret and display all this information in a clean and understandable way ?

Our project can be defined as a “narration manager”. Its goal is to make it easier for people to write coherent and complex scenarios without either becoming mad or canceling their project because of its increasing complexity. It is intended for all “story makers” (videogame makers, film makers, roleplayers, writers, . . .), and is thus meant to be generic and conveniently adapt to various situations, as well as user preferences and priorities in the story (for example, some users could want to define a precise date for each event happening in their story, as others could prefer to focus on the relations binding all the characters together).

Possibilities of telling a story are infinite, yet time and coordination constraints often limit what is actually possible to achieve. It is now time to push these limits away.

2 Elementary Facts

Bellow are some elementary facts we wrote to better understand what to do, which relation exists between all the entities.

2.1 About characters

Pierre is from Bruxelles.

Pierre is born on 28/12/1992

Jean is born on 01/04/1992

Benjamin is born on 03/06/1992

Jean is melancholic

Benjamin is member of the association “Les Petits Riens”

2.2 Characters relations

Pierre liked Benjamin from 9/12/2002 to 13/7/2007.

Benjamin liked Pierre from 10/11/2003 to 12/8/2009.

Jean doesn’t like Benjamin from 10/11/2003 to 12/8/2009.

Paul is Pierre’s father.

Pierre is Paul's son since 28/12/1992.

2.3 About events

Jean attended the event "The beer festival"

The "beer festival" took place at LLN

The "beer festival" lasted from 08/03/2014 to 18/03/2014.

The "beer festival" is "blablablablablablabla" as description.

2.4 About places

Intel room is a sub-location of Réaumur's Map and is represented on square number 10.

Réaumur is a sub-location of LLN's Map and is represented on square number 5.

The LLN's Map represents the location "LLN"

The Réaumur's Map represents the location "Réaumur"

LLNMap has 10 square width, and represents a 5km distance.

LLNMAP has 20 square length, and represents a 10km distance.

3 ORM schema

The ORM schema is shown on the Figure 1. If some relations are too difficult to read, the numeric version is available in the Annexes directory of the zip file.

The notations conventions used are those one :

- Entities are circled with straight lines
- Attributes are linked to entities with dashed lines.
- When the relation arity equals 2, we indicate the multiplicity/compulsory of the relation on the link.
- When the relation arity is bigger, we draw a line above the square representing the relation (If no lines are drawn, it is equivalent of having drawn the line on all squares). And this means that combination of all the attributes concerned by the line will always be different, whatever the relation expressed.
- If a relation is not clear enough, we could add some text in the squares to clarify the meaning of the relation.
- An underlined attribute means that it is a unique key.

As we can see on the schema, there are 4 main entities which are "Characters", "Events", "Place", and "Map".

We will explain here above three specific case of the diagram :

Character - Relation relations involving time range, time or timeless notion.

The relations explain the relationships between different characters. They are uni-directional and the different kinds of relations can be defined by the user. We split these relations into three types to represent the fact that some relations are time-independent (e.g "... is my father"), some can start at a given time and be permanent and/or open-ended (e.g "... is my godfather since ... "), and finally some can last for only a while (e.g "... was

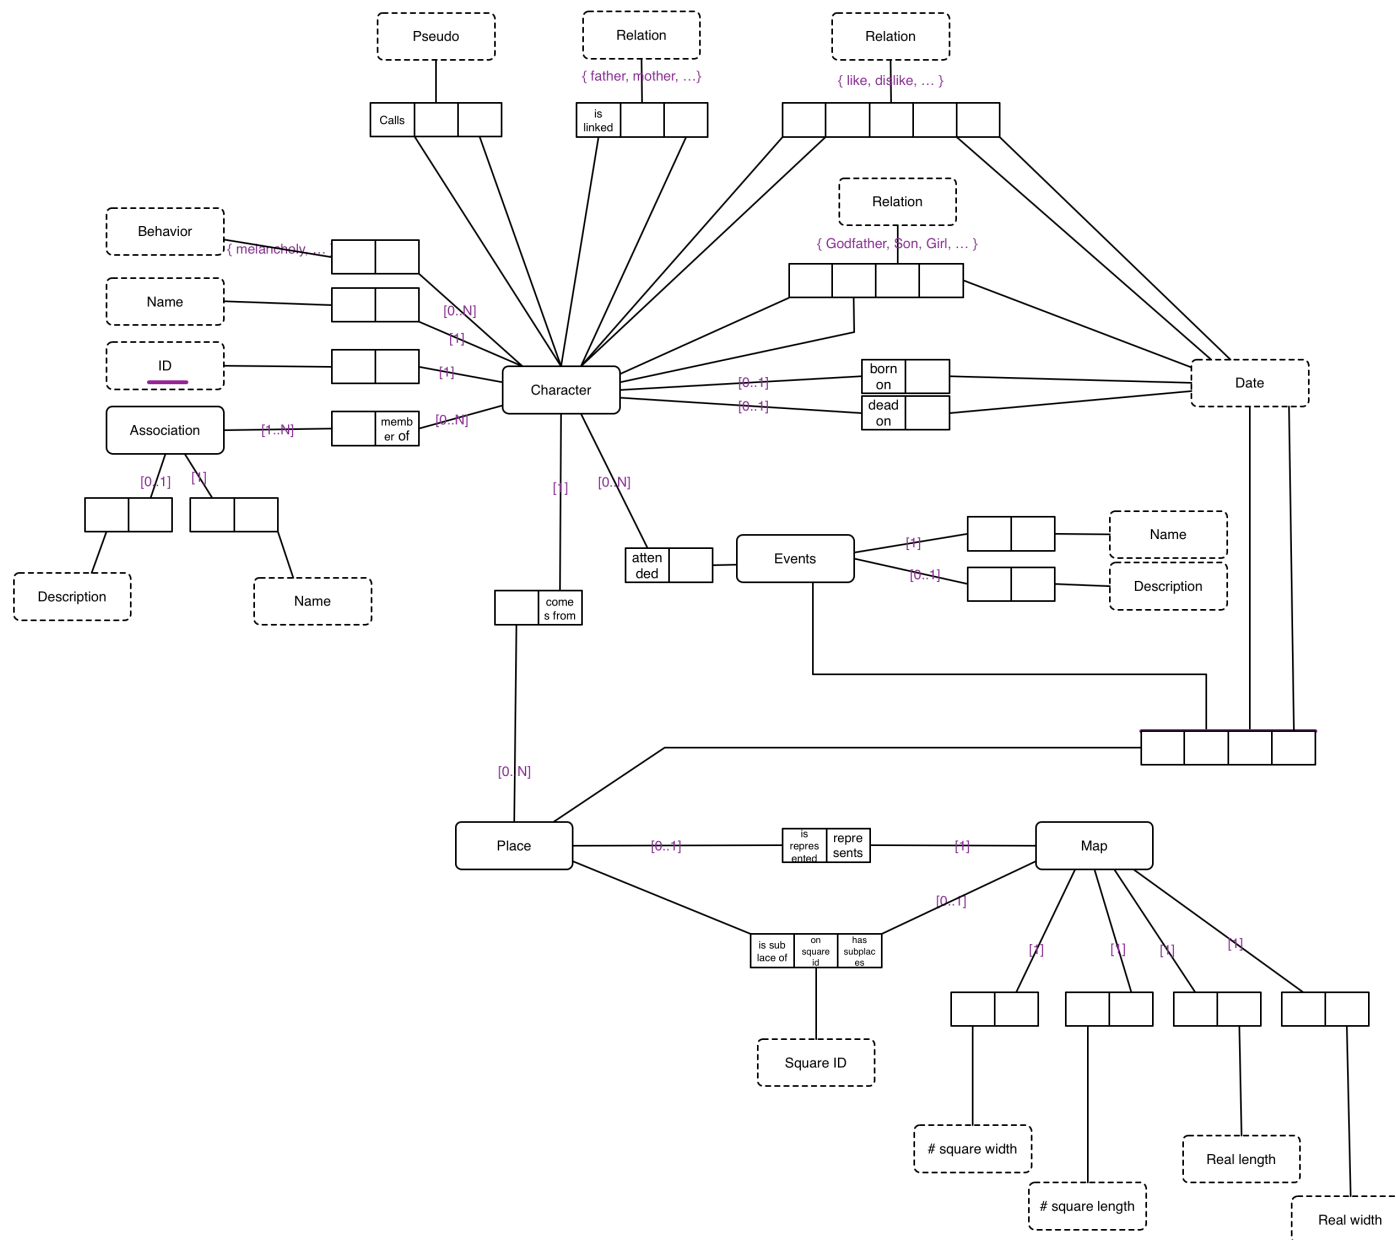


Figure 1 – ORM Schema

my friend from ... to ... ").

Pseudo relation.

This relation involves two characters and a pseudonym. It describes the name used by the first character for the second one. This represents the fact that during the story, a given character might not know another's real name. We added this relation since this can have an impact on the story (he wouldn't realize others were talking about someone he knows for example). The corresponding table will also allow us to find all the pseudonyms a given person might go by.

Place - Map relation.

This is a rather complex relation that we introduced to keep track of a story's geography at different levels. The first use is to allow users to situate events or characters. We can also define sub-places to refine locations. We can see that a place's map is optional. However, since a place's sub-places are linked to its map, it implicitly becomes required when we want to add levels. This structure allows us to chain an arbitrary number of levels with a "place - map - place - map - ..." hierarchy. This relation has two constraints that are not expressed in the database and will have to be verified in the software implementation. Firstly, the map square on which the sub-place is located must belong to the map's domain of possible squares (between 1 and $(\# \text{ square width}) * (\# \text{ square length})$). Secondly, it is required that two places of the same level do not overlap.

4 Translating ORM in relvar

In this section, we will explain the way we convert our ORM diagram into relvar predicates.

First, we identify, for each entity, the compulsory binaries relations. All those are grouped in the same relvar.

Second, we create a new relvar for all the optionals binaries relations.

Last, we create a new relvar for all relations with an arity bigger than 2.

5 Constraints

Among all the foreign key constraints, unique keys, ... we found a more special and interesting constraint to express. We impose that the start date of a relation is lower than the end date. In tutorial-D and PostgreSQL, since we used custom types for our date representation, we implemented a function that allows us to know which date came before the other.

We realized that we could add other constraints (like oblige the month number to be lower than 12, the day number to be lower than 31, ...), but since while creating histories, we like having freedom (we can easily imagine a story where there are more than 12 months, 31 days, ...).

6 Tutorial-D script

In the zip file, you can find files `structure_rel.d` and `data_rel.d`.

structure_rel.d has three different parts. The **first** one is the definition of special types (All the entities ID, and one for some names too). Then, the **second** part is all the relvars, with all primary keys, and also unique keys (e.g. `MAPPEDPLACE` which has one key on the `PLACEID` and another on the `MAPID`). The third part is all the constraints which are foreign keys. We express first all the constraints implying `CHARID`, then implying

ASSOCIATIONID, and so on.

data_rel.d fills the database with all elementary facts expressed before in the report.

7 Relvar predicates

In this section, we will give the relvar predicates that our database represents. The attributes of a relation are in bold, and the attributes that form the key are underlined.

About characters :

- Relvar [CHARACTER]
The character **CHARACTERID** is named **NAME**.
- Relvar [BEHAVIOR]
The character **CHARACTERID** has a behavior that is **BEHAVIOR**.
- Relvar [PSEUDO]
The character **CALLERID** knows the character **CALLEID** by the pseudonym **PSEUDONYME**.

About time :

- Relvar [BIRTH]
The character **CHARACTERID** was born on **BIRTH**.
- Relvar [DEATH]
The character **CHARACTERID** died on **DEATH**.

About Associations :

- Relvar [ASSOCIATIONNAME]
The association **ASSOCIATIONID** is named **NAME**.
- Relvar [ASSOCIATIONDESCRIPTION]
The association **ASSOCIATIONID** is described as **DESCRIPTION**.
- Relvar [ASSOCIATION]
The character **CHARACTERID** is a member of the association **ASSOCIATIONID**.

About character relations :

- Relvar [RELATIONLIST]
The relation **RELATIONID** is of the type **RELATIONSHIP**.
- Relvar [TIMELESSRELATION]
The character **SOURCE** has a timeless relation with **TARGET** of the type **RELATIONID**.
- Relvar [DATERELATION]
The character **SOURCE** started a permanent relation with **TARGET** of the type **RELATIONID** at the time **DATE**.

- Relvar [RANGERELATION]
The character SOURCE had a relation with TARGET of the type RELATIONID that started on START and ended on ENDDATE.

About places :

- Relvar [PLACE]
The place PLACEID is called PLACENAME.
- Relvar [MAP]
The map MAPID has a width of WIDTH split into NUMWIDTH sections, and a length LENGTH split into NUMLENGTH sections.
- Relvar [MAPPEDPLACE]
The place PLACEID is represented by the map MAPID.
- Relvar [SUBPLACE]
The place PLACEID is located on the square SQUAREID of the MAPID map.
- Relvar [ORIGINATES]
The character CHARACTERID originates from PLACEID.

About events :

- Relvar [EVENTNAME]
The event EVENTID is named NAME.
- Relvar [EVENTDESCRIPTION]
The event EVENTID is described as DESCRIPTION.
- Relvar [ATTENDS]
The character CHARACTERID attended EVENTID.
- Relvar [EVENT]
The event EVENTID happened at PLACEID, started on BEGINNING, and ended on ENDDATE.

8 SQL script

In the zip file, you can find files `structure.sql` which builds the entire structure of the database in SQL. This script is idempotent, and is built with the same structure as the tutorial-D script. Indeed, we first create all the tables with the primary keys/unique keys, then we alter them to add the foreign key constraints.

The file `data.sql` is also available in the zip file. This one is also idempotent. It builds the structure of the database as the previous file, then it fills the database with all the elementary facts presented above in the report.

9 What we did

In this section, we explain which functionalities we managed to implement before the project's deadline. As the requirements set is pretty large, we had to choose among them which ones were more important in order to get a working program as soon and efficiently as possible. For clarity purposes, we group them here by concerned database model :

9.1 Events

Let us begin with events. Events can be created using the main menu's "Create new event" button, which opens a new edition window (actually, a `JDialog`, so it blocks the calling window until it has been closed). In that window, we can see that several default data have already been put into the required fields, and of course that it is possible to modify them. To modify an element in the table, simply double-click on it, and then press enter to validate your caption. Note that in the case of date fields, the user cannot enter other values than string in the form year-month-day (the programs will refuse other input formats and surround the corresponding cell in red). These dates do however not need to represent "real-world dates", as it is possible to enter any number for the day, month, or year. We did this choice to better stick to the requirements of the program telling that the user should be able to model as many imaginary universes as possible in the program (which may imply the use of a non-Gregorian calendar). Once you have done all the modifications you needed, simply click the "Apply" button to save them into database and close the window. Clicking "Cancel" would also close the window, but would discard your changes, so that nothing is written in database. Events can also be edited with the same kind of menu (actually, the same class is called), using the "Edit event" option in the main menu, and then selecting the event to edit into the lists it displays. If no event is available to be edited in the database, an error message will be displayed to the user to kindly inform him that he should first create an event. Links can also be created between characters and events, as we will explain in the characters –related point.

Relations

Relations can be created or edited in order to link characters. Their creation and edition is entirely managed in the menus used for characters, so we will explain them in the "Characters" section.

9.2 Characters

Characters can be created or edited in the same manner than events. The characters edition window contains two tabs, one containing the basic data about the character and his relations with other characters in a table, the other containing a table with all the events linked to the character. These two tables give the possibility to add or remove elements to them using the "Insert..." and "Remove selected lines" buttons lying below them. The relations table displays both relations targeting the opened character and the relations from which this character is the source. To achieve this, it simply appends the

tag “ [INVERSE]” (with a space before the ‘[’ to the type of the relation when the character is the target of the relation. Note that the relations table allows editing table cells in each of its columns, except the one containing the target name (as this is more new relation creation than edition in that case). This table also allows sorting relations by type or character name with the JComboBox below it. The second type lists the events linked to the character being edited. It is not editable (to edit an event, one needs to open the dedicated window through the main menu), but allows adding or removing relations, and thus modifying the “peerings” between events and characters.

10 Technical specifications

10.1 About the database

For this project, we use PostgreSQL 9.3.4. It can be downloaded here : <http://www.enterprisedb.com/products-services-training/pgdownload#windows> In order to get the project working, you need to install it, and then create a new database with it on localhost (on the default PostgreSQL port number), naming it lingi2172, with password “ben” for user “postgres”.

10.2 About the code

Our project makes use of the latest Java version, that is, 1.8.0_05. Make sure you have it (or a later version) installed to use our software, as we used some of the new constructs it defines (as lambda functions). Java 8 is available here on Oracle’s website : <http://www.oracle.com/technetwork/java/javase/downloads/index-jsp-138363.html>

We connect the database to Java using JDBC and directly coding the requests with it (in DatabaseCoordinator.java). To be able to use PostgreSQL with JDBC, you need a specific database driver, defined in the .jar file available here : <http://jdbc.postgresql.org/download.html> (make sure you choose a driver compatible with Java 8). This file has been included in the submitted archive for convenience purposes, so you are not obliged to download it. The section about the code philosophy will explain you what to do with it.

10.3 Code philosophy

We did not use any IDE for this project, only text editor and command line. This choice was first proposed by one of our team members (a jEdit-fundamentalist who strongly believes that coding without IDE leads to better code quality and higher mastery of the overall language and has been programming this way in Java since the very beginning of his studies). The two other ones saw there an opportunity to try something different and decided to follow him. However, even our fundamentalist (actually, especially him) must admit that finding how to run Java in the command line, despite the great wisdom of Internet, sometimes may proof pretty uneasy (and it is a pity). For this reason, here is a small guide explaining how to compile and execute our program, so that you don’t lose time searching if you don’t already know how to do :

10.3.1 First steps

- Open a terminal into the repository containing the source code
- Create a new directory where the program will be compiled. We will refer to it as “cpld” (stands for “compiled”), but you can of course give any name you like.
- Copy the database driver obtained as stated in the section about Java into your cpld directory.
- Check you java and javac installation, using both “java -version” and “javac -version” commands. Both should return that you are using Java 1.8. If it is not the case, check your environment variables.

10.3.2 Compilation

In the directory containing the code, type :

```
java -d cpld *.java
```

This command compiles everything, creating the package directories into the cpld directory

10.3.3 Execution

Go to your cpld directory and type :

```
java -cp .;<name_of_driver_jar> narrationmanager.NarrationManager
```

Note that this command seems to be different on Mac : you must then replace the ‘;’ by a ‘:’. We did not test it on other UNIX systems, but it is possible that they also require this modification.

<name_of_driver_jar> must of course be replaced by the name of the database driver file (actually, you can also place it in another repository and give the path to it here).

-cp specifies the classpath to use for the JVM

Narrationmanager.NarrationManager is the full package path toward the class containing the main method.

10.3.4 Javadoc

- The code contains few comments, but each class has a brief Javadoc description that can be nicer to see browsing a generated Javadoc. This point explains how to do this
- In your source code repository, create a new directory, say “doc”
- Type the following command (as previously, replacing doc by the name of your doc repository) :

```
javadoc -d doc *.java
```

(don't worry about all the stuff this command prints in the terminal ; for once, if means everything is going fine)

- The Javadoc is now in the doc repository !

Annexes

A Code Rel

```

1 TYPE NAME POSSREP {NAME CHAR};
2 TYPE CHARACTER# POSSREP {CHARACTERNUM CHAR};
3 TYPE EVENT# POSSREP {EVENTNUM CHAR};
4 TYPE MAP# POSSREP {MAPNUM CHAR};
5 TYPE PLACE# POSSREP {PLACENUM CHAR};
6 TYPE ASSOCIATION# POSSREP {ASSOCIATIONNUM CHAR};
7 TYPE RELATION# POSSREP {RELATIONNUM CHAR};
8 TYPE ENHANCEDDATE POSSREP {YEAR INTEGER, MONTH INTEGER, DAY INTEGER};
9
10 OPERATOR DATE_CMP (START ENHANCEDDATE, ENDDATE ENHANCEDDATE) RETURNS INTEGER
11 ;
12 IF THE_YEAR(START) > THE_YEAR(ENDDATE) THEN RETURN 1;
13 ELSE IF THE_YEAR(START) < THE_YEAR(ENDDATE) THEN RETURN -1;
14 ELSE IF THE_MONTH(START) > THE_MONTH(ENDDATE) THEN RETURN 1;
15 ELSE IF THE_MONTH(START) < THE_MONTH(ENDDATE) THEN RETURN -1;
16 ELSE IF THE_DAY(START) > THE_DAY(ENDDATE) THEN RETURN 1;
17 ELSE IF THE_DAY(START) < THE_DAY(ENDDATE) THEN RETURN -1;
18 ELSE RETURN 0;
19 END IF;
20 END IF;
21 END IF;
22 END IF;
23 END IF;
24 END OPERATOR;
25
26
27 VAR CHARACTER BASE RELATION {CHARACTERID CHARACTER#, NAME NAME} KEY {
28 CHARACTERID};
29
30 VAR ASSOCIATION BASE RELATION {CHARACTERID CHARACTER#, ASSOCIATIONID
31 ASSOCIATION#} KEY {CHARACTERID , ASSOCIATIONID};
32
33 VAR ORIGINATES BASE RELATION {CHARACTERID CHARACTER#, PLACEID PLACE#} KEY
34 {CHARACTERID};
35
36 VAR BEHAVIOR BASE RELATION {CHARACTERID CHARACTER#, BEHAVIOR CHAR} KEY {
37 CHARACTERID, BEHAVIOR};
38
39 VAR PSEUDO BASE RELATION {CALLERID CHARACTER#, CALLEDID CHARACTER#,
40 PSEUDONYME NAME} KEY {CALLERID, CALLEDID, PSEUDONYME};
41
42 VAR TIMELESSRELATION BASE RELATION {SOURCE CHARACTER#, TARGET CHARACTER
43 #, RELATIONID RELATION#} KEY {SOURCE, TARGET, RELATIONID};
44
45 VAR DATERELATION BASE RELATION {SOURCE CHARACTER#, TARGET CHARACTER#,
46 RELATIONID RELATION#, DATE ENHANCEDDATE} KEY {SOURCE, TARGET, RELATIONID
47 , DATE};
48
49 VAR RANGERELATION BASE RELATION {SOURCE CHARACTER#, TARGET CHARACTER#,
50 RELATIONID RELATION#, START ENHANCEDDATE, ENDDATE ENHANCEDDATE} KEY {
51 SOURCE, TARGET, RELATIONID, START, ENDDATE};
52
53
54
55
56
57
58

```

```

39 VAR BIRTH    BASE RELATION {CHARACTERID CHARACTER#, BIRTH ENHANCEDDATE} KEY
    {CHARACTERID};
40 VAR DEATH    BASE RELATION {CHARACTERID CHARACTER#, DEATH ENHANCEDDATE} KEY
    {CHARACTERID};
41
42 VAR ATTENDS  BASE RELATION {CHARACTERID CHARACTER#, EVENTID EVENT#} KEY {
    CHARACTERID, EVENTID};
43
44 VAR RELATIONLIST  BASE RELATION {RELATIONID RELATION#, RELATIONTYPE CHAR}
    KEY {RELATIONID};
45
46 VAR EVENTNAME  BASE RELATION {EVENTID EVENT#, NAME CHAR} KEY {EVENTID};
47 VAR EVENTDESCRIPTION  BASE RELATION {EVENTID EVENT#, DESCRIPTION CHAR}
    KEY {EVENTID};
48
49 VAR ASSOCIATIONNAME  BASE RELATION {ASSOCIATIONID ASSOCIATION#, NAME CHAR}
    KEY {ASSOCIATIONID};
50 VAR ASSOCIATIONDESCRIPTION  BASE RELATION {ASSOCIATIONID ASSOCIATION#,
    DESCRIPTION CHAR} KEY {ASSOCIATIONID};
51
52
53 VAR MAP      BASE RELATION {MAPID MAP#, NUMWIDTH INTEGER, NUMLength INTEGER,
    WIDTH RATIONAL, LENGTH RATIONAL} KEY {MAPID};
54
55 VAR PLACE    BASE RELATION {PLACEID PLACE#, PLACENAME NAME} KEY {PLACEID};
56
57
58 VAR SUBPLACE  BASE RELATION {PLACEID PLACE#, SQUAREID INTEGER, MAPID MAP
    #} KEY {PLACEID, SQUAREID, MAPID};
59
60
61 VAR MAPPEDPLACE  BASE RELATION {PLACEID PLACE#, MAPID MAP#} KEY {PLACEID}
    KEY {MAPID};
62
63 VAR EVENT    BASE RELATION {EVENTID EVENT#, PLACEID PLACE#, BEGINNING
    ENHANCEDDATE, ENDDATE ENHANCEDDATE} KEY {EVENTID, PLACEID, BEGINNING,
    ENDDATE};
64
65
66
67
68 CONSTRAINT C1 ASSOCIATION {CHARACTERID} <= CHARACTER {CHARACTERID};
69
70 CONSTRAINT C2 ORIGINATES {CHARACTERID} <= CHARACTER {CHARACTERID};
71 CONSTRAINT C3 BEHAVIOR {CHARACTERID} <= CHARACTER {CHARACTERID};
72 CONSTRAINT C4 (PSEUDO RENAME {CALLERID AS CHARACTERID}) {CHARACTERID} <=
    CHARACTER {CHARACTERID};
73 CONSTRAINT C5 (PSEUDO RENAME {CALLEDID AS CHARACTERID}) {CHARACTERID} <=
    CHARACTER {CHARACTERID};
74
75 CONSTRAINT C6 (TIMELESSRELATION RENAME {SOURCE AS CHARACTERID}) {
    CHARACTERID} <= CHARACTER {CHARACTERID};
76 CONSTRAINT C7 (DATERELATION RENAME {SOURCE AS CHARACTERID}) {CHARACTERID}
    <= CHARACTER {CHARACTERID};
77 CONSTRAINT C8 (RANGERELATION RENAME {SOURCE AS CHARACTERID}) {CHARACTERID}
    <= CHARACTER {CHARACTERID};

```

```

78
79 CONSTRAINT C9 (TIMELESSRELATION RENAME {TARGET AS CHARACTERID}) {CHARACTERID
    } <= CHARACTER {CHARACTERID};
80 CONSTRAINT C10 (DATERELATION RENAME {TARGET AS CHARACTERID}) {CHARACTERID}
    <= CHARACTER {CHARACTERID};
81 CONSTRAINT C11 (RANGERELATION RENAME {TARGET AS CHARACTERID}) {CHARACTERID}
    <= CHARACTER {CHARACTERID};
82
83 CONSTRAINT C12 BIRTH {CHARACTERID} <= CHARACTER {CHARACTERID};
84 CONSTRAINT C13 DEATH {CHARACTERID} <= CHARACTER {CHARACTERID};
85
86 CONSTRAINT C14 ATTENDS {CHARACTERID} <= CHARACTER {CHARACTERID};
87
88
89
90
91 CONSTRAINT C15 ASSOCIATION {ASSOCIATIONID} <= ASSOCIATIONNAME {
    ASSOCIATIONID};
92 CONSTRAINT C16 ASSOCIATIONDESCRIPTION {ASSOCIATIONID} <= ASSOCIATIONNAME {
    ASSOCIATIONID};
93
94
95 CONSTRAINT C17 ORIGINATES {PLACEID} <= PLACE {PLACEID};
96 CONSTRAINT C18 SUBPLACE {PLACEID} <= PLACE {PLACEID};
97 CONSTRAINT C19 MAPPEDPLACE {PLACEID} <= PLACE {PLACEID};
98 CONSTRAINT C20 EVENT {PLACEID} <= PLACE {PLACEID};
99
100
101 CONSTRAINT C21 TIMELESSRELATION {RELATIONID} <= RELATIONLIST {RELATIONID};
102 CONSTRAINT C22 DATERELATION {RELATIONID} <= RELATIONLIST {RELATIONID};
103 CONSTRAINT C23 RANGERELATION {RELATIONID} <= RELATIONLIST {RELATIONID};
104
105
106 CONSTRAINT C31 ATTENDS {EVENTID} <= EVENTNAME {EVENTID};
107 CONSTRAINT C32 EVENTDESCRIPTION {EVENTID} <= EVENTNAME {EVENTID};
108 CONSTRAINT C33 EVENT {EVENTID} <= EVENTNAME {EVENTID};
109
110 CONSTRAINT C34 MAPPEDPLACE {MAPID} <= MAP {MAPID};
111 CONSTRAINT C35 SUBPLACE {MAPID} <= MAP {MAPID};
112
113 CONSTRAINT C36 DATE_CMP (RANGERELATION {START}, RANGERELATION {ENDDATE}) <=
    0;
114 CONSTRAINT C37 DATE_CMP (EVENT {BEGINNING}, EVENT {ENDDATE}) <= 0;
115
116
117
118
119 CONSTRAINT C36 DATE_CMP(ENHANCEDDATE(2014,4,4) , ENHANCEDDATE(2015,4,4)) <=
    0;
120
121 CONSTRAINT C37 DATE_CMP(RANGERELATION{START}, RANGERELATION{ENDDATE}) <= 0;

```

structure_rel.d

B Code SQL

```

1 DROP TABLE IF EXISTS CHARACTER CASCADE;
2 DROP TABLE IF EXISTS ASSOCIATION CASCADE;
3 DROP TABLE IF EXISTS ORIGINATES CASCADE;
4 DROP TABLE IF EXISTS BEHAVIOR CASCADE;
5 DROP TABLE IF EXISTS PSEUDO CASCADE;
6 DROP TABLE IF EXISTS TIMELESSRELATION CASCADE;
7 DROP TABLE IF EXISTS DATERELATION CASCADE;
8 DROP TABLE IF EXISTS RANGERELATION CASCADE;
9 DROP TABLE IF EXISTS BIRTH CASCADE;
10 DROP TABLE IF EXISTS DEATH CASCADE;
11 DROP TABLE IF EXISTS ATTENDS CASCADE;
12 DROP TABLE IF EXISTS RELATIONLIST CASCADE;
13 DROP TABLE IF EXISTS EVENTNAME CASCADE;
14 DROP TABLE IF EXISTS EVENTDESCRIPTION CASCADE;
15 DROP TABLE IF EXISTS ASSOCIATIONNAME CASCADE;
16 DROP TABLE IF EXISTS ASSOCIATIONDESCRIPTION CASCADE;
17 DROP TABLE IF EXISTS MAP CASCADE;
18 DROP TABLE IF EXISTS PLACE CASCADE;
19 DROP TABLE IF EXISTS SUBPLACE CASCADE;
20 DROP TABLE IF EXISTS SQUAREID CASCADE;
21 DROP TABLE IF EXISTS MAPPEDPLACE CASCADE;
22 DROP TABLE IF EXISTS EVENT CASCADE;
23 DROP TYPE IF EXISTS ENHANCEDDATE;
24
25 CREATE TYPE ENHANCEDDATE as (YEAR INTEGER, MONTH INTEGER, DAY INTEGER);
26
27 CREATE TABLE CHARACTER(
28     CHARACTERID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
29     NAME TEXT NOT NULL
30 );
31
32 CREATE TABLE ASSOCIATION(
33     CHARACTERID CHARACTER VARYING(10) NOT NULL,
34     ASSOCIATIONID CHARACTER VARYING(10) NOT NULL,
35     PRIMARY KEY (CHARACTERID, ASSOCIATIONID)
36 );
37
38 CREATE TABLE ORIGINATES(
39     CHARACTERID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
40     PLACEID CHARACTER VARYING(10) NOT NULL
41 );
42
43 CREATE TABLE BEHAVIOR(
44     CHARACTERID CHARACTER VARYING(10) NOT NULL,
45     BEHAVIOR CHARACTER VARYING(42) NOT NULL,
46     PRIMARY KEY (CHARACTERID, BEHAVIOR)
47 );
48
49 CREATE TABLE PSEUDO(
50     CALLERID CHARACTER VARYING(10) NOT NULL,
51     CALLEDID CHARACTER VARYING(10) NOT NULL,
52     PSEUDONYME CHARACTER VARYING(42) NOT NULL,
53     PRIMARY KEY (CALLERID, CALLEDID, PSEUDONYME)

```

```
54 );
55
56 CREATE TABLE TIMELESSRELATION(
57     SOURCE CHARACTER VARYING(10) NOT NULL,
58     TARGET CHARACTER VARYING(10) NOT NULL,
59     RELATIONID CHARACTER VARYING(10) NOT NULL,
60     PRIMARY KEY (SOURCE,TARGET,RELATIONID)
61 );
62
63 CREATE TABLE DATERELATION(
64     SOURCE CHARACTER VARYING(10) NOT NULL,
65     TARGET CHARACTER VARYING(10) NOT NULL,
66     RELATIONID CHARACTER VARYING(10) NOT NULL,
67     DATE ENHANCEDDATE NOT NULL,
68     PRIMARY KEY (SOURCE,TARGET,RELATIONID,DATE)
69 );
70
71 CREATE TABLE RANGERELATION(
72     SOURCE CHARACTER VARYING(10) NOT NULL,
73     TARGET CHARACTER VARYING(10) NOT NULL,
74     RELATIONID CHARACTER VARYING(10) NOT NULL,
75     START ENHANCEDDATE NOT NULL,
76     ENDDATE ENHANCEDDATE NOT NULL,
77     PRIMARY KEY (SOURCE,TARGET,RELATIONID,START,ENDDATE)
78 );
79
80 CREATE TABLE BIRTH(
81     CHARACTERID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
82     BIRTH ENHANCEDDATE NOT NULL
83 );
84
85 CREATE TABLE DEATH(
86     CHARACTERID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
87     DEATH ENHANCEDDATE NOT NULL
88 );
89
90 CREATE TABLE ATTENDS(
91     CHARACTERID CHARACTER VARYING(10) NOT NULL,
92     EVENTID CHARACTER VARYING(10) NOT NULL,
93     PRIMARY KEY (CHARACTERID,EVENTID)
94 );
95
96 CREATE TABLE RELATIONLIST(
97     RELATIONID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
98     RELATIONTYPE CHARACTER VARYING(42) NOT NULL
99 );
100
101 CREATE TABLE EVENTNAME(
102     EVENTID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
103     NAME CHARACTER VARYING(42) NOT NULL
104 );
105
106 CREATE TABLE EVENTDESCRIPTION(
107     EVENTID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
108     DESCRIPTION CHARACTER VARYING(42) NOT NULL
109 );
```



```

110 |
111 | CREATE TABLE ASSOCIATIONNAME(
112 |     ASSOCIATIONID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
113 |     NAME CHARACTER VARYING(42) NOT NULL
114 | );
115 |
116 | CREATE TABLE ASSOCIATIONDESCRIPTION(
117 |     ASSOCIATIONID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
118 |     DESCRIPTION TEXT NOT NULL
119 | );
120 |
121 | CREATE TABLE MAP(
122 |     MAPID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
123 |     NUMWIDTH INTEGER NOT NULL,
124 |     NUMLength INTEGER NOT NULL,
125 |     WIDTH DOUBLE PRECISION NOT NULL,
126 |     LENGTH DOUBLE PRECISION NOT NULL
127 | );
128 |
129 | CREATE TABLE PLACE(
130 |     PLACEID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
131 |     PLACENAME CHARACTER VARYING(42) NOT NULL
132 | );
133 |
134 | CREATE TABLE SUBPLACE(
135 |     PLACEID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
136 |     SQUAREID INTEGER NOT NULL,
137 |     MAPID CHARACTER VARYING(10) NOT NULL
138 | );
139 |
140 | CREATE TABLE SQUAREID(
141 |     PLACEID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
142 |     SQUAREID CHARACTER VARYING(10) NOT NULL
143 | );
144 |
145 | CREATE TABLE MAPPEDPLACE(
146 |     PLACEID CHARACTER VARYING(10) PRIMARY KEY NOT NULL,
147 |     MAPID CHARACTER VARYING(10) UNIQUE NOT NULL
148 | );
149 |
150 | CREATE TABLE EVENT(
151 |     EVENTID CHARACTER VARYING(10) NOT NULL,
152 |     PLACEID CHARACTER VARYING(10) NOT NULL,
153 |     BEGINNING ENHANCEDDATE NOT NULL,
154 |     ENDDATE ENHANCEDDATE NOT NULL,
155 |     PRIMARY KEY (EVENTID, PLACEID, BEGINNING, ENDDATE)
156 | );
157 |
158 | ALTER TABLE ONLY ASSOCIATION
159 |     ADD CONSTRAINT C1 FOREIGN KEY (CHARACTERID) REFERENCES CHARACTER(
160 |         CHARACTERID);
161 |
162 | ALTER TABLE ONLY ORIGINATES
163 |     ADD CONSTRAINT C2 FOREIGN KEY (CHARACTERID) REFERENCES CHARACTER(
164 |         CHARACTERID);

```

```
164 ALTER TABLE ONLY BEHAVIOR
165     ADD CONSTRAINT C3 FOREIGN KEY (CHARACTERID) REFERENCES CHARACTER(
166         CHARACTERID);
167
168 ALTER TABLE ONLY PSEUDO
169     ADD CONSTRAINT C4 FOREIGN KEY (CALLERID) REFERENCES CHARACTER(
170         CHARACTERID);
171
172 ALTER TABLE ONLY PSEUDO
173     ADD CONSTRAINT C5 FOREIGN KEY (CALLEDID) REFERENCES CHARACTER(
174         CHARACTERID);
175
176 ALTER TABLE ONLY TIMELESSRELATION
177     ADD CONSTRAINT C6 FOREIGN KEY (SOURCE) REFERENCES CHARACTER(CHARACTERID
178         );
179
180 ALTER TABLE ONLY DATERELATION
181     ADD CONSTRAINT C7 FOREIGN KEY (SOURCE) REFERENCES CHARACTER(CHARACTERID
182         );
183
184 ALTER TABLE ONLY RANGERELATION
185     ADD CONSTRAINT C8 FOREIGN KEY (SOURCE) REFERENCES CHARACTER(CHARACTERID
186         );
187
188 ALTER TABLE ONLY TIMELESSRELATION
189     ADD CONSTRAINT C9 FOREIGN KEY (TARGET) REFERENCES CHARACTER(CHARACTERID
190         );
191
192 ALTER TABLE ONLY DATERELATION
193     ADD CONSTRAINT C10 FOREIGN KEY (TARGET) REFERENCES CHARACTER(
194         CHARACTERID);
195
196 ALTER TABLE ONLY RANGERELATION
197     ADD CONSTRAINT C11 FOREIGN KEY (TARGET) REFERENCES CHARACTER(
198         CHARACTERID);
199
200 ALTER TABLE ONLY BIRTH
201     ADD CONSTRAINT C12 FOREIGN KEY (CHARACTERID) REFERENCES CHARACTER(
202         CHARACTERID);
203
204 ALTER TABLE ONLY DEATH
205     ADD CONSTRAINT C13 FOREIGN KEY (CHARACTERID) REFERENCES CHARACTER(
206         CHARACTERID);
207
208 ALTER TABLE ONLY ATTENDS
209     ADD CONSTRAINT C14 FOREIGN KEY (CHARACTERID) REFERENCES CHARACTER(
210         CHARACTERID);
211
212 ALTER TABLE ONLY ASSOCIATION
213     ADD CONSTRAINT C15 FOREIGN KEY (ASSOCIATIONID) REFERENCES
214         ASSOCIATIONNAME(ASSOCIATIONID);
215
216 ALTER TABLE ONLY ASSOCIATIONDESCRIPTION
217     ADD CONSTRAINT C16 FOREIGN KEY (ASSOCIATIONID) REFERENCES
218         ASSOCIATIONNAME(ASSOCIATIONID);
```

```
206 ALTER TABLE ONLY ORIGINATES
207     ADD CONSTRAINT C17 FOREIGN KEY (PLACEID) REFERENCES PLACE(PLACEID);
208
209 ALTER TABLE ONLY SUBPLACE
210     ADD CONSTRAINT C18 FOREIGN KEY (PLACEID) REFERENCES PLACE(PLACEID);
211
212 ALTER TABLE ONLY MAPPEDPLACE
213     ADD CONSTRAINT C19 FOREIGN KEY (PLACEID) REFERENCES PLACE(PLACEID);
214
215 ALTER TABLE ONLY EVENT
216     ADD CONSTRAINT C20 FOREIGN KEY (PLACEID) REFERENCES PLACE(PLACEID);
217
218 ALTER TABLE ONLY TIMELESSRELATION
219     ADD CONSTRAINT C21 FOREIGN KEY (RELATIONID) REFERENCES RELATIONLIST(
220         RELATIONID);
221
222 ALTER TABLE ONLY DATERELATION
223     ADD CONSTRAINT C22 FOREIGN KEY (RELATIONID) REFERENCES RELATIONLIST(
224         RELATIONID);
225
226 ALTER TABLE ONLY RANGERELATION
227     ADD CONSTRAINT C23 FOREIGN KEY (RELATIONID) REFERENCES RELATIONLIST(
228         RELATIONID);
229
230 ALTER TABLE ONLY ATTENDS
231     ADD CONSTRAINT C31 FOREIGN KEY (EVENTID) REFERENCES EVENTNAME(EVENTID);
232
233 ALTER TABLE ONLY EVENTDESCRIPTION
234     ADD CONSTRAINT C32 FOREIGN KEY (EVENTID) REFERENCES EVENTNAME(EVENTID);
235
236 ALTER TABLE ONLY EVENT
237     ADD CONSTRAINT C33 FOREIGN KEY (EVENTID) REFERENCES EVENTNAME(EVENTID);
238
239 ALTER TABLE ONLY MAPPEDPLACE
240     ADD CONSTRAINT C34 FOREIGN KEY (MAPID) REFERENCES MAP(MAPID);
241
242 ALTER TABLE ONLY SUBPLACE
243     ADD CONSTRAINT C35 FOREIGN KEY (MAPID) REFERENCES MAP(MAPID);
```

structure.sql