


Contents

[Configure Base Paths](#)[See Also](#)

Route Requests to a Single MRT Environment with Environment Base Paths

Consider environment base paths when planning your storefront project with multiple Managed Runtime (MRT) environments and a single domain. To route requests to the correct MRT environment via eCDN, set up environment base paths for each MRT environment. Also, use an environment base path to host the storefront within a specific subpath of a website.

This example diagram shows that two base paths are set up for the `www.example.com` domain. Each base path points to a distinct MRT environment.

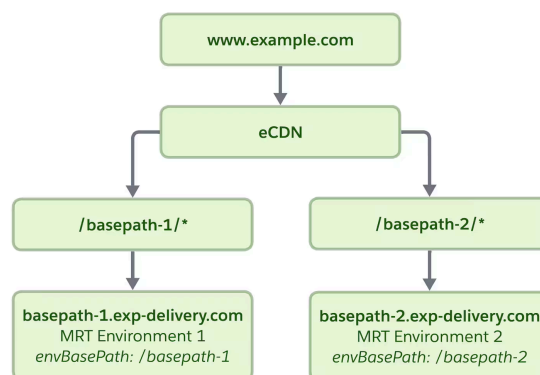

An organization with a single domain can host multiple storefronts for various uses. One example is offering a storefront for each locale. For example, Northern Trail Outfitters (NTO) has multiple locations and has multiple storefront URLs for each region.

`www.northerntrailoutfitters.com/us/retail` is for the US region and

`www.northerntrailoutfitters.com/ca/retail` is for the Canadian region. Set up two base paths: `us` and `ca`.

Both URLs use the same domain,

`www.northerntrailoutfitters.com`, but the base paths map them to distinct MRT environments.

Note

[Try for free](#)

Another example is a website that hosts the storefront only in a subpath. For example, `www.example.com` is the main site with pages showing content. It contains one storefront that's available under a specific path:

`www.example.com/shop`. This path corresponds to an environment base path of `/shop`. The base path points to an MRT environment.

Configure Base Paths

Configure base paths in `config.server.ts` under `runtime.ssrParameters.envBasePath`:

```
1 // config.server.ts
2 export default {
3   runtime: {
4     ssrParameters: {
5       ssrFunctionNodeVersion: '24.x',
6       envBasePath: '/storefront-a',
7     },
8   },
9   app: { /_ ... _/ },
10 };
```

For more information about environment base paths and for setting up MRT environment variables, see [Base Path](#) in the pwa-kit GitHub repository.

See Also

- [Managed Runtime Overview](#)

DID THIS ARTICLE SOLVE YOUR ISSUE?

Let us know so we can improve!

[Share your feedback](#)

DEVELOPER CENTERS

[Heroku](#)
[MuleSoft](#)
[Tableau](#)

POPULAR RESOURCES

[Documentation](#)
[Component Library](#)
[APIs](#)

COMMUNITY

[Trailblazer Community](#)
[Events and Calendar](#)
[Partner Community](#)



Try for free



© Copyright 2026 Salesforce, Inc. [All rights reserved](#). Various trademarks held by their respective owners. Salesforce, Inc. Salesforce Tower, 415 Mission Street, 3rd Floor, San Francisco, CA 94105, United States

[Legal](#) [Terms of Service](#) [Privacy Information](#) [Responsible Disclosure](#) [Trust](#) [Contact](#)

[Use of Cookies](#) [Cookie Preferences](#)  [Your Privacy Choices](#)