

K12-KGraph: A Curriculum-Aligned Knowledge Graph for Benchmarking and Training Educational LLMs

Hao Liang*, Qihan Lin*, Zhaoyang Han, Xiaochen Ma, Zhen Hao Wong, Meiyl Qiang, Linzhuang Sun, Wentao Zhang[‡]

¹Peking University, ²Institute for Advanced Algorithms Research, Shanghai,

³OriginHub Technology, ⁴Zhongguancun Academy

Large language models (LLMs) are increasingly deployed in K–12 education, yet existing benchmarks such as C-Eval, CMMLU, GaokaoBench, and EduEval measure only whether a model can answer an exam question, i.e., factual recall. Effective educational AI further requires **curriculum cognition**: the structured understanding of how knowledge is organized, including prerequisite chains, concept taxonomies, experiment–concept links, and pedagogical sequencing. Curriculum cognition is neither probed by current benchmarks nor explicitly taught by current instruction-tuning data. To close this gap, we introduce **K12-KGraph**, a curriculum-aligned knowledge graph extracted from the official People’s Education Press textbooks, covering mathematics, physics, chemistry, and biology across primary, middle, and high school, with seven node types (**Concept**, **Skill**, **Experiment**, **Exercise**, **Section**, **Chapter**, **Book**) and nine relation types spanning taxonomy, prerequisite, association, verification, assessment, location, and order. Building on this single graph, we derive two complementary resources: **K12-Bench**, a 23,640-question multi-select benchmark across five graph-derived task families (GROUND, PREREQ, NEIGHBOR, EVIDENCE, and LOCATE) that jointly probe curriculum cognition; and **K12-Train**, a KG-guided supervised fine-tuning corpus of ~2,300 QA pairs synthesized from node attributes and edge semantics. Experiments expose a clear gap and a clear remedy: on K12-Bench, even a strong proprietary model (Gemini-3-Flash) reaches only 57% exact match and a strong open-source model (Gemma-4-31B-IT) only 46%, with PREREQ and NEIGHBOR being the hardest; yet under a strictly matched 2,300-sample SFT budget on Qwen3-4B-Base and Llama3.1-8B-Base, K12-Train consistently outperforms equally sized subsets of eight mainstream instruction-tuning corpora (OpenHermes, Infinity, UltraChat, WizardLM, DataFlow, LMSYS, SmolTalk, Tulu-3) on both GaokaoBench and EduEval, showing that structural curriculum grounding is remarkably sample-efficient for educational SFT. We release the graph, benchmark, training data, and the full construction pipeline.

*Equal Contribution, [‡]Corresponding author

🔗 **Source Code** : <https://github.com/haolpku/K12-Dataset>

🗂️ **Dataset** : <https://huggingface.co/datasets/lhpku20010120/K12-KGraph>

📄 **Dataset Website** : <https://haolpku.github.io/K12-KGraph-page/>

Contents

1	Introduction	3
2	Related Work	3
3	K12-KGraph	4
3.1	Schema Design	5
3.2	Construction Pipeline	5
3.3	Graph Statistics	5
4	Benchmark and Training Data from K12-KGraph	6
4.1	K12-Bench: Benchmark Construction	6
4.2	K12-Train: KG-Guided Data Synthesis	7
5	Experiments and Results	8
5.1	Experimental Settings	8
5.2	Benchmarking LLMs on K12-Bench	9
5.3	K12-Train for Educational SFT	10
6	Conclusion	11
A	K12-KGraph Construction Details	14
A.1	Node and Edge Attribute Specification	14
A.2	Source Documents and Preprocessing Setup	14
A.3	Prompt for KG Extraction	15
B	K12-Bench Construction Details and Evaluation Protocol	15
B.1	Distractor Pool and Structural Sampling Rules	15
B.2	Prompt for Pedagogical Filtering	17
B.3	Benchmark Composition Statistics	17
B.4	Answering Prompt and Decoding Rules	19
B.5	Baseline EM/F1 Computation for the Random Predictor	19
B.6	Illustrative Example of KG-Grounded Resource Derivation	20
C	K12-Train Construction Details and SFT Protocol	20
C.1	Prompt for QA Synthesis	20
C.2	Training Configuration	21
C.3	Baseline Subsampling and Fairness Controls	21
D	Validation and Quality Assurance	21
D.1	Validation Strategy, Annotator Background, and Ethics	22
D.2	KG Validation: Structural Checks and Human Verification	22
D.3	Spot-Check Validation of K12-Bench and K12-Train	22
E	Extended Results and Sanity Checks	23
E.1	Full Benchmark Results	23
E.2	Stability Across Random Seeds	23
E.3	Overlap and Leakage Analysis	24

1 Introduction

Large language models (LLMs) have become strikingly proficient at answering K–12 exam questions. On benchmarks such as C-Eval [9], CMMLU [12], GaokaoBench [29], and EduEval [18], frontier models now rival, and sometimes surpass, top human students, fueling rapid interest in LLM-powered tutoring and exam preparation [10]. Taken at face value, this progress suggests that educational AI is close to being solved. Yet anyone who has tried to build a real tutoring product knows that answering a question is only a small fraction of what a good teacher actually does, and it is precisely the larger fraction that today’s benchmarks leave untested.

The untested part is what we call **curriculum cognition**: the structured understanding of why a topic must be learned before another, how a laboratory experiment connects to a theoretical concept, and where in the textbook each idea actually lives. A competent 7th-grade mathematics teacher does not merely know that “linear equations” is a topic; she knows it requires arithmetic operations as a prerequisite, that it sits as a sibling of “inequalities” under “algebraic expressions”, and that it first appears in Chapter 3 of the People’s Education Press textbook. None of today’s K–12 benchmarks probe this kind of structural understanding, and consequently none of today’s training data explicitly teaches it either. If we care about building AI that supports students, rather than merely testing them, this gap is the bottleneck.

To close it, we build everything from a single resource: a curriculum-aligned knowledge graph extracted directly from the official Chinese K–12 textbooks (People’s Education Press). The resulting graph, **K12-KGraph**, is a heterogeneous property graph covering mathematics, physics, chemistry, and biology across primary, middle, and high school. Nodes carry rich pedagogical attributes (**Concept**, **Skill**, **Experiment**, **Exercise**, **Section**, **Chapter**, **Book**) and edges capture the relations teachers actually reason about: taxonomy (**is_a**), prerequisite (**prerequisites_for**), association (**relates_to**), verification (**verifies**), assessment (**tests_concept**, **tests_skill**), location (**appears_in**), and order (**leads_to**). Because the graph faithfully mirrors how the curriculum is organized, we can turn it into evaluation questions by traversing neighborhoods, and into training data by rendering node properties and edge semantics into QA pairs. A single graph thus yields both a benchmark that measures curriculum cognition and a training set that explicitly teaches it.

Contributions. Our work makes three contributions:

1. **K12-KGraph**, a large-scale, multi-subject, official-textbook-grounded curriculum-aligned knowledge graph for Chinese K–12, together with a reproducible LLM-based extraction and hierarchical-merge pipeline with DAG validation on taxonomic and prerequisite relations.
2. **K12-Bench**, a 23,640-question benchmark of graph-derived multi-select items grouped into five task families: **GROUND** (Knowledge Grounding), **PREREQ** (Prerequisite Reasoning), **NEIGHBOR** (Neighbor Recommendation), **EVIDENCE** (Experiment Evidence Chain), and **LOCATE** (Cross-Chapter Indexing). These families together probe structural curriculum understanding. Evaluating ten open-source and proprietary LLMs, we find that even Gemini-3-Flash reaches only 57% exact match, and a strong open-source model (Gemma-4-31B-IT [21]) reaches only 46%.
3. **K12-Train**, a KG-guided QA synthesis pipeline yielding ~2,300 high-quality educational SFT samples. Under a strictly matched 2,300-sample budget, SFT on K12-Train consistently outperforms eight mainstream instruction-tuning corpora (OpenHermes [22], Infinity [13], UltraChat [4], WizardLM [17], DataFlow [14], LMSYS [30], SmolTalk [1], Tulu-3 [11]) across two base models on GaokaoBench and EduEval. On GaokaoBench, K12-Train achieves the best overall performance across both backbones, improving over the strongest SFT baseline by +24.1 (Qwen3-4B-Base) and +32.4 (Llama3.1-8B-Base), and over their corresponding official instruction-tuned variants by +114.6 and +221.0, respectively. On EduEval, it also attains the highest average score among all SFT configurations, indicating that KG-grounded in-domain supervision is highly effective for educational SFT.

2 Related Work

K–12 and education benchmarks. Several benchmarks evaluate LLMs on Chinese K–12 subjects. C-Eval [9] and CMMLU [12] are broad multi-discipline suites that include K–12 categories but focus on multiple-choice

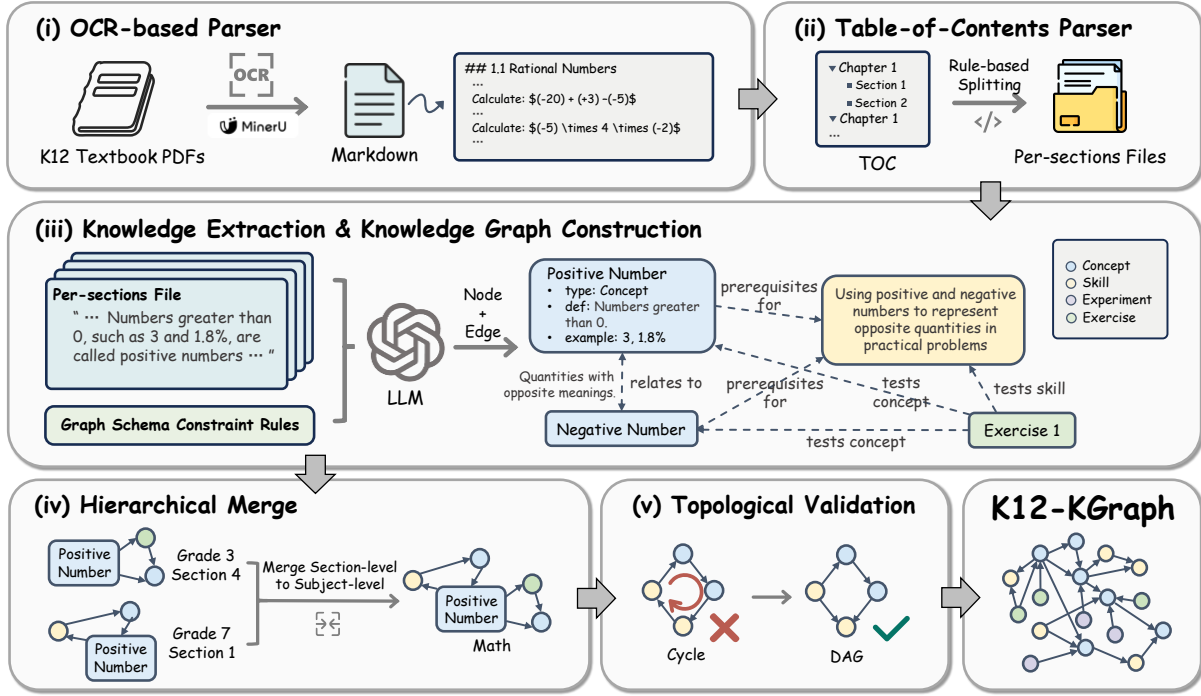


Figure 1 Overview of the K12-KGraph construction pipeline. The process consists of five stages: OCR-based parsing of textbooks, hierarchical segmentation into sections, LLM-based schema-guided extraction of nodes and edges, hierarchical graph merging across sections and books, and structural validation with lightweight human verification. The design combines automated extraction with rule-based processing and human-in-the-loop checks to ensure both scalability and correctness.

factual questions. GaokaoBench [29] targets the Chinese college entrance exam (Gaokao) with both objective and subjective questions. EduEval [18] covers six educational capability dimensions (application, creativity, ethics, memory, reasoning, understanding). E-Eval [8] and K-12 EduBench [26] further expand coverage. CK12 [27] incorporates a knowledge graph but focuses on holistic cognition rather than structural curriculum understanding. All of these benchmarks test whether a model can answer domain questions; none systematically evaluate whether models understand the structure of the curriculum, i.e., prerequisite dependencies, concept taxonomies, or pedagogical sequencing.

Educational knowledge graphs. Knowledge graphs have been applied in education for knowledge tracing [16] and prerequisite discovery [3]. However, existing educational KGs typically focus on a single subject or English-language courses, and are rarely aligned to an official K-12 curriculum. Recent work has explored using LLMs for KG construction [2, 24], but no prior work has built a large-scale, multi-subject, curriculum-aligned KG from Chinese K-12 textbooks and used it to both benchmark and train LLMs.

Instruction tuning datasets. Supervised fine-tuning (SFT) with high-quality instruction data is critical for aligning LLMs [20]. General-purpose datasets such as OpenHermes [22], UltraChat [4], WizardLM [17], Tulu-3 [11], and SmolTalk [1] cover diverse tasks but lack domain-specific educational knowledge. Self-Instruct [23] and its variants generate synthetic data from LLMs, but do not leverage structured knowledge sources. Our KG-guided synthesis approach bridges this gap by grounding training data in curriculum structure.

3 K12-KGraph

Table 1 K12-KGraph statistics for the selected core node and edge types by subject. Counts are reported after hierarchical merging and deduplication. The total number of `leads_to` edges is computed globally and includes cross-subject links, and thus does not equal the sum over subject-specific rows.

Subject	Nodes					Edges						
	Book	Cpt	Skl	Exp	Exe	is_a	prereq	rel_to	verif	tes_cpt	tes_skl	lea_to
Mathematics	23	1,475	428	0	471	288	855	405	0	464	229	44
Physics	9	1,154	197	220	186	247	648	300	251	248	104	19
Chemistry	7	2,302	451	309	270	856	1,344	1,083	468	571	251	21
Biology	9	1,648	288	123	244	505	858	386	170	391	116	11
Total	48	6,579	1,364	652	1,171	1,896	3,705	2,174	889	1,674	700	282

3.1 Schema Design

We design a heterogeneous property graph schema tailored to K–12 education. The schema defines seven node types and nine directed edge types, summarized in Table 5 (Appendix A.1).

Each node carries typed properties. For example, a `Concept` node includes `name`, `definition` (preferring textbook wording), `importance` (understand/master/important), and optional fields such as `formula`, `aliases`, and `examples`. An `Experiment` node includes `instruments`, `is_student` (whether it is a student-performed experiment), `process`, `phenomena`, and `conclusion`.

3.2 Construction Pipeline

Construction proceeds in five automatic stages, as illustrated in Figure 1. (i) An OCR-based parser (MinerU [19]) converts textbook PDFs into structured Markdown while preserving heading hierarchy, mathematical formulas, and raw text. (ii) A table-of-contents parser produces a `sections_index.json` manifest and splits the Markdown into per-section files. (iii) For each section, we prompt GPT-5.2 with a schema-aware instruction (Appendix A.3) to emit nodes and edges as structured JSON, together with evidence citations (original sentences from textbooks) for every edge. (iv) Per-section graphs are merged bottom-up: a book-level pass assigns globally unique IDs, deduplicates same-name concepts and skills, and remaps edges; a subject-level pass then reconciles entities across books within the same subject (e.g., “velocity” appearing in both 8th- and 9th-grade physics). (v) We run depth-first cycle detection on the `is_a` and `prerequisites_for` subgraphs and manually resolve any violations, yielding valid DAGs for the taxonomic and prerequisite relations.

Quality control. Beyond automated DAG validation, the extraction prompt explicitly discourages hallucination and restricts outputs to “truly important, clearly presented” knowledge; edges are encouraged to carry an `evidence` field linking back to the underlying textbook excerpt; all extracted triples are manually verified by domain experts; and hierarchical deduplication uses light-normalized name matching followed by expert review to reconcile cross-book aliases.

3.3 Graph Statistics

Table 1 summarizes the core node and edge types of K12-KGraph across subjects. For clarity and compactness, we focus on pedagogically salient content nodes (`Concept`, `Skill`, `Experiment`, `Exercise`) together with `Book`, and omit structural container nodes (`Chapter`, `Section`), which primarily serve organizational roles. We further omit ubiquitous container relations such as `appears_in` and `is_part_of`. By construction, every content node is anchored to a specific textbook location via `appears_in`, and all sections and chapters participate in a fixed hierarchy via `is_part_of`; their presence is guaranteed by the schema and therefore carries no information for summarizing graph composition.

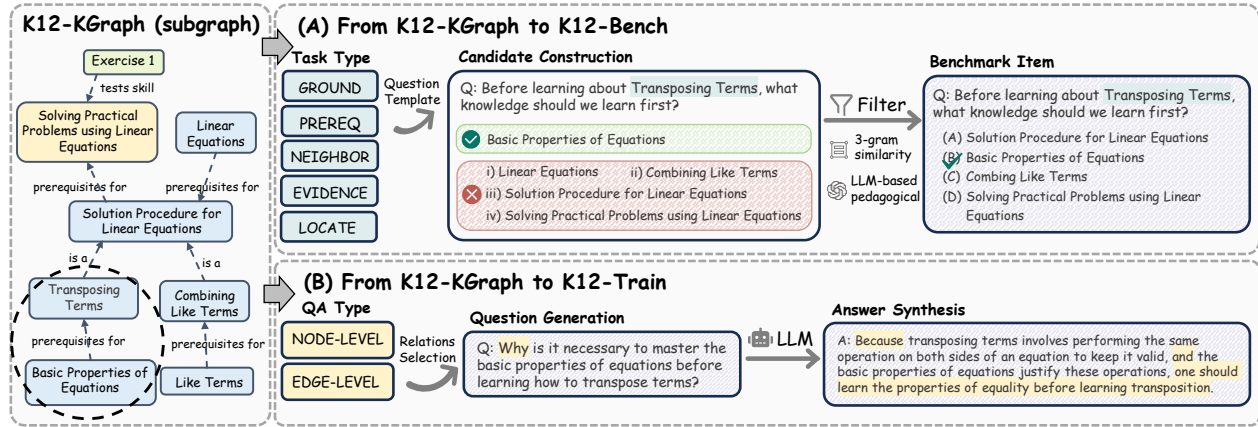


Figure 2 A concrete example of K12-Bench and K12-Train generation from K12-KGraph. (A) shows benchmark construction for a PREREQ task via neighborhood sampling and filtering. (B) shows QA synthesis grounded in the `prerequisites_for` relation.

4 Benchmark and Training Data from K12-KGraph

We derive two KG-grounded datasets from K12-KGraph. K12-Bench (§4.1) converts graph neighborhoods into multi-select questions for evaluating LLMs’ curriculum cognition, while K12-Train (§4.2) converts node attributes and edge semantics into structurally grounded QA pairs for training educational LLMs. Figure 2 illustrates the shared pipeline on a single `prerequisites_for` subgraph: panel (A) shows how the subgraph is instantiated into a PREREQ benchmark item, while panel (B) shows how the same relation is reformulated into a KG-guided QA pair for training. Despite serving different purposes, both resources exploit the same property: every sample can be traced back to a specific subgraph, making difficulty, coverage, and factual correctness systematically controllable.

4.1 K12-Bench: Benchmark Construction

K12-Bench comprises five task families (nine subtasks) that each probe a distinct facet of structural curriculum understanding. All tasks are formulated as multi-select questions: given a question and four labeled candidates, the model must output the full set of correct labels. The gold answer cardinality varies per item from 1 to 3 depending on the query and the local graph neighborhood, so even items with a single correct option must still be produced in the multi-select output format. Questions and distractors are graph-derived rather than LLM-generated: for each task we define templates instantiated via graph queries, with correct answers being the true graph neighbors and distractors sampled from a multi-level pool of structurally proximate but non-answer nodes (e.g., 2-hop neighborhoods or siblings under shared `is_a` parents). Detailed distractor pool construction and sampling rules are provided in Appendix B.1. Models receive only the question text without any graph context, so the benchmark probes parametric curriculum knowledge. Each candidate set is filtered by a character 3-gram cosine-similarity step that removes surface-form near-duplicates, followed by a GPT-5.2-based pedagogical filter that discards distractors synonymous with any correct answer (see Appendix B.1 for details).

We name the five task families GROUND, PREREQ, NEIGHBOR, EVIDENCE, and LOCATE after the relation they probe.

GROUND: Knowledge Grounding (`tests_concept`, `tests_skill`). *Subtask 1:* given an exercise stem, select the core concepts or skills it tests. *Subtask 2:* given a concept or skill, select which exercises assess it. Distractors are drawn from structurally related concepts/skills within the same curriculum context.

PREREQ: Prerequisite Reasoning (`prerequisites_for`). *Subtask 1:* given a concept/skill, select its prerequisite closure. *Subtask 2:* given a concept/skill, select all of its most direct successors. Distractors are

sampled from structurally adjacent nodes, including related concepts and taxonomic siblings.

NEIGHBOR: Neighbor Recommendation (`is_a`, `relates_to`). Given a concept, select all directly related concepts (via `is_a` or `relates_to` in either direction). Distractors are drawn from structurally nearby but non-neighbor concepts, primarily from the 2-hop outer ring.

EVIDENCE: Experiment Evidence Chain (`verifies`). *Subtask 1:* given a concept, select which experiments verify it. *Subtask 2:* given an experiment, select which concepts it verifies. Distractors are sampled from structurally related concepts or experiments.

LOCATE: Cross-Chapter Indexing (`appears_in`, `leads_to`). *Subtask 1:* given a knowledge entity, select the chapter(s) where it first appears. *Subtask 2:* given a chapter, select which chapters are its prerequisites. Distractors are drawn from alternative structural locations within the curriculum.

Benchmark statistics and quality. K12-Bench contains 23,640 multi-select items in total, with per-task breakdown reported in Appendix B.3 (Table 7). Because every item is derived deterministically from validated K12-KGraph subgraphs rather than generated by an LLM, its factual correctness reduces to the correctness of the underlying graph. K12-KGraph itself is fully human-verified by 12 subject-qualified annotators with strong inter-annotator agreement (Fleiss’ $\kappa = 0.84$ overall; see Appendix D), and a stratified spot-check of K12-Bench finds 98.4% of sampled items to be fully correct. This pipeline gives K12-Bench an unusually tight link between benchmark quality and graph quality: improvements to the KG propagate directly into the benchmark, while failures are localizable to specific graph edges.

4.2 K12-Train: KG-Guided Data Synthesis

K12-Train converts the knowledge graph into supervised fine-tuning data along three complementary paths, illustrated in Appendix C.1.

(i) Node-grounded QA (LLM-prompted). For each `Concept`, `Skill`, `Experiment`, or `Exercise` node, we prompt Qwen3-235B-A22B [25] to generate a question–answer pair grounded in that node’s typed properties: definitions, formulas, and worked examples for `Concept`; procedural steps and application scenarios for `Skill`; instruments, phenomena, and conclusions for `Experiment`; and the stem augmented with concise step-by-step reasoning for `Exercise`. This yields supervision that teaches the content of a node.

(ii) Edge-grounded QA (LLM-prompted). For each semantic relation, the prompt is anchored in a specific question template that forces the answer to articulate the relation itself: “*Why does A belong to category B?*” for `is_a`, “*Why must one learn A before B?*” for `prerequisites_for`, “*How are A and B related?*” for `relates_to`, and “*How does experiment E verify concept C?*” for `verifies`. This yields supervision that teaches the structure between nodes.

(iii) Exercise-assessment QA (deterministic templates). For `tests_concept` and `tests_skill` edges, which are factually unambiguous, we bypass the LLM and fill deterministic templates directly from the edge. This guarantees full factual grounding and eliminates any risk that the LLM fabricates or paraphrases the target relation for the exercise-to-concept/skill subset.

Quality control. To minimize hallucination, we crop each node’s property set to only those fields relevant for the target QA type before prompting, preventing the LLM from drifting into unrelated attributes. Prompts further instruct the model to produce grade-appropriate language, strictly grounded in the provided attributes, with a structured answer format that highlights key conclusions. After generation, every QA pair is validated for JSON structure, non-empty fields, and language consistency.

The final K12-Train dataset contains 2,267 QA pairs, selected from a substantially larger KG-derived pool via controlled subsampling to balance different QA sources. Specifically, it includes 450 `Exercise` examples (with step-by-step reasoning), 356 `tests_concept`/`tests_skill` examples, 695 node-grounded QA pairs (from `Concept`, `Skill`, and `Experiment`), and 766 relation-grounded QA pairs (from `is_a`, `prerequisites_for`,

Table 2 K12-Bench results (zero-shot, answer-only), reported in %. EM = exact match (per-instance all-or-nothing, averaged across instances). F1 is the instance-level (example-based) macro F1: we compute precision/recall/F1 on each instance’s option-label set, then average across instances. Within each model family (open-source vs. proprietary), the best Overall score is highlighted in yellow, and the second-best in green.

Model	GROUND		PREREQ		NEIGHBOR		EVIDENCE		LOCATE		Overall	
	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1
Random Baseline												
<i>Random guess</i>	6.7	36.2	6.7	37.9	6.7	41.3	6.7	37.7	6.7	32.9	6.7	36.4
Open Source Models												
<i>Meta-LLaMA-3-8B-Instruct</i>	6.2	54.9	4.3	47.9	3.8	53.4	5.2	55.4	11.5	53.9	7.2	52.6
<i>GLM-4.7-Flash</i>	36.4	70.9	13.4	56.6	15.2	59.6	39.3	72.8	48.9	66.3	31.7	63.9
<i>Ministral-3-14B-Instruct</i>	43.0	75.1	18.4	59.4	14.5	59.8	38.3	73.2	59.3	72.2	37.5	67.4
<i>Qwen3-32B</i>	46.7	77.2	16.9	60.4	14.6	60.3	41.7	75.1	72.1	75.9	42.6	69.5
<i>Gemma-4-31B-IT</i>	50.6	79.0	28.3	62.6	15.0	60.7	43.3	73.9	73.4	73.5	46.4	69.5
Proprietary Models												
<i>GPT-4o</i>	30.3	70.6	9.3	57.5	10.1	57.9	32.4	71.8	55.6	72.3	31.1	65.9
<i>GPT-5-mini</i>	30.4	70.4	9.9	57.6	12.5	59.0	32.9	72.3	55.5	72.8	31.7	66.4
<i>GPT-5.2</i>	50.8	79.2	17.9	59.5	13.1	60.0	41.6	73.9	70.1	71.5	42.8	68.0
<i>Gemini-2.5-Flash</i>	58.0	75.7	29.7	56.3	15.4	56.0	47.1	72.0	72.8	74.0	48.3	66.7
<i>Gemini-3-Flash</i>	63.4	83.3	34.8	58.2	33.4	63.5	47.4	72.4	81.7	82.6	57.1	73.0

`relates_to`, and `verifies`). This balancing mitigates the natural skew in the raw KG-derived pool (e.g., relatively fewer textbook exercises) and encourages the model to learn uniformly across content and relational supervision signals. Despite its modest size, we show in Section 5 that these structurally grounded samples are highly effective for educational SFT.

5 Experiments and Results

5.1 Experimental Settings

We conduct two complementary experiments: (i) **benchmarking** open-source and proprietary LLMs on K12-Bench to assess structural curriculum understanding (§5.2), and (ii) **fine-tuning** two base models on K12-Train and on eight mainstream instruction-tuning datasets under a matched data budget to compare downstream educational performance (§5.3).

Models under evaluation. For K12-Bench, we evaluate five open-source LLMs (Meta-LLaMA-3-8B-Instruct [7], GLM-4.7-Flash [5], Ministral-3-14B-Instruct [15], Qwen3-32B [25], Gemma-4-31B-IT [21]) and five proprietary APIs (GPT-4o, GPT-5-mini, GPT-5.2, Gemini-2.5-Flash, Gemini-3-Flash) in a zero-shot, answer-only setting: given a question and four labeled options, the model outputs the correct option label(s). We report per-task exact match (EM; all predicted labels must equal the gold set) and an instance-level (example-based) macro F1: for each instance we compute precision, recall, and F1 on the predicted and gold option-label sets, and then average across instances, so every question contributes equally regardless of how many labels it has. This choice keeps F1 on the same per-instance footing as EM, avoids letting items with larger gold sets dominate a micro-pooled F1, and matches the `average=‘samples’` convention for multi-label classification. Task-level scores are the average over instances within that task, and Overall scores are the instance-count-weighted average across tasks.

SFT protocol. For the K12-Train experiment, we compare against eight general-purpose instruction tuning datasets: OpenHermes-2.5 [22], Infinity-Instruct [13], UltraChat [4], WizardLM_evol_instruct_V2_196k [17], DataFlow-10K-Instruct [14], LMSYS [30], SmolTalk [1], and Tulu-3-SFT [11]. To ensure a fair comparison,

Table 3 GaokaoBench scores after SFT on Qwen3-4B-Base and Llama3.1-8B-Base with 2,300 samples from each dataset. “Total” denotes the sum of per-subject scores; “Obj” / “Sub” are overall score rates across objective / subjective sub-portions. Within each base-model block, the best Overall score per column is highlighted in yellow, and the second-best in green.

Model	Eng.	Chi.	Sci.	Hum.	Phy.	Chem.	Bio.	His.	Geo.	Pol.	Overall		
			Math	Math							Total	Obj	Sub
Trained on Qwen3-4B-Base													
<i>Qwen3-4B-Base</i>	37.88	55.20	65.22	76.59	47.34	30.60	30.72	39.80	17.72	44.35	445.42	61.4%	19.9%
<i>Qwen3-4B-Instruct</i>	119.98	103.22	97.32	106.62	72.60	54.45	73.40	88.75	88.38	90.65	895.37	77.7%	77.3%
+ OpenHermes	125.04	114.28	117.87	123.75	69.96	69.85	80.11	87.65	86.18	92.15	966.84	79.9%	85.4%
+ Infinity	122.92	103.74	119.55	120.90	73.08	73.45	77.97	82.95	86.42	92.75	953.73	80.1%	82.4%
+ UltraChat	120.44	110.19	100.32	104.58	69.17	66.00	77.11	81.00	82.78	91.05	902.64	74.6%	79.8%
+ WizardLM	124.28	112.52	102.69	112.26	69.17	65.70	78.94	81.95	83.44	91.80	922.75	77.6%	80.6%
+ DataFlow	120.93	116.85	122.49	127.92	77.35	70.70	81.79	87.65	85.78	94.45	985.91	81.3%	87.1%
+ LMSYS	86.39	85.16	80.58	89.70	57.40	60.80	73.07	78.55	83.86	86.85	782.36	65.1%	68.9%
+ SmolTalk	119.72	111.69	117.93	124.92	77.09	68.75	79.07	85.05	85.18	94.20	963.60	78.9%	85.4%
+ Tulu	122.89	93.58	117.60	125.91	74.12	74.15	81.25	84.35	84.50	93.30	951.65	80.7%	81.4%
+ K12-Train (ours)	122.04	120.18	128.61	132.00	79.73	79.35	80.74	87.40	85.76	94.15	1009.96	81.8%	89.5%
Trained on Llama3.1-8B-Base													
<i>Llama3.1-8B-Base</i>	26.89	16.83	6.60	6.48	16.19	8.05	8.69	18.50	17.18	5.35	130.76	12.7%	9.0%
<i>Llama3.1-8B-Instruct</i>	14.49	28.52	58.35	57.90	40.94	23.85	33.14	52.05	43.92	51.35	404.50	33.0%	36.2%
+ OpenHermes	62.88	79.84	51.54	54.39	38.83	39.45	56.93	65.60	65.92	64.80	580.19	35.7%	62.4%
+ Infinity	67.50	79.75	48.57	52.38	37.38	41.40	53.13	67.05	61.12	65.05	573.33	37.1%	60.5%
+ UltraChat	72.97	83.17	52.02	56.31	32.54	52.40	56.87	64.20	58.24	63.50	592.23	37.3%	62.7%
+ WizardLM	89.76	79.78	51.24	52.26	33.59	46.60	54.36	66.40	55.58	63.50	593.08	39.2%	62.8%
+ DataFlow	62.46	86.82	47.97	50.91	33.18	40.45	57.29	70.20	67.60	68.15	585.03	32.6%	66.8%
+ LMSYS	60.36	40.16	34.32	43.56	24.20	28.70	36.90	48.25	48.22	37.95	402.62	29.1%	38.5%
+ SmolTalk	62.02	80.40	44.67	51.87	31.86	34.90	53.45	67.90	65.02	63.55	555.64	34.7%	60.8%
+ Tulu	74.73	74.53	56.58	60.15	36.76	40.05	55.53	63.40	62.68	62.55	586.97	38.8%	61.1%
+ K12-Train (ours)	76.17	93.39	52.02	60.45	34.63	48.85	59.61	69.80	67.62	62.95	625.49	41.0%	65.2%

we uniformly sample 2,300 examples from each baseline, approximately matching K12-Train’s 2,267-sample scale, and perform full-parameter SFT on two base models, Qwen3-4B-Base [25] and Llama3.1-8B-Base [6], both with identical hyperparameters across all configurations: learning rate 5×10^{-6} , cosine scheduler with 10% warmup, 3 epochs, per-device batch size 1 with gradient accumulation of 4, DeepSpeed ZeRO-3, and bf16 precision, implemented via LLaMA-Factory [31]. For each backbone, we additionally include two reference points that are not constrained to 2,300 samples: the untuned base and the corresponding official instruct version.

Evaluation axes. Fine-tuned models are evaluated on two open-ended educational benchmarks: **GaokaoBench** [29] and **EduEval** [18]. For GaokaoBench, we follow the official evaluation protocol for both objective and subjective questions, using string-matching against the reference answers. For EduEval, we report a subset of 18 tasks covering five capability dimensions (Application, Ethics, Memory, Reasoning, and Understanding). As EduEval employs heterogeneous evaluation protocols across tasks, we restrict to those with standardized, officially supported scoring to ensure comparability.

5.2 Benchmarking LLMs on K12-Bench

Table 2 presents per-task and overall results across all five K12-Bench task families. In addition to model results, we report a simple *Random guess* baseline, which samples uniformly from the 15 non-empty label subsets of $\{A, B, C, D\}$. This baseline provides a lower reference for purely random guessing on multi-select items; formal EM/F1 definitions and the expectation formulas are in Appendix B.5.

Table 4 EduEval scores after SFT on Qwen3-4B-Base and Llama3.1-8B-Base, organized by capability dimension (18 sub-tasks). Within each base-model block, the best Avg is highlighted in yellow, and the second-best in green.

Model	Application					Ethics				Memory			Reasoning			Understanding			Avg.
	CDC	ES	JPS	PPS	SPS	EEJ	JES	PM	SES	JKR	PFR	SCR	JR	PR	SR	JU	PU	SU	
Trained on Qwen3-4B-Base																			
Qwen3-4B-Base	15.7	25.6	35.2	33.0	32.2	41.0	44.0	42.4	39.4	34.0	35.6	51.4	33.2	29.8	34.4	34.1	28.9	42.9	34.51
Qwen3-4B-Instruct	19.2	90.1	74.0	58.0	63.0	65.8	72.4	67.6	64.6	63.5	73.8	75.8	75.4	54.8	70.0	78.4	78.3	78.6	66.30
+ OpenHermes	14.8	89.8	74.6	59.8	61.4	65.0	70.8	68.8	68.2	63.0	70.4	75.8	76.2	56.4	69.8	78.5	77.4	80.1	66.01
+ Infinity	15.9	91.3	73.4	56.4	62.6	66.6	72.2	67.2	68.4	62.5	72.0	77.4	79.0	56.4	71.4	76.8	76.1	79.3	66.04
+ UltraChat	16.4	92.0	74.4	52.2	59.2	64.8	74.2	70.0	67.6	64.0	71.4	80.4	74.8	52.4	68.4	76.4	76.2	79.6	65.44
+ WizardLM	16.4	91.1	74.8	59.6	64.4	69.2	74.8	71.6	71.4	66.8	70.2	78.2	75.0	52.0	70.0	76.6	76.1	80.9	66.70
+ DataFlow	13.7	92.1	72.2	57.2	61.0	67.6	74.8	72.0	70.4	66.8	69.6	74.2	76.6	51.4	67.6	77.2	78.1	77.8	65.57
+ LMSYS	14.2	50.2	72.0	57.0	64.4	68.8	72.8	70.4	69.0	63.5	71.0	75.4	75.0	53.8	67.4	73.4	76.5	77.0	64.68
+ SmolTalk	14.6	92.7	73.4	58.8	65.4	69.0	74.8	70.4	70.6	63.7	71.4	76.0	76.0	52.6	67.6	75.1	77.6	80.0	66.10
+ Tulu	15.8	93.2	75.4	59.0	64.2	69.2	74.0	70.8	69.4	63.0	71.0	79.0	75.6	52.8	67.0	76.2	77.2	79.5	66.27
+ K12-Train (ours)	16.2	93.1	74.4	59.6	60.2	71.8	77.0	73.6	71.6	69.2	70.6	78.4	72.6	57.8	68.2	74.8	77.8	79.0	66.76
Trained on Llama3.1-8B-Base																			
Llama3.1-8B-Base	10.7	55.8	24.6	13.2	21.4	25.4	26.4	26.0	23.4	15.2	25.2	40.0	11.2	12.0	19.6	25.0	10.2	21.9	20.98
Llama3.1-8B-Instruct	10.7	83.4	22.6	26.8	25.8	34.0	32.8	34.0	35.6	33.2	22.2	24.4	27.4	26.6	24.0	28.1	31.5	28.4	27.31
+ OpenHermes	12.7	80.7	42.4	27.8	34.4	55.6	58.6	60.0	60.6	34.8	34.4	37.8	40.8	29.0	38.4	39.1	43.7	41.3	40.05
+ Infinity	16.0	89.6	38.8	23.0	32.0	49.4	56.2	52.8	57.2	27.3	40.2	41.2	38.4	29.0	38.4	37.1	32.3	41.3	37.33
+ UltraChat	12.9	89.1	34.8	36.8	25.6	61.6	34.6	33.2	34.6	25.5	33.4	22.8	24.8	27.6	26.8	39.9	34.0	30.8	31.87
+ WizardLM	16.4	88.6	41.8	21.8	33.0	56.6	62.6	61.2	63.8	25.8	36.0	39.6	39.4	26.2	33.0	39.8	32.6	38.7	38.58
+ DataFlow	9.6	80.4	33.0	25.8	28.4	49.4	48.4	57.2	53.6	34.0	31.0	29.0	35.6	30.6	29.8	31.9	37.1	33.8	34.53
+ LMSYS	21.7	74.2	27.0	29.6	27.0	42.0	42.2	40.8	40.8	24.8	22.8	24.2	24.8	26.0	27.8	28.7	27.9	26.3	29.85
+ SmolTalk	12.3	60.7	37.0	28.8	29.6	60.4	66.0	64.8	65.8	35.8	34.2	40.6	29.2	28.8	30.6	33.0	36.6	36.4	37.64
+ Tulu	9.6	78.7	36.8	26.4	30.0	53.0	58.8	58.8	56.2	36.0	39.4	31.2	43.8	25.2	38.8	39.3	41.2	39.3	37.68
+ K12-Train (ours)	12.3	88.3	40.6	27.8	32.6	60.0	67.2	69.6	68.6	34.8	39.8	35.0	40.8	27.6	35.8	40.7	41.4	41.9	40.90

Findings. **(1) Even strong LLMs struggle with curriculum structure.** The best overall exact match is only 57.1% (Gemini-3-Flash); a strong open-source model (Gemma-4-31B-IT) reaches just 46.4%. In more than half the questions, models fail to identify the complete correct answer set. Overall F1 peaks at $\sim 73\%$, indicating systematic errors rather than isolated mistakes. Moreover, LLaMA-3-8B-Instruct (EM = 7.2%) is essentially indistinguishable from pure random guessing (EM = 6.7%), showing that smaller open-source models have no parametric knowledge of curriculum structure at all.

(2) Prerequisite and neighbor tasks are hardest. PREREQ and NEIGHBOR yield the lowest EM across almost every model, with EM below 35% even for Gemini-3-Flash on both tasks. These tasks require understanding directed and structural relationships between concepts, capabilities that current LLMs evidently lack.

(3) Ground and Evidence are relatively easier. Knowledge Grounding (GROUND) and Experiment Evidence Chain (EVIDENCE) achieve the highest F1 (above 75% on GROUND and above 72% on EVIDENCE for top models), likely because exercise–concept and experiment–concept associations are more explicitly discussed in pretraining corpora such as textbook solutions and lab handbooks.

5.3 K12-Train for Educational SFT

This subsection reports results for the SFT comparison described in §5.1, using a 2,300-sample matched budget across two base models (Qwen3-4B-Base and Llama3.1-8B-Base).

GaokaoBench. Table 3 reports per-subject scores, the summed total across ten subjects, and the objective/subjective score rates for both backbones. On Qwen3-4B-Base, K12-Train achieves the highest overall total (**1009.96**), improving over the strongest baseline DataFlow (985.91) by +24.1, while also reaching the best objective score rate (81.8%) and subjective score rate (89.5%). On Llama3.1-8B-Base, K12-Train again

obtains the highest total (**625.49**) and the best objective score rate (41.0%), outperforming the strongest baseline WizardLM (593.08) by +32.4. Curriculum-structured training thus transfers across distinct model families rather than being confined to a single backbone.

EduEval. Table 4 presents the 18 sub-task scores grouped into five capability dimensions (Application, Ethics, Memory, Reasoning, Understanding) for both backbones. On Qwen3-4B-Base, K12-Train achieves the best average score (**66.76**) among all 2,300-sample SFT configurations, surpassing the strongest baseline WizardLM (66.70) while delivering the strongest Ethics results overall. On Llama3.1-8B-Base, K12-Train again reaches the best average score (**40.90**), ahead of OpenHermes (40.05) by nearly one point, a non-trivial gap given identical training budget. Although the overall gains are smaller than on GaokaoBench, they remain consistent across both base models under the same 2,300-sample budget, demonstrating robust improvements across backbones.

Analysis: Why does K12-Train work? We hypothesize that the advantage of K12-Train stems from two properties of KG-guided synthesis. First, structural grounding: each QA pair encodes not just a fact but an explicit relationship (prerequisite, taxonomy, association, verification). Second, pedagogical coherence: because the KG mirrors the official curriculum, the training distribution aligns with what educational benchmarks implicitly assume. Consistent with this, K12-Train’s largest gains appear on open-ended GaokaoBench questions and on EduEval’s Ethics dimension (both of which demand structured reasoning rather than isolated recall) across both Qwen3-4B and Llama3.1-8B backbones.

A further piece of evidence comes from cross-subject transfer. Although K12-Train is synthesized exclusively from the mathematics, physics, chemistry, and biology subgraphs, SFT on K12-Train also attains the highest Chinese score (120.18, +3.33 over the strongest baseline DataFlow) and the best Humanities Math score (132.00, +4.08 over DataFlow), and matches the top tier on History, Geography, and Politics (Table 3). Since these subjects receive no in-domain supervision from K12-Train, the improvement cannot be attributed to content memorization and instead reflects the acquisition of a transferable, structurally-grounded answer style, supporting our claim that K12-Train teaches curriculum cognition itself.

6 Conclusion

We introduced K12-KGraph, a curriculum-aligned knowledge graph built from official Chinese K–12 textbooks, together with K12-Bench (for evaluating curriculum cognition) and K12-Train (for KG-guided SFT). Experiments show that (1) current LLMs lack robust curriculum cognition despite strong factual recall (46% EM for a strong open-source model on K12-Bench), and (2) KG-guided synthesis is remarkably sample-efficient: ~2,300 K12-Train examples outperform equally-sized subsets of eight mainstream SFT corpora on GaokaoBench and EduEval, pointing toward curriculum-aware educational AI beyond the Chinese K–12 setting.

References

- [1] Loubna Ben Allal, Anton Lozhkov, Elie Bakouch, Gabriel Martín Blázquez, Guilherme Penedo, Lewis Tunstall, Andrés Marafioti, Hynek Kydlíček, Agustín Piqueres Lajarín, Vaibhav Srivastav, et al. Smollm2: When smol goes big—data-centric training of a small language model. [arXiv preprint arXiv:2502.02737](#), 2025.
- [2] Hamed Babaei Giglou, Jennifer D’Souza, and Sören Auer. Llms4ol: Large language models for ontology learning. In *International semantic web conference*, pages 408–427. Springer, 2023.
- [3] Penghe Chen, Yu Lu, Vincent W Zheng, and Yang Pian. Prerequisite-driven deep knowledge tracing. In *2018 IEEE international conference on data mining (ICDM)*, pages 39–48. IEEE, 2018.
- [4] Ning Ding, Yulin Chen, Bokai Xu, Yujia Qin, Shengding Hu, Zhiyuan Liu, Maosong Sun, and Bowen Zhou. Enhancing chat language models by scaling high-quality instructional conversations. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 3029–3051, 2023.
- [5] Team Glm, Aohan Zeng, Bin Xu, Bowen Wang, Chenhui Zhang, Da Yin, Dan Zhang, Diego Rojas, Guanyu Feng, Hanlin Zhao, et al. Chatglm: A family of large language models from glm-130b to glm-4 all tools. [arXiv preprint arXiv:2406.12793](#), 2024.
- [6] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. [arXiv preprint arXiv:2407.21783](#), 2024.
- [7] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. [arXiv preprint arXiv:2407.21783](#), 2024.
- [8] Jinchang Hou, Chang Ao, Haihong Wu, Xiangtao Kong, Zhigang Zheng, Daijia Tang, Chengming Li, Xiping Hu, Ruifeng Xu, Shiwen Ni, et al. E-eval: A comprehensive chinese k-12 education evaluation benchmark for large language models. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 7753–7774, 2024.
- [9] Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu, Chuancheng Lv, Yikai Zhang, Yao Fu, et al. C-eval: A multi-level multi-discipline chinese evaluation suite for foundation models. *Advances in neural information processing systems*, 36:62991–63010, 2023.
- [10] Enkelejda Kasneci, Kathrin Sekler, Stefan Küchemann, Maria Bannert, Daryna Dementieva, Frank Fischer, Urs Gasser, Georg Groh, Stephan Günnemann, Eyke Hüllermeier, et al. Chatgpt for good? on opportunities and challenges of large language models for education. *Learning and individual differences*, 103:102274, 2023.
- [11] Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James V Miranda, Alisa Liu, Nouha Dziri, Shane Lyu, et al. Tulu 3: Pushing frontiers in open language model post-training. [arXiv preprint arXiv:2411.15124](#), 2024.
- [12] Haonan Li, Yixuan Zhang, Fajri Koto, Yifei Yang, Hai Zhao, Yeyun Gong, Nan Duan, and Timothy Baldwin. Cmmlu: Measuring massive multitask language understanding in chinese. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 11260–11285, 2024.
- [13] Jijie Li, Li Du, Hanyu Zhao, Bo-wen Zhang, Liangdong Wang, Boyan Gao, Guang Liu, and Yonghua Lin. Infinity instruct: Scaling instruction selection and synthesis to enhance language models. [arXiv preprint arXiv:2506.11116](#), 2025.
- [14] Hao Liang, Xiaochen Ma, Zhou Liu, Zhen Hao Wong, Zhengyang Zhao, Zimo Meng, Runming He, Chengyu Shen, Qifeng Cai, Zhaoyang Han, et al. Dataflow: An llm-driven framework for unified data preparation and workflow automation in the era of data-centric ai. [arXiv preprint arXiv:2512.16676](#), 2025.
- [15] Alexander H Liu, Kartik Khandelwal, Sandeep Subramanian, Victor Jouault, Abhinav Rastogi, Adrien Sadé, Alan Jeffares, Albert Jiang, Alexandre Cahill, Alexandre Gavaudan, et al. Ministral 3. [arXiv preprint arXiv:2601.08584](#), 2026.
- [16] Qi Liu, Zhenya Huang, Yu Yin, Enhong Chen, Hui Xiong, Yu Su, and Guoping Hu. Ekt: Exercise-aware knowledge tracing for student performance prediction. *IEEE Transactions on Knowledge and Data Engineering*, 33(1):100–115, 2019.

- [17] Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. Wizardcoder: Empowering code large language models with evol-instruct. [arXiv preprint arXiv:2306.08568](#), 2023.
- [18] Guoqing Ma, Jia Zhu, Hanghui Guo, Weijie Shi, Yue Cui, Jiawei Shen, Zilong Li, and Yidan Liang. Edueval: A hierarchical cognitive benchmark for evaluating large language models in chinese education. [arXiv preprint arXiv:2512.00290](#), 2025.
- [19] Junbo Niu, Zheng Liu, Zhuangcheng Gu, Bin Wang, Linke Ouyang, Zhiyuan Zhao, Tao Chu, Tianyao He, Fan Wu, Qintong Zhang, et al. Mineru2. 5: A decoupled vision-language model for efficient high-resolution document parsing. In [The 64th Annual Meeting of the Association for Computational Linguistics–Industry Track](#), 2025.
- [20] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. [Advances in neural information processing systems](#), 35:27730–27744, 2022.
- [21] Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, et al. Gemma: Open models based on gemini research and technology. [arXiv preprint arXiv:2403.08295](#), 2024.
- [22] Teknium. Openhermes 2.5: An open dataset of synthetic data for generalist llm assistants, 2023. URL <https://huggingface.co/datasets/teknium/OpenHermes-2.5>.
- [23] Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi. Self-instruct: Aligning language models with self-generated instructions. In [Proceedings of the 61st annual meeting of the association for computational linguistics \(volume 1: long papers\)](#), pages 13484–13508, 2023.
- [24] Xiang Wei, Xingyu Cui, Ning Cheng, Xiaobin Wang, Xin Zhang, Shen Huang, Pengjun Xie, Jinan Xu, Yufeng Chen, Meishan Zhang, et al. Chatie: Zero-shot information extraction via chatting with chatgpt. [arXiv preprint arXiv:2302.10205](#), 2023.
- [25] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. [arXiv preprint arXiv:2505.09388](#), 2025.
- [26] Yuqing Ye, Xuan Zhou, Zhifu Chen, Dandan Li, Hengnian Gu, Jin Peng Zhou, and Dongdai Zhou. K-12edubench: A benchmark for evaluating large language models’ knowledge, problem-solving, and educational goal cognition in k-12 education. In [Proceedings of the AAAI Conference on Artificial Intelligence](#), volume 40, pages 34459–34466, 2026.
- [27] Weihao You, Pengcheng Wang, Changlong Li, Zhilong Ji, and Jinfeng Bai. Ck12: a rounded k12 knowledge graph based benchmark for chinese holistic cognition evaluation. In [Proceedings of the AAAI Conference on Artificial Intelligence](#), volume 38, pages 19431–19439, 2024.
- [28] Peitian Zhang, Shitao Xiao, Zheng Liu, Zhicheng Dou, and Jian-Yun Nie. Retrieve anything to augment large language models. [arXiv preprint arXiv:2310.07554](#), 2023.
- [29] Xiaotian Zhang, Chunyang Li, Yi Zong, Zhengyu Ying, Liang He, and Xipeng Qiu. Evaluating the performance of large language models on gaokao benchmark. [arXiv preprint arXiv:2305.12474](#), 2023.
- [30] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Tianle Li, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zhuohan Li, Zi Lin, Eric P Xing, et al. Lmsys-chat-1m: A large-scale real-world llm conversation dataset. [arXiv preprint arXiv:2309.11998](#), 2023.
- [31] Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, and Zheyang Luo. Llamafactory: Unified efficient fine-tuning of 100+ language models. In [Proceedings of the 62nd annual meeting of the association for computational linguistics \(volume 3: system demonstrations\)](#), pages 400–410, 2024.

Table 5 K12-KGraph schema: seven node types and nine edge types with allowed source→target connections.

Category	Type	Description
Nodes	Book	Textbook entity (subject, grade, publisher)
	Chapter	Chapter with title and ordering
	Section	Section with title and ordering
	Concept(Cpt)	Core knowledge concept with definition
	Skill(Skl)	Transferable method or technique
	Experiment(Exp)	Laboratory experiment with instruments
	Exercise(Exe)	Practice problem with stem and answer
Edges	is_a	Taxonomic subsumption (Concept→Concept)
	prerequisites_for(prereq)	Learning dependency (Concept/Skill→Concept/Skill/Experiment)
	relates_to(rel_to)	Semantic association (Concept→Concept)
	verifies(verif)	Experimental validation (Experiment→Concept)
	tests_concept(tes_cpt)	Exercise assesses concept (Exercise→Concept)
	tests_skill(tes_skl)	Exercise assesses skill (Exercise→Skill)
	appears_in	Knowledge located in section (Concept/Skill/Experiment→Section)
	leads_to(lea_to)	Chapter-level necessary learning order (Chapter→Chapter)
	is_part_of	(Section→Chapter, Chapter→Book)

Table 6 Node-level attribute schema in K12-KGraph.

Node Type	Required Fields	Optional Fields	Constraints
Concept	id, name, definition, importance	examples, aliases, formula, unit	importance ∈ {understand, master, important}
Skill	id, name, description	examples	must be generalizable (not exercise-specific)
Experiment	id, name, instruments, is_student	process, phenomena, conclusion	is_student ∈ {0, 1}
Exercise	id, stem, answer, difficulty, type	analysis	difficulty ∈ [1, 5], must link to Concept/Skill

Appendix

A K12-KGraph Construction Details

A.1 Node and Edge Attribute Specification

Table 5 defines the high-level ontology of K12-KGraph (seven node types and nine edge types), and Table 6 summarizes the detailed attribute specifications for each node type.

Global Constraints. All node attributes must be explicitly supported by the source textbook content. Attributes should not introduce information beyond the provided text, and any extracted field must be verifiable from the corresponding source passage.

A.2 Source Documents and Preprocessing Setup

K12-KGraph is constructed from official textbook PDFs from the People’s Education Press (PEP) curriculum, covering mathematics, physics, chemistry, and biology across primary, middle, and high school levels. The source files are obtained from public repository¹.

For document preprocessing, we directly adopt the official MinerU pipeline and recommended settings to convert PDFs into structured text. We use the provided CLI interface and default configuration without introducing any custom parsing rules or modifications.

¹<https://github.com/TapXWorld/ChinaTextbook>

SINGLE-TURN USER PROMPT FOR K12-KGRAPH EXTRACTION

You are a knowledge graph expert proficient in K–12 textbook research and development, skilled at extracting structured knowledge from textbook texts.

Your task is to: read the provided **textbook section text**, extract nodes and edges according to the specified **Schema Definition**, and output the JSON result.

Requirements:

- This task **primarily focuses on building concepts/skills and the relationships between them**. Exercises are optional or only a few are required; quality over quantity is preferable.
- Extract the **truly important and clearly presented** concepts/methods from this section of the textbook. Do not create content or include trivial details.
- Skills should be **generalizable and applicable** within the subject, not specific problem-solving techniques used in a particular question.
- For each edge, if there are supporting sentences in the original textbook text, please provide the original text.

Output Format:

- Output only a single JSON object. Do not output any explanatory text, comments, or Markdown code block markers.

Input Text:

- **Textbook text:** {Section_Markdown_Content}

Now, please generate the knowledge graph JSON:

Figure 3 Simplified prompt template for KG extraction. The actual extraction prompt additionally includes the full graph schema definition and JSON output requirements.

A.3 Prompt for KG Extraction

A simplified version of the prompt template used for LLM-based knowledge graph extraction (Stage 3 of the pipeline) is demonstrated in Figure 3. The full prompt includes detailed schema definitions presented in Table 5 and Table 6. In the implementation, this template is sent as a single user message without a separate system prompt.

B K12-Bench Construction Details and Evaluation Protocol

B.1 Distractor Pool and Structural Sampling Rules

Overview. We construct distractors through a structured, graph-driven pipeline rather than generating them from an LLM from scratch. For each benchmark instance, the generator first derives the question and gold answer set from a target relation or graph query, and then samples distractors from a multi-layer pool of structurally relevant but non-gold nodes. The overall design follows a “near-to-far” principle: candidates are first drawn from graph-local neighborhoods and only expanded to broader curriculum contexts when necessary, ensuring both plausibility and difficulty without introducing semantically valid alternatives.

Distractor construction pipeline. For each instance, distractors are constructed in three stages:

1. **Candidate pooling:** multi-layer expansion from graph neighborhoods to broader curriculum-based pools;
2. **Rule-based filtering:** removal of gold answers, surface-form duplicates, and task-invalid candidates;
3. **Pedagogical filtering:** LLM-based filtering to discard weak, trivial, or controversial distractors.

Candidates are finally deduplicated and stably ordered before option sampling.

Candidate pool construction. Candidate pools are expanded in layers. Early layers consist of structurally proximate nodes, while later layers draw from broader curriculum scopes such as the same section, chapter, book, subject-stage, or subject. Each layer is only used when previous layers are insufficient, and candidates already selected in earlier layers are removed.

Graph distance is defined over the undirected union of `relates_to`, `is_a`, and `prerequisites_for`. Thus, references to 1-hop, 2-hop, or 3-hop neighborhoods correspond to distances in this combined structural graph rather than any single relation type. We also incorporate “sibling” structures induced by shared `is_a` parents or shared `prerequisites_for` targets, as such nodes are often pedagogically adjacent while remaining distinct from the correct answers.

In practice, this layered expansion yields an initial pool of approximately 8–20 raw candidates per instance prior to filtering, reducing the risk of brittle items with insufficient negative options.

Candidate ranking. Within each layer, candidates are ranked by semantic similarity using BAAI/bge-small-zh-v1.5 [28]. For each candidate, the final score averages (i) similarity between the candidate text and the finalized question text, and (ii) the maximum similarity between the candidate text and any gold answer. Node representations use the `name` field, while `Exercise` nodes preferentially use their `stem`. Candidates are sorted within each layer by descending similarity before subsequent filtering.

Task-specific sampling rules. The exact construction of candidate pools varies by task family:

- **Ground (exercise → concept/skill):** Distractors are seeded from the 2-hop neighborhoods of the correct answers and expanded to same-section, same-chapter, same-book, subject-stage, and subject-level pools with the same node type.
- **Ground (concept/skill → exercise):** The first layer consists of exercises attached to the 2-hop structural neighborhood of the query node, followed by broader curriculum-based expansions.
- **Prereq:** Candidate pools are asymmetric by design. For prerequisite queries, early layers emphasize forward descendants of the query node and the boundary of the gold prerequisite closure. For successor queries, early layers emphasize the full prerequisite closure and deeper descendants beyond the direct gold successors.
- **Neighbor:** The answer set consists only of direct `relates_to` and `is_a` neighbors. Distractors are drawn from the immediately outer ring, primarily 2-hop concept nodes and broader same-location concept pools.
- **Evidence:** First-layer distractors are constructed from structurally nearby concepts or experiments within the 2-hop neighborhood of the query or answer node, and then expanded through the same section/chapter/book/stage/subject hierarchy.
- **Locate:** For “first appearance” questions, distractors are drawn from alternative locations where the queried node appears and expanded to nearby sections or chapters. For chapter-level `leads_to` tasks, the first layer contains nearby earlier chapters relative to both the query and gold prerequisite chapters, with fallback to broader chapter pools when necessary.

Final filtering. In addition to removing gold answers and name-level duplicates, task-specific rule filters exclude candidates that are too closely related to the gold set under the intended task semantics (e.g., nodes reachable via short alternative paths or still acceptable under a looser interpretation). The remaining candidates are then passed to the pedagogical filter described in the next subsection, ensuring that final distractors are both challenging and unambiguously incorrect.

PROMPT FOR FILTERING K12-BENCH CANDIDATE DISTRACTORS

System Prompt:

You are an experienced K–12 teacher.

Your task is to judge whether a candidate option is a **valid distractor** for a multiple-choice question.

Criteria.

A valid distractor must satisfy all of the following:

- It is **incorrect** given the question and the gold answers.
- It is **plausible** and relevant (not obviously unrelated).
- It is **not partially correct**, not ambiguous, and would not be accepted as correct by a careful teacher.

Instruction.

- Be conservative: if a candidate could be considered correct under any reasonable interpretation, mark it as invalid.

Output format.

- Output exactly one label: **VALID** or **INVALID**.

User Prompt:

- **Question:** {question}
- **Gold answers:** {gold_answers}
- **Candidate option:** {candidate}

Is this a valid distractor?

Figure 4 Prompt for judging whether a candidate option can serve as a distractor. The system prompt defines the teacher-style judgment criteria, and the user prompt supplies the question, the gold answer set, and the candidate option to be checked.

B.2 Prompt for Pedagogical Filtering

To ensure that distractors are pedagogically valid and unambiguously incorrect, we apply an LLM-based filtering step after rule-based candidate pruning. The goal of this step is not to improve semantic similarity, but to remove candidates that are either trivially implausible or potentially acceptable as correct answers under a reasonable educational interpretation.

Each candidate is evaluated independently, given the question and the gold answer set. The model is instructed to act as a conservative K–12 teacher and determine whether the candidate is a valid distractor, as shown in Figure 4.

Candidates labeled as **INVALID** are removed from the pool. Only candidates labeled as **VALID** are retained for final option sampling.

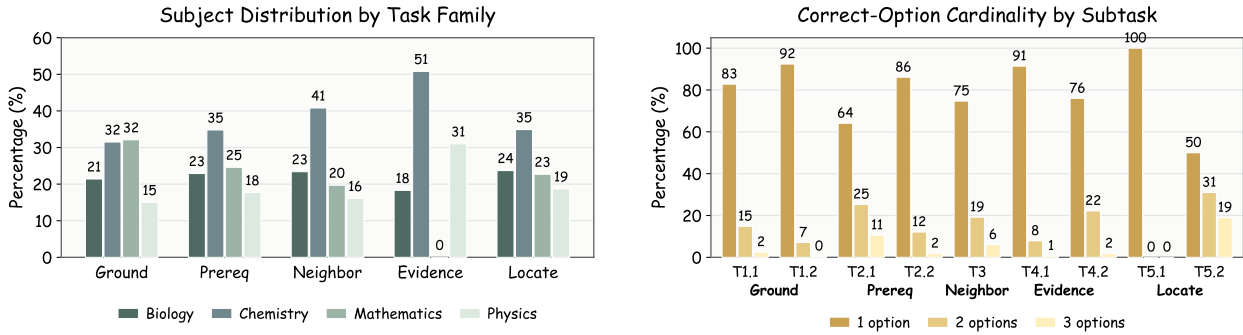
B.3 Benchmark Composition Statistics

Table 7 reports the per-subtask sample counts and the graph relation probed by each subtask, complementing the high-level statistics quoted in the main text (§4.1).

Figure 5 summarizes two additional aspects of K12-Bench: (i) subject distribution across task families, and (ii) answer cardinality, i.e., the number of correct options per subtask. These properties are important for interpreting benchmark performance, as exact-match accuracy depends not only on reasoning difficulty but also on the structure of the answer space.

Table 7 K12-Bench statistics. All tasks use multi-select format with four options.

Task	Subtask	#Samples	Probed Relation
GROUND (Knowledge Grounding)	Subtask 1	1,754	Exercise $\rightarrow$ Concept/Skill
	Subtask 2	2,096	Concept/Skill $\rightarrow$ Exercise
PREREQ (Prerequisite Reasoning)	Subtask 1	2,565	Prerequisite closure
	Subtask 2	2,852	Direct successors
NEIGHBOR (Neighbor Recommendation)	–	4,358	is_a + relates_to
EVIDENCE (Experiment Evidence)	Subtask 1	769	Concept $\rightarrow$ Experiment
	Subtask 2	622	Experiment $\rightarrow$ Concept
LOCATE (Cross-Chapter Indexing)	Subtask 1	8,456	First appearance location
	Subtask 2	168	Chapter prerequisites (leads_to)
Total		23,640	

**Figure 5 Benchmark composition statistics for K12-Bench.** The left panel shows subject distribution across task families, and the right panel shows distribution of the number of correct options per subtask.

The left panel shows that subject coverage is broadly balanced across task families. For most tasks, items are evenly distributed across biology, chemistry, mathematics, and physics, without a clear bias towards any single subject. EVIDENCE exhibits a different pattern: it draws primarily from chemistry, biology, and physics, and contains no mathematics items. This is a direct consequence of the graph schema, as mathematics does not include **Experiment** nodes and therefore cannot instantiate **verifies**-based queries. Overall, the subject distribution reflects the underlying curriculum structure rather than sampling artifacts.

The right panel shows that single-answer items dominate several task families, especially LOCATE. This pattern is largely induced by the semantics of the underlying graph queries. Many queries are structurally single-answer: for example, “first appearance” in LOCATE typically corresponds to a unique earliest location, and tightly constrained relation queries often yield a single valid node in the merged graph. More generally, a substantial portion of K12-Bench is derived from relations whose gold sets are inherently small, leading to a natural skew toward single-answer instances.

At the same time, the final option construction stage explicitly enforces balance over both answer cardinality and label combinations. The number of retained correct options per item is selected from the feasible set under a balancing constraint over $k \in \{1, 2, 3\}$, and the corresponding label combination (e.g., A, A,B, B,C,D) is assigned through a separate balancing procedure before populating slots A–D. As a result, while task families retain their intrinsic structural differences, the benchmark avoids systematic bias toward particular answer letters or specific label combinations.

PROMPT FOR ANSWERING K12-BENCH QUESTIONS

System Prompt:

You are a K-12 teaching expert.

Please output the **set of correct option letters** according to the requirements of the question, and you must strictly adhere to the following format:

- Only uppercase letters A/B/C/D are allowed;
- Output example: "A" or "A,C";
- Multiple letters must be arranged in ascending alphabetical order;
- Only English commas are allowed for separation; spaces are not permitted;
- **No explanations, analyses, prefixes, suffixes, punctuation, or line breaks are allowed.**

Each question may have one or more correct options.

No points will be awarded for incorrect, multiple, or missing selections.

User Prompt:

Question: {question}

A. {A}

B. {B}

C. {C}

D. {D}

Please provide the set of letters for the answer:

Figure 6 Prompt that instructs the model how to respond to K12-Bench questions. The system prompt enforces an answer-only output format, and the user prompt presents the question together with the four labeled candidate options.

B.4 Answering Prompt and Decoding Rules

All K12-Bench evaluations are run through the OpenAI-compatible chat interface. Each sample is formatted as a two-message conversation consisting of a fixed system prompt and a user prompt instantiated from the benchmark item. The combined prompt is shown in Figure 6. The system prompt constrains the model to answer using only option labels, while the user prompt presents the question stem and the four candidate options.

Across all released model configurations in `eval/configs/models/`, we use deterministic decoding with `temperature = 0.0`, `top_p = 1.0`, and `max_tokens = 32`.

Model responses are post-processed by a lightweight parser to extract predicted label sets. Both the raw model output and the parsed prediction are retained: the former is stored verbatim, while the latter is normalized (uppercased, deduplicated, and sorted) and used for evaluation.

The parser performs minimal normalization (e.g., unifying common delimiter variants) and extracts labels from the model output without attempting semantic repair. For abnormal cases (e.g., empty responses or API failures), instances are flagged and re-evaluated via automatic retries until a valid response is obtained.

B.5 Baseline EM/F1 Computation for the Random Predictor

For completeness, we formalize how exact match (EM) and option-label F1 are computed for the simple random baseline on K12-Bench. Let the gold label set for an instance be $G \subseteq \{A, B, C, D\}$ and the predicted

label set be $\hat{G}$. Denote $k = |G|$ and $m = |\hat{G}|$. Per-instance scores are defined as

$$\text{EM}(G, \hat{G}) = \mathbf{1}[G = \hat{G}], \quad (1)$$

$$P(G, \hat{G}) = \frac{|G \cap \hat{G}|}{|\hat{G}|}, \quad (2)$$

$$R(G, \hat{G}) = \frac{|G \cap \hat{G}|}{|G|}, \quad (3)$$

$$\text{F1}(G, \hat{G}) = \frac{2P(G, \hat{G})R(G, \hat{G})}{P(G, \hat{G}) + R(G, \hat{G})}, \quad (4)$$

with $\text{F1}(G, \hat{G}) = 0$ when both precision and recall are zero.

Aggregation: instance-level (example-based) macro F1. To form a task- or benchmark-level F1, we average per-instance F1 across instances rather than pooling intersection/union counts:

$$\text{F1}_{\text{task}} = \frac{1}{N_{\text{task}}} \sum_{i=1}^{N_{\text{task}}} \text{F1}(G_i, \hat{G}_i), \quad (5)$$

and overall scores are obtained by weighting task-level averages by the task’s instance count. This is the instance-level (example-based) macro F1, equivalent to scikit-learn’s `average=‘samples’` convention for multi-label classification; every instance contributes equal weight regardless of its gold cardinality. We prefer this aggregation over a micro (corpus-pooled) F1 for two reasons: (i) it keeps F1 on the same per-instance footing as EM, so EM and F1 numbers in the same row are directly comparable; and (ii) micro-pooling would implicitly up-weight items with more correct labels, mixing difficulty with cardinality in an undesirable way for an evaluation aimed at curriculum cognition rather than label frequency.

For a random predictor, the baseline score is the expected EM or F1 under the corresponding sampling rule. Equivalently, one may view the baseline as repeatedly sampling predictions and averaging the resulting scores over infinitely many trials.

Random guess. This baseline samples $\hat{G}$ uniformly from the 15 non-empty subsets of $\{A, B, C, D\}$. For a fixed gold set G , the expected score is

$$\mathbb{E}[\text{EM} \mid G] = \frac{1}{15}, \quad (6)$$

$$\mathbb{E}[\text{F1} \mid G] = \frac{1}{15} \sum_{\emptyset \neq S \subseteq \{A, B, C, D\}} \text{F1}(G, S). \quad (7)$$

Because the label positions are symmetrically balanced, these expectations depend only on the gold cardinality $k = |G|$, not on the specific letters in G .

B.6 Illustrative Example of KG-Grounded Resource Derivation

Figure 2 in the main text provides a concrete instantiation of the K12-KGraph-based construction pipeline. Both K12-Bench and K12-Train are generated by first selecting a target relation and extracting the corresponding local subgraph, followed by task-specific instantiation under structural constraints. The benchmark version preserves the original graph query form for evaluation, while the training version reformulates the same structure into instruction–response pairs for supervision.

C K12-Train Construction Details and SFT Protocol

C.1 Prompt for QA Synthesis

We use separate prompt templates for node-level and edge-level QA generation. As shown in Figure 7 and Figure 8, node-level prompts instruct the LLM to generate questions targeting the node’s key attributes, while

Table 8 Full SFT training configuration used across all experiments.

Component	Setting
Backbones	Qwen3-4B-Base; Llama3.1-8B-Base
Framework	LLaMA-Factory (v0.9.5.dev0)
SFT Type	Full-parameter fine-tuning
Max Sequence Length	32768
Per-device Batch Size	1
Gradient Accumulation	4
Effective Batch Size	32 ($1 \times 4 \times 8$ GPUs)
Optimizer	AdamW
Learning Rate	5×10^{-6}
Scheduler	Cosine decay
Warmup	10% steps
Epochs	3
Precision	bf16
Distributed Training	DeepSpeed ZeRO-3
Random Seed	42
Checkpoint Selection	Last checkpoint
Hardware	8×A100 (80GB)
Training Time	~0.4–1.7 hours per run

edge-level prompts instruct the LLM to generate questions that require reasoning about the relationship. In the implementation, this template is sent as a single user message without a separate system prompt.

All prompts include style constraints: answers should be grade-appropriate in language, logically rigorous, and strictly grounded in the graph data. Before prompting, each node’s property set is cropped to only the fields relevant for the target QA type (e.g., **importance** is removed for Concept QAs to prevent meta-commentary leakage).

C.2 Training Configuration

Table 8 provides the full training configuration for all SFT experiments. All models share an identical set of hyperparameters for fair comparison. Hyperparameters not explicitly listed follow the default settings of the training framework.

C.3 Baseline Subsampling and Fairness Controls

To ensure a fair comparison under a fixed data budget, we subsample 2,300 instances from each baseline dataset, matching the size of K12-Train.

Importantly, when metadata (e.g., source tags, task types, or length categories) is available, we perform stratified sampling to preserve the original distribution of these attributes. This ensures that the subsampled data remains representative of the full dataset rather than being biased toward a particular subset.

Our goal is to isolate the effect of data quality and structural grounding under a controlled budget, rather than total data scale. Using a fixed-size and distribution-preserving sampling strategy allows us to attribute performance differences to dataset characteristics rather than volume or sampling artifacts.

We further verify that different random samples from the same dataset yield similar performance trends in pilot experiments, suggesting that our conclusions are not sensitive to a particular subset.

D Validation and Quality Assurance

D.1 Validation Strategy, Annotator Background, and Ethics

To ensure the reliability of K12-KGraph and its downstream resources, we adopt a tiered validation strategy centered on the knowledge graph (KG), which serves as the foundation for both K12-Bench and K12-Train.

The KG receives the most intensive validation, combining automatic structural checks with full human verification. In contrast, K12-Bench and K12-Train are validated via targeted manual spot-checks rather than full re-annotation. This difference is motivated by how these resources are constructed. K12-Bench instances (including both answers and distractors) are deterministically derived from graph structure rather than generated by LLMs, making their correctness largely reducible to the correctness of the underlying KG. K12-Train, as a supervision dataset, does not require perfect instance-level accuracy: minor imperfections are tolerable as long as the data remains factually grounded and pedagogically useful. Therefore, verifying consistency with the validated KG is sufficient for both resources.

All human validation is conducted by domain-qualified annotators. Since K12-KGraph covers four core disciplines (mathematics, physics, chemistry, and biology), we recruit subject specialists accordingly, with three annotators per subject (12 in total). Annotators are experienced K–12 education practitioners, collectively covering primary, middle, and high school levels, ensuring reliable assessment of both fine-grained concepts and cross-stage curriculum relations.

Annotators are compensated at rates that meet or exceed the local minimum wage, in accordance with standard academic annotation practices. All data are derived from public educational materials and do not involve sensitive personal information.

D.2 KG Validation: Structural Checks and Human Verification

Automatic structural checks. We first perform automatic consistency checks on the `is_a` and `prerequisites_for` subgraphs, both expected to be directed acyclic graphs (DAGs). Cycles and structural inconsistencies are detected after graph construction and merging.

Detected conflicts are then reviewed by subject annotators, who determine whether to remove, modify, or retain edges based on curriculum correctness. In cases of ambiguity, decisions are made through discussion among annotators to ensure consistency with standard curriculum progression.

Human verification. After resolving structural conflicts, we conduct full human validation over the entire graph. Each node and edge is independently annotated by three annotators within the same subject area. Disagreements are identified and resolved through joint review, leading to a consensus decision (retain, modify, or remove). The consensus label is taken as final.

To quantify annotation reliability, we report inter-annotator agreement (IAA) before adjudication (Table 9). Agreement tends to be higher for structurally explicit relations (e.g., `is_a`) and lower for semantically nuanced ones (e.g., `relates_to`). After adjudication, the final graph achieves high precision.

D.3 Spot-Check Validation of K12-Bench and K12-Train

We validate K12-Bench and K12-Train via stratified manual sampling.

For K12-Bench, we perform stratified sampling across task families, subjects, and grade levels, and manually review 15% instances in total. Each instance is checked for consistency between the question text, gold answer set, and distractor options with respect to the underlying graph structure. We find that 98.4% of sampled instances are fully correct, while the remaining cases primarily involve minor issues such as phrasing ambiguity or borderline distractor quality, rather than semantic errors.

For K12-Train, we sample 10% QA pairs from different construction categories (e.g., node-grounded and relation-grounded) and evaluate factual consistency, pedagogical appropriateness, and linguistic clarity. Among the sampled instances, 96.9% are judged to be fully correct, with most errors attributable to surface-level issues rather than factual inconsistencies.

Table 9 Inter-annotator agreement (IAA) before adjudication, measured by Fleiss’ κ , across subjects and node/edge types.

Group	Category	Math	Physics	Chemistry	Biology	Overall
Node	Concept	0.84	0.86	0.85	0.83	0.85
	Skill	0.81	0.83	0.82	0.80	0.82
	Experiment	–	0.85	0.84	0.83	0.84
	Exercise	0.78	0.80	0.79	0.77	0.79
Edge	is_a	0.90	0.92	0.91	0.89	0.91
	prerequisites_for	0.85	0.87	0.86	0.84	0.86
	relates_to	0.68	0.70	0.69	0.67	0.69
	verifies	–	0.82	0.83	0.81	0.82
	tests_concept/skill	0.79	0.81	0.80	0.78	0.80
Overall	–	0.83	0.85	0.84	0.82	0.84

Table 10 Per-subtask K12-Bench results, reported in %. EM = exact match; F1 is computed at the option-label level.

Model	GROUND_1		GROUND_2		PREREQ_1		PREREQ_2		NEIGHBOR		EVIDENCE_1		EVIDENCE_2		LOCATE_1		LOCATE_2	
	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1
Open Source Models																		
<i>Meta-LLaMA-3-8B-Instruct</i>	9.1	58.0	3.8	52.3	6.4	50.5	2.5	45.6	3.8	53.4	4.3	55.7	6.3	54.9	11.5	53.9	6.5	48.8
<i>GLM-4.7-Flash</i>	43.0	74.1	30.8	68.3	12.2	59.1	14.4	54.3	15.2	59.6	46.3	75.9	30.5	68.9	48.9	66.3	13.1	60.3
<i>Ministral-3-14B-Instruct</i>	40.8	74.7	44.9	75.5	17.2	61.0	19.5	57.9	14.5	59.8	47.3	77.6	27.2	67.8	59.3	72.2	19.0	58.1
<i>Qwen3-32B</i>	44.2	76.8	48.9	77.6	17.0	62.3	16.9	58.6	14.6	60.3	49.5	78.6	32.0	70.8	72.1	75.9	18.5	59.0
<i>Gemma-4-31B-IT</i>	45.7	76.8	54.8	80.9	20.3	63.6	35.4	61.7	15.0	60.7	50.1	78.0	34.9	68.8	73.4	73.5	19.0	62.0
Proprietary Models																		
<i>GPT-4o</i>	28.9	71.1	31.5	70.1	9.9	60.1	8.7	55.1	10.1	57.9	37.5	74.3	26.2	68.8	56.4	72.6	12.5	58.0
<i>GPT-5-mini</i>	29.0	70.8	31.6	70.0	10.5	60.1	9.4	55.4	12.5	59.0	38.4	74.8	26.2	69.2	56.4	73.1	10.1	58.6
<i>GPT-5.2</i>	43.9	76.4	56.6	81.5	13.5	60.9	21.9	58.3	13.1	60.0	46.9	77.7	34.9	69.1	71.2	71.7	17.3	61.7
<i>Gemini-2.5-Flash</i>	56.1	75.6	59.6	75.8	24.0	55.3	34.8	57.2	15.4	56.0	55.0	75.9	37.3	67.2	73.9	74.4	16.3	52.9
<i>Gemini-3-Flash</i>	42.5	75.5	80.9	89.9	26.6	56.1	42.1	60.1	33.4	63.5	55.9	76.7	36.8	67.1	82.7	82.9	33.9	67.6

Across both resources, most identified issues are minor (e.g., phrasing or distractor similarity) rather than semantic errors, confirming that the validated KG provides a reliable basis for both benchmark construction and QA synthesis.

E Extended Results and Sanity Checks

E.1 Full Benchmark Results

Table 10 and Table 11 provide fine-grained K12-Bench results omitted from the main text. Rather than repeating the task-family averages in Table 2, we report per-subtask and per-subject breakdowns, highlighting the sources of variation behind the aggregate results.

E.2 Stability Across Random Seeds

Although we do not conduct a full multi-seed evaluation on the entire benchmarks due to computational cost, we perform controlled multi-seed validation via stratified subsampling to assess robustness.

Specifically, for both GaokaoBench and EduEval, we randomly sample 20% of instances within each subtask to preserve the original task distribution. On this fixed subset, we repeat the SFT process with three different random seeds ($\{42, 123, 2026\}$) and evaluate the resulting models.

Table 12 reports the overall performance on these sampled evaluation sets. We observe only minor variation across seeds, indicating that the performance gains are stable and not driven by a particular random initialization.

Table 11 Per-subject K12-Bench results, reported in %. EM = exact match; F1 is instance-level (example-based) macro F1. This table complements Table 10 by showing how performance varies across curriculum domains.

Model	Biology		Chemistry		Mathematics		Physics		Overall	
	EM	F1	EM	F1	EM	F1	EM	F1	EM	F1
Open Source Models										
<i>Meta-LLaMA-3-8B-Instruct</i>	8.8	53.5	8.1	53.2	5.2	51.3	5.7	52.0	7.2	52.6
<i>GLM-4.7-Flash</i>	34.4	64.4	28.8	63.2	34.0	64.5	31.2	64.0	31.7	63.9
<i>Ministral-3-14B-Instruct</i>	39.9	68.3	35.2	66.9	38.9	67.5	37.2	67.2	37.5	67.4
<i>Qwen3-32B</i>	45.4	70.8	39.8	68.7	44.2	69.8	42.5	69.1	42.6	69.5
<i>Gemma-4-31B-IT</i>	48.9	70.2	44.1	69.0	47.8	69.9	46.3	69.0	46.4	69.5
Proprietary Models										
<i>GPT-4o</i>	33.2	67.2	29.2	65.2	31.9	65.9	31.3	65.6	31.1	65.9
<i>GPT-5-mini</i>	33.8	67.7	29.8	65.7	32.4	66.4	31.9	66.1	31.7	66.4
<i>GPT-5.2</i>	45.5	69.2	39.9	67.2	44.8	68.5	42.7	67.4	42.8	68.0
<i>Gemini-2.5-Flash</i>	51.3	68.0	45.0	65.8	50.8	67.1	48.0	66.3	48.3	66.7
<i>Gemini-3-Flash</i>	60.8	74.5	53.6	72.0	59.8	73.7	56.2	72.3	57.1	73.0

Table 12 Performance variation across random seeds ({42, 123, 2026}). Mean and standard deviation are computed over three runs on a 20% stratified subset.

Backbone	GaokaoBench	EduEval
<i>Qwen3-4B-Base</i>	1002.94 $\pm$ 6.37	66.83 $\pm$ 0.11
<i>Llama3.1-8B-Base</i>	621.18 $\pm$ 5.28	40.87 $\pm$ 0.23

These results suggest that performance differences between datasets are stable with respect to seed choice.

E.3 Overlap and Leakage Analysis

We analyze potential data contamination between K12-Train and the external evaluation benchmarks (GaokaoBench and EduEval).

Source independence. K12-Train is synthesized from K-12 textbook content, focusing on curriculum structure and concept relations. In contrast, GaokaoBench consists of standardized high-stakes examination questions, while EduEval is constructed independently with diverse evaluation objectives. These sources are institutionally and functionally distinct.

Content characteristics. K12-Train emphasizes concept definitions, procedural knowledge, and relation explanations grounded in textbook structure, whereas GaokaoBench and EduEval primarily assess problem-solving and applied reasoning. The difference in content form and objective further reduces the likelihood of overlap.

Empirical verification. We perform n-gram overlap analysis between K12-Train and the evaluation benchmarks and observe negligible lexical overlap. Manual inspection of sampled instances also reveals no duplicated or near-duplicated question-answer pairs.

Taken together, these observations indicate that K12-Train does not introduce measurable leakage into the evaluation benchmarks.

SINGLE-TURN PROMPT FOR NODE-LEVEL QA SYNTHESIS

You are a top K–12 education expert with 20 years of experience, skilled at transforming complex STEM textbook knowledge into highly logical and thought-provoking QA materials. Your task is to synthesize n high-quality SFT training datasets based on the provided Concept/Skill.

Input Data

- **name:** {name}
- **properties:** {properties_json}

Generation Strategy

1. General Constraints

- Each example must contain exactly **one question and one answer**.
- All content must be **strictly grounded in the input properties**; do not introduce external knowledge.
- Use aliases when appropriate to improve naturalness.

2. Concept-Oriented QA

- Questions should focus on:
 - definition (what it is),
 - key properties or formulas,
 - basic understanding.
- Answers must follow the structure:

$\backslash box\{\text{core definition}\} + \backslash box\{\text{core formula / key rule}\}$ (optional)

followed by:

- 1–2 sentences of explanation (optional),
- 1 illustrative example (optional).

3. Skill-Oriented QA

- Questions should focus on:
 - what the method is,
 - how to apply it (steps or procedure),
 - when to use it (applicable scenarios).
- Answers must follow the structure:

$\backslash box\{\text{method description or steps}\}$

followed by:

- brief explanation of usage or advantages (optional),
- 1 illustrative example (optional).

Style Requirements

- Language must be **clear, concise, and pedagogically appropriate**.
- Maintain a **formal and precise tone**, but avoid unnecessary complexity.
- Explanations should be accessible to K–12 students.

Figure 7 Node-level prompt for K12-Train QA synthesis. Given a Concept or Skill and its properties, the model is asked to generate factually grounded question–answer pairs for K–12 learners.

SINGLE-TURN PROMPT FOR EDGE-LEVEL QA SYNTHESIS

You are a top K–12 education expert with 20 years of experience, skilled at transforming complex STEM textbook knowledge into highly logical and thought-provoking QA materials.

Your task is to synthesize $\{n\}$ high-quality SFT training datasets based on the provided **edge relation** (`is_a`, `prerequisites_for`, `relates_to`, and `verifies`).

Input Data

- **source:** {source_name}
- **target:** {target_name}
- **properties:** {properties_json}

Generation Strategy

1. General Constraints

- Each example must contain exactly **one question and one answer**.
- All content must be **strictly grounded in the input properties**; do not introduce external knowledge.
- Questions must focus on explaining **why the edge holds**, rather than merely restating the two endpoint names.

2. Relation-Specific Prompting Goals

- **is_a:** ask why {source_name} belongs to or is part of {target_name}; answers should explain how the source satisfies the defining properties of the target.
- **prerequisites_for:** ask why one should learn {source_name} before {target_name}; answers should explain what knowledge or ability the source provides that supports later learning of the target.
- **relates_to:** ask what relationship holds between {source_name} and {target_name}; answers should clarify their connection, contrast, or shared properties.
- **verifies:** ask what principle is verified by {source_name}, or how {source_name} verifies {target_name}; answers should trace the path from experiment content and observations to the verified concept.

3. Preferred Answer Structures

- **is_a:** because {source definition}, {target definition}, and {source satisfies target definition}, therefore {source belongs to target}.
- **prerequisites_for:** because learning the target requires {specific knowledge/ability}, and the source provides this knowledge/ability, therefore the source should be learned first.
- **relates_to:** first state the concrete relationship between the two concepts, then briefly explain each side of the relation.
- **verifies:** from the experiment's setup, operation, or observed phenomenon, explain what result is seen and why that result supports the target concept.

Style Requirements

- Language must be **clear, concise, and pedagogically appropriate**.
- Maintain a **formal and precise tone**, but avoid unnecessary complexity.
- Explanations should be accessible to K–12 students.

Figure 8 Edge-level prompt for K12-Train QA synthesis. Given a typed relation and its endpoint nodes, the model is asked to generate factually grounded question–answer pairs for K–12 learners.