Подготовка файла merge.sh

```
rrm@smart:~$ cd devops-netology
rrm@smart:~/devops-netology$ ls
rrm@smart:~/devops-netology$ mkdir branching
rrm@smart:~/devops-netology$ ls
branching
rrm@smart:~/devops-netology$ cd branching
rrm@smart:~/devops-netology/branching$ vim merge.sh
rrm@smart:~/devops-netology/branching$ git commit -m 'prepare for merge and reba
se'
[main (root-commit) afd25f9] prepare for merge and rebase
 2 files changed, 16 insertions(+)
 create mode 100644 branching/merge.sh
 create mode 100644 branching/rebase.sh
rrm@smart:~/devops-netology/branching$ git status
On branch main
Your branch is based on 'origin/main', but the upstream is gone.
  (use "git branch --unset-upstream" to fixup)

nothing to commit, working tree clean
rrm@smart:~/devops-netology/branching$
```

Подготовка файла merge.sh

```
rrm@smart:~/devops-netology/branching$ git branch git-merge
rrm@smart:~/devops-netology/branching$ git branches
git: 'branches' is not a git command. See 'git --help'.
rrm@smart:~/devops-netology/branching$ git branch
  git-merge
* main
rrm@smart:~/devops-netology/branching$
```

далее для замены переключиться в git-merge

```
rrm@smart:~/devops-netology/branching$ git checkout git-merge
Switched to branch &apos;git-merge&apos;
rrm@smart:~/devops-netology/branching$ ls
merge.sh  rebase.sh
```

поменять на git merge
команда git checkout git-merge

```
On branch git-merge
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   merge.sh

no changes added to commit (use "git add" and/or "git commit -a")
rrm@smart:~/devops-netology/branching$ git add merge.sh
rrm@smart:~/devops-netology/branching$ git status
On branch git-merge
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   merge.sh

rrm@smart:~/devops-netology/branching$ merge: @ instead *
Command 'merge:' not found, did you mean:
  command 'merge' from deb rcs (5.10.1-1)
  command 'merger' from deb emboss (6.6.0+dfsg-11ubuntu1)
Try: sudo apt install <deb name>
rrm@smart:~/devops-netology/branching$ merge: @ instead *
```

rm@smart:~/devops-netology/branching$ git commit -m'merge: @ instead *'
[git-merge 99391ce] merge: @ instead *
 1 file changed, 9 insertions(+), 2 deletions(-)

отправить
rrm@smart:~/devops-netology/branching$ git push origin git-merge
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 12 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (8/8), 717 bytes | 717.00 KiB/s, done.
Total 8 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), done.
To github.com:Romanru5116/devops-netology.git
* [new branch]   git-merge -> git-merge

rrm@smart:~/devops-netology/branching$ vim merge.sh

git add merge.sh

git commit -m'merge: use shift'
git push origin git-merge

Изменим main

Шаг 1. Вернитесь в ветку main

git checkout main

Шаг 2. Предположим, что пока мы работали над веткой git-merge, кто-то изменил main. Для этого изменим содержимое файла rebase.sh

git add rebase.sh

git commit -m'rebasemain'
git push origin main

Подготовка файла rebase.sh

```
error: switch `m' requires a value
rrm@smart:~/devops-netology/branching$ git commit -m'rebasemain'
[main 54a9429] rebasemain
 1 file changed, 4 insertions(+), 2 deletions(-)
rrm@smart:~/devops-netology/branching$  git push --set-upstream origin main,
error: src refspec main, does not match any
error: failed to push some refs to 'github.com:Romanru5116/devops-netology.git'
rrm@smart:~/devops-netology/branching$ git remote -v
origin  git@github.com:Romanru5116/devops-netology.git (fetch)
```

Подготовка файла rebase.sh

Шаг 1. Предположим, что теперь другой участник нашей команды не сделал

Найти хэш 'prepare for merge and rebase':

git log --grep 'prepare for merge and rebase'

git checkout afd25f9db2970f30ebc3955d8e23c45a00a2cf56

результат: switching to 'afd25f9db2970f30ebc3955d8e23c45a00a2cf56

Шаг 2. Создадим ветку **git-rebase**, основываясь на текущем коммите

Новая ветка- создаем и переключаемся:

rrm@smart:~/devops-netology/branching$ git checkout -b git-rebase

Шаг 3. И изменим содержимое файла **rebase.sh** на следующее, тоже починив скрипт,

VIM rebase.sh

git add rebase.sh

`git commit -m 'git-rebase 1.1'`

Шаг 4. Отправим эти изменения в ветку git-rebase с комментарием git-rebase

```
git push origin git-rebase
```

Шаг5

```
 делаем git pull по совету giit checkout maint


меняем rebase:
vim rebase.sh
добавить на stage:
git add rebase.sh
.
делаем сам commit:
git commit -m 'git-rebase 2'
отправляем в ветку
git push origin git-rebase
```

Промежуточный итог

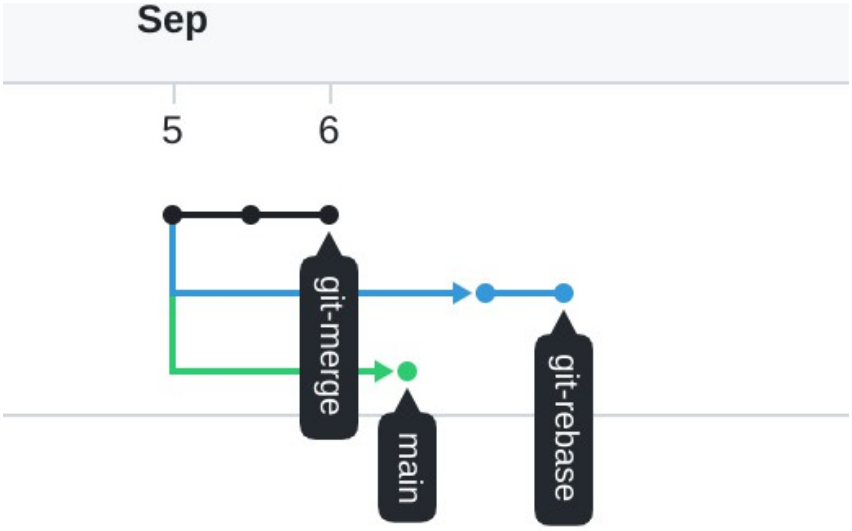

Merge

Шаг1

Перейти на main

 git checkout main

слить ветки:

git merge git-merge

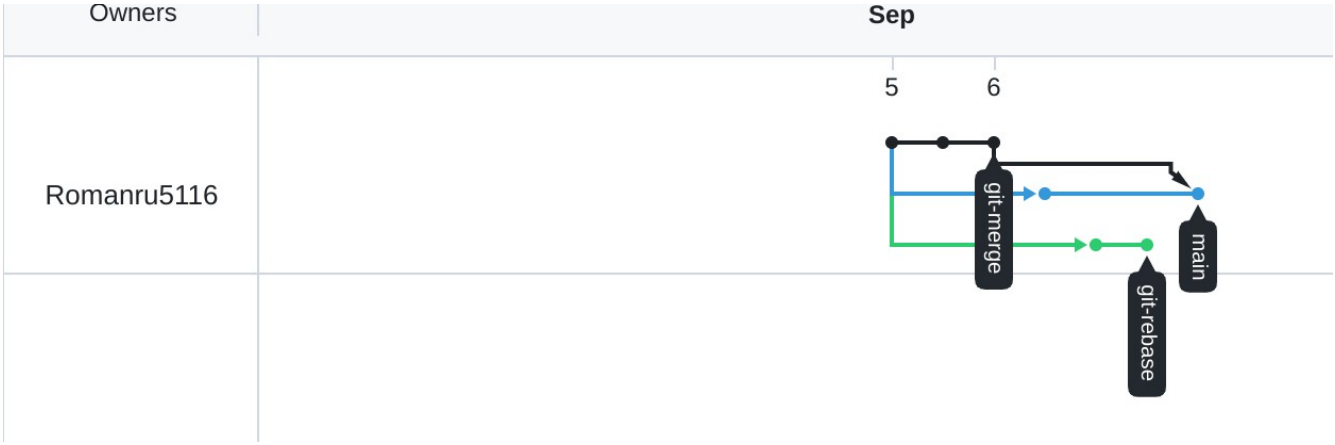

Rebase

Шаг 1. Перед мержем ветки **git-rebase** выполним её **rebase** на main

делаем: переход на ветку git checkout git-rebase

делаем: git rebase -i main

правим в vim сохраняем

видим конфликт cat rebase.sh

Шаг 3. Удалим метки

vim.rebase.sh

добавим на stage

git add rebase.sh

продолжим merge

git rebase --continue

запишем коммент, выход с сохранением из VIM: WQ

Шаг 7 ДЕЛАЕМ ПУШ

git push -u origin git-rebase

```
To github.com:Romanru5116/devops-netology.git
 ! [rejected]        git-rebase -> git-rebase (non-fast-forward)
error: failed to push some refs to 'github.com:Romanru5116/devops-netology.git'
hint: Updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. Integrate the remote changes (e.g.
hint: 'git pull ...') before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
```

ошибка:

Шаг8

заставляем делать

git push -u origin git-rebase -f

шаг9

git merge git-rebase

```
our branch is up to date with 'origin/main'.
rm@smart:~/devops-netology/branching$ git merge git-rebase
erge made by the 'ort' strategy.
branching/rebase.sh | 4 ++++
1 file changed, 4 insertions(+)
rm@smart:~/devops-netology/branching$
```