


Aula006: Rômulo Pardim, Ricardo Henrique

1- JavaScript

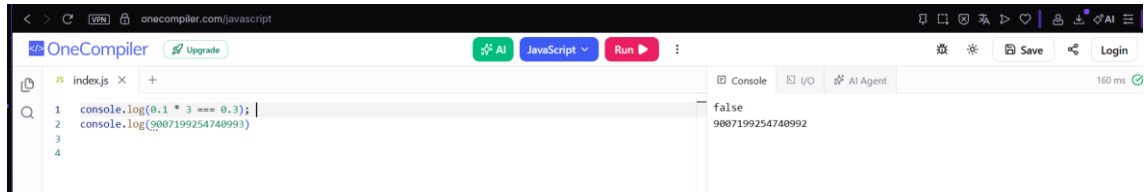

The screenshot shows the OneCompiler JavaScript editor. The code in the editor is:

```
1 console.log(0.1 * 3 === 0.3);  
2 console.log(9007199254740993);  
3  
4
```


The console output on the right shows:

```
false  
9007199254740992
```

The execution time is 160 ms.

Sem erro.

2- Python

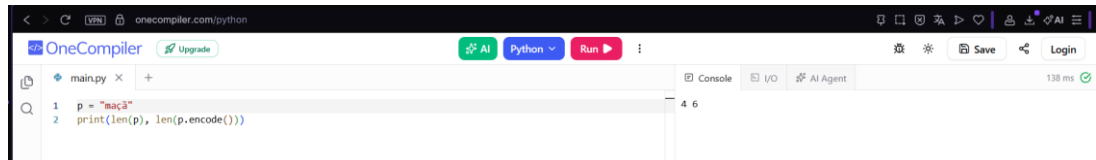

The screenshot shows the OneCompiler Python editor. The code in the editor is:

```
1 p = "maçã"  
2 print(len(p), len(p.encode()))
```


The console output on the right shows:

```
4 6
```

The execution time is 138 ms.

Sem erro.

3- Go

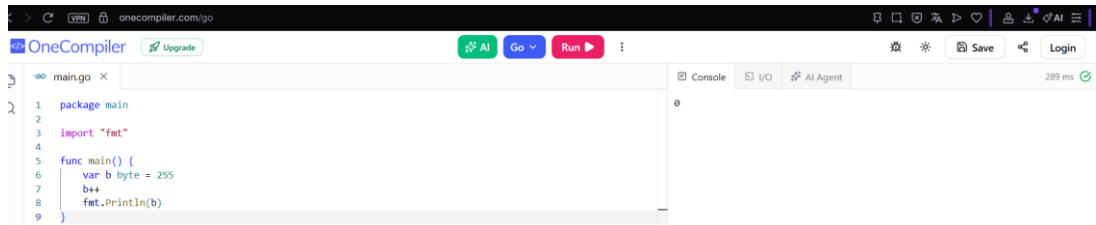

The screenshot shows the OneCompiler Go editor. The code in the editor is:

```
1 package main  
2  
3 import "fmt"  
4  
5 func main() {  
6     var b byte = 255  
7     b++  
8     fmt.Println(b)  
9 }
```


The console output on the right shows:

```
0
```

The execution time is 289 ms.

Erro nunca é detectado.

4-

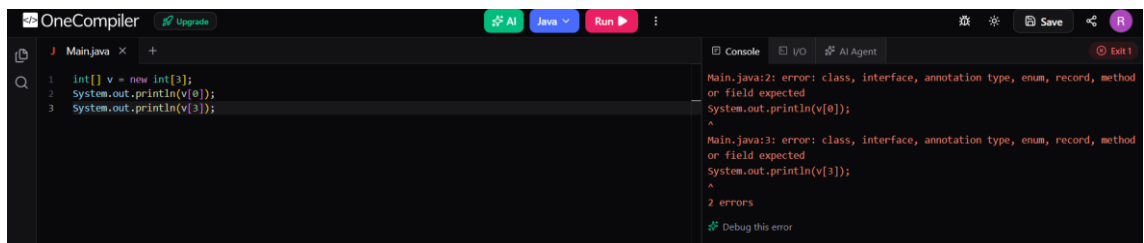

The screenshot shows the OneCompiler Java editor. The code in the editor is:


```
1 int[] v = new int[3];  
2 System.out.println(v[0]);  
3 System.out.println(v[3]);
```

The console output on the right shows two errors:

```
Main.java:2: error: class, interface, annotation type, enum, record, method  
or field expected  
System.out.println(v[0]);  
^  
Main.java:3: error: class, interface, annotation type, enum, record, method  
or field expected  
System.out.println(v[3]);  
^  
2 errors  
Debug this error
```

Apresenta erro. Detectado em EXECUÇÃO

5-

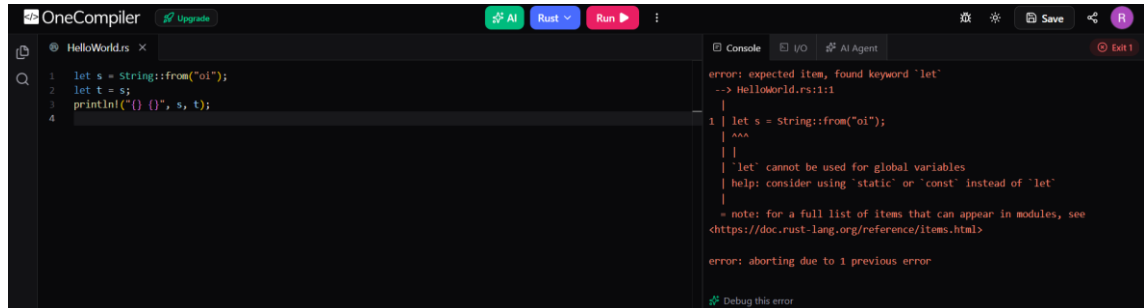

The screenshot shows the OneCompiler interface with a Rust file named 'HelloWorld.rs'. The code in the editor is:

```
1 let s = String::from("oi");
2 let t = s;
3 println!("{}", s, t);
4
```


The console on the right displays the following error:

```
error: expected item, found keyword `let`
--> HelloWorld.rs:1:1
|
1 | let s = String::from("oi");
|   ^^^
|   |
|   | `let` cannot be used for global variables
|   | help: consider using `static` or `const` instead of `let`
|   |
= note: for a full list of items that can appear in modules, see
<https://doc.rust-lang.org/reference/items.html>

error: aborting due to 1 previous error
```

Rust: NÃO COMPILA (erro E0382: borrow of moved value `s`). Detectado em COMPILAÇÃO.

6-

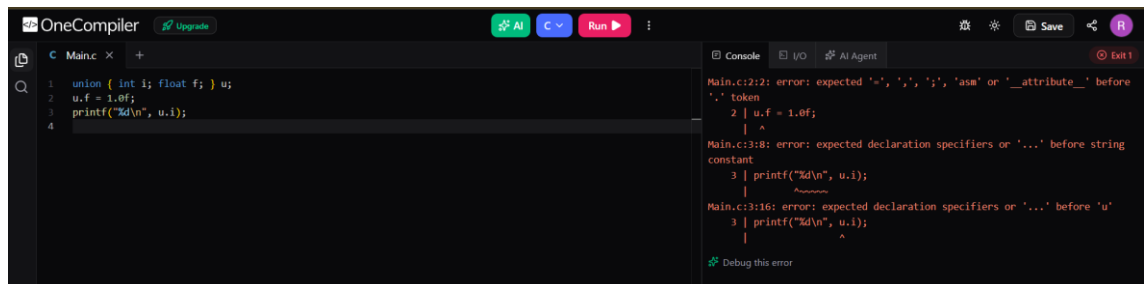

The screenshot shows the OneCompiler interface with a C file named 'Main.c'. The code in the editor is:

```
1 union { int i; float f; } u;
2 u.f = 1.0f;
3 printf("%d\n", u.i);
4
```

The console on the right displays the following errors:

```
Main.c:2:2: error: expected '(', ',', ';', 'asm' or '__attribute__' before
'.' token
  2 | u.f = 1.0f;
    | ^
Main.c:3:8: error: expected declaration specifiers or '...' before string
constant
  3 | printf("%d\n", u.i);
    |           ^
Main.c:3:16: error: expected declaration specifiers or '...' before 'u'
  3 | printf("%d\n", u.i);
    |                ^
```

C: imprime 1065353216, os bits de 1.0f lidos como int (união livre). NUNCA é detectado.