
➢Our model: the same U, changed inside

▼ Input: spectrogram, 1 × 512 × 512 — no border trimming

1×1 conv → 2 raw scores → softmax ⑤ → RFI probability ▲

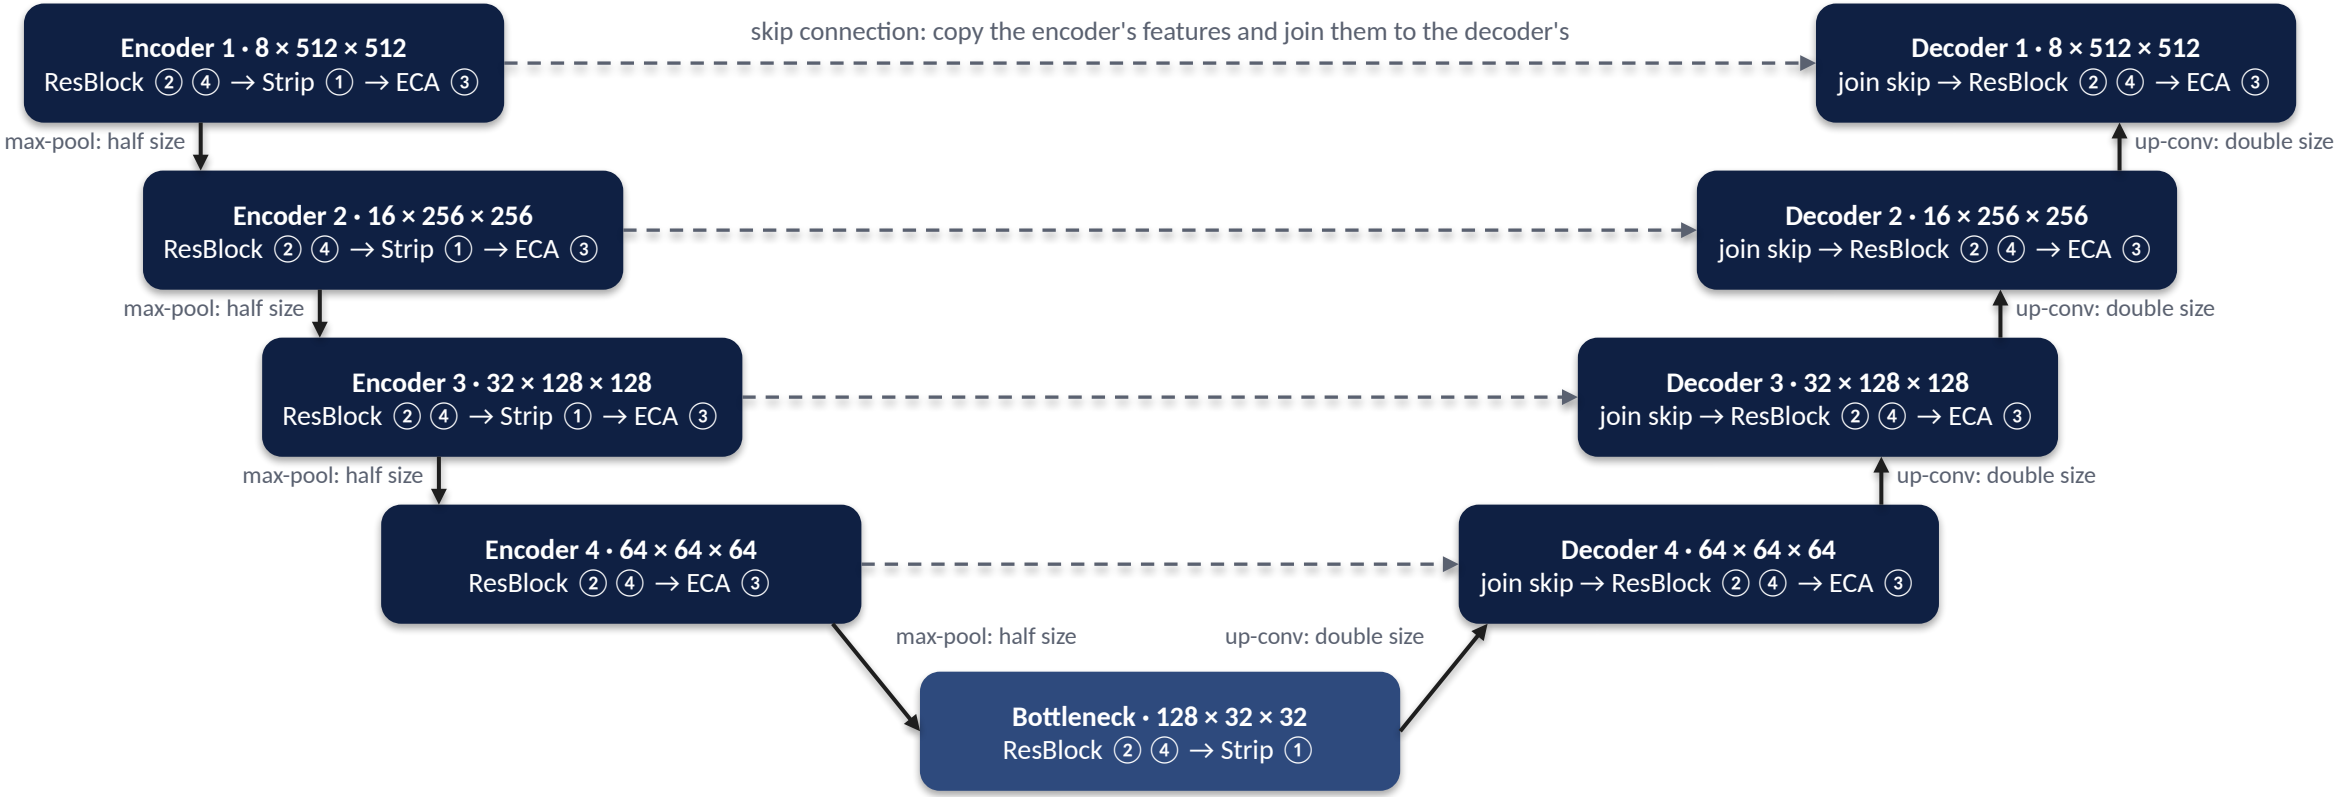


① Strip convolutions ② Residual shortcut ③ ECA attention ④ GroupNorm ⑤ Raw scores

Inside one level, step by step


ResBlock ② ④

Two 3×3 convolutions, each tidied by GroupNorm; the input is added back at the end. Dropout works in training only.

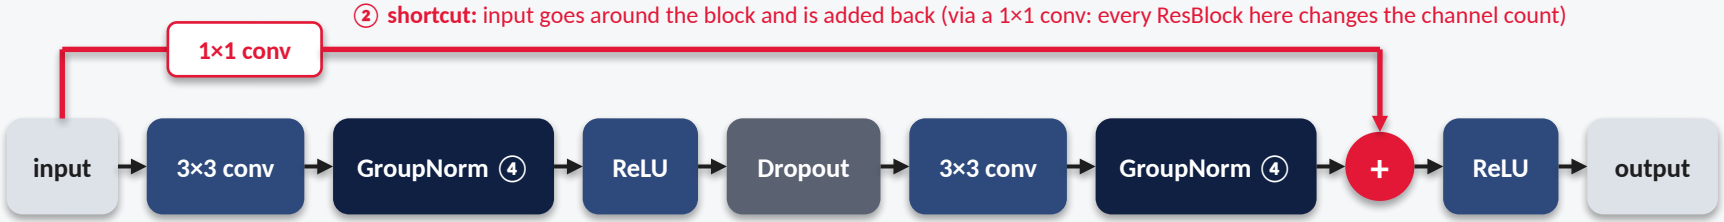

Strip module ①


Looks at wider areas (7, 11, 21 px) cheaply: a thin filter along frequency, then one along time.

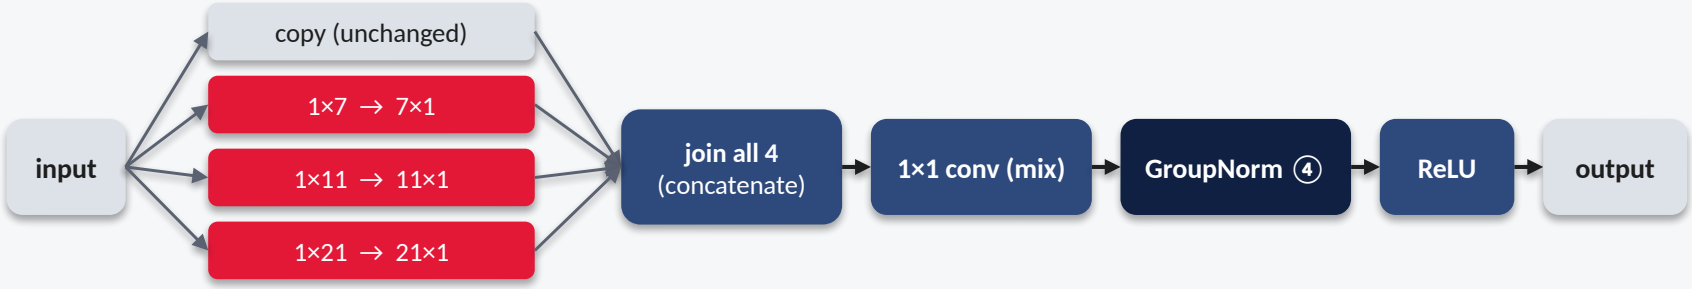

Each red path = 1×K along frequency, then K×1 along time (LOFAR axes), each channel on its own → together it covers a K×K square (measured)

ECA attention ③

Gives each feature map a weight between 0 and 1, then scales it.

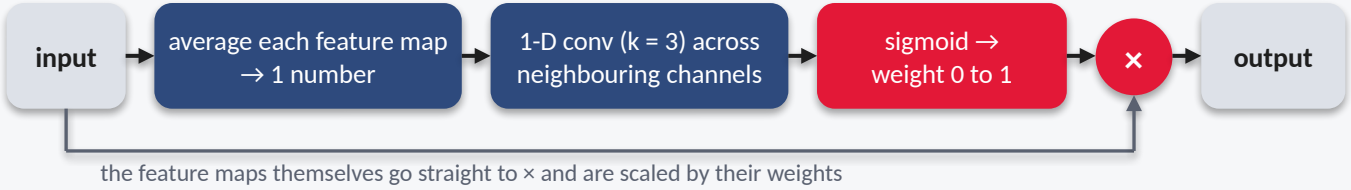

the feature maps themselves go straight to × and are scaled by their weights