
Feather IO

Console design

ACCESS

Splash while the app loads



Feather IO

Connecting to the storage service...

ACCESS

Login

Feather IO

S3, without the weight.

Buckets are folders on your disk. AWS CLI, rclone and the S3 SDKs connect with SigV4. One Dart binary and a web console.

Self-hosted | S3-compatible | Lightweight | Built in Dart

Sign in

Manage your buckets and access keys.

Access Key

access

Secret Key

secret


Login

The keys are set on the server with **FEATHER_ACCESS** and **FEATHER_SECRET**.

With ♥ from Root101


BROWSER

Browser: buckets, list view

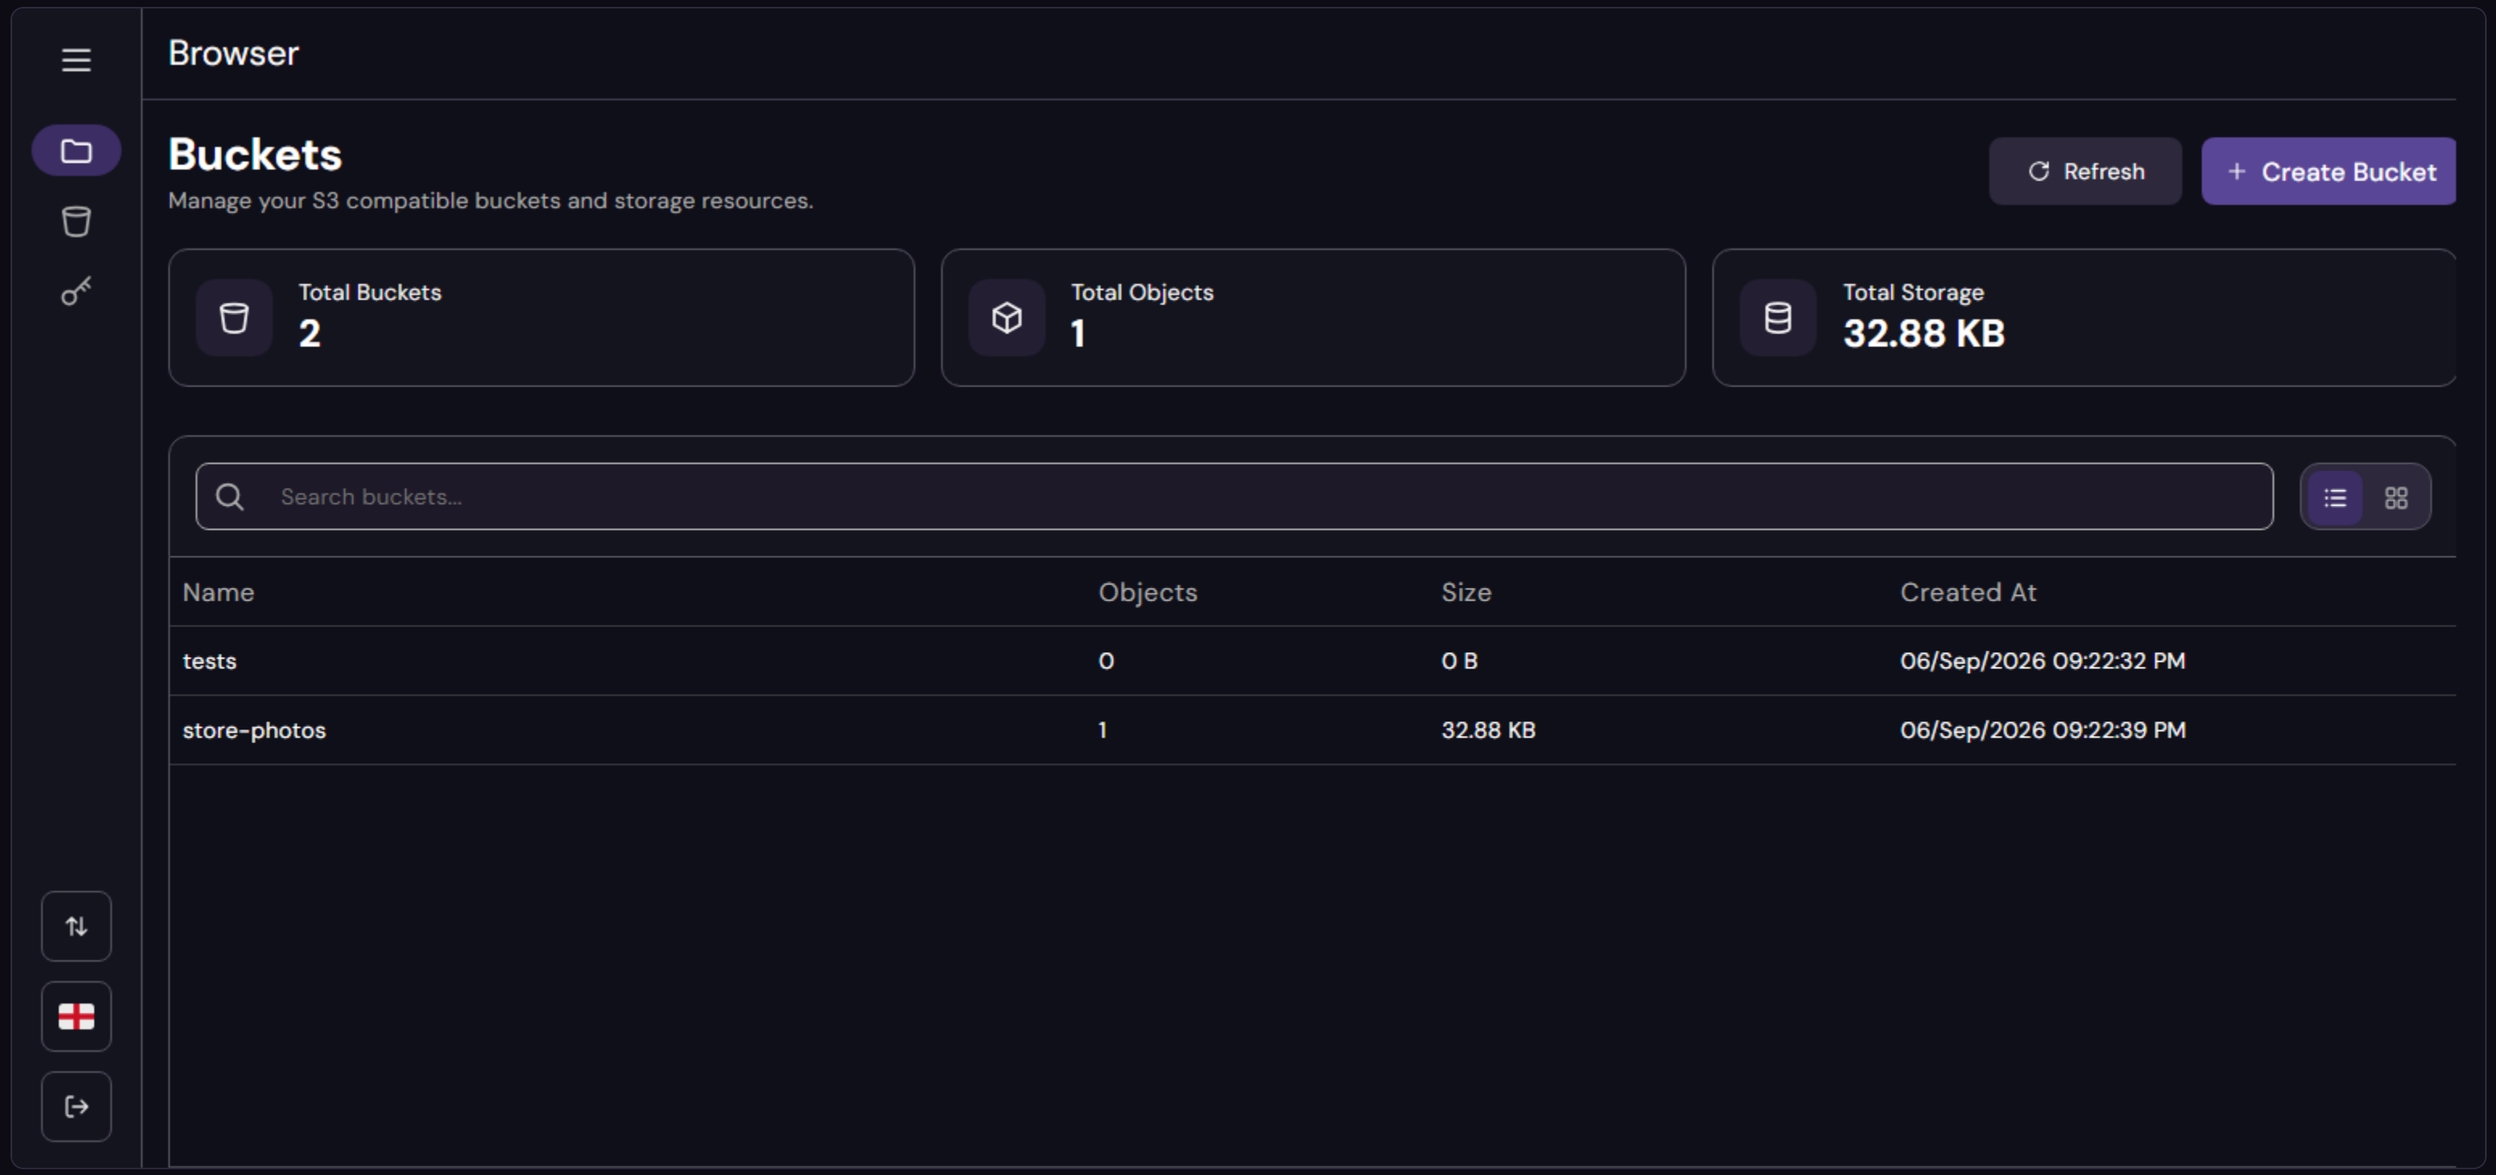


BROWSER

Browser: buckets, grid view with the bucket menu

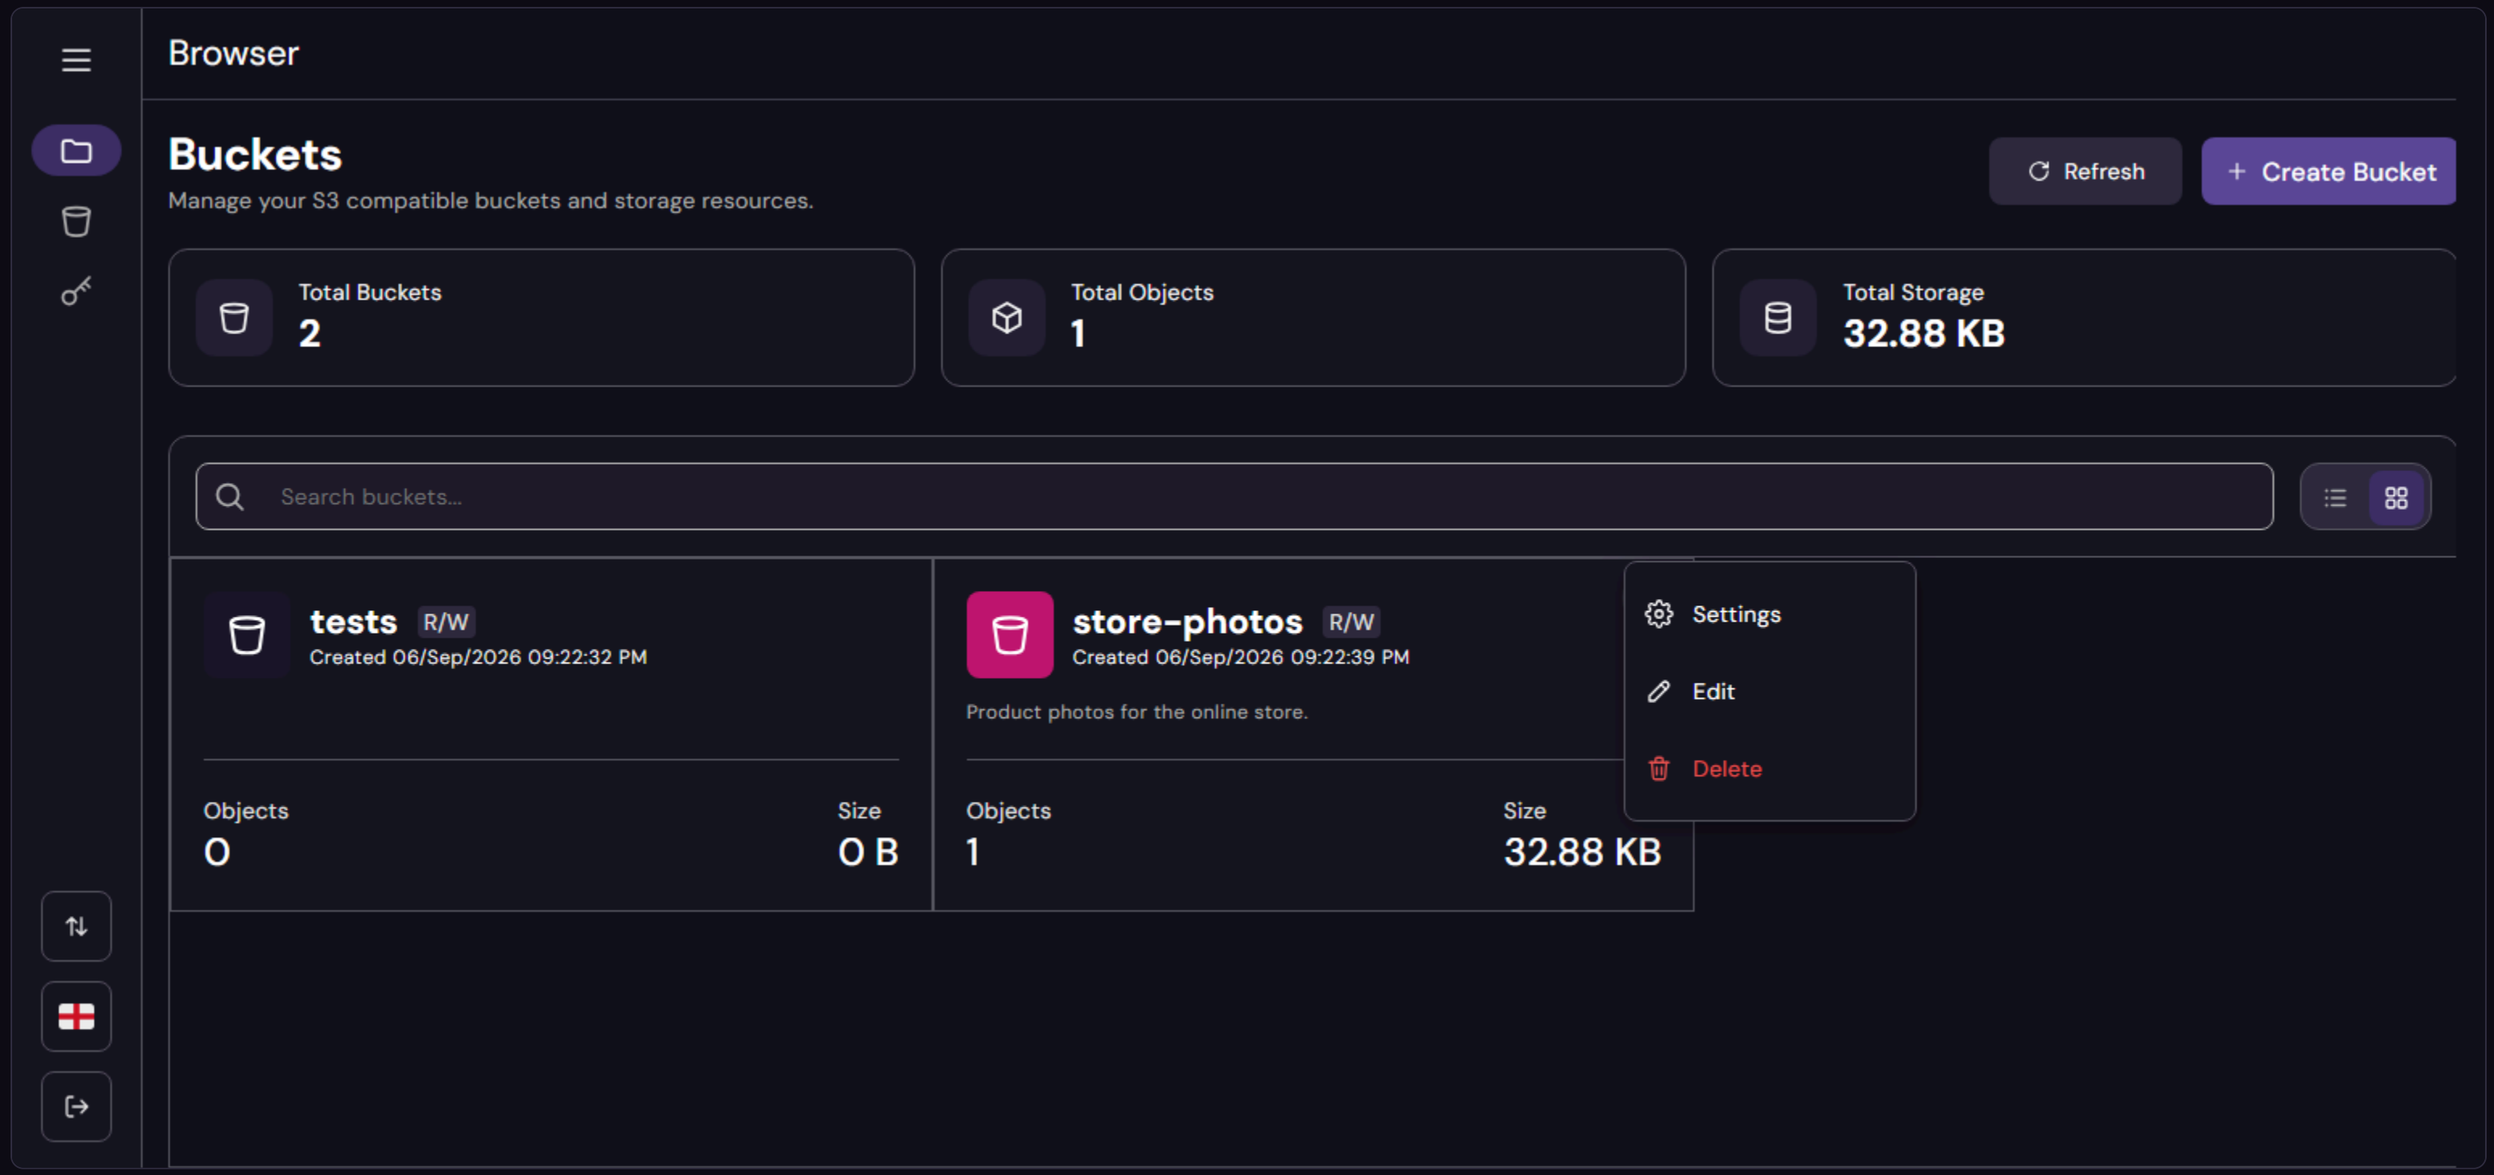


BROWSER

Create bucket

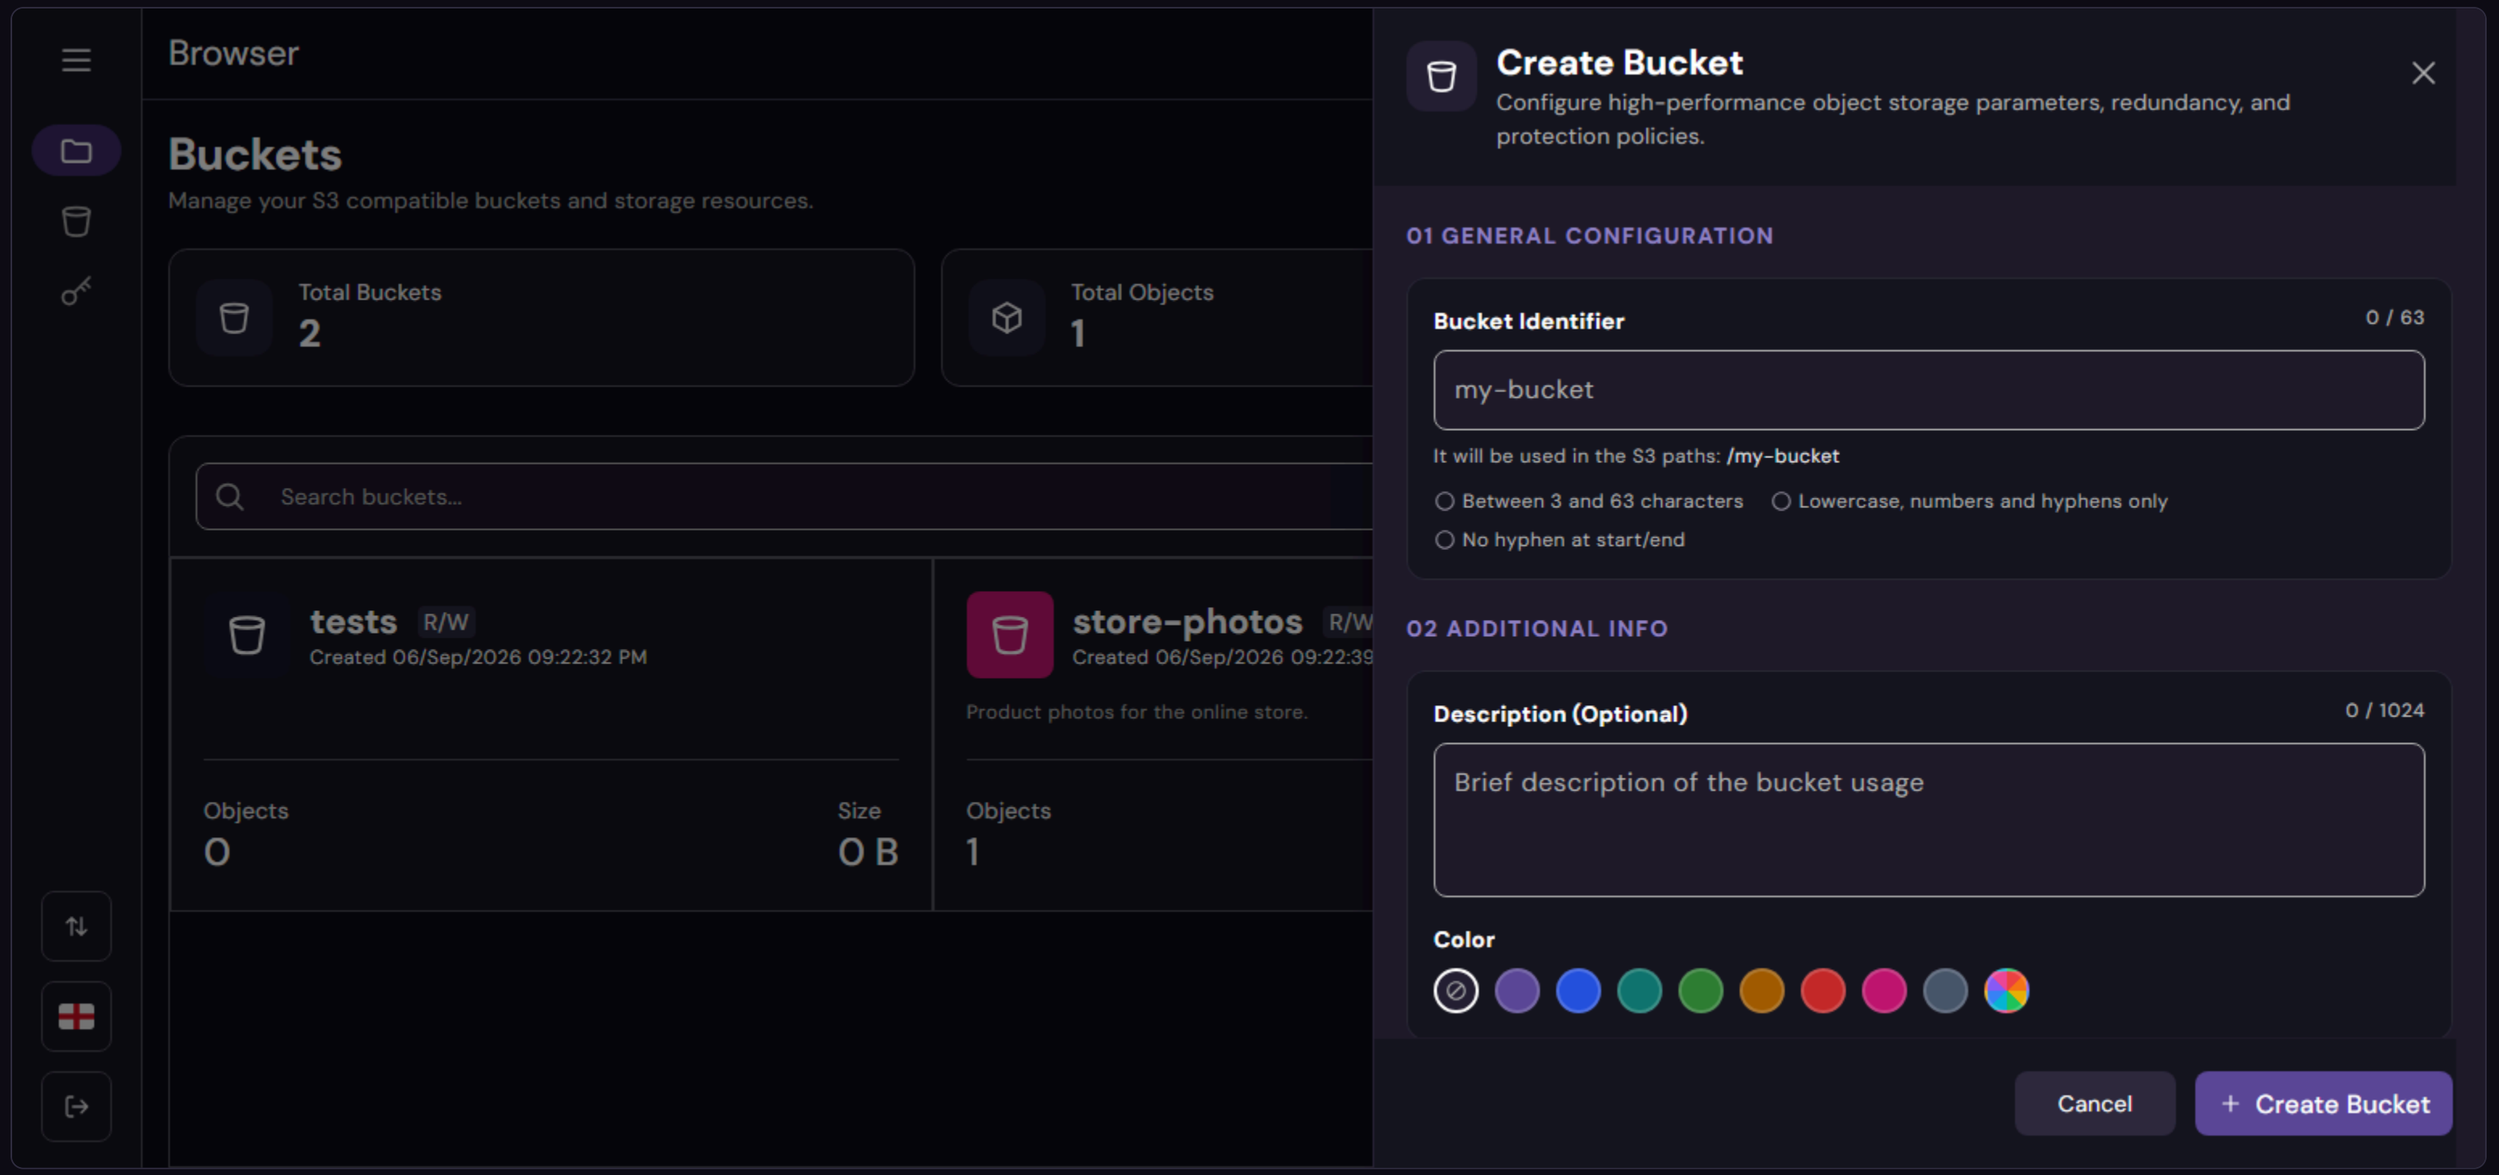


BROWSER

Create bucket: validation of the name

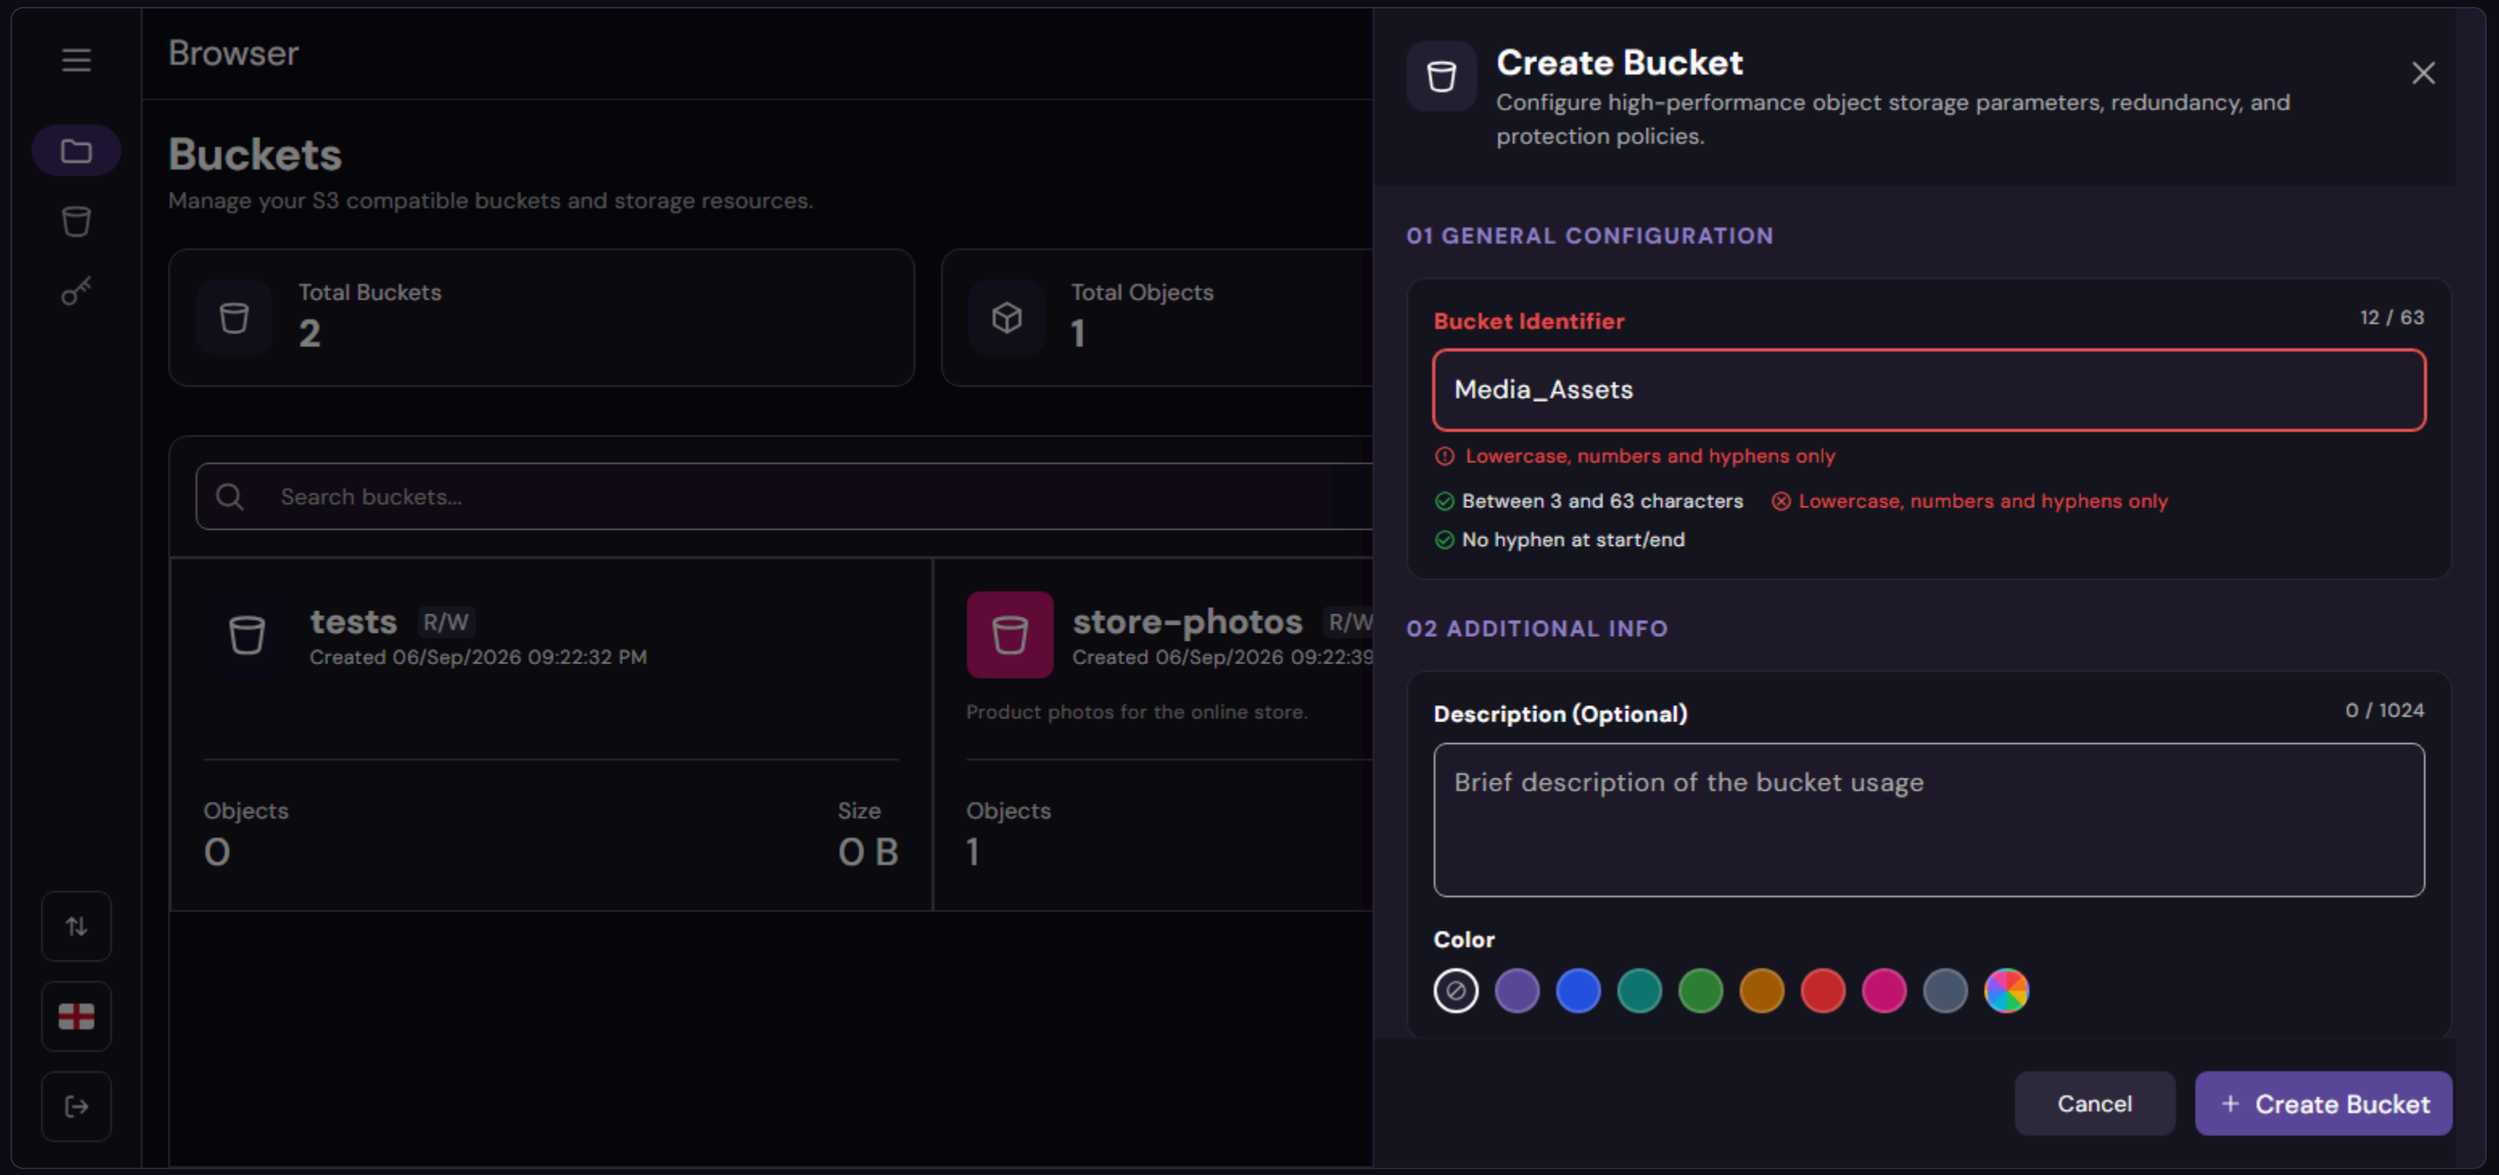


BROWSER

Create bucket: custom color

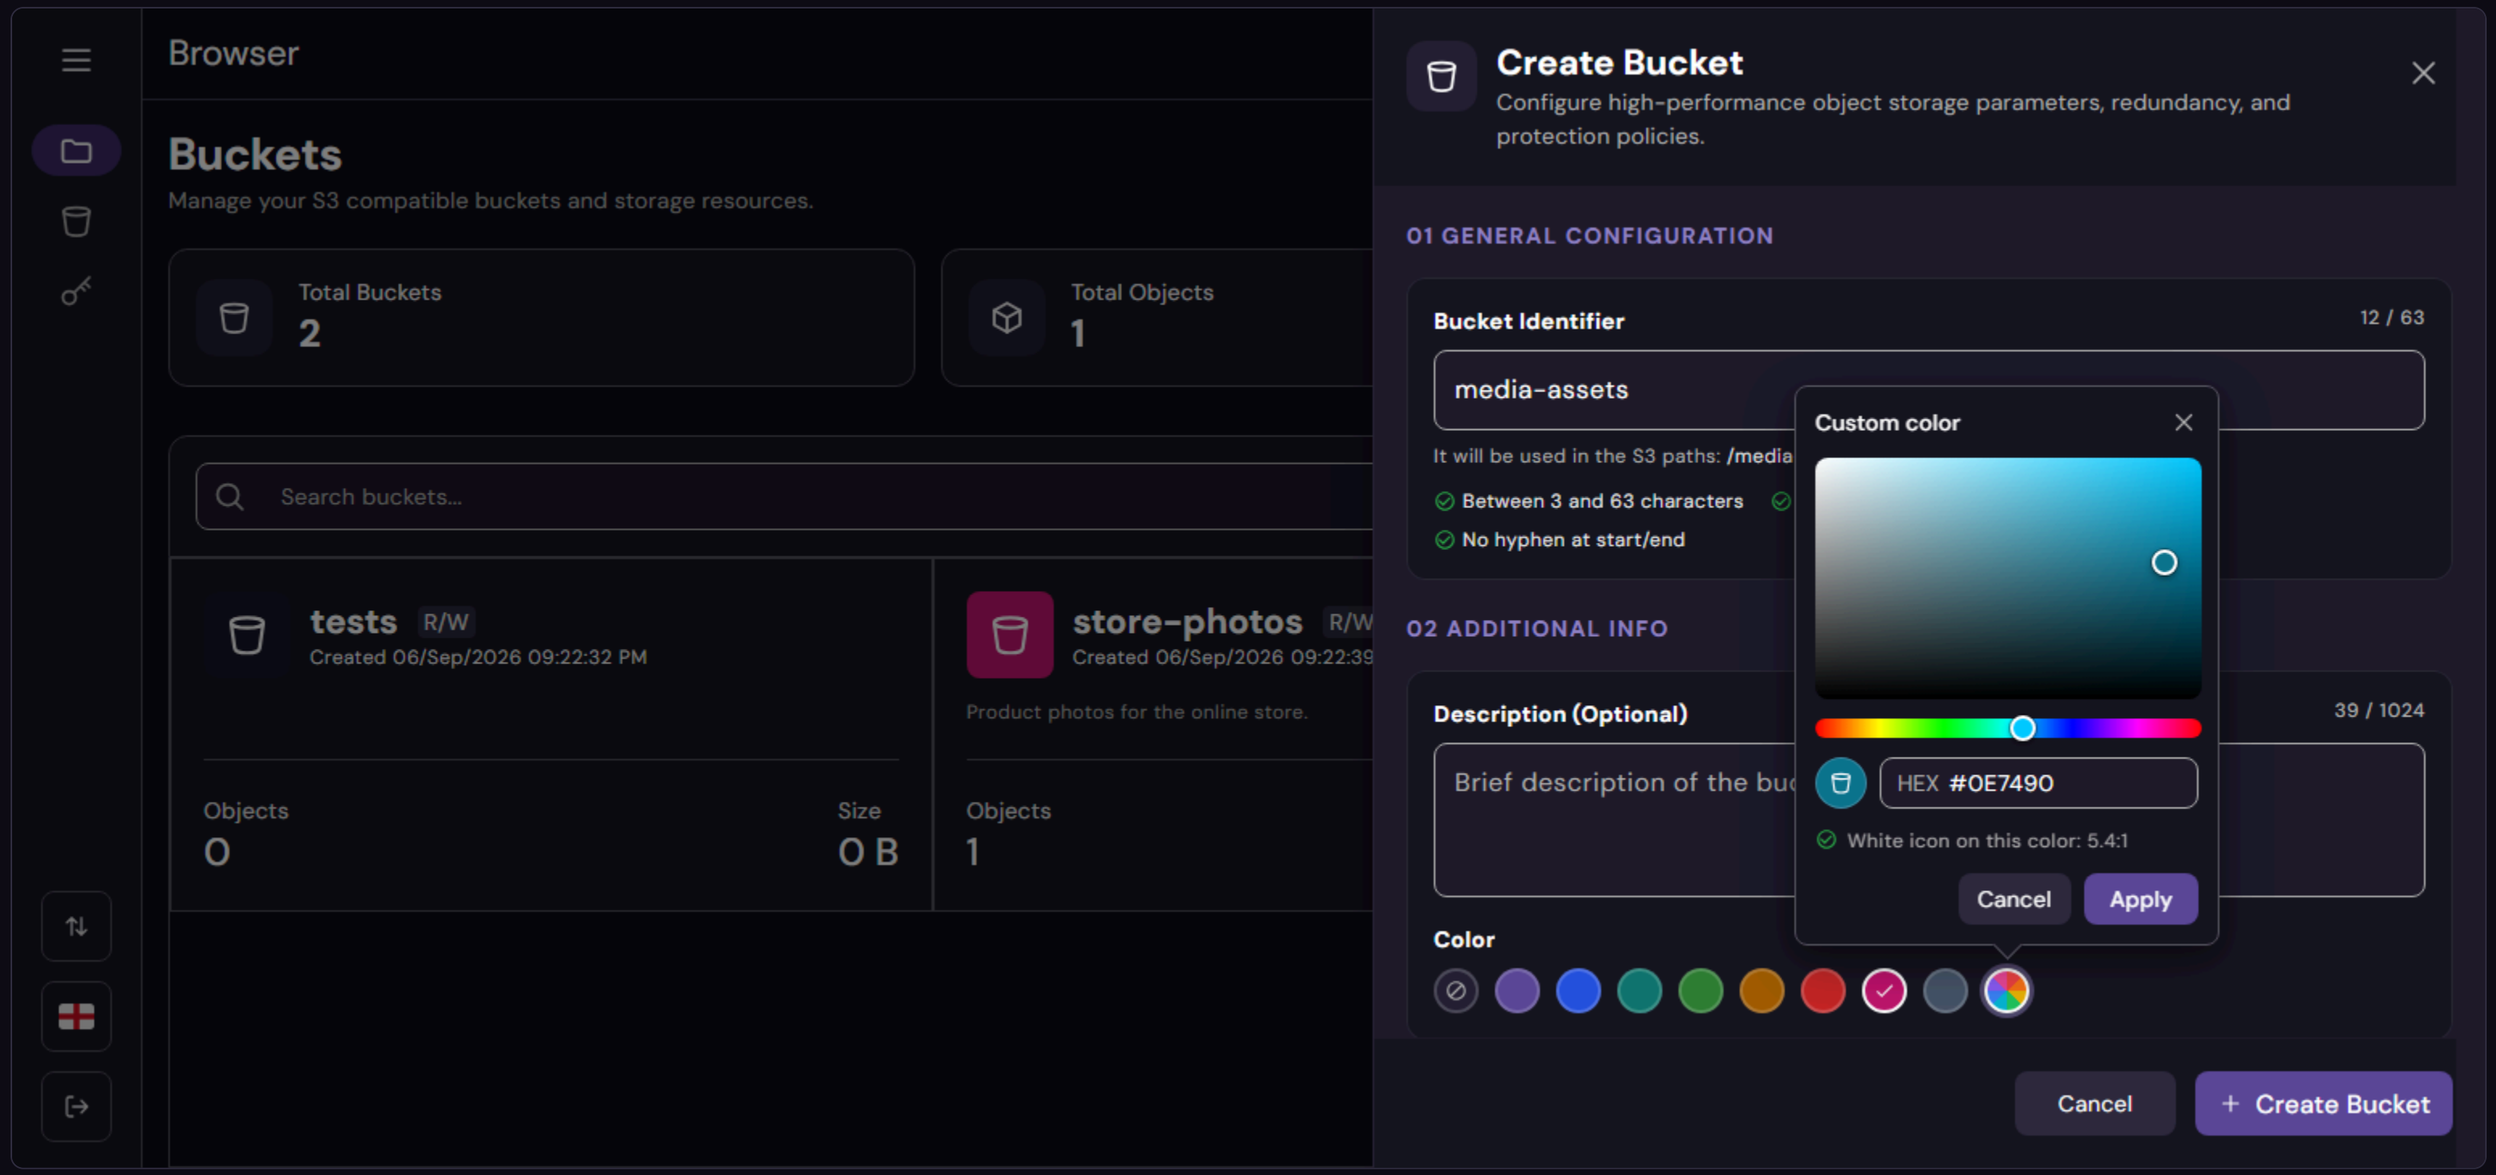


BROWSER

Inside a bucket: list view

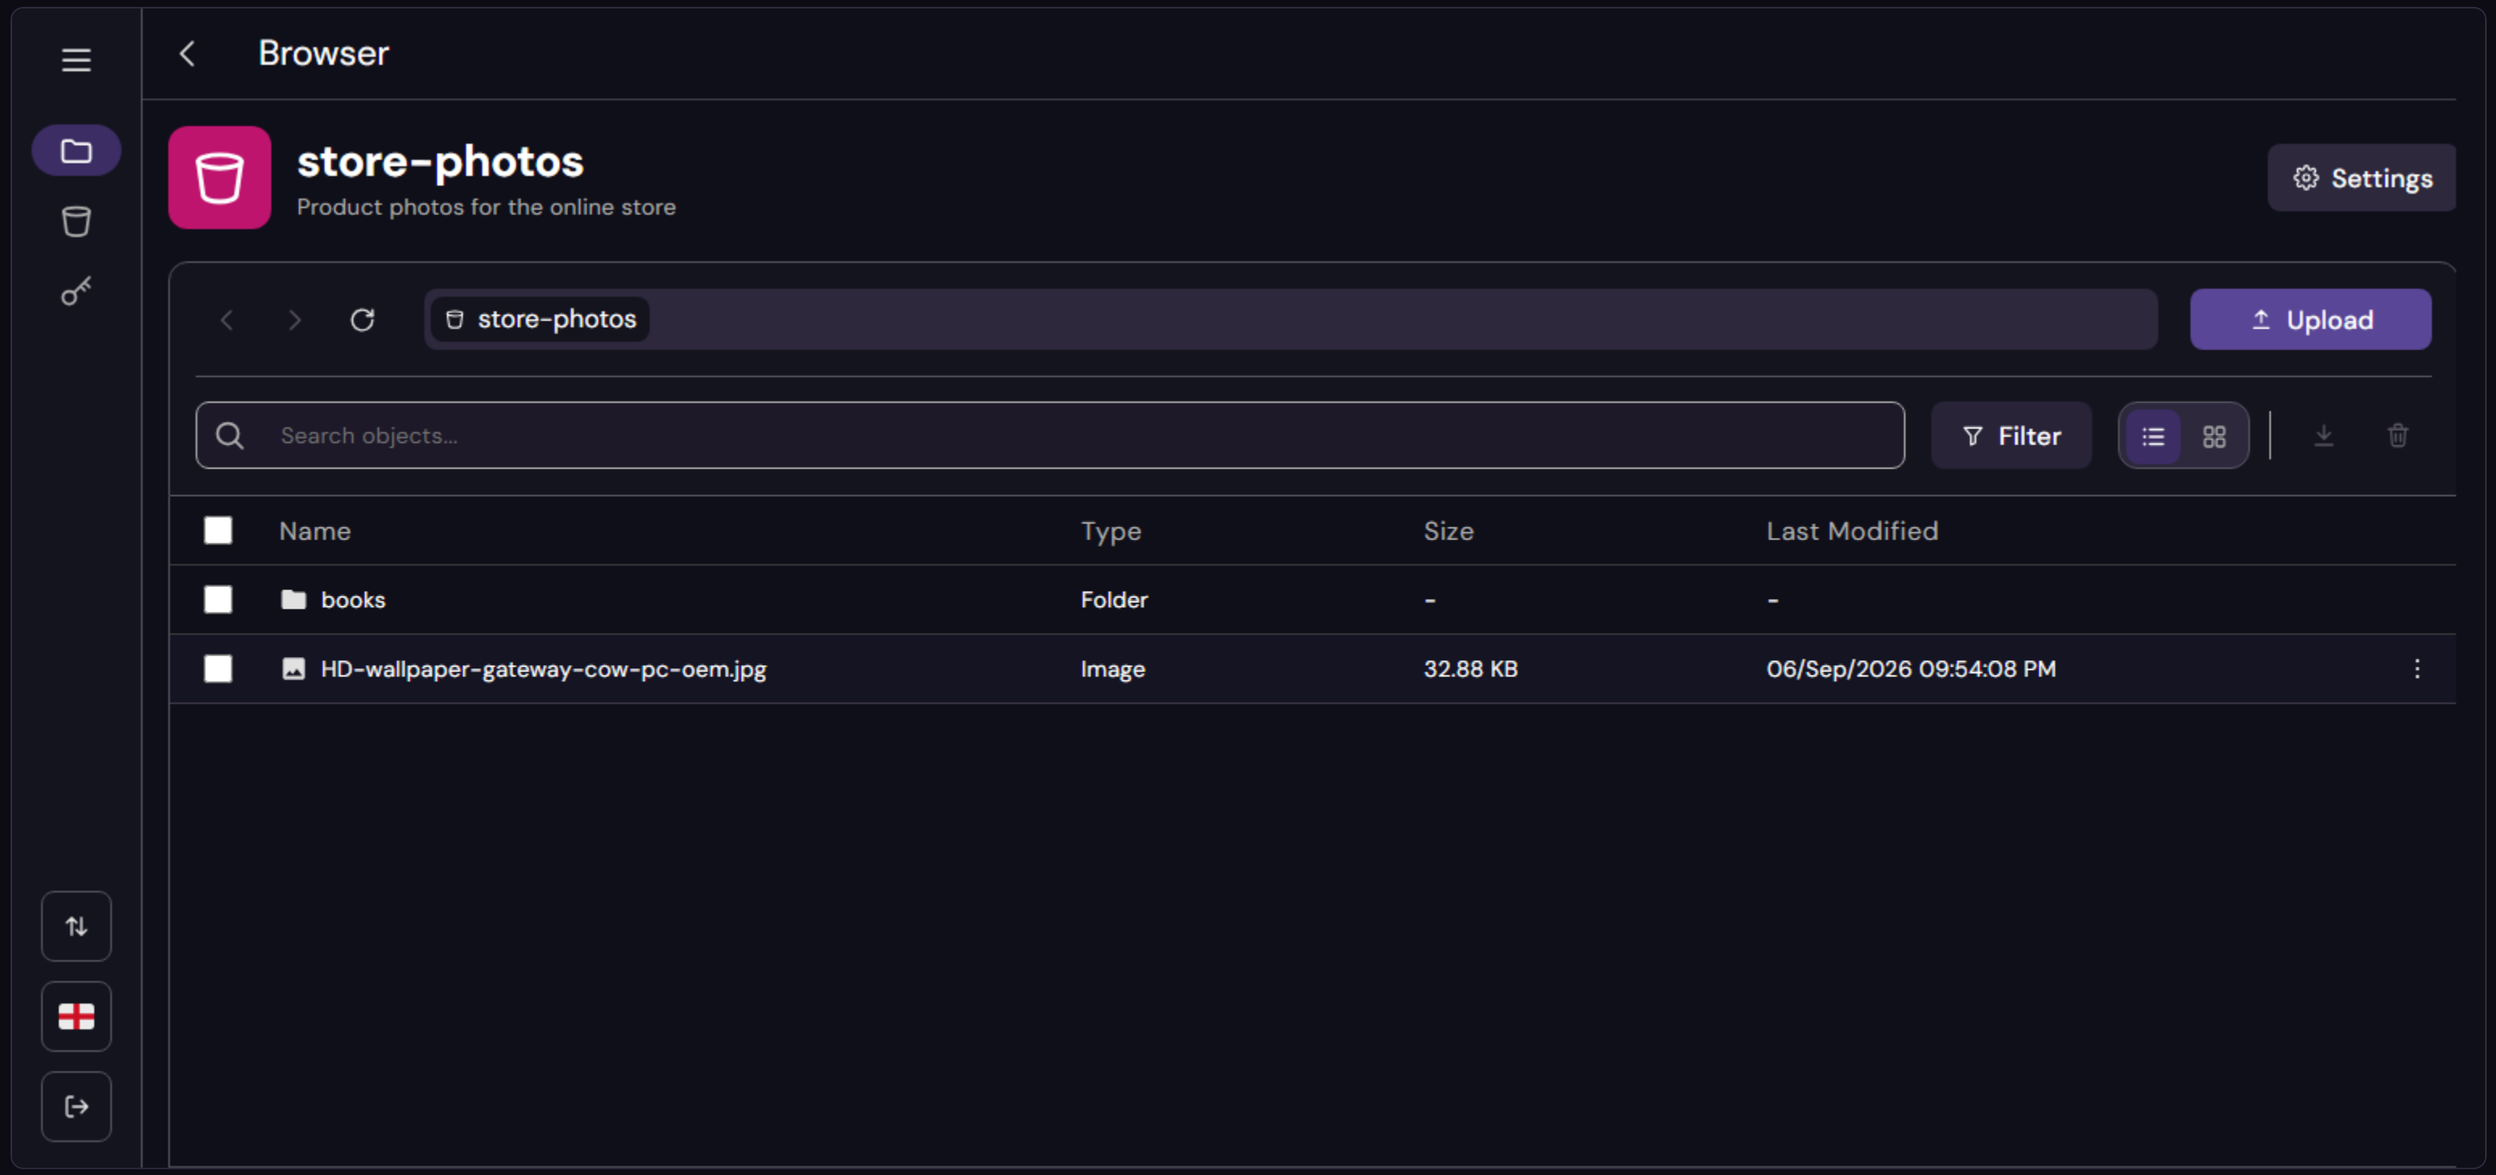


BROWSER

Inside a bucket: grid view with the object menu

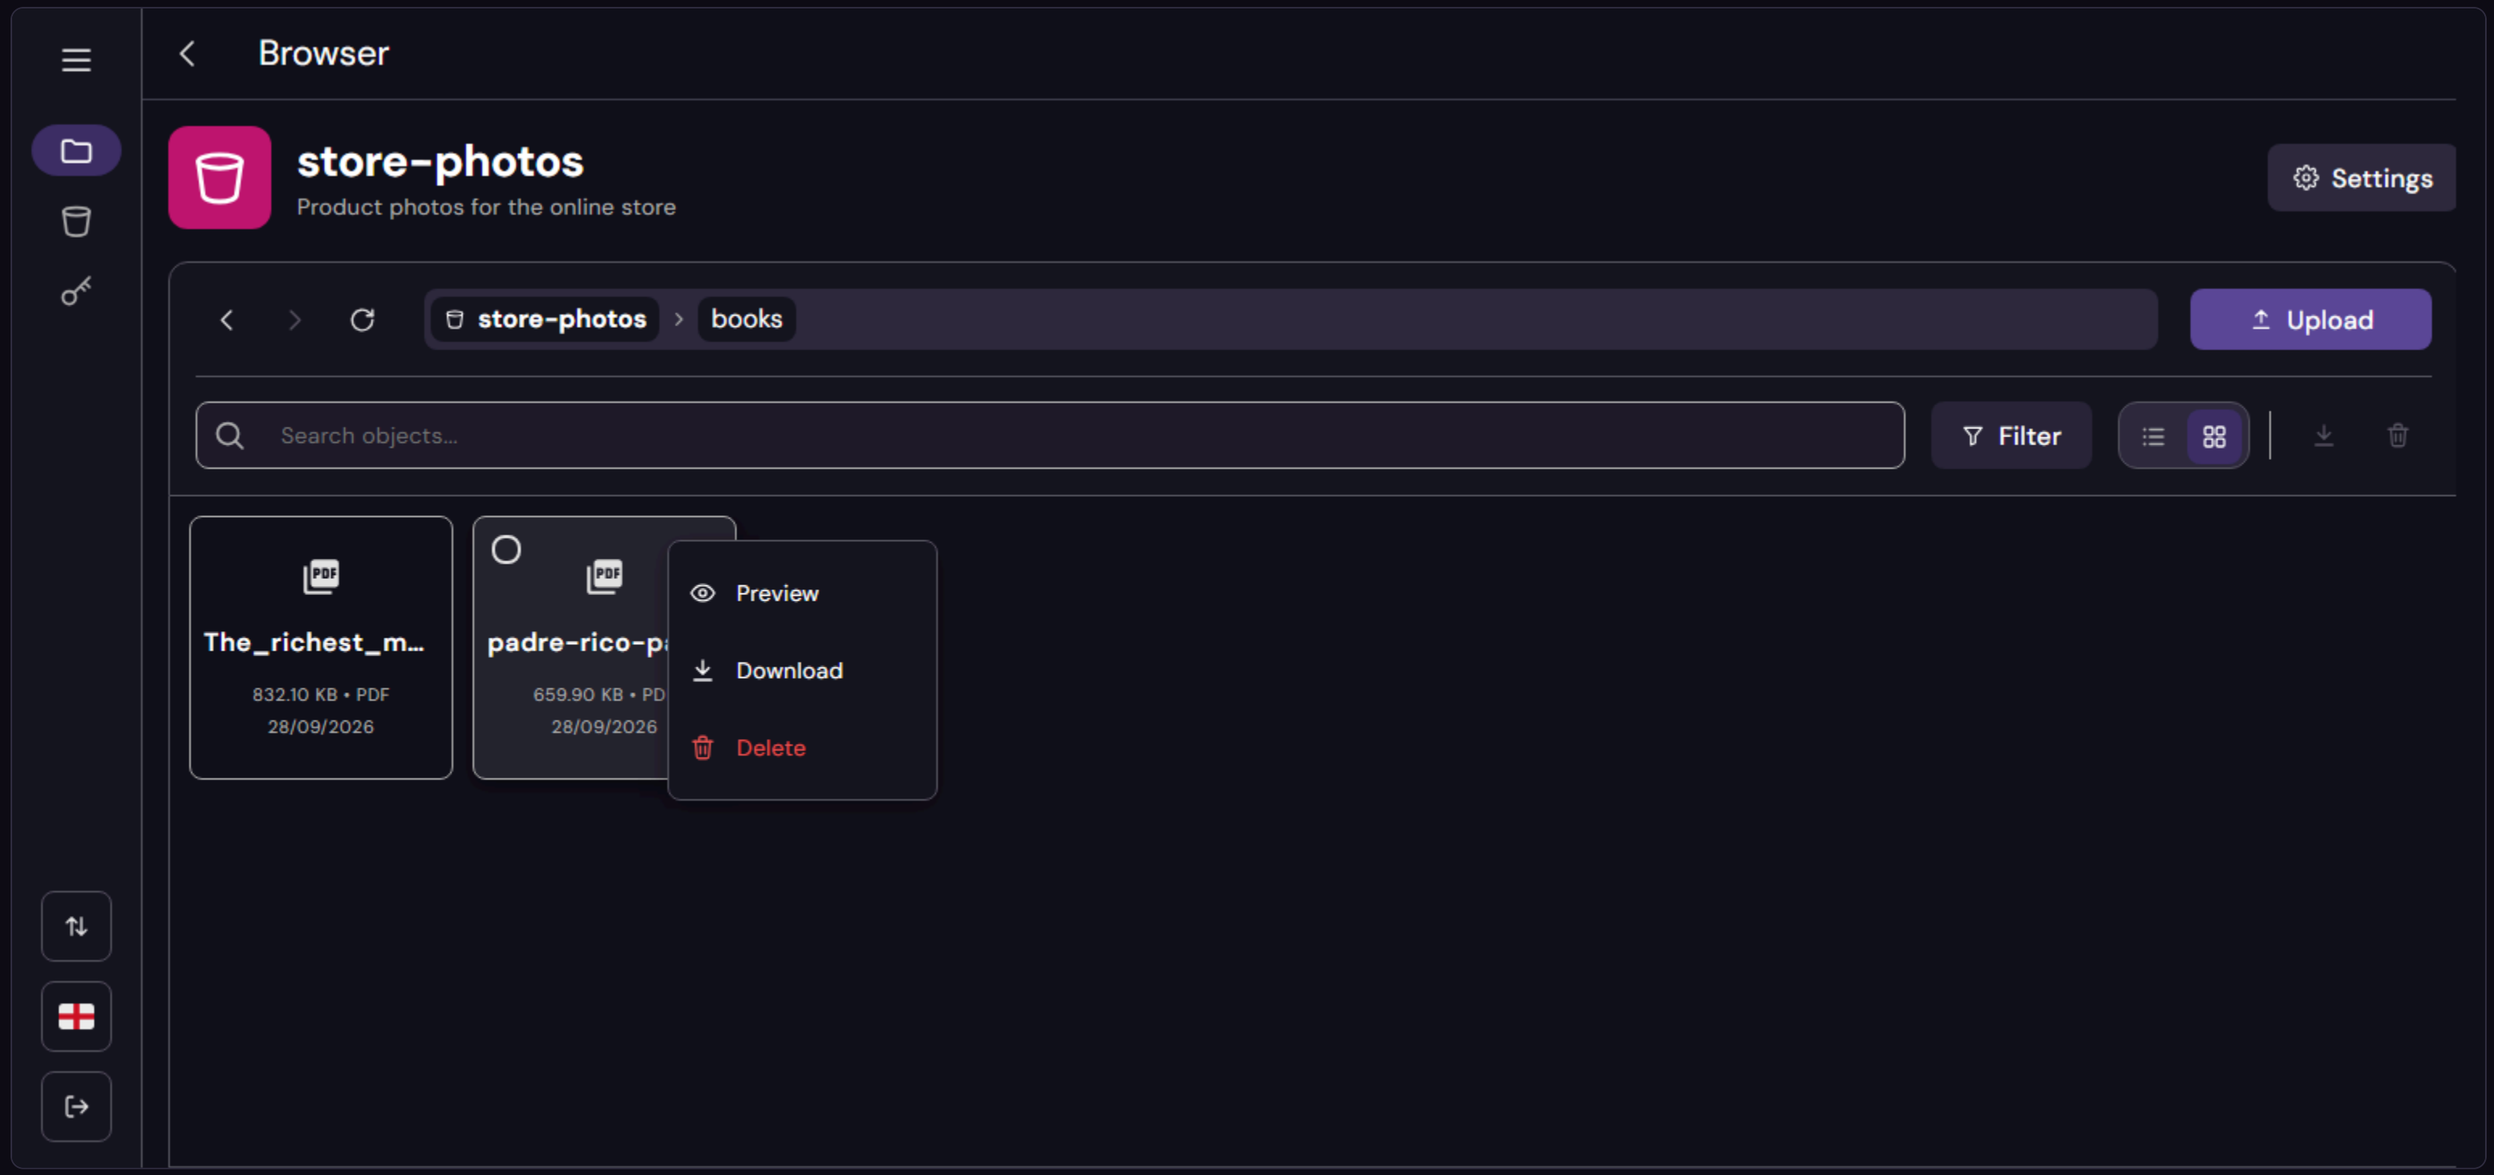


BROWSER

Object menu: details, share, rename, move

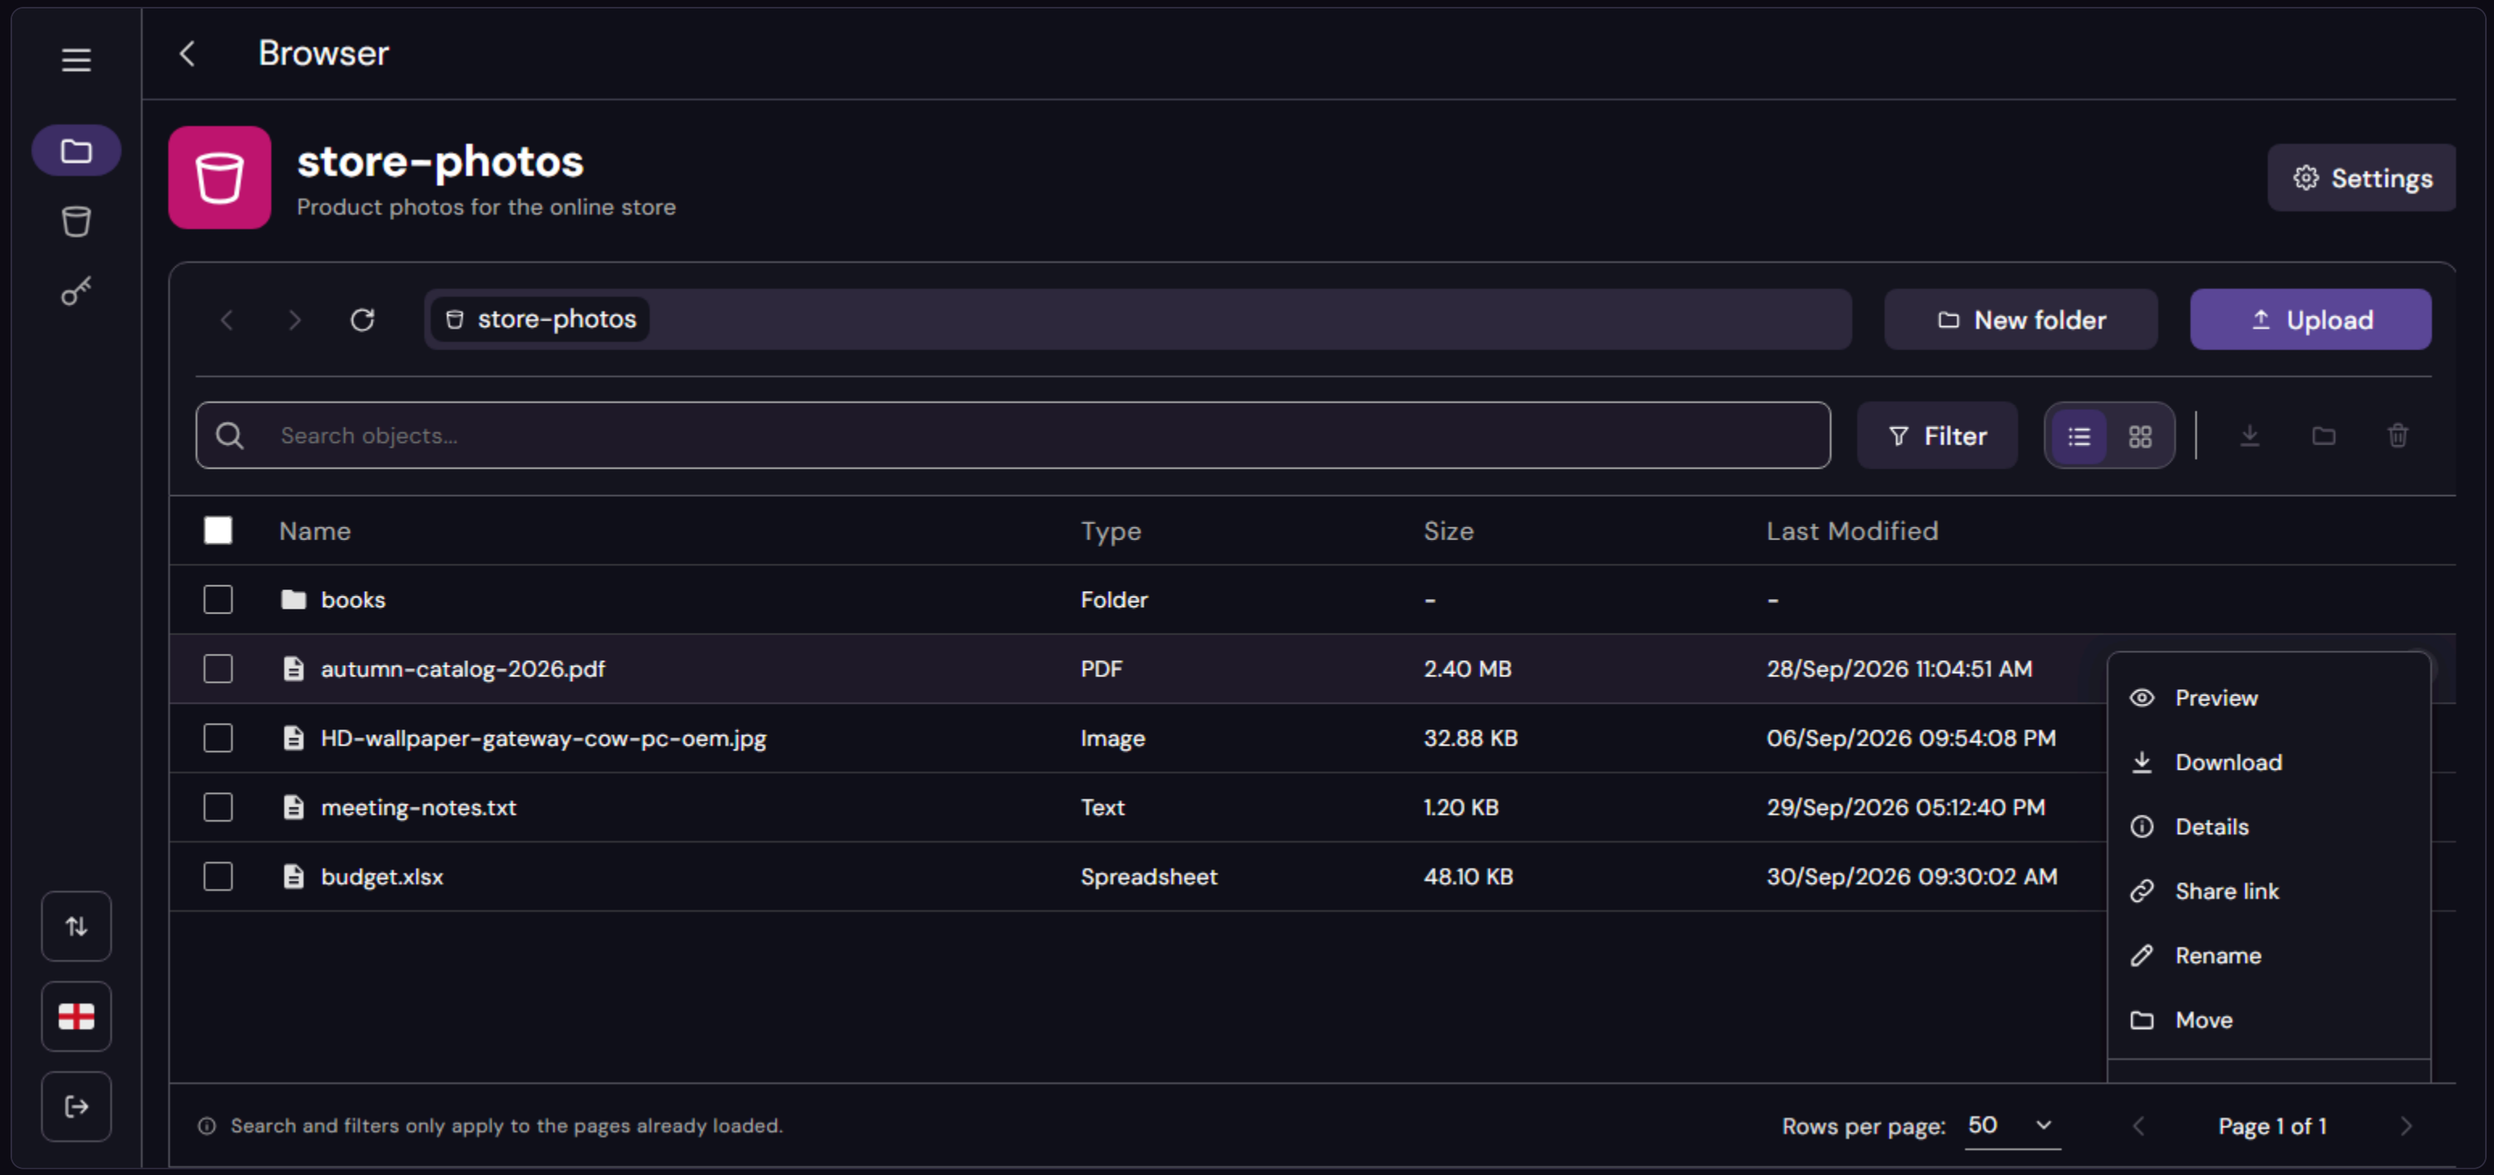


BROWSER

Several objects selected: download, move or delete

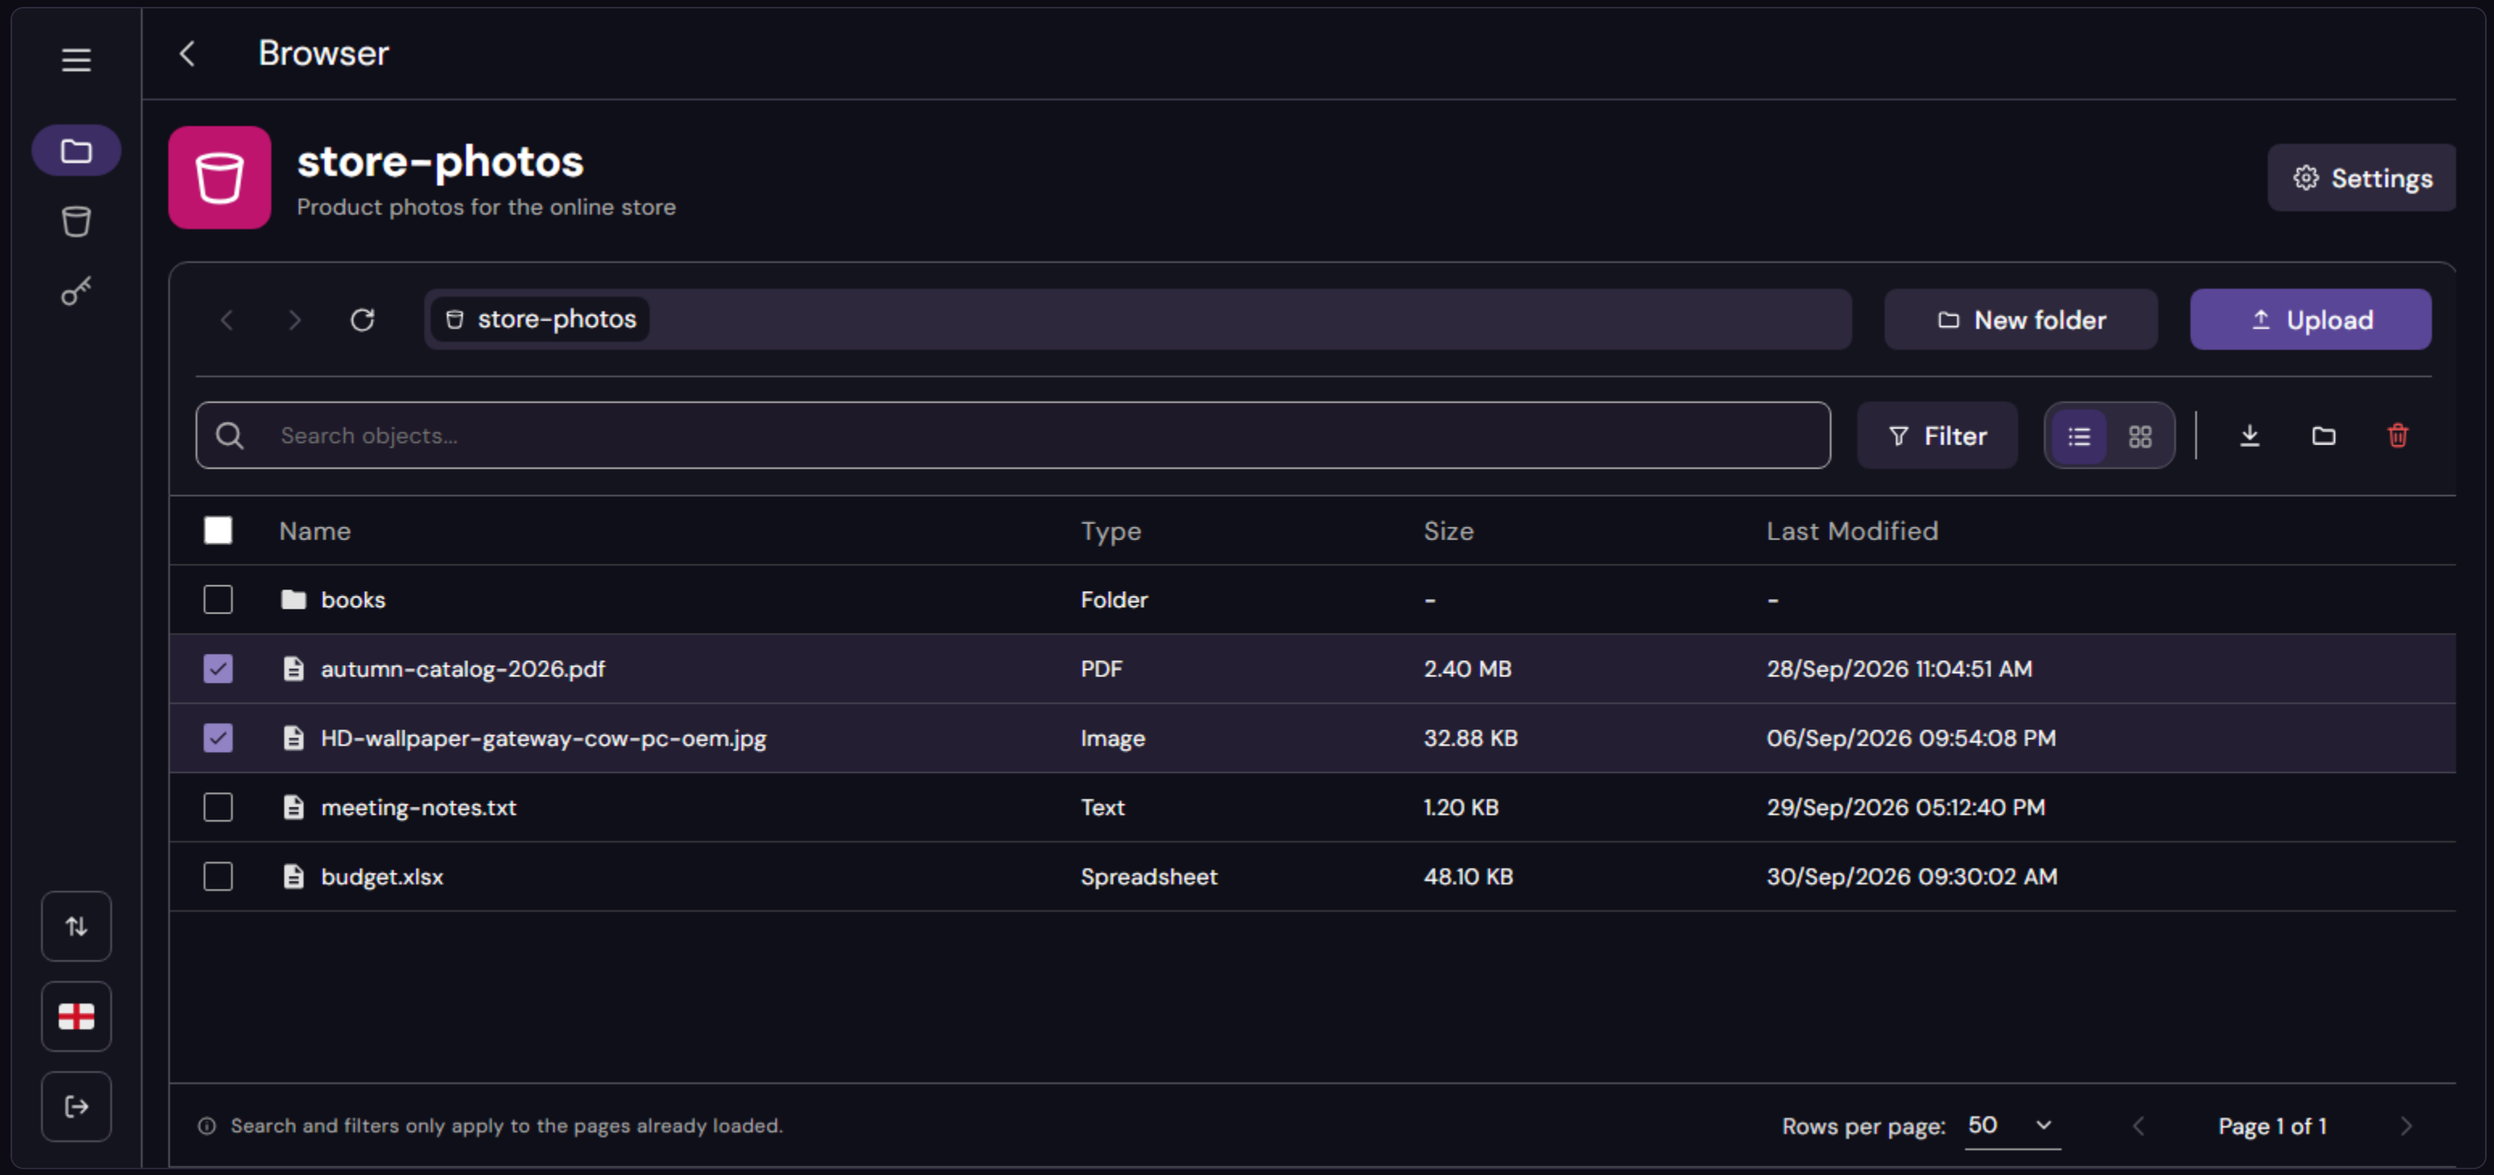


BROWSER

Filters by type, size and date

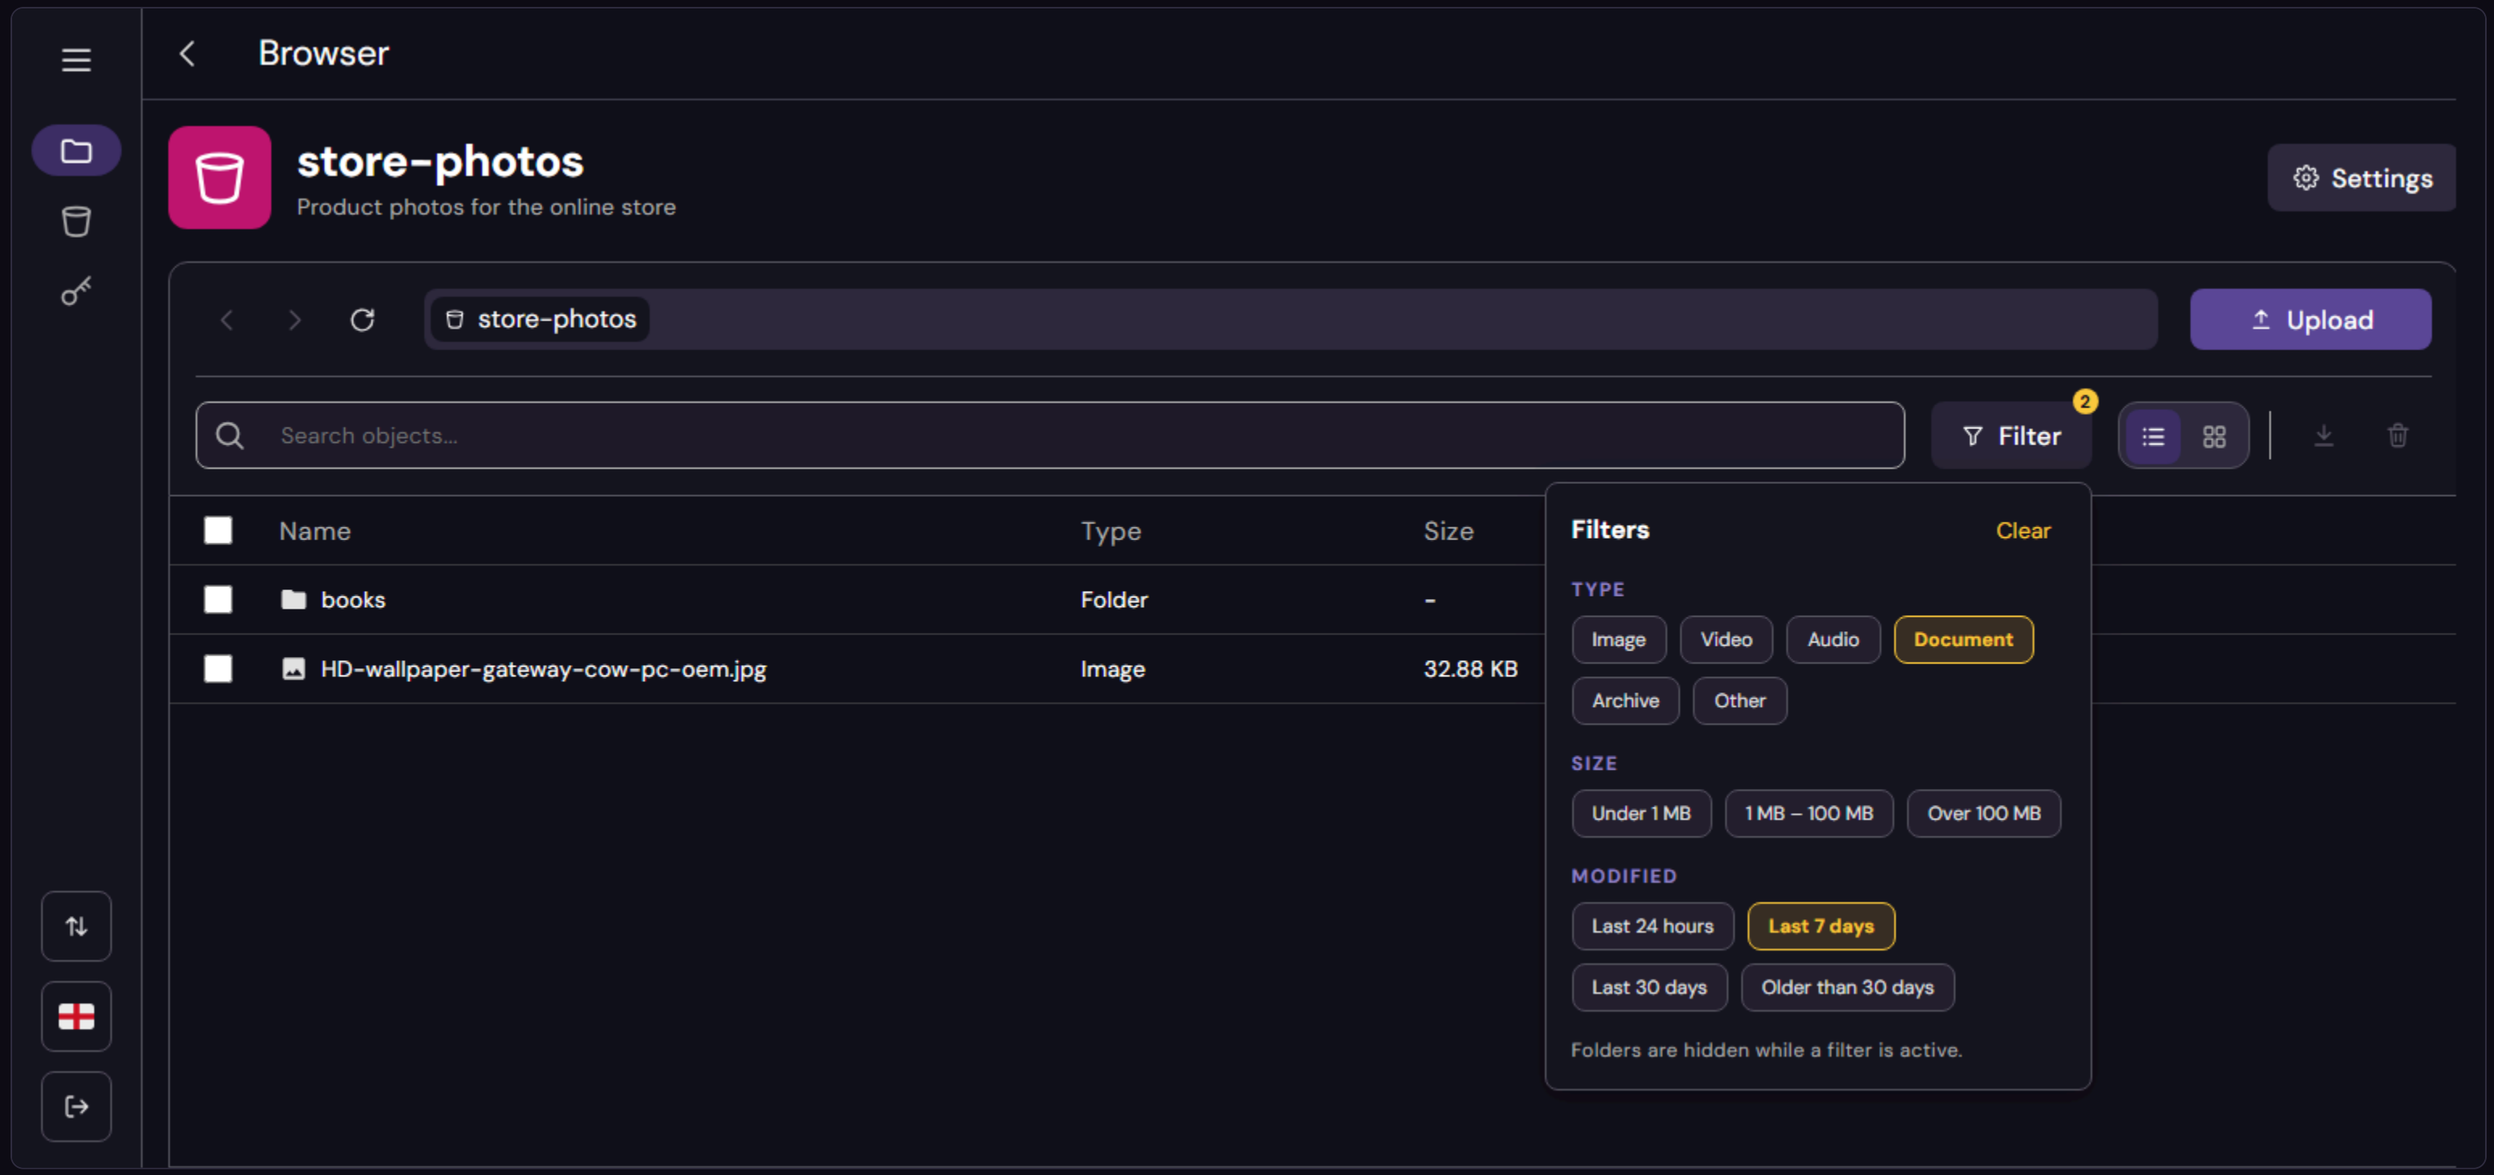


BROWSER

Dropping files to upload them

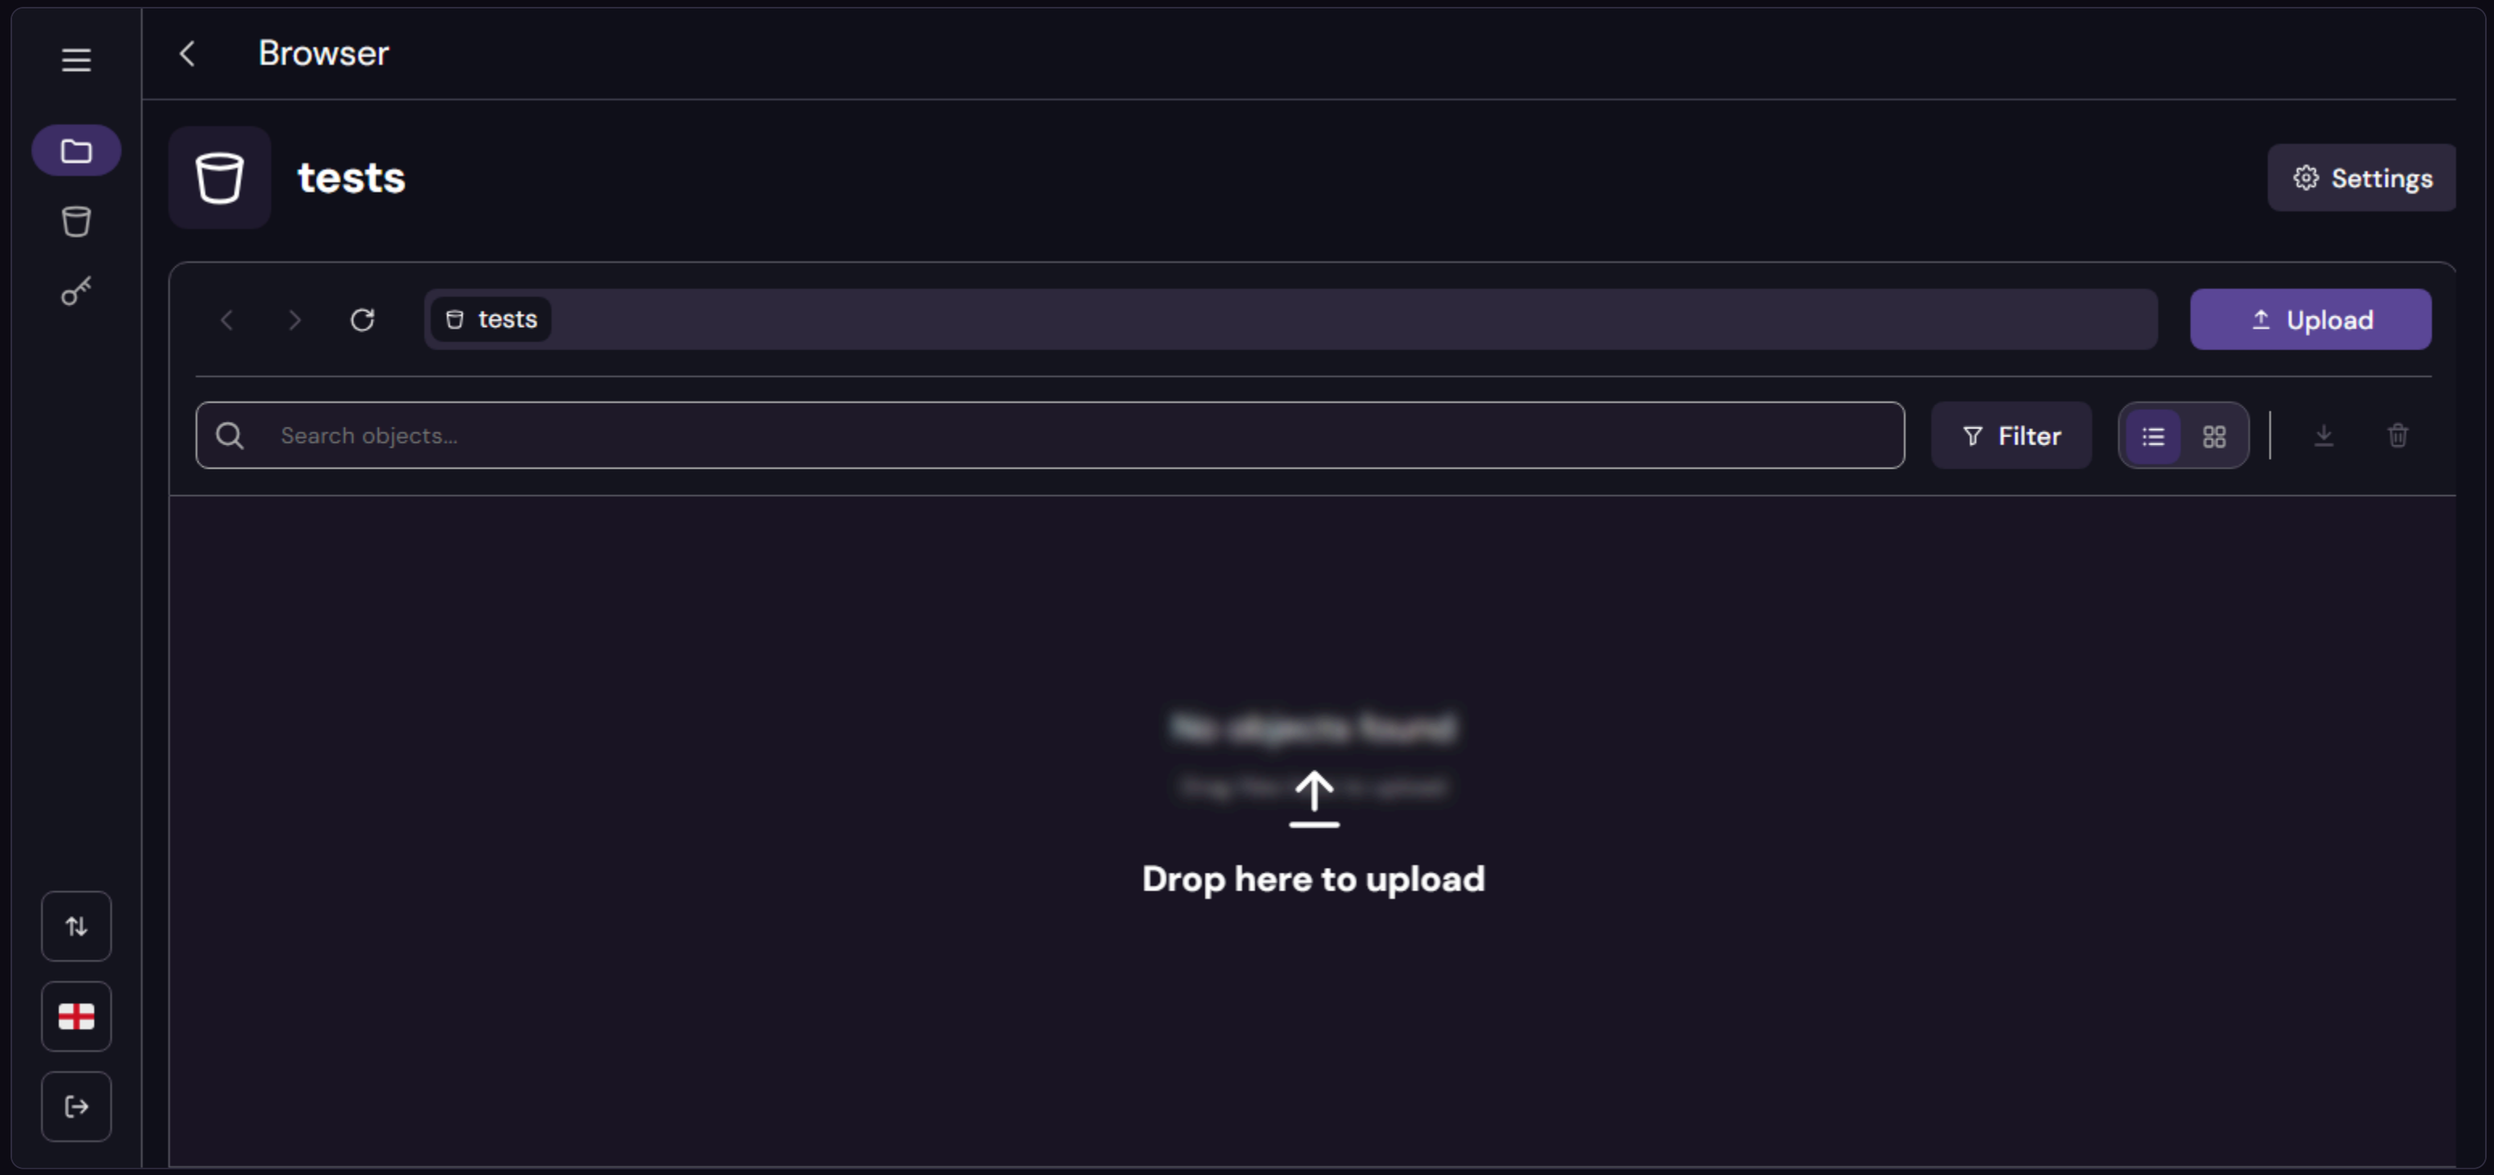


BROWSER

Delete objects

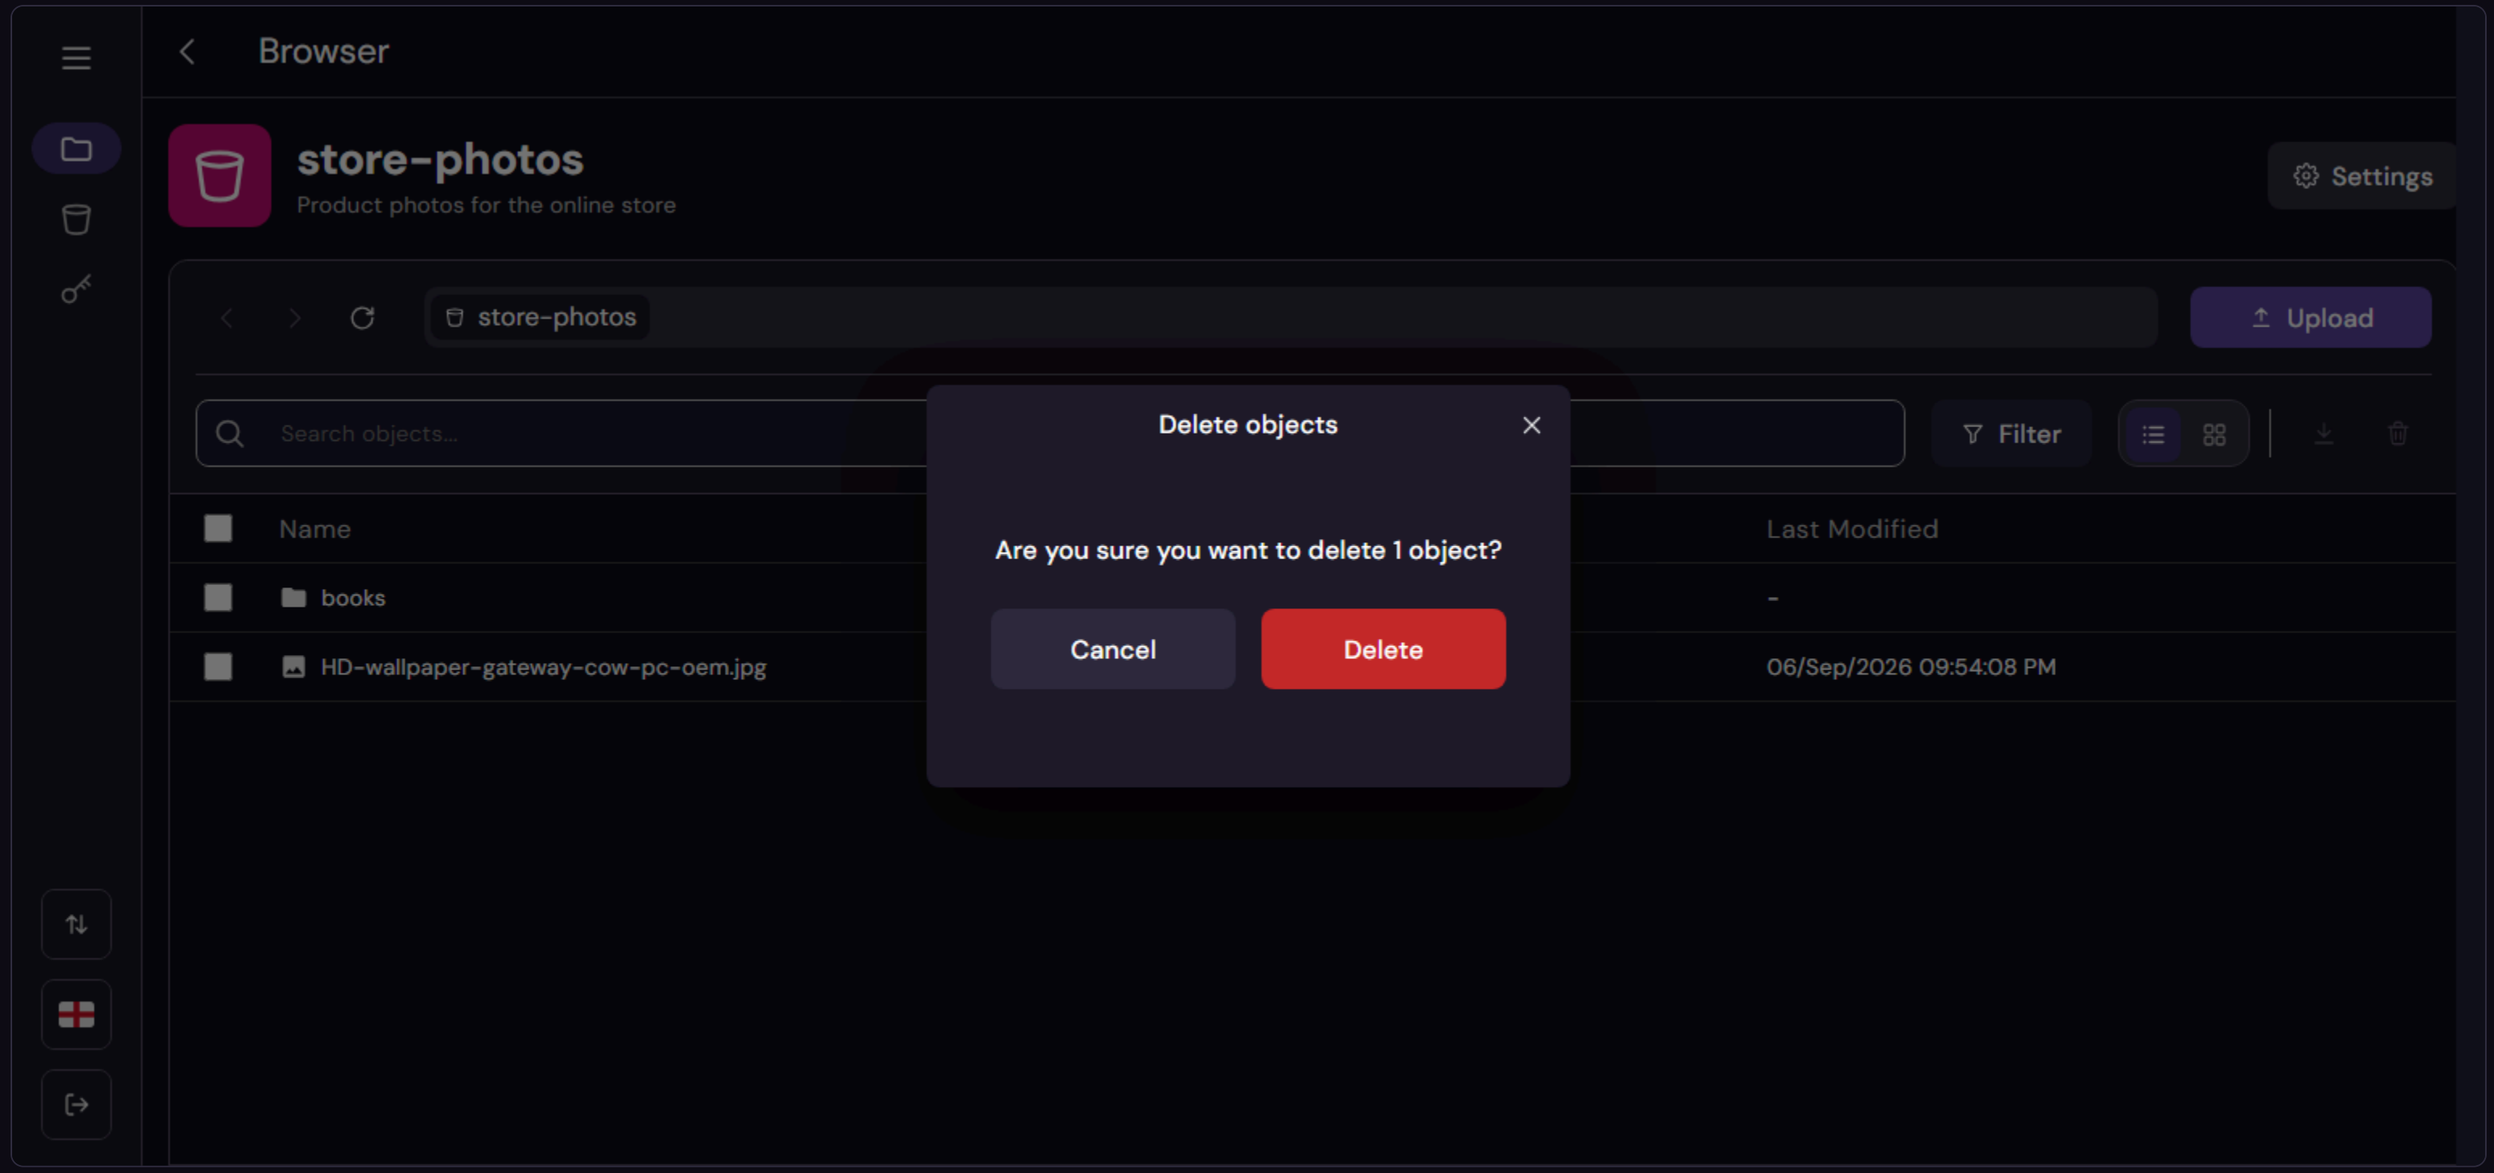


BROWSER

Object details

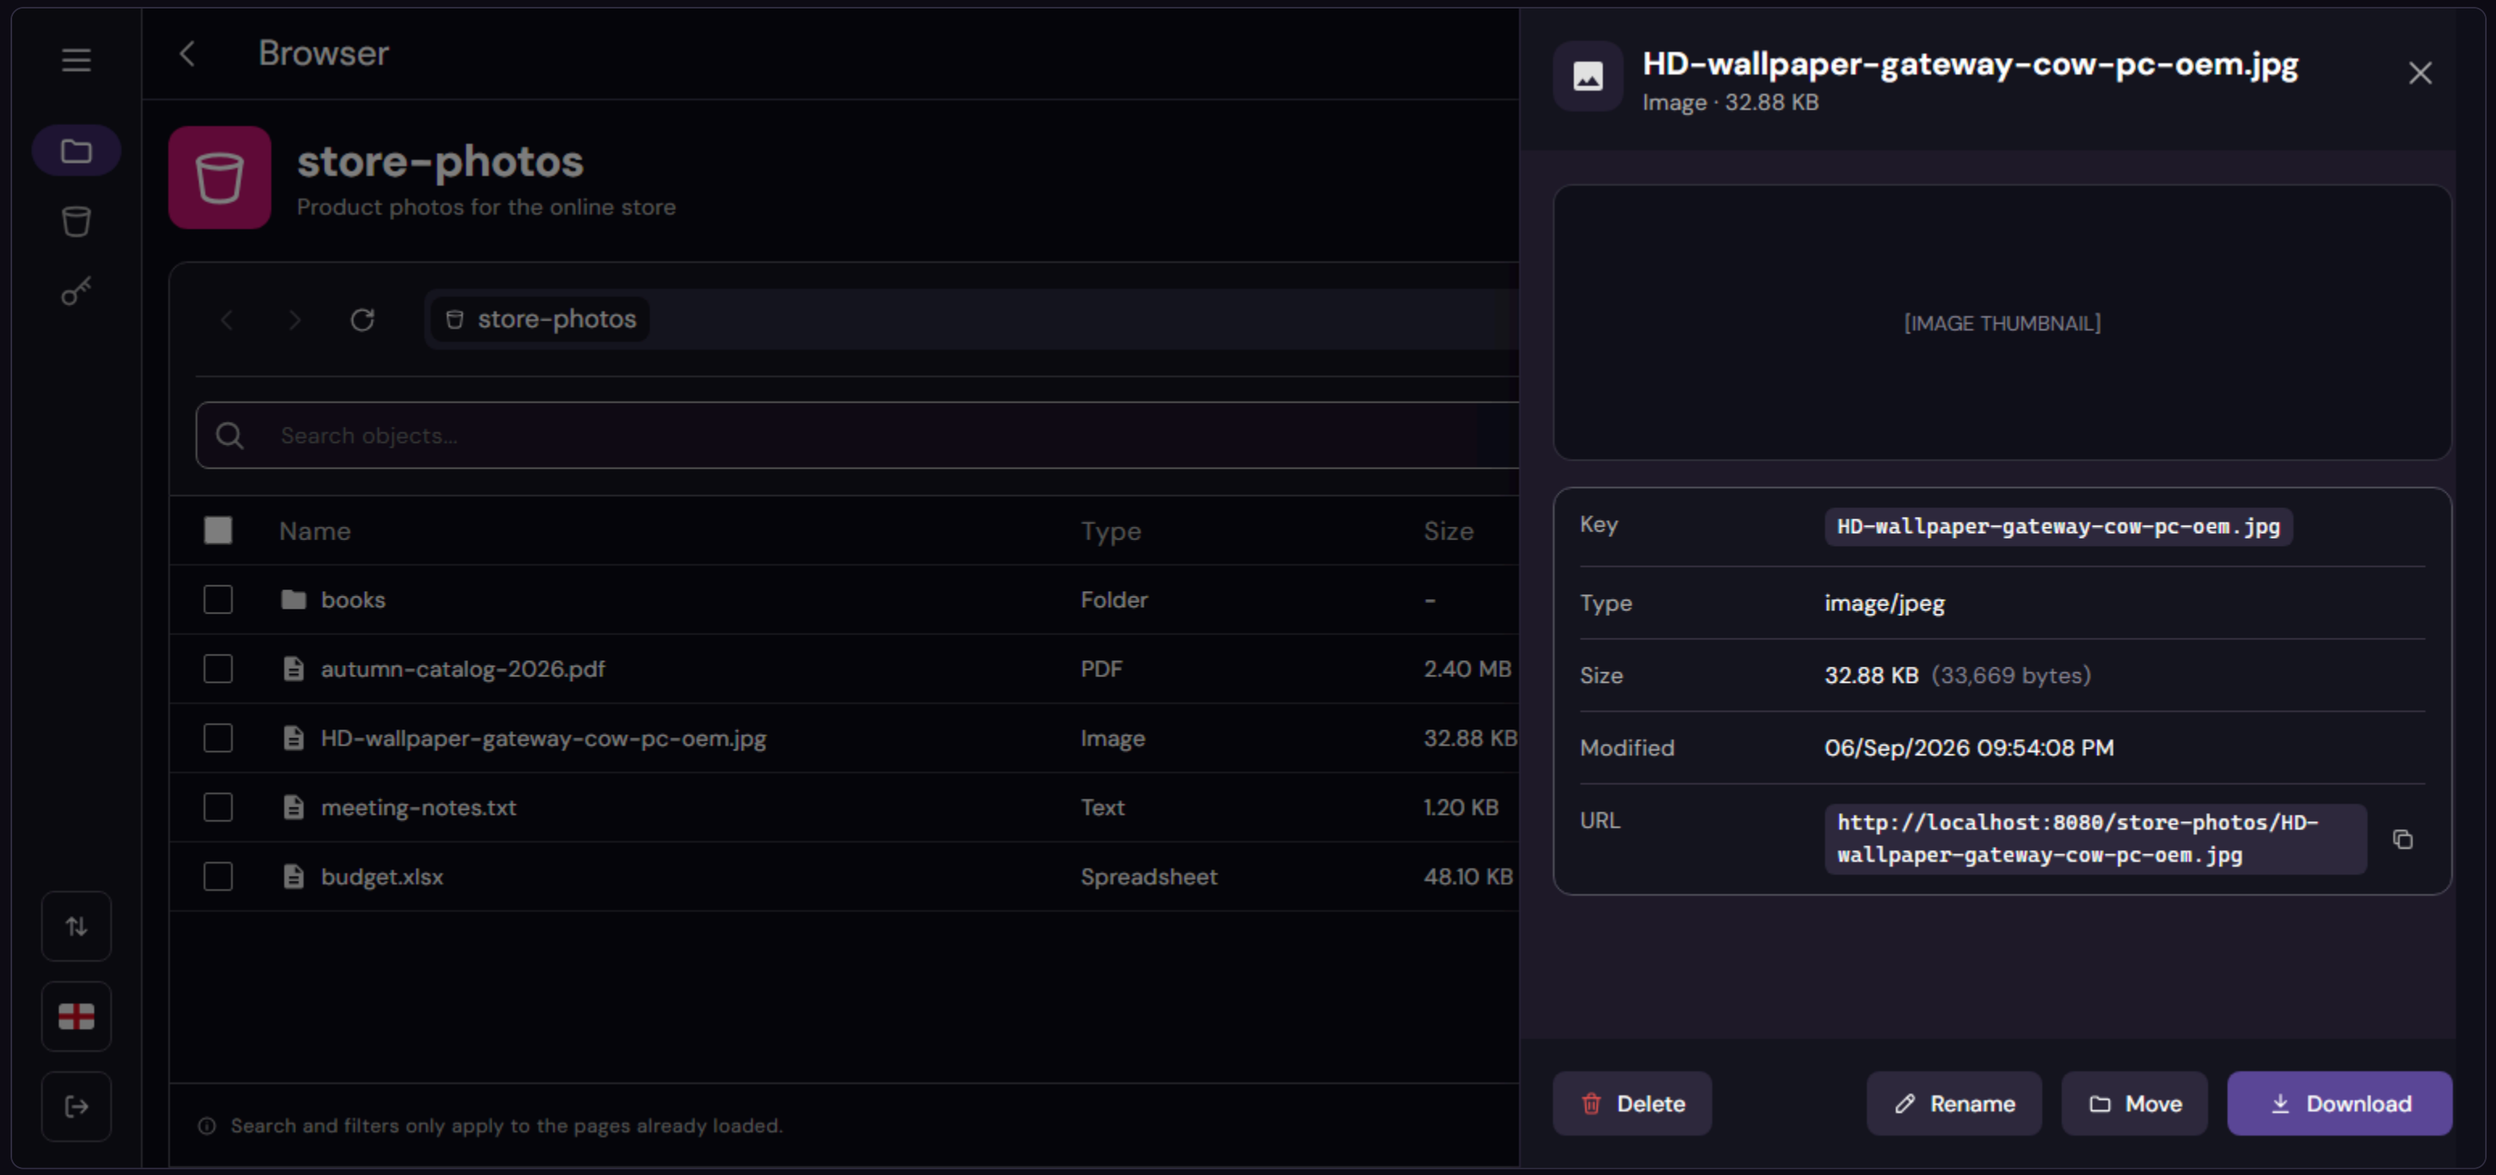


BROWSER

New folder

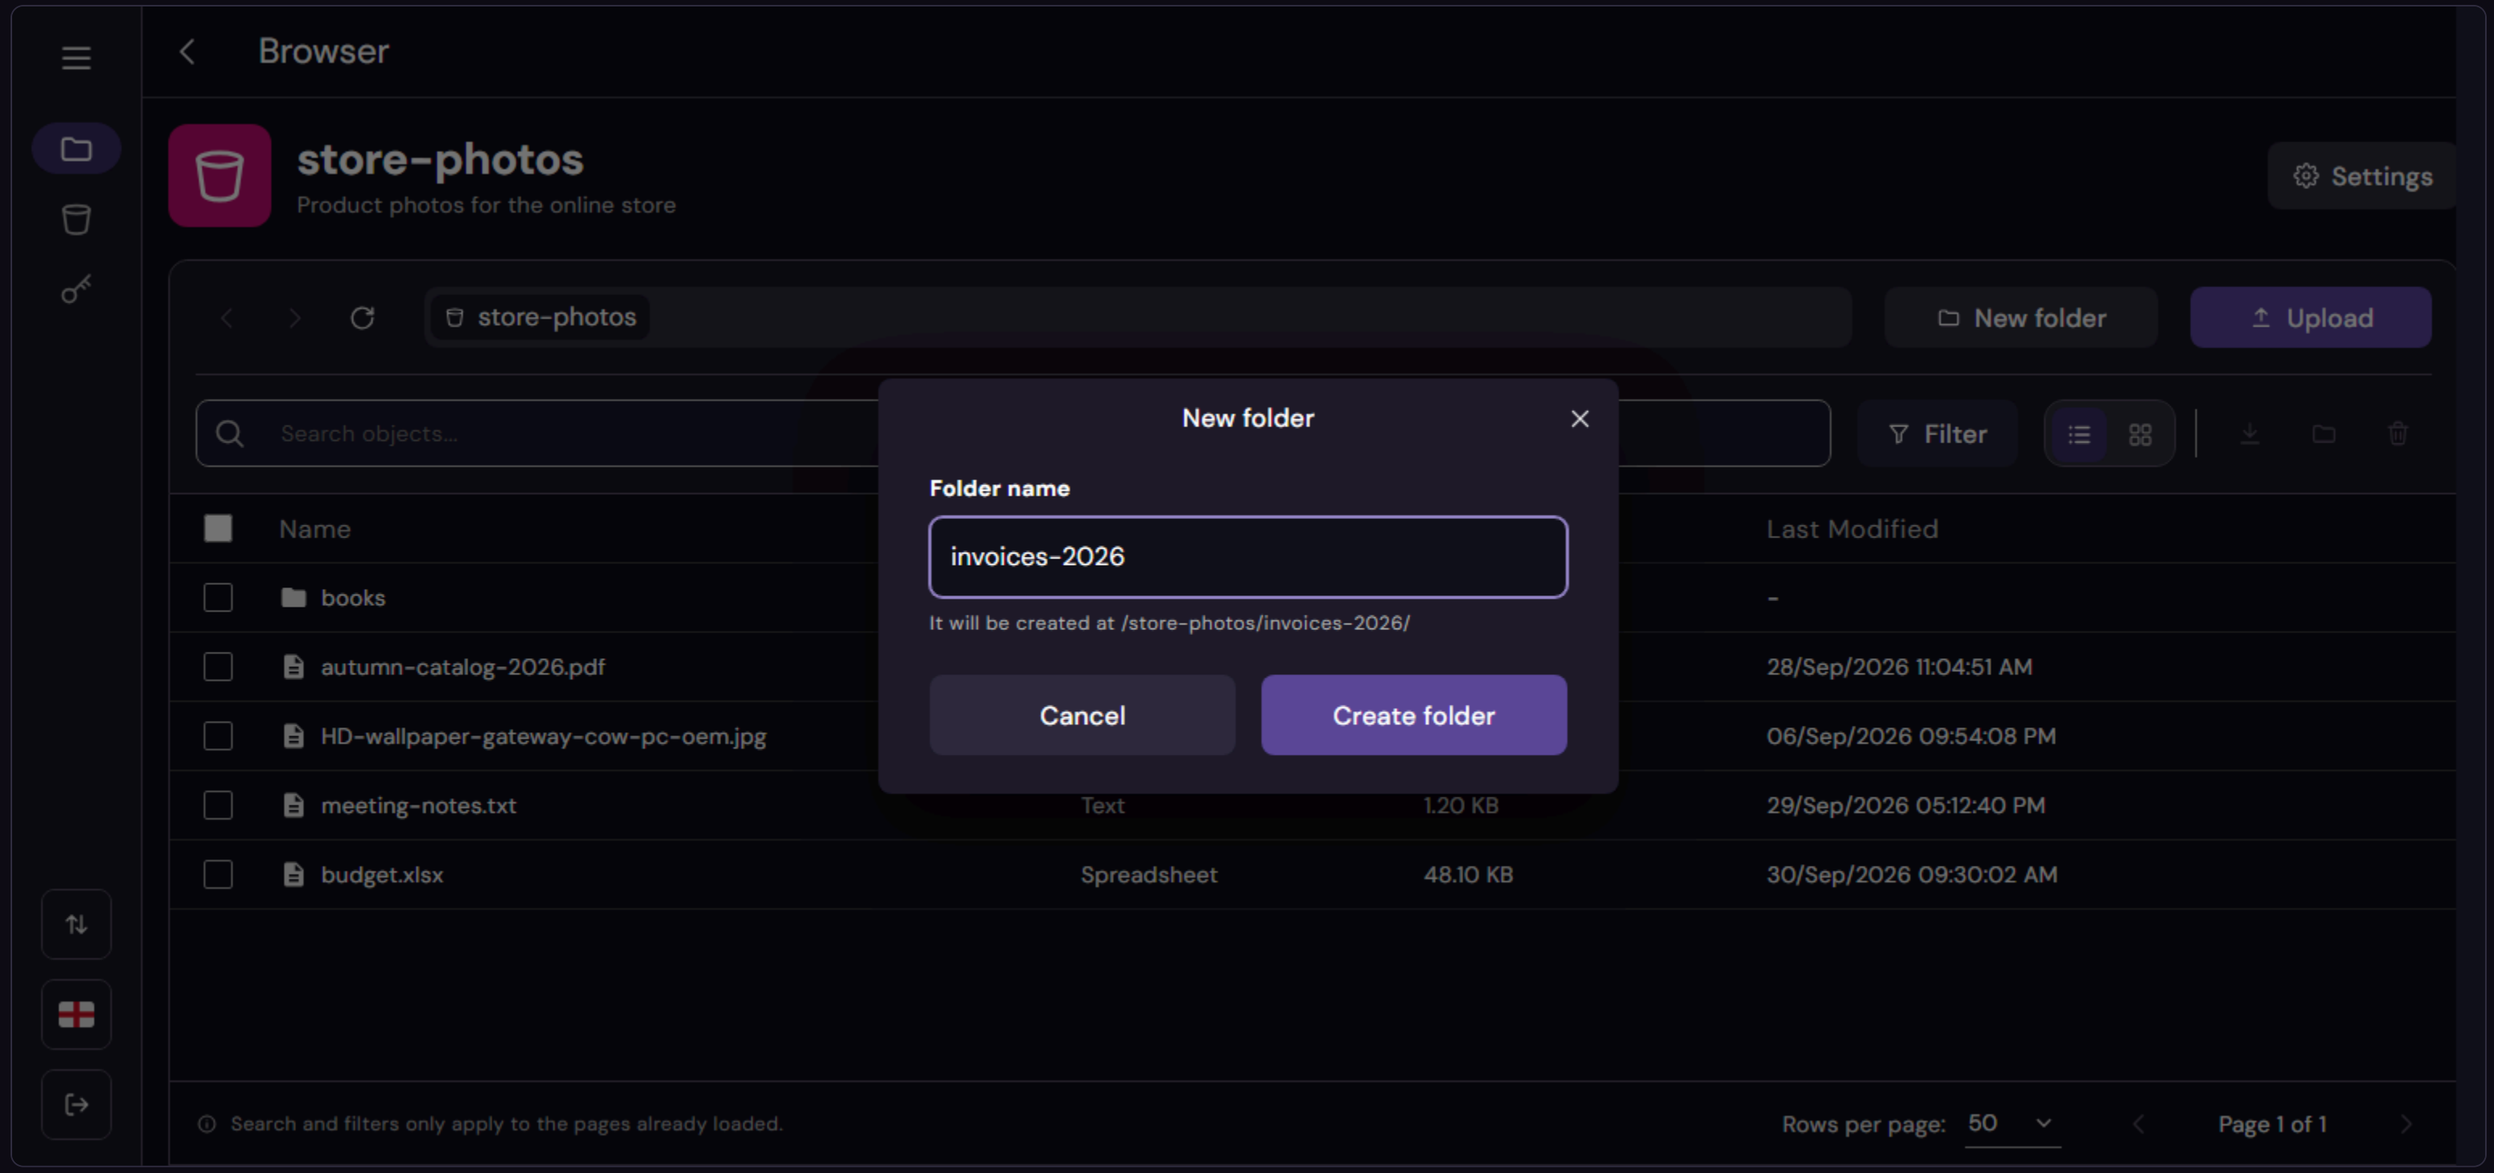


BROWSER

Rename an object

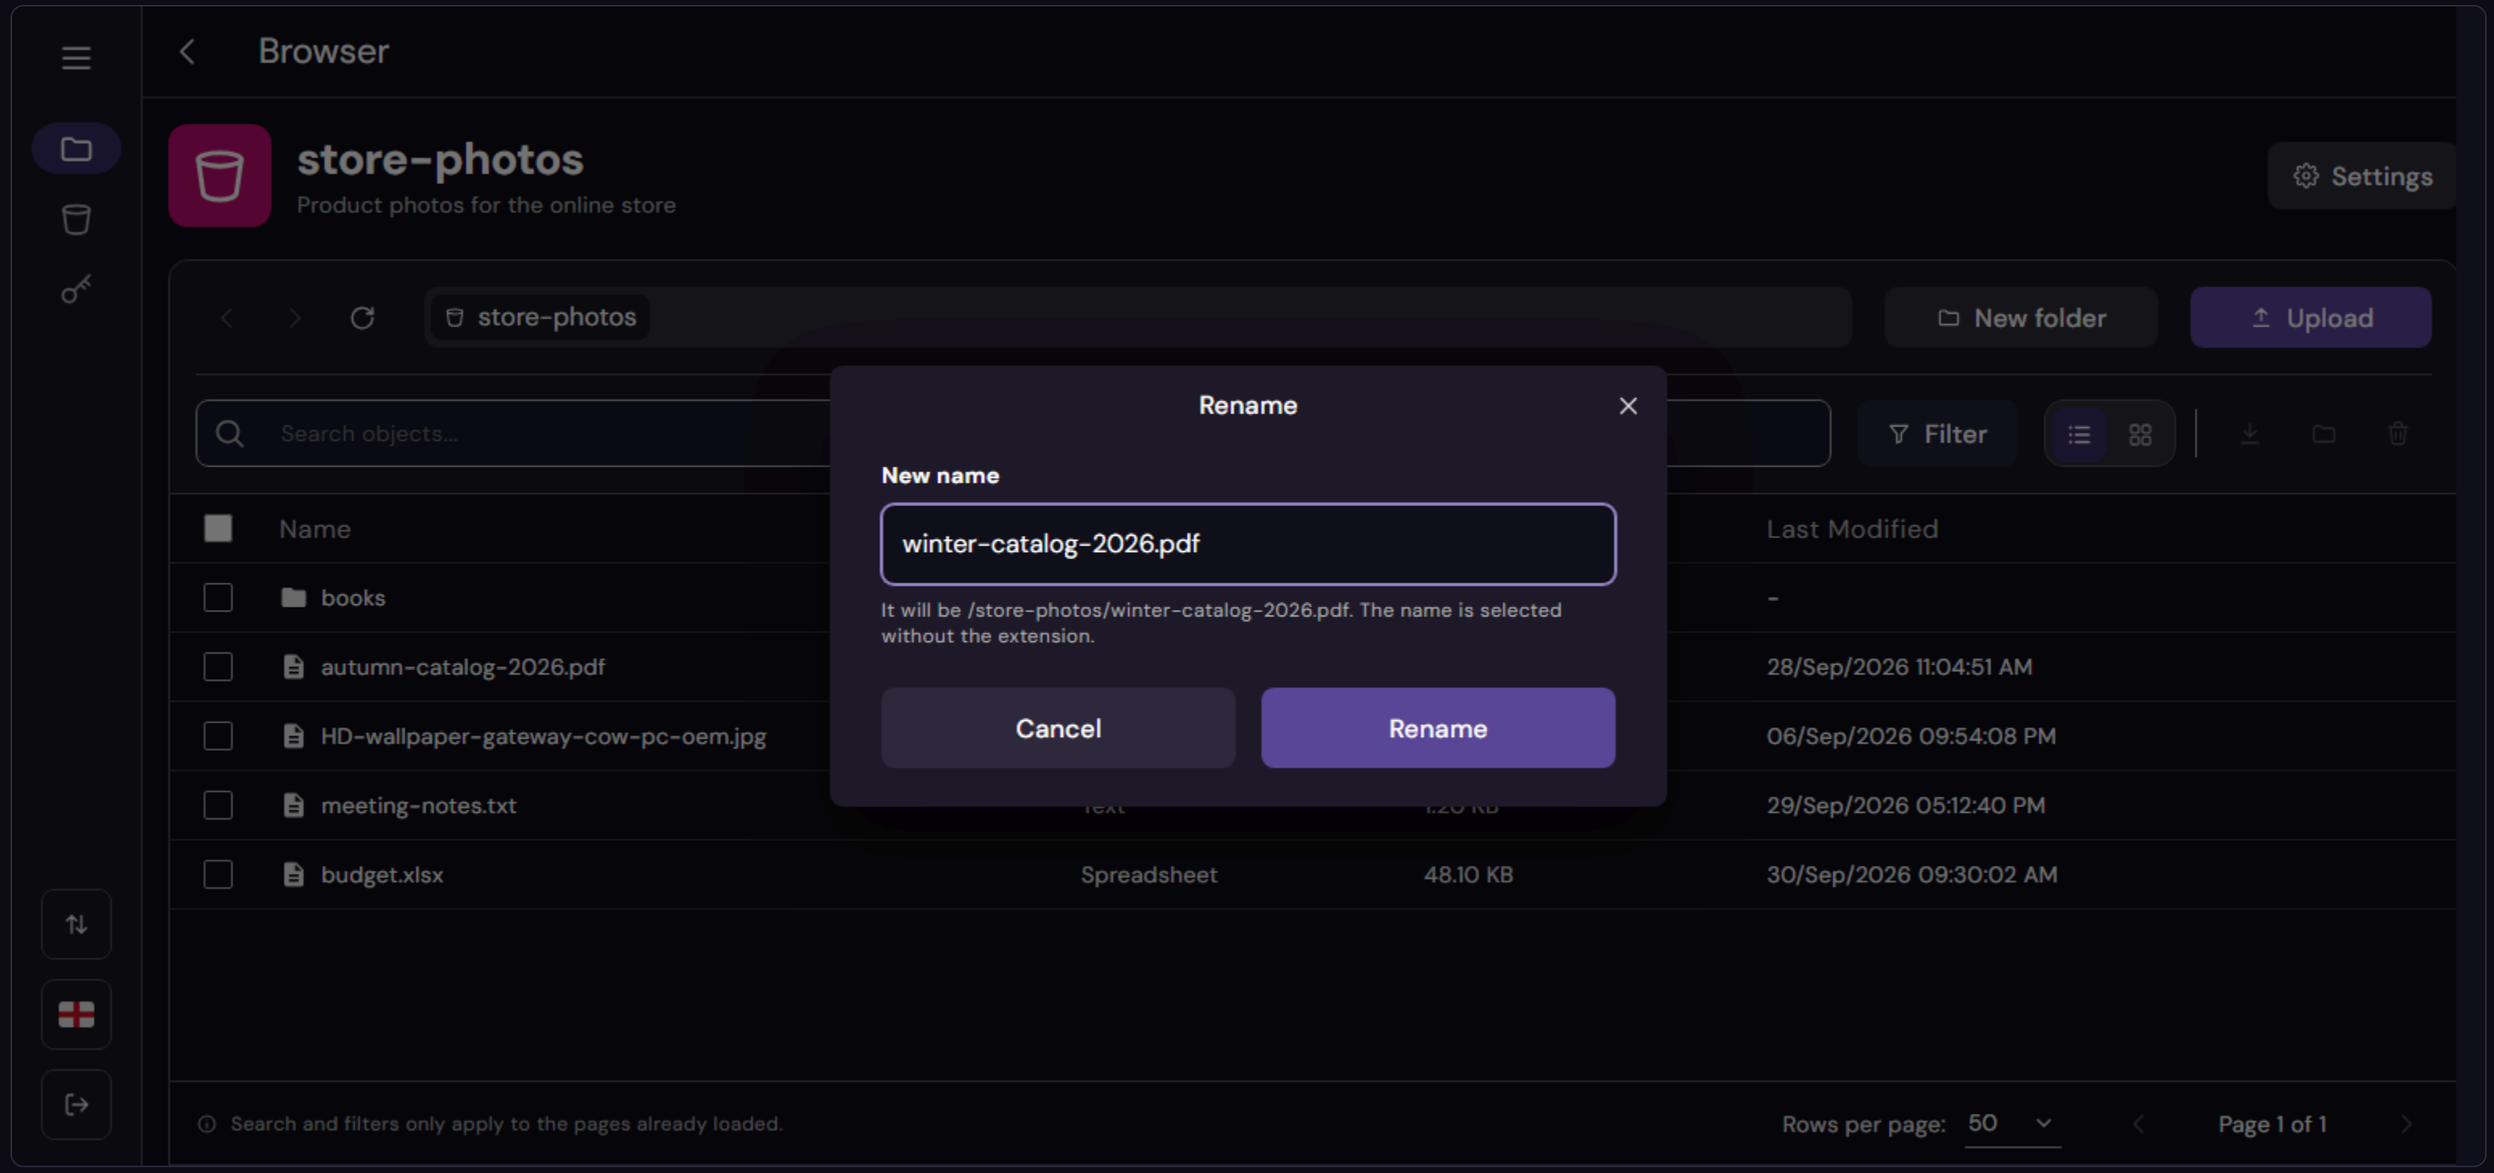


BROWSER

Move objects to another folder

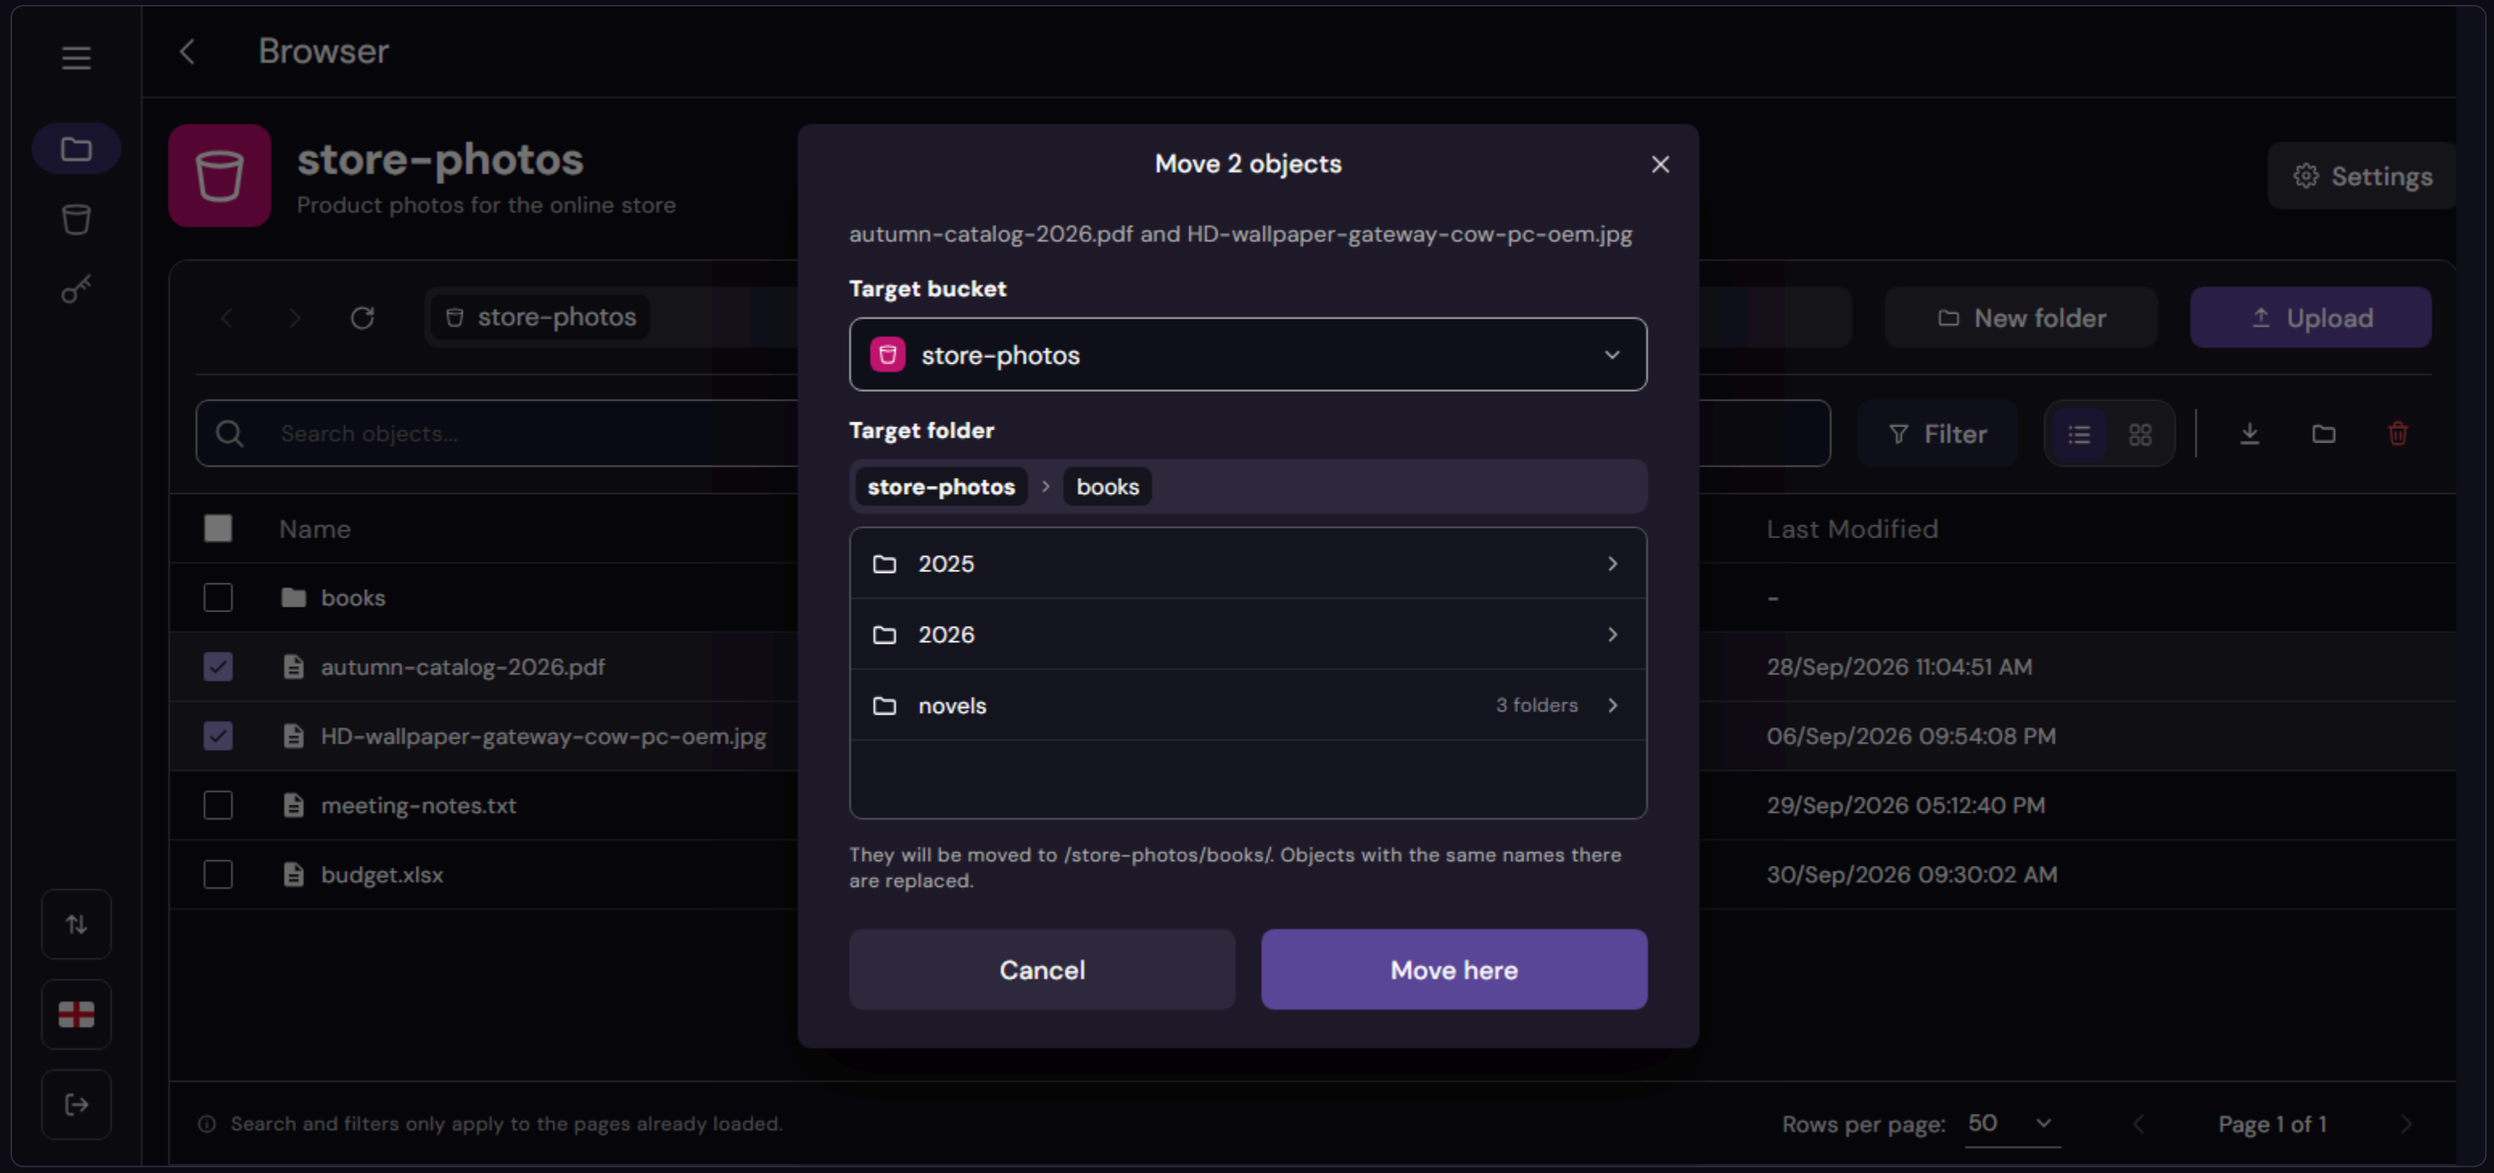


BROWSER

Share link (presigned URL)

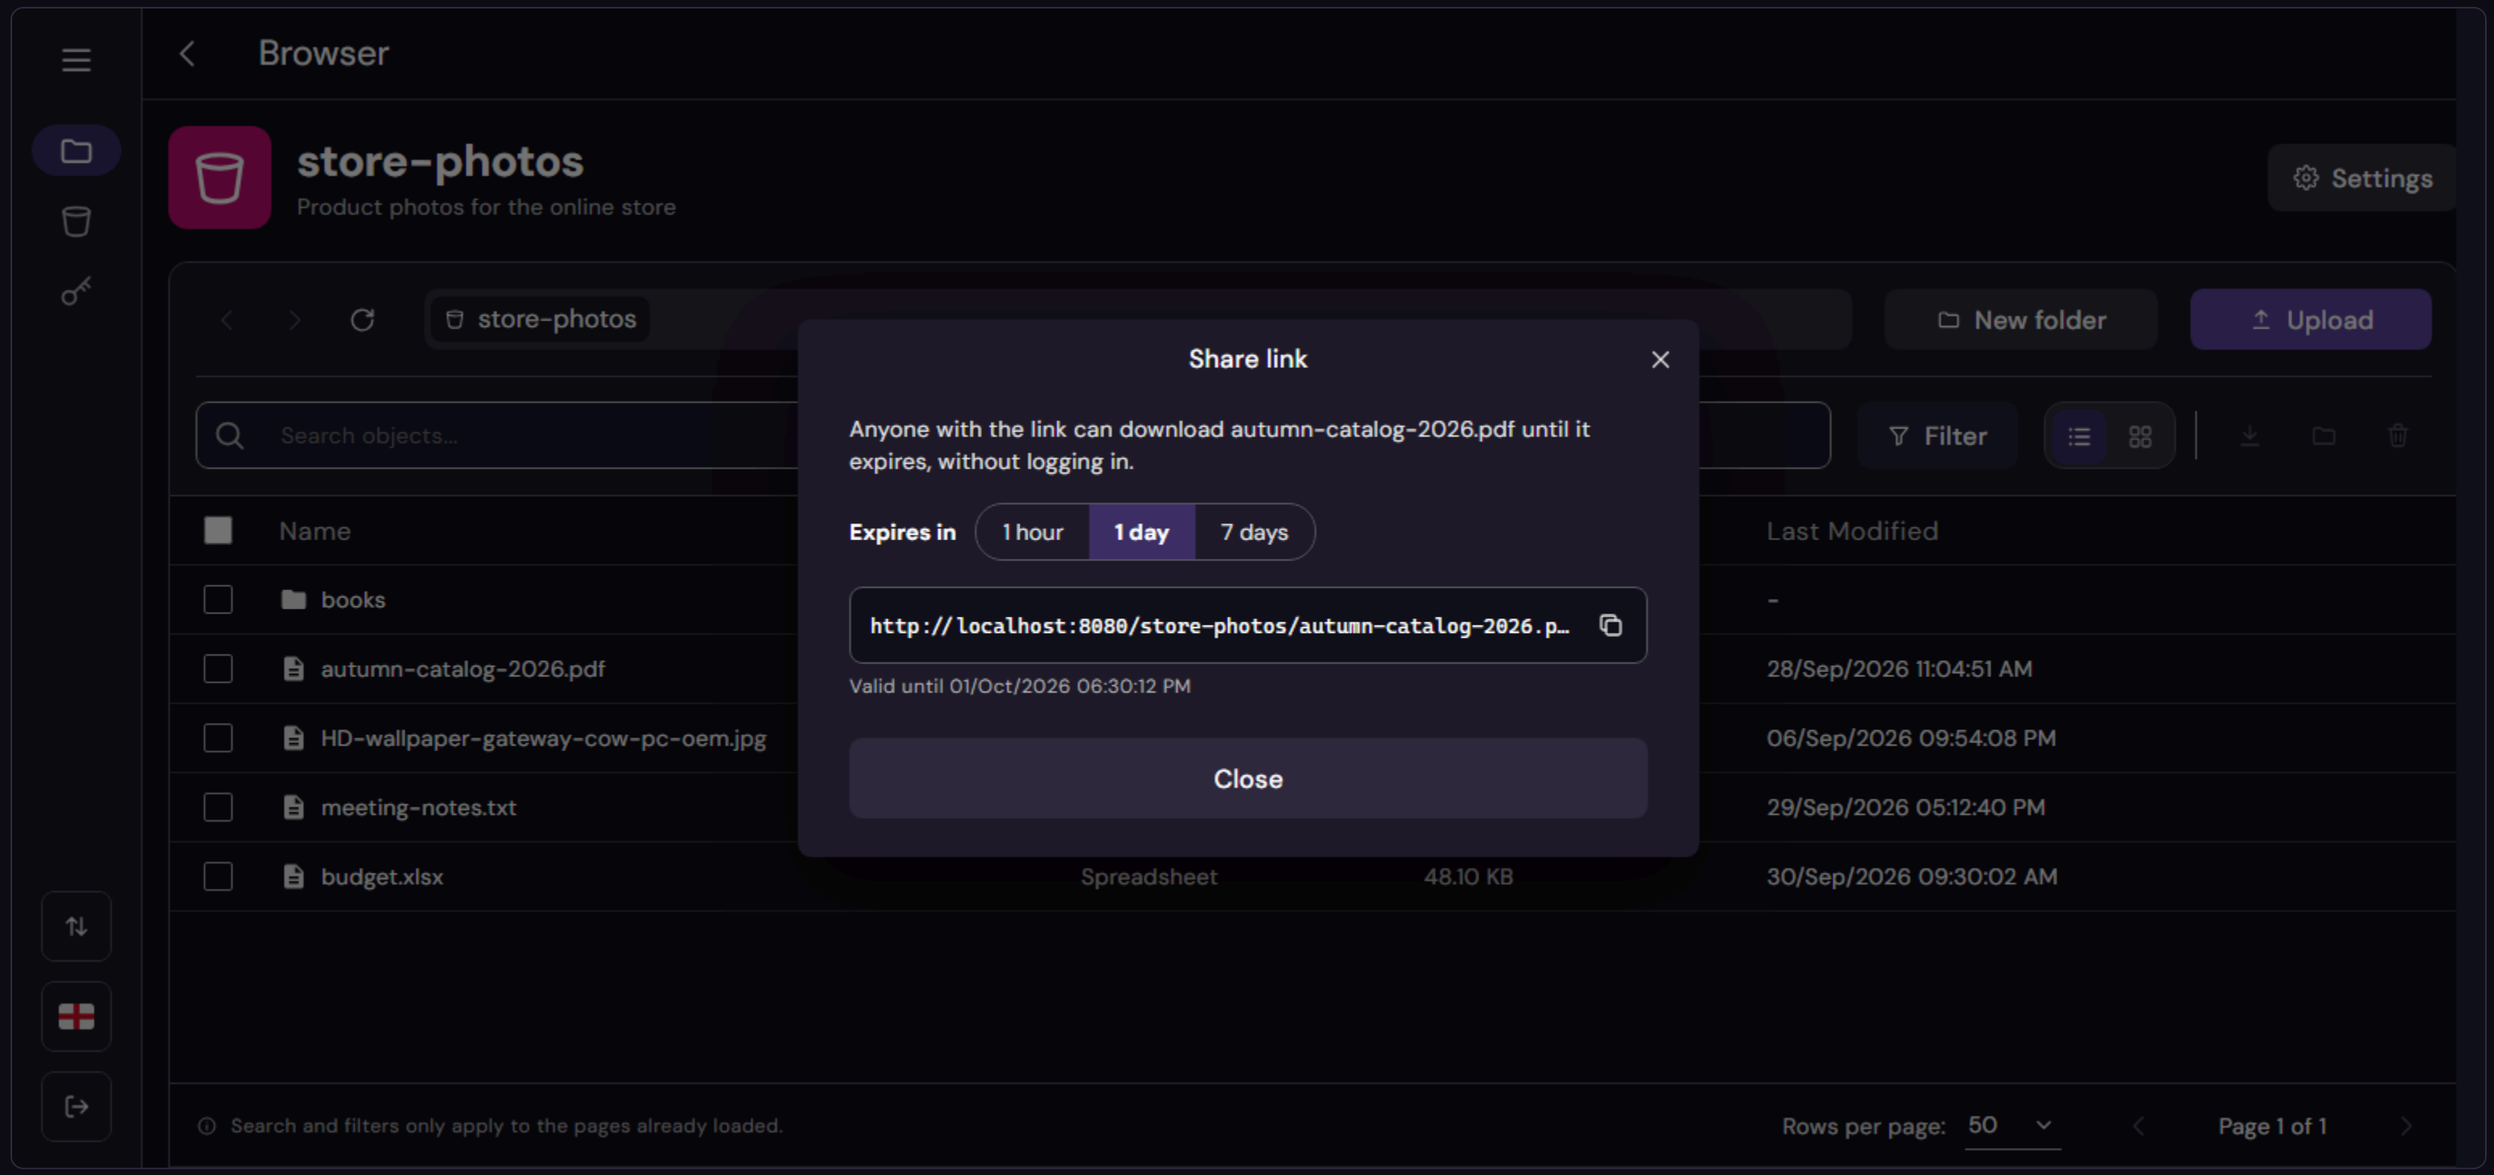


BROWSER

Background transfers

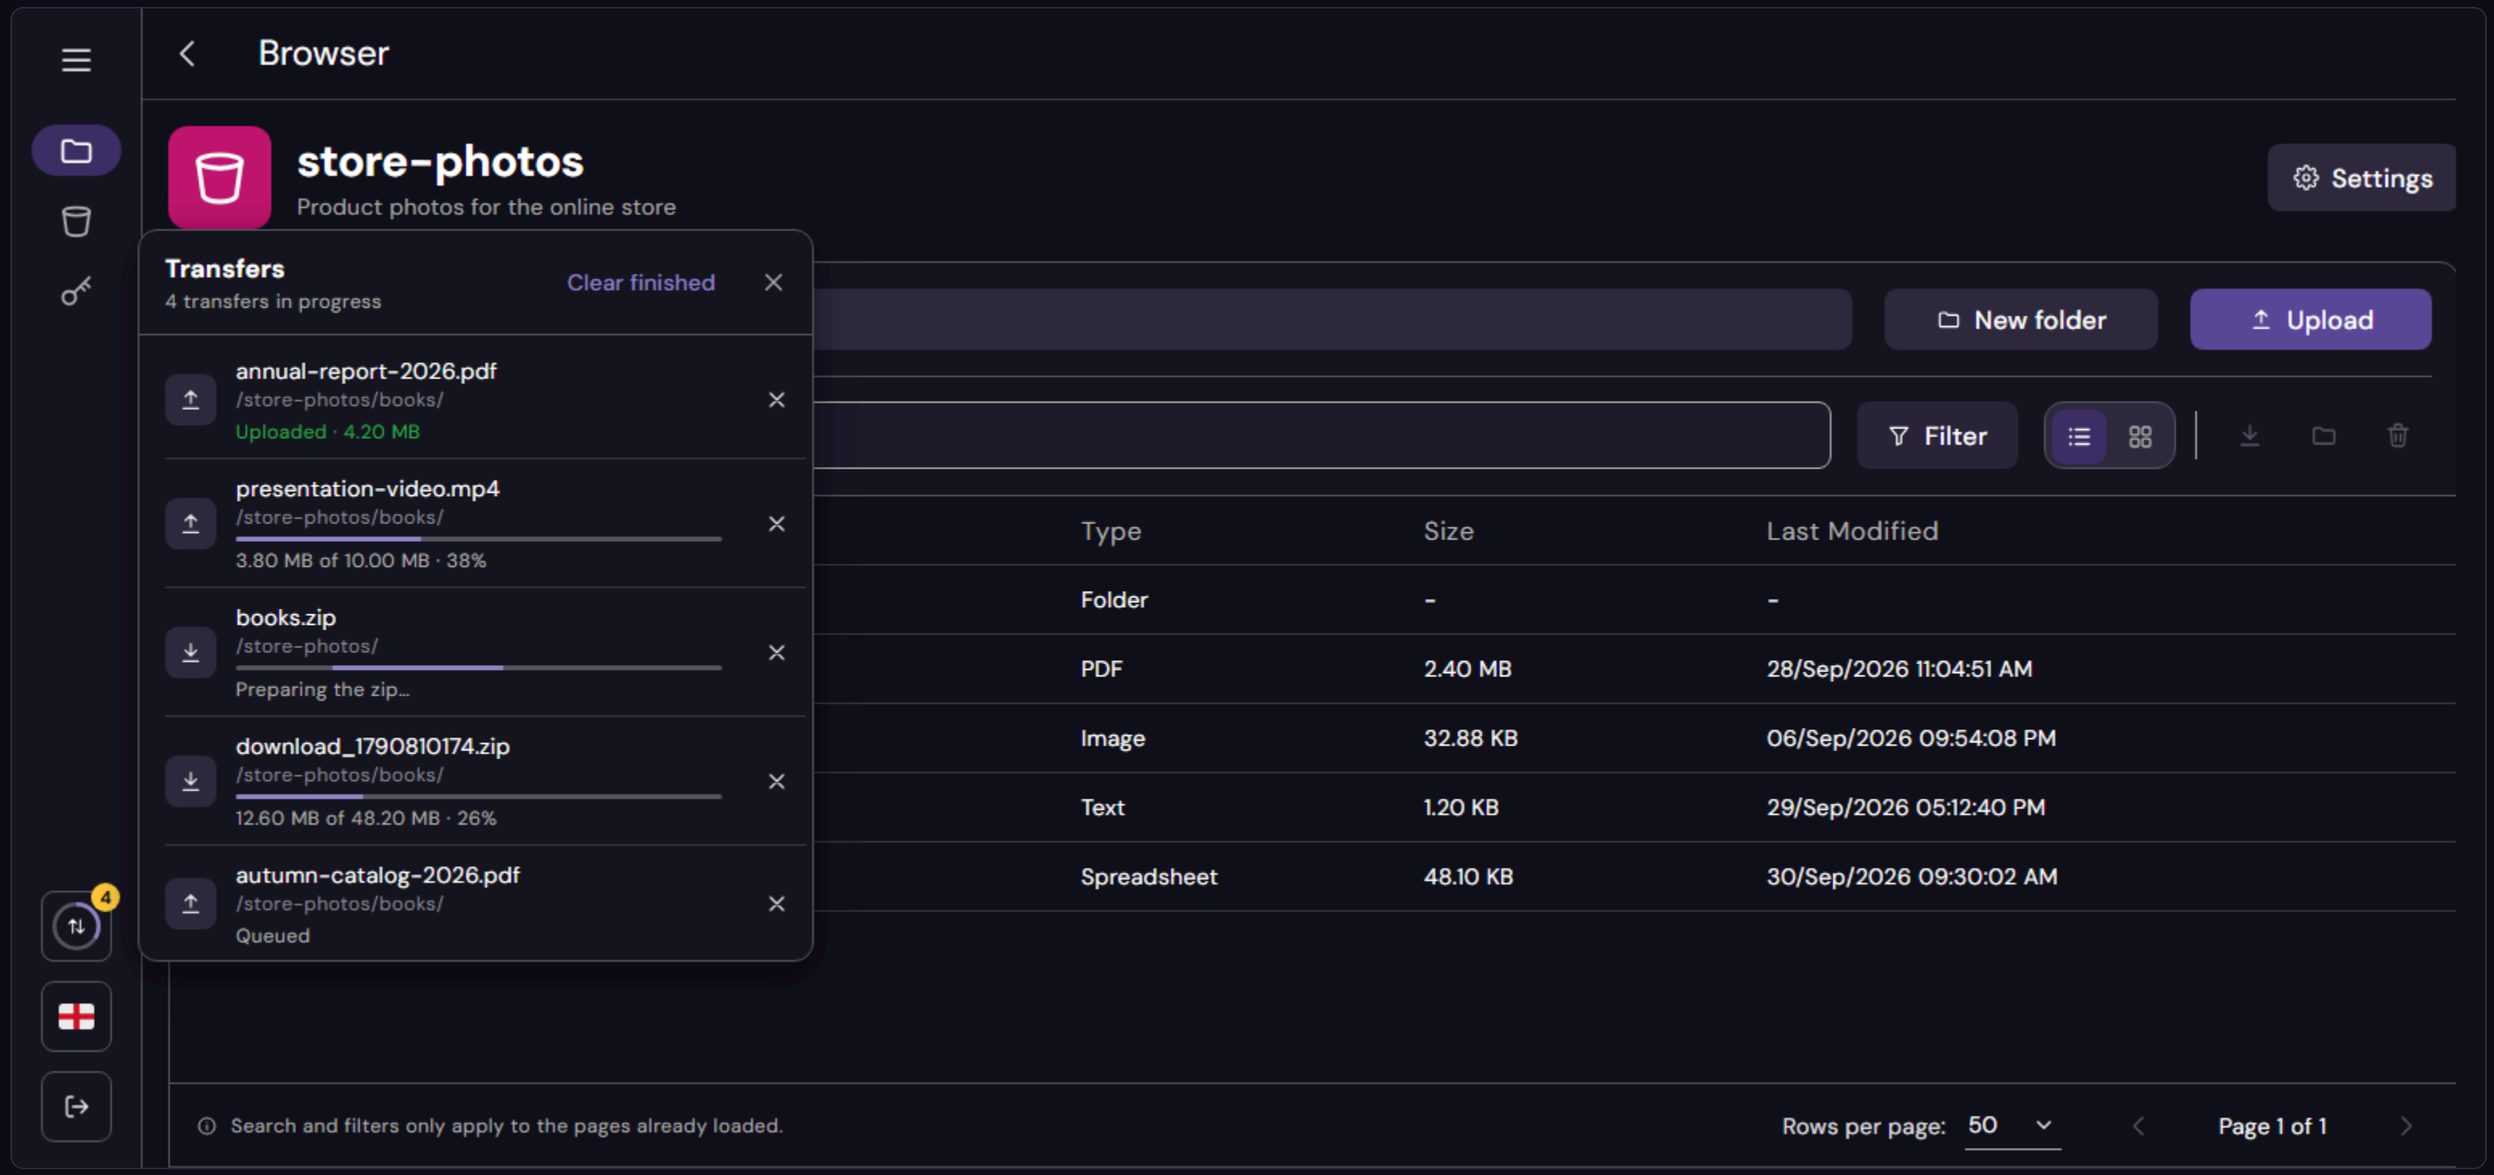


BUCKETS

Buckets: general tab

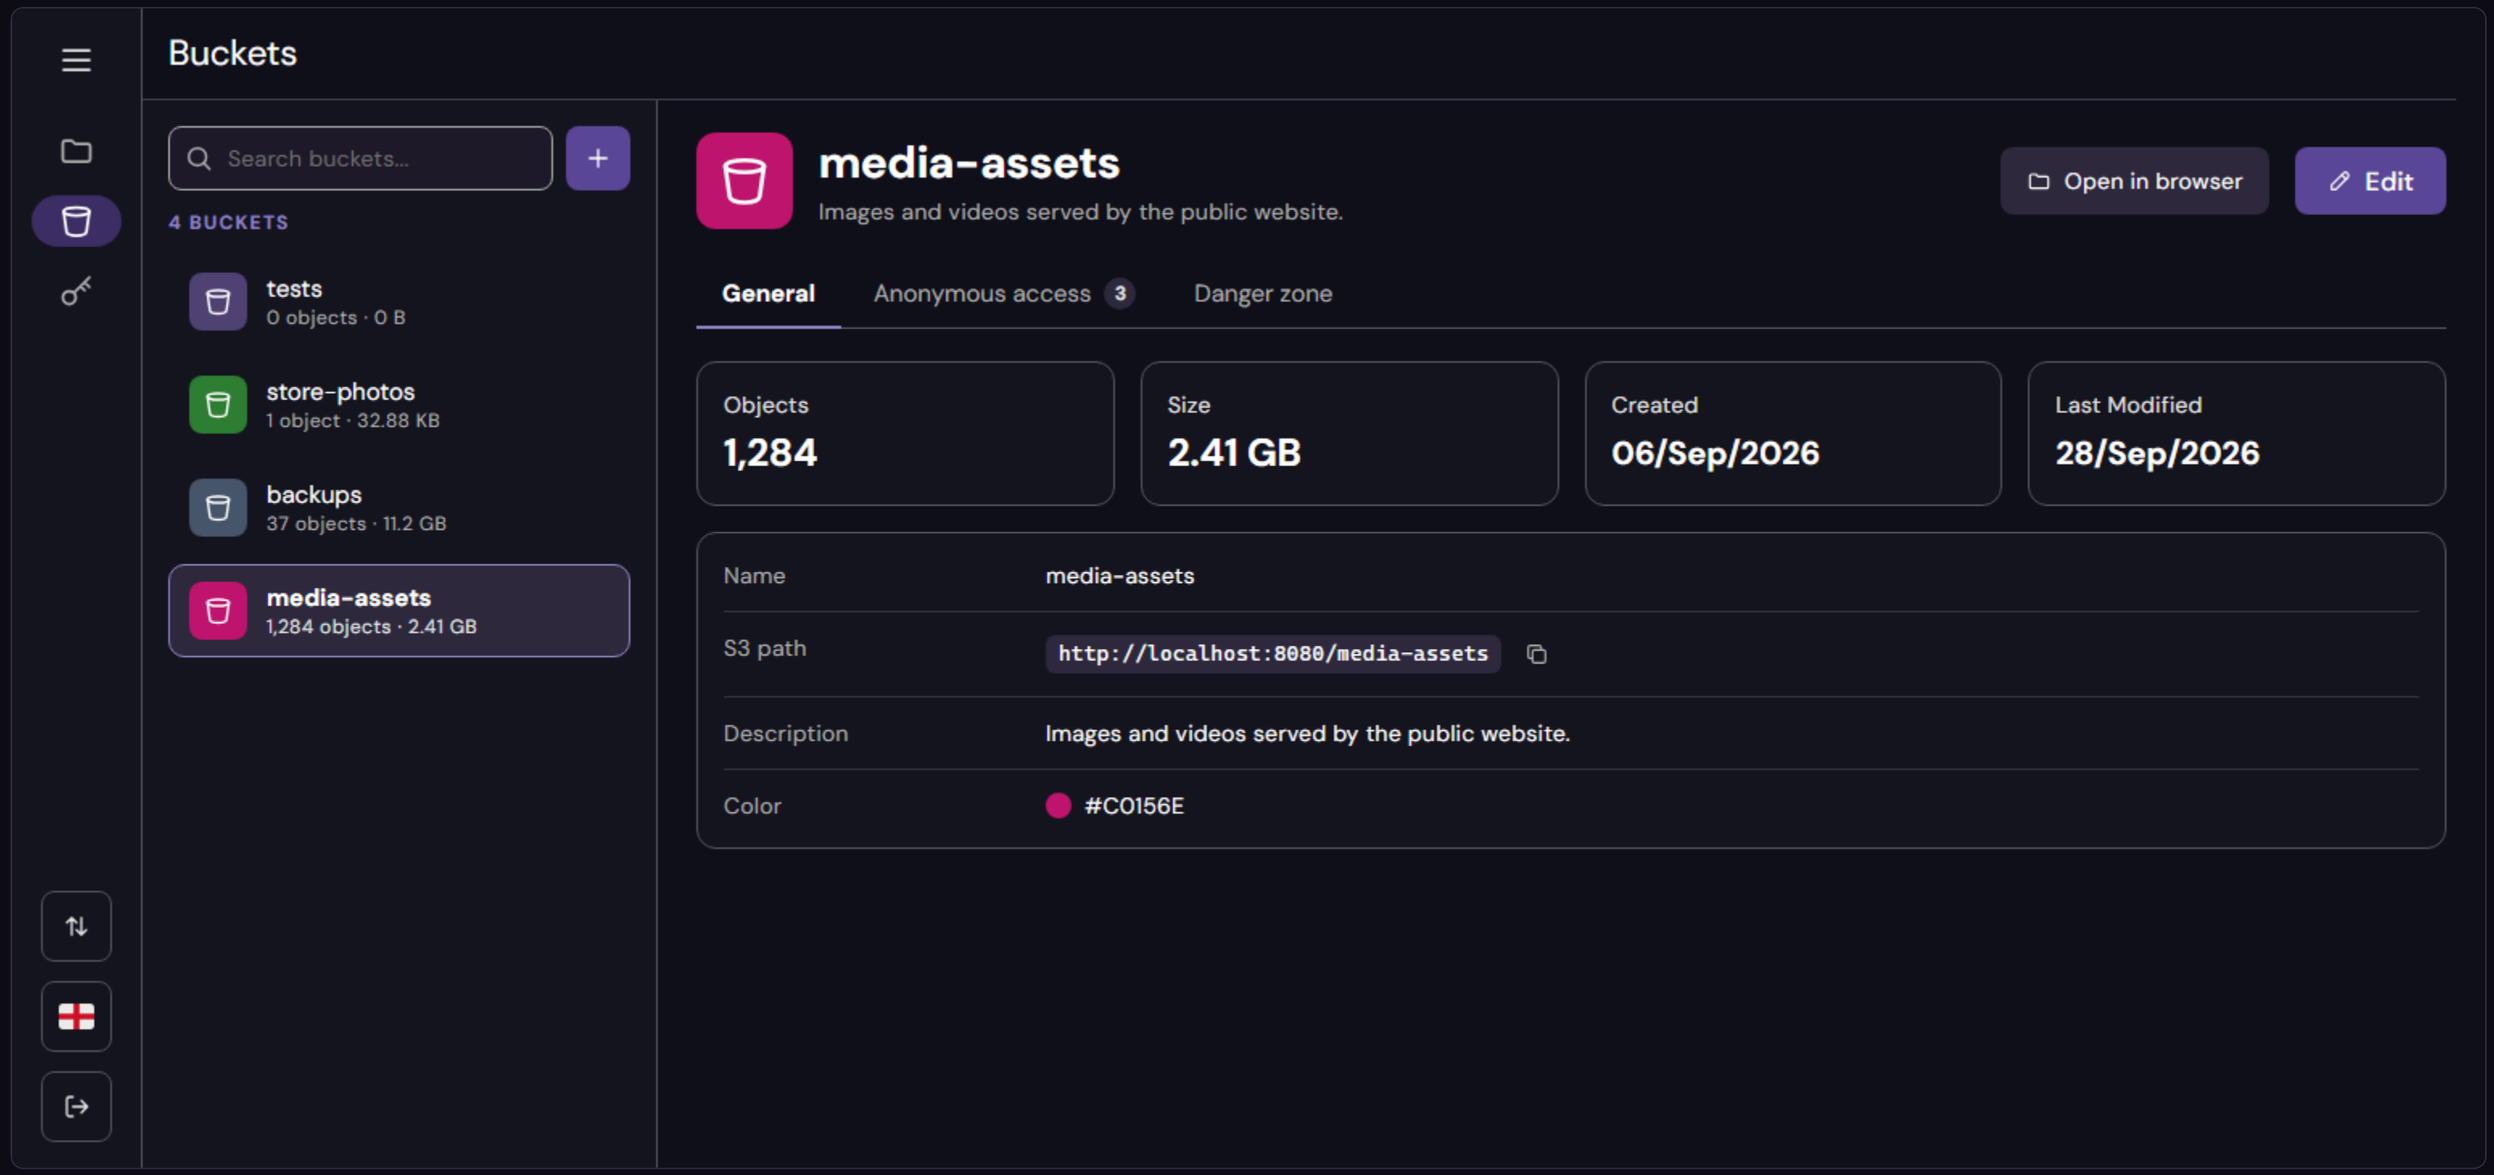


BUCKETS

Buckets: anonymous access rules

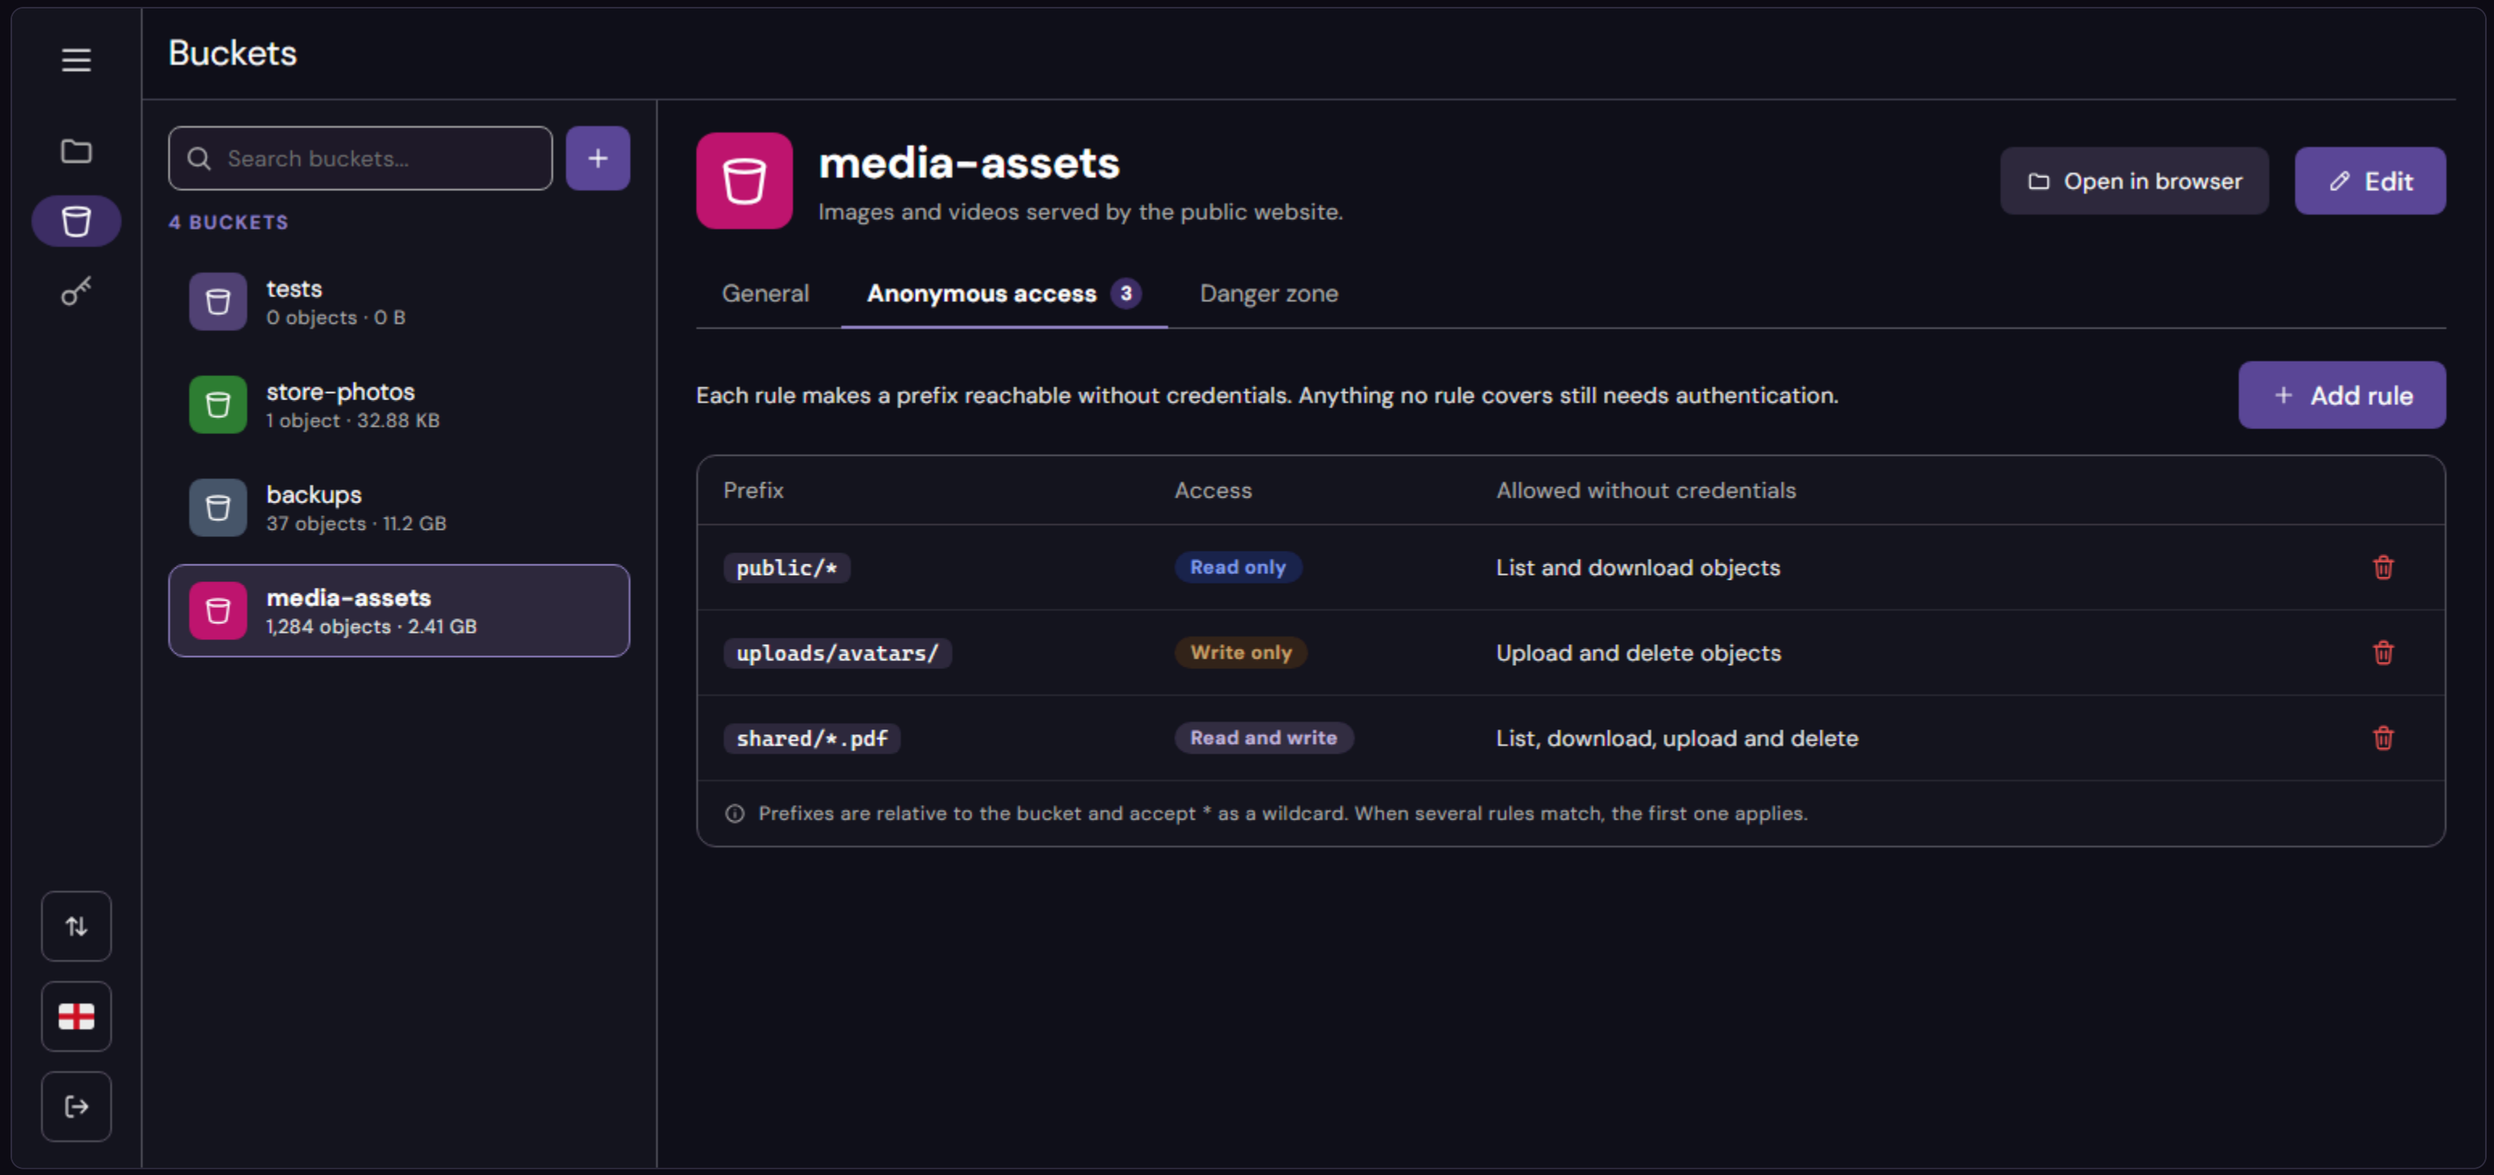


BUCKETS

Add an anonymous access rule

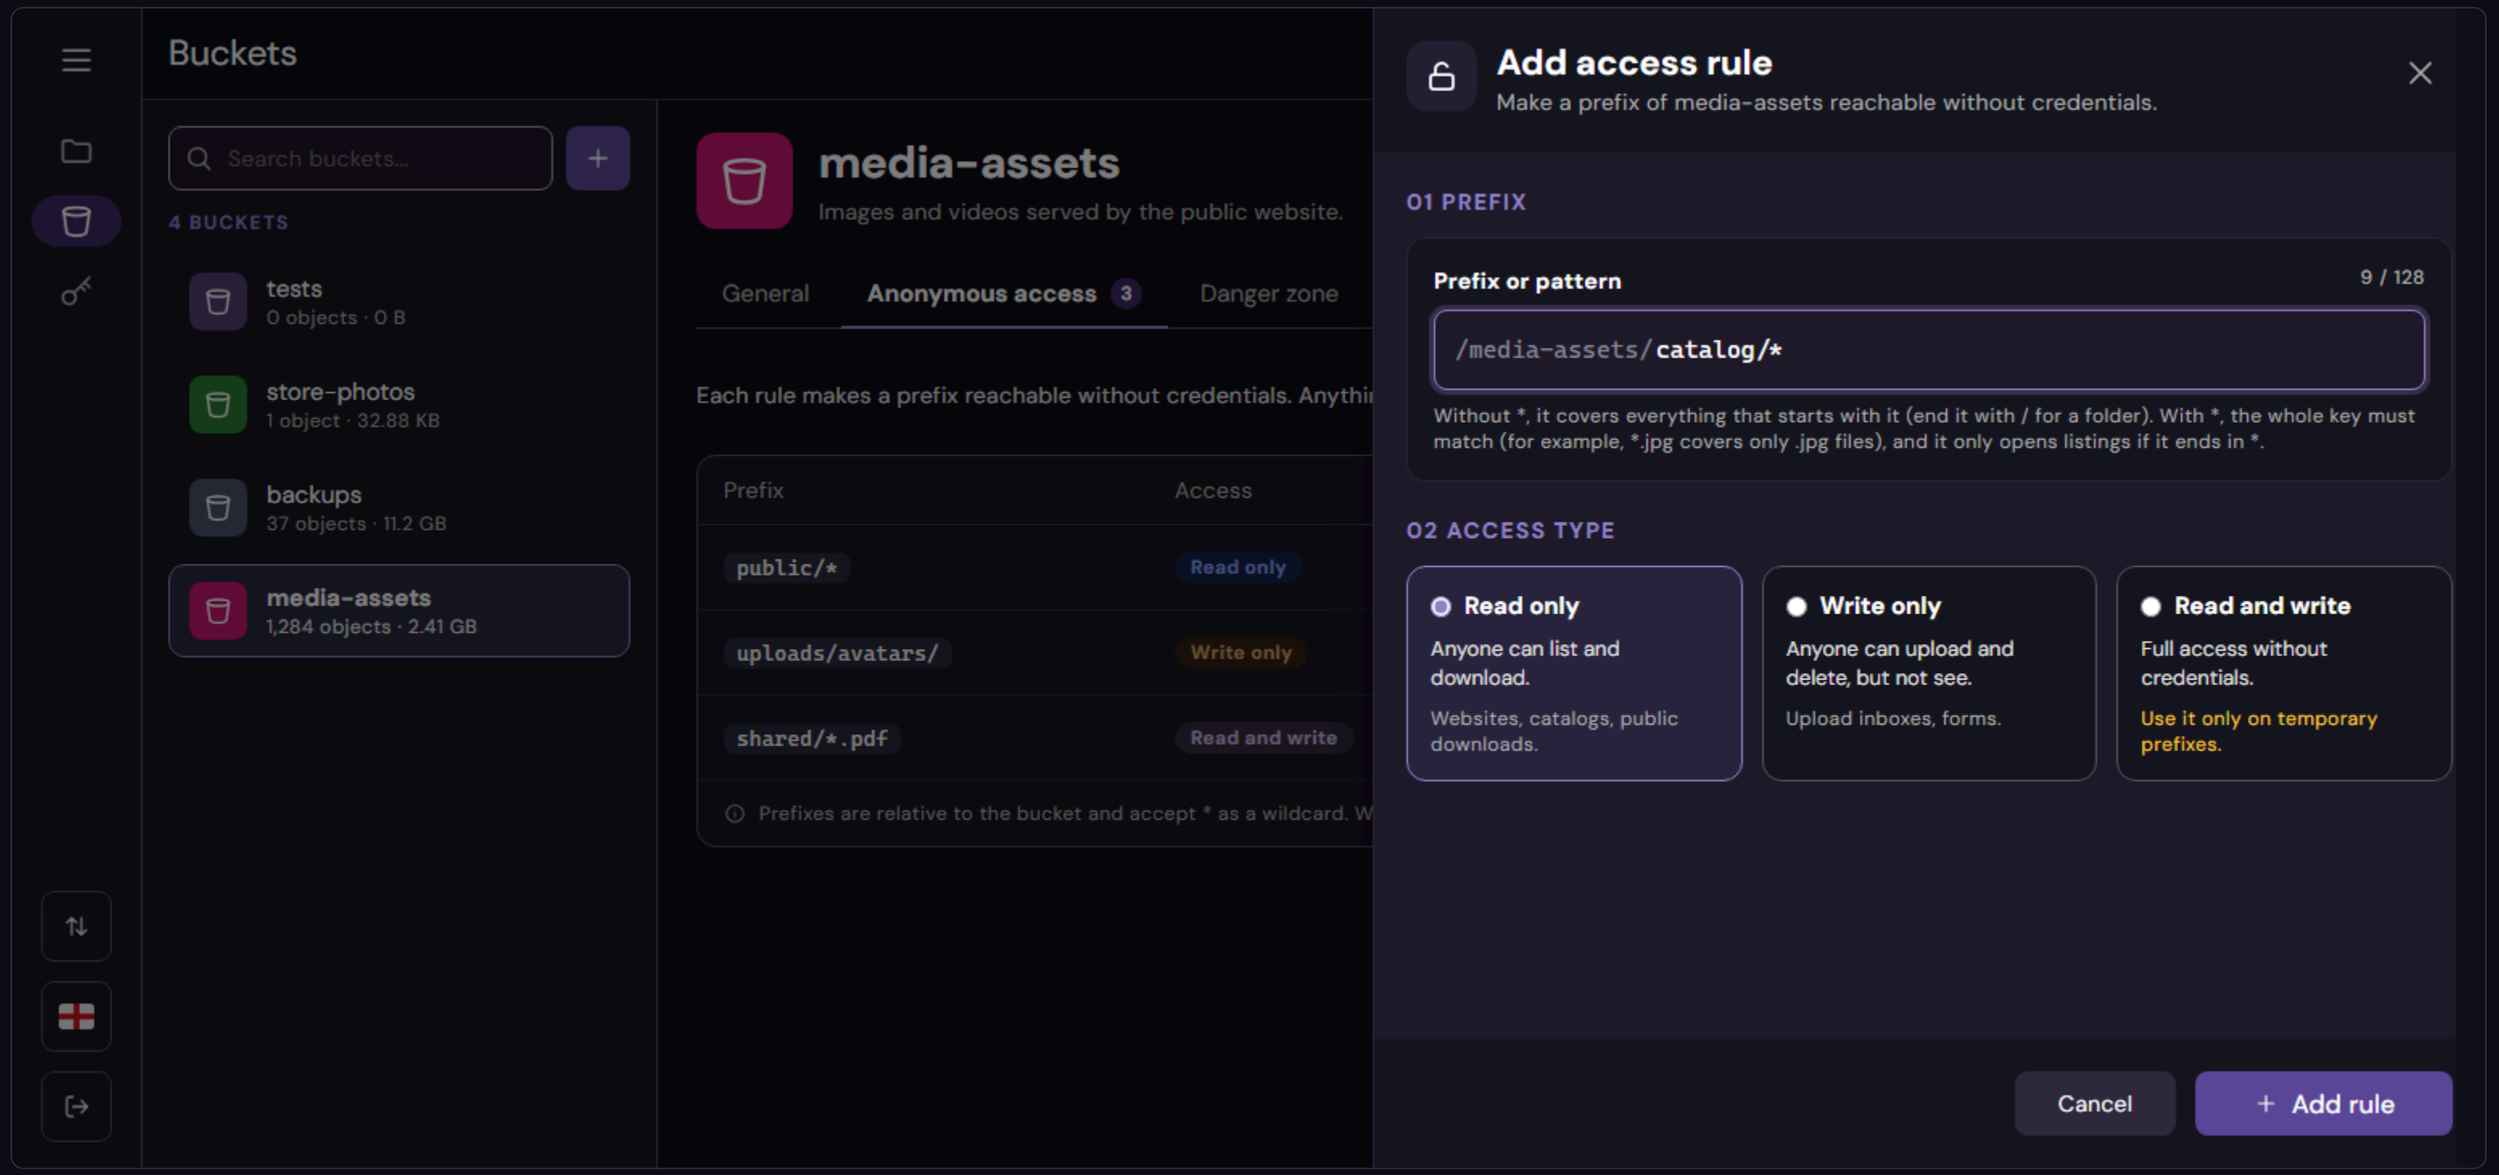


BUCKETS

Buckets: danger zone

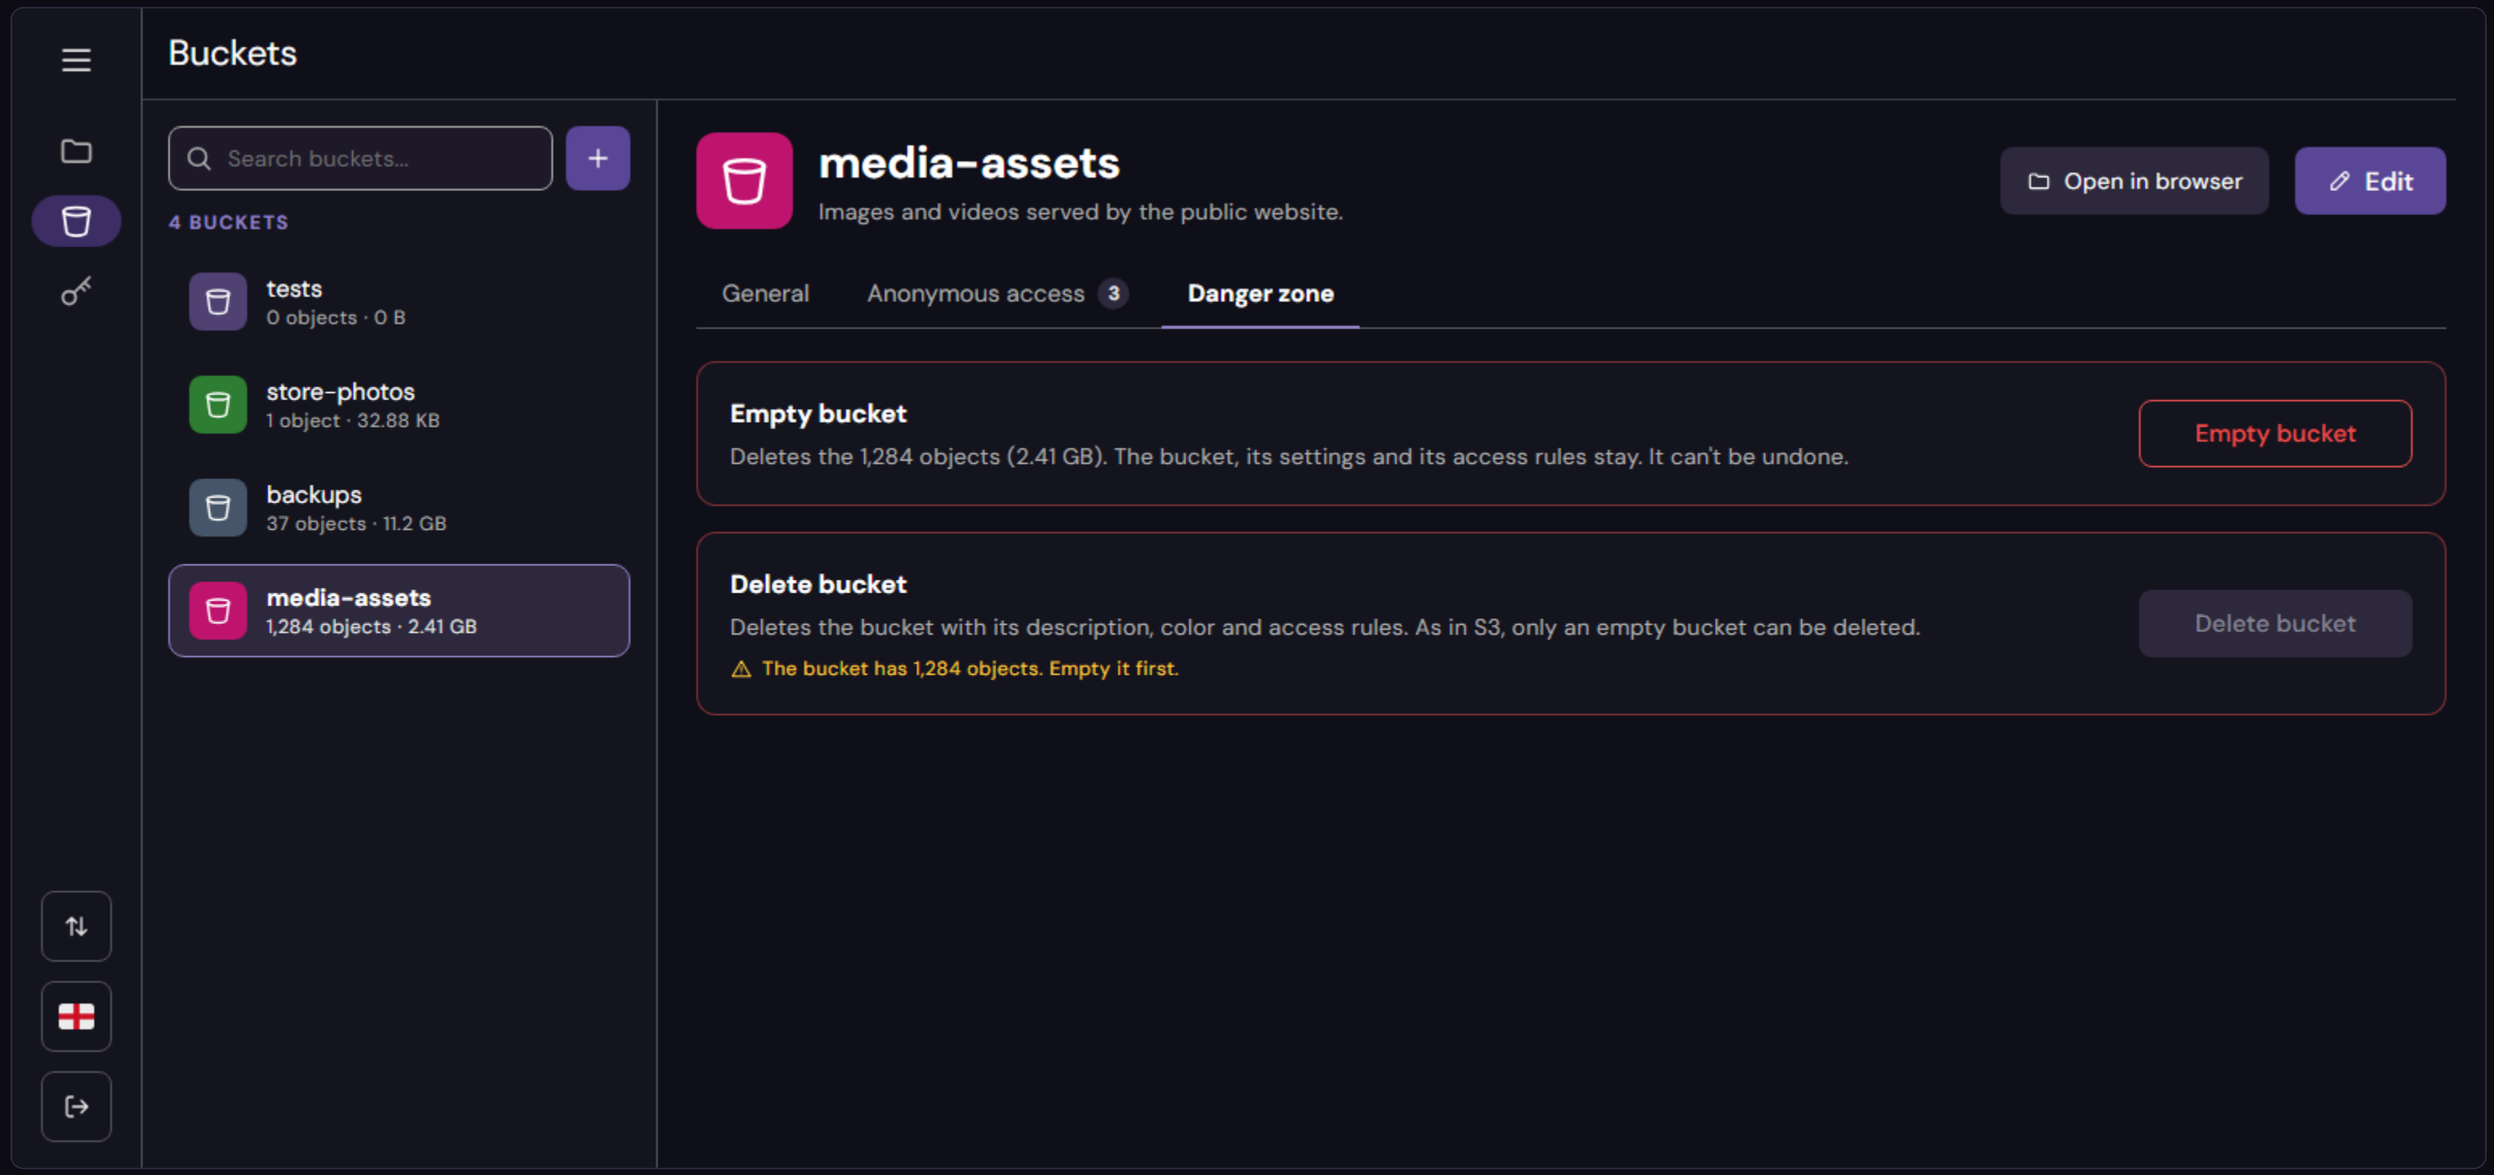


BUCKETS

Empty a bucket, confirmed with its name

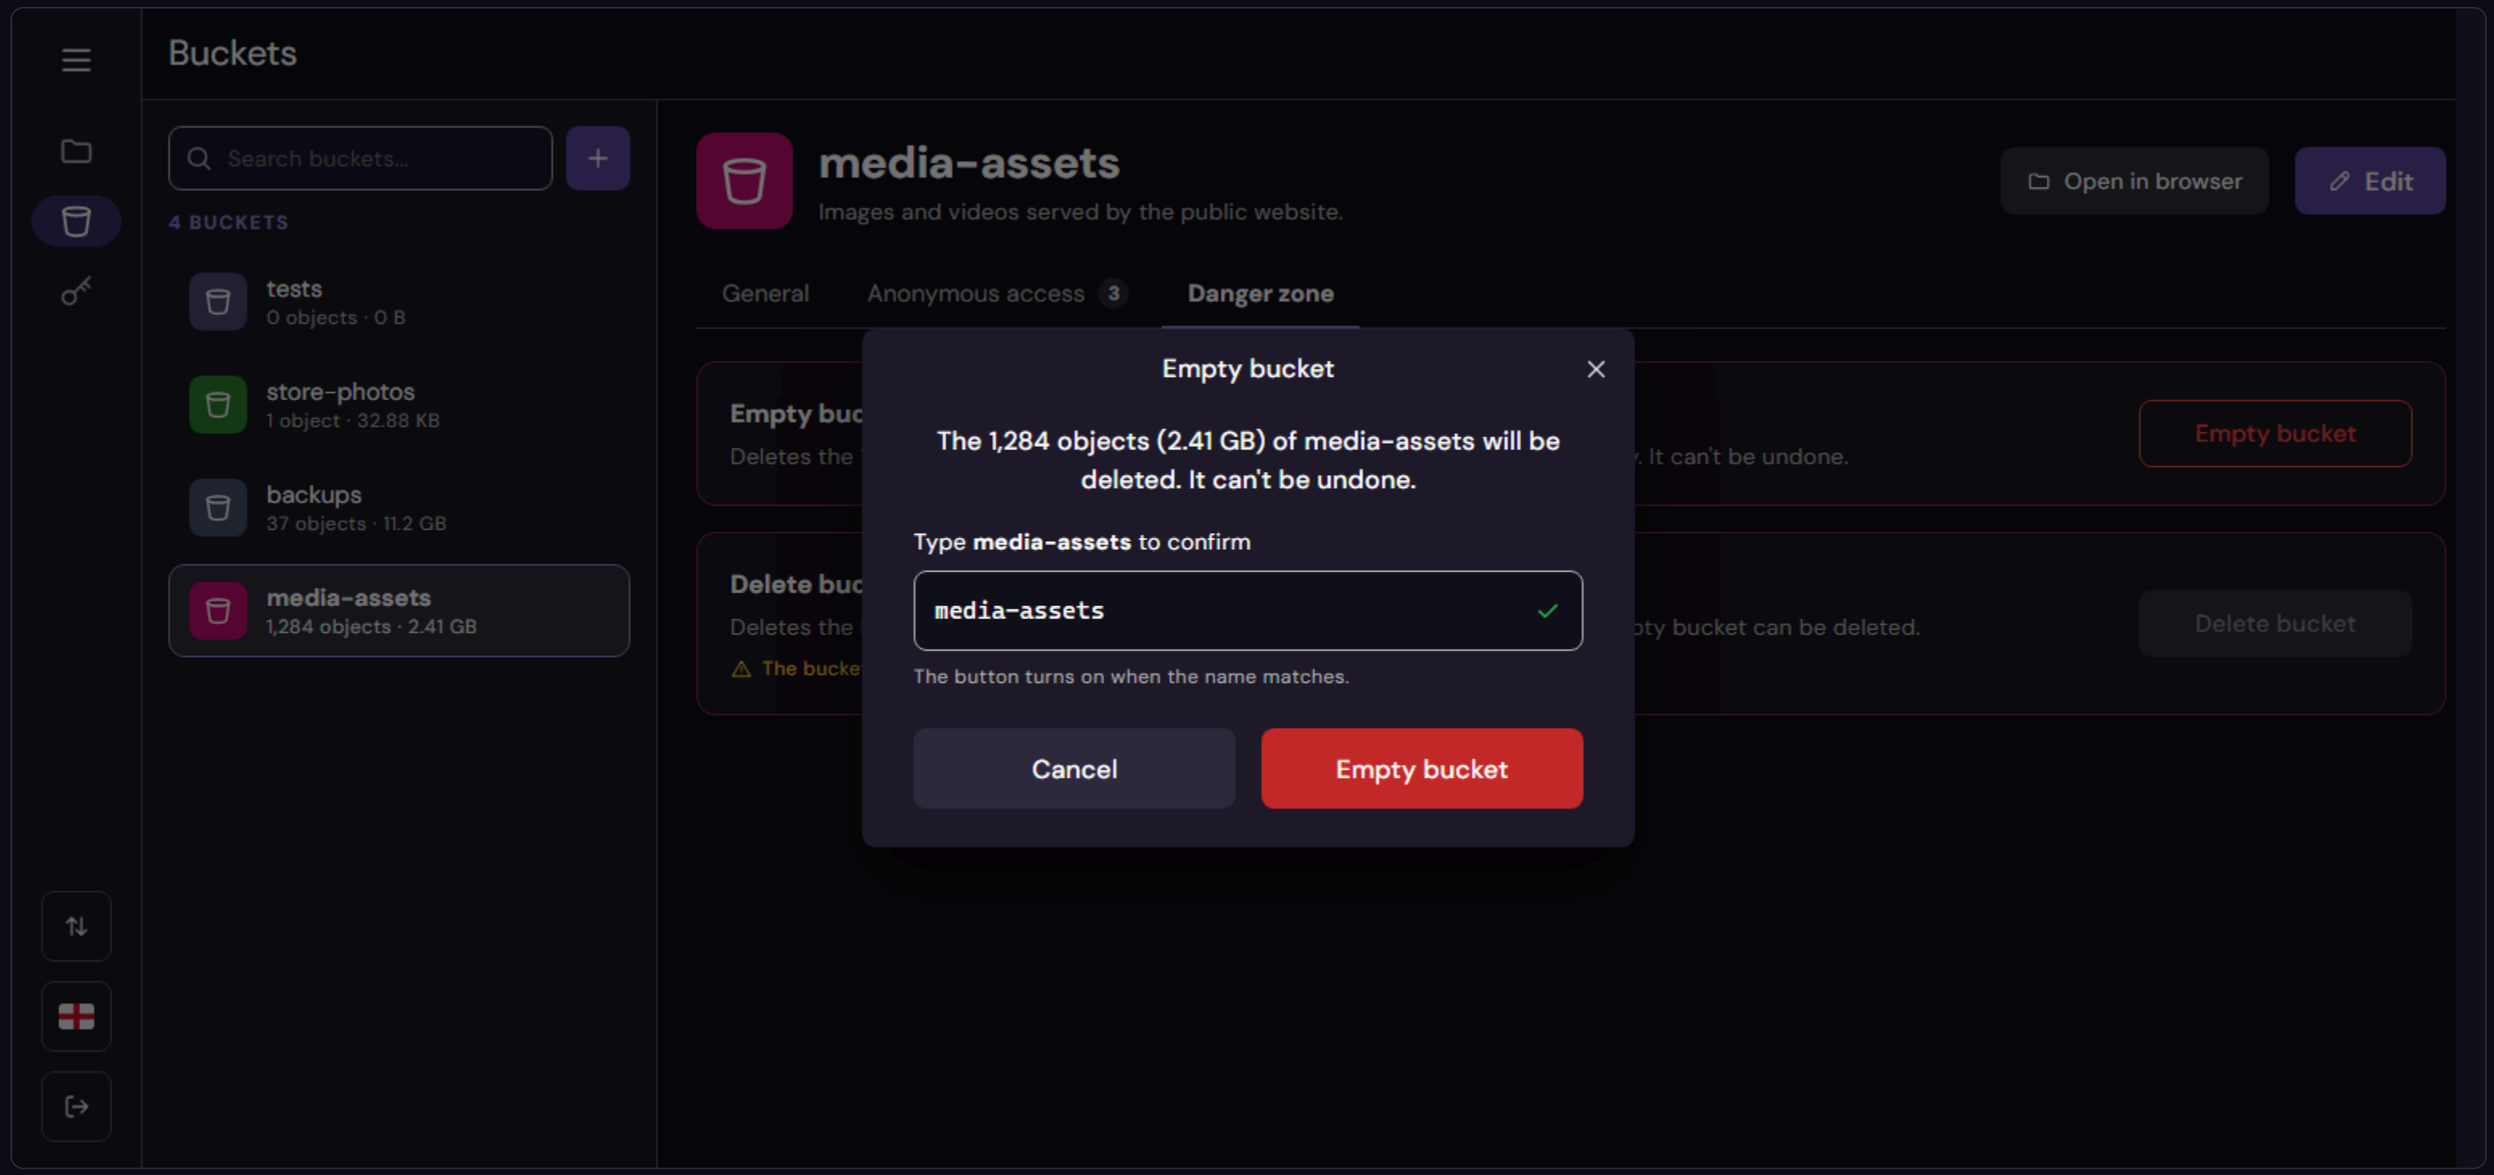


BUCKETS

Edit a bucket

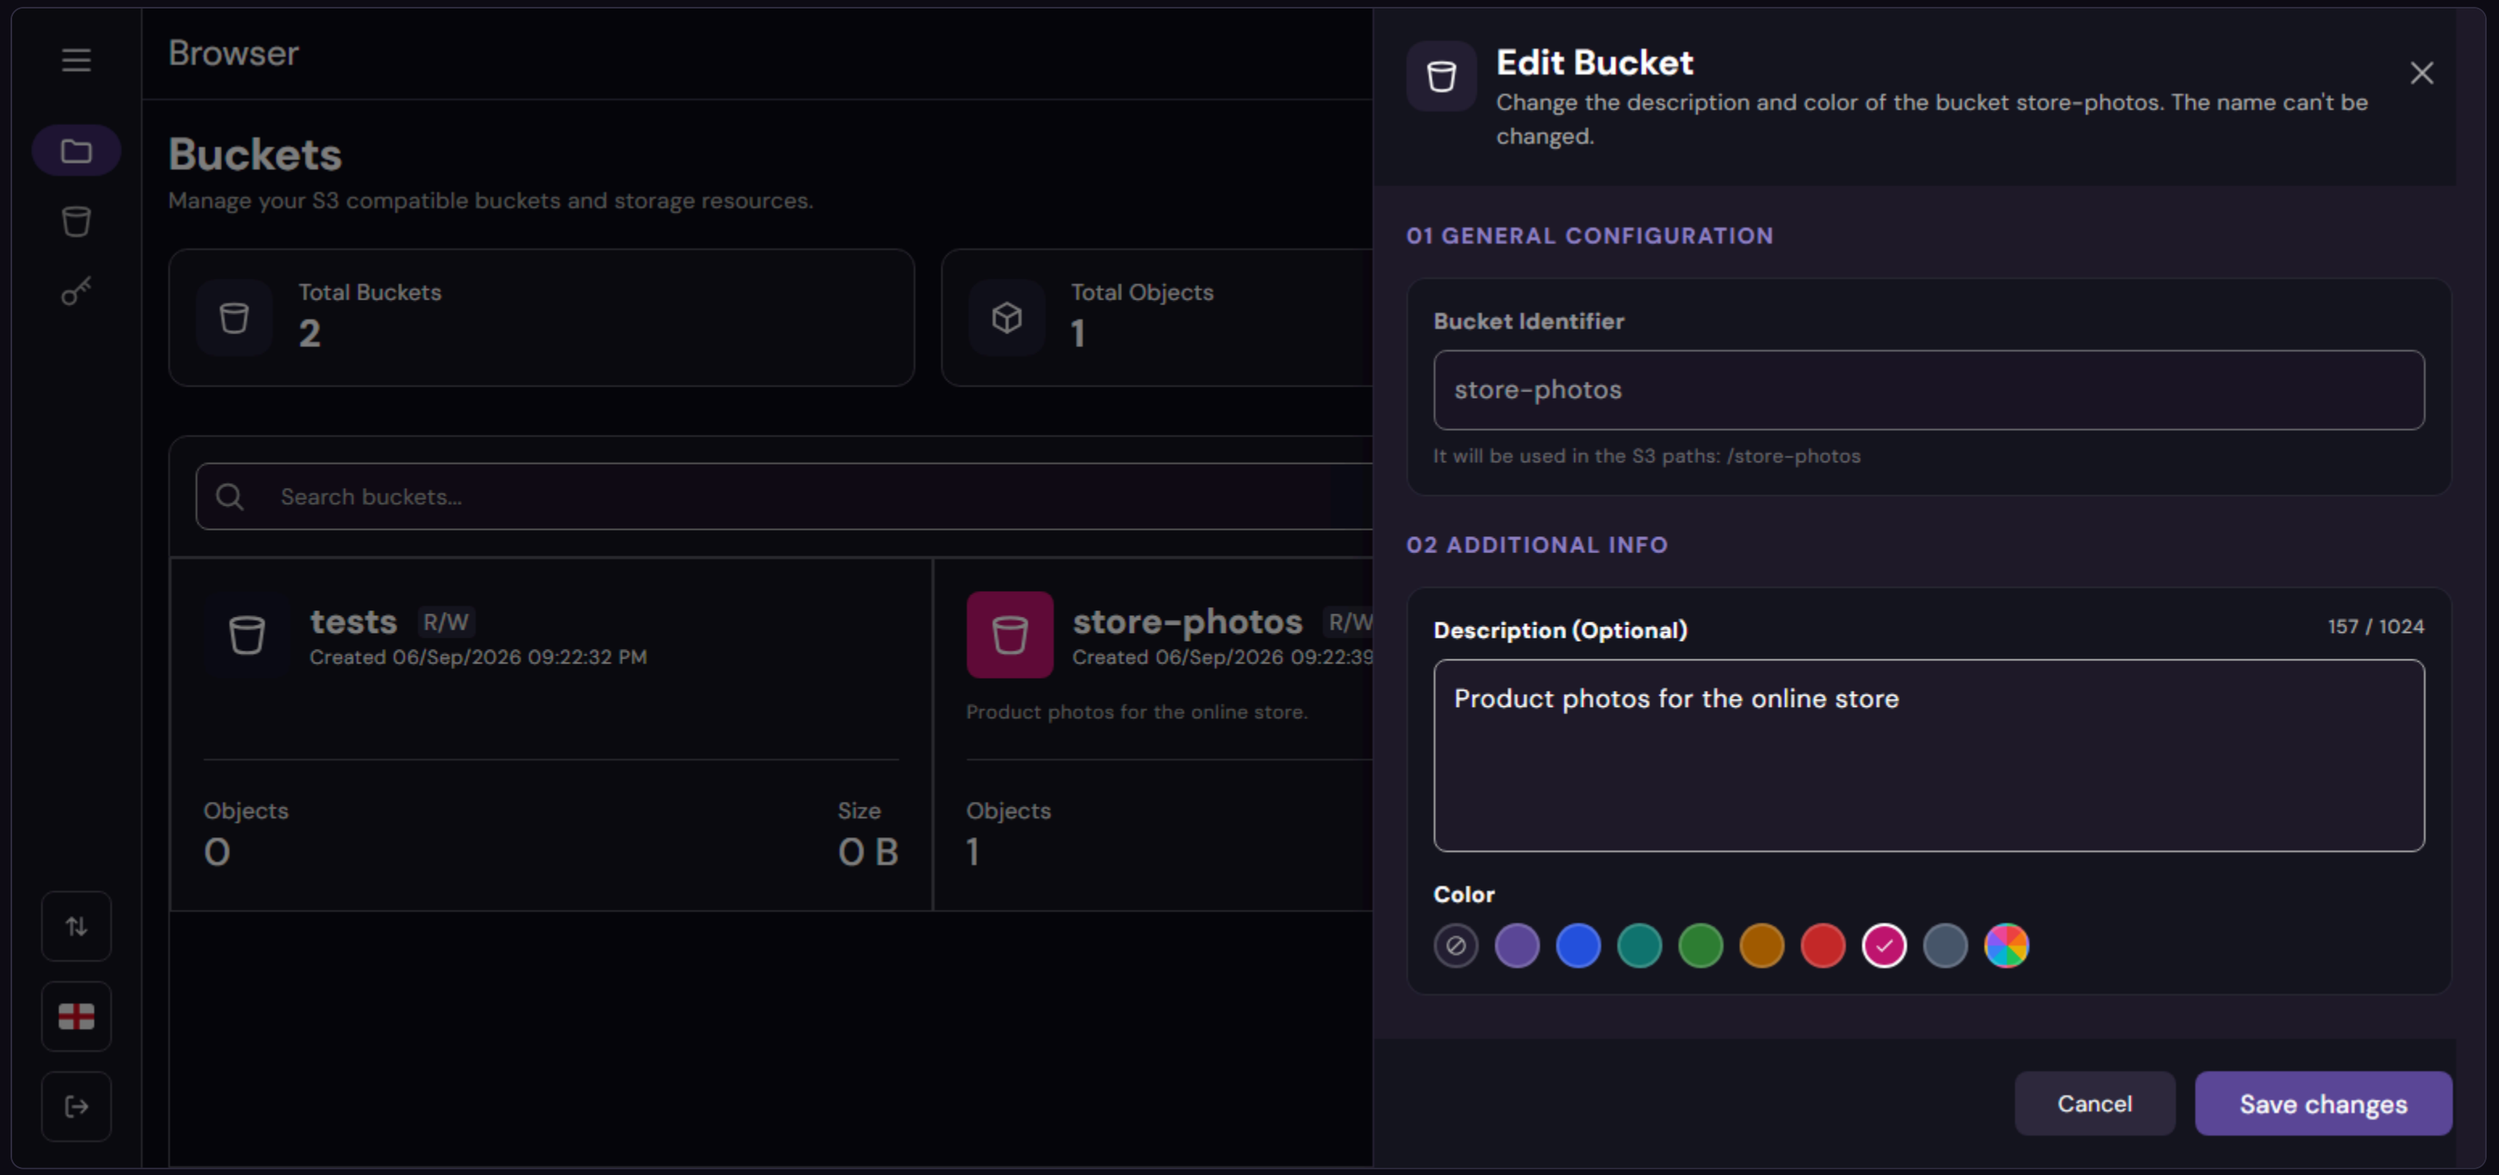


ACCESS KEYS

Access keys

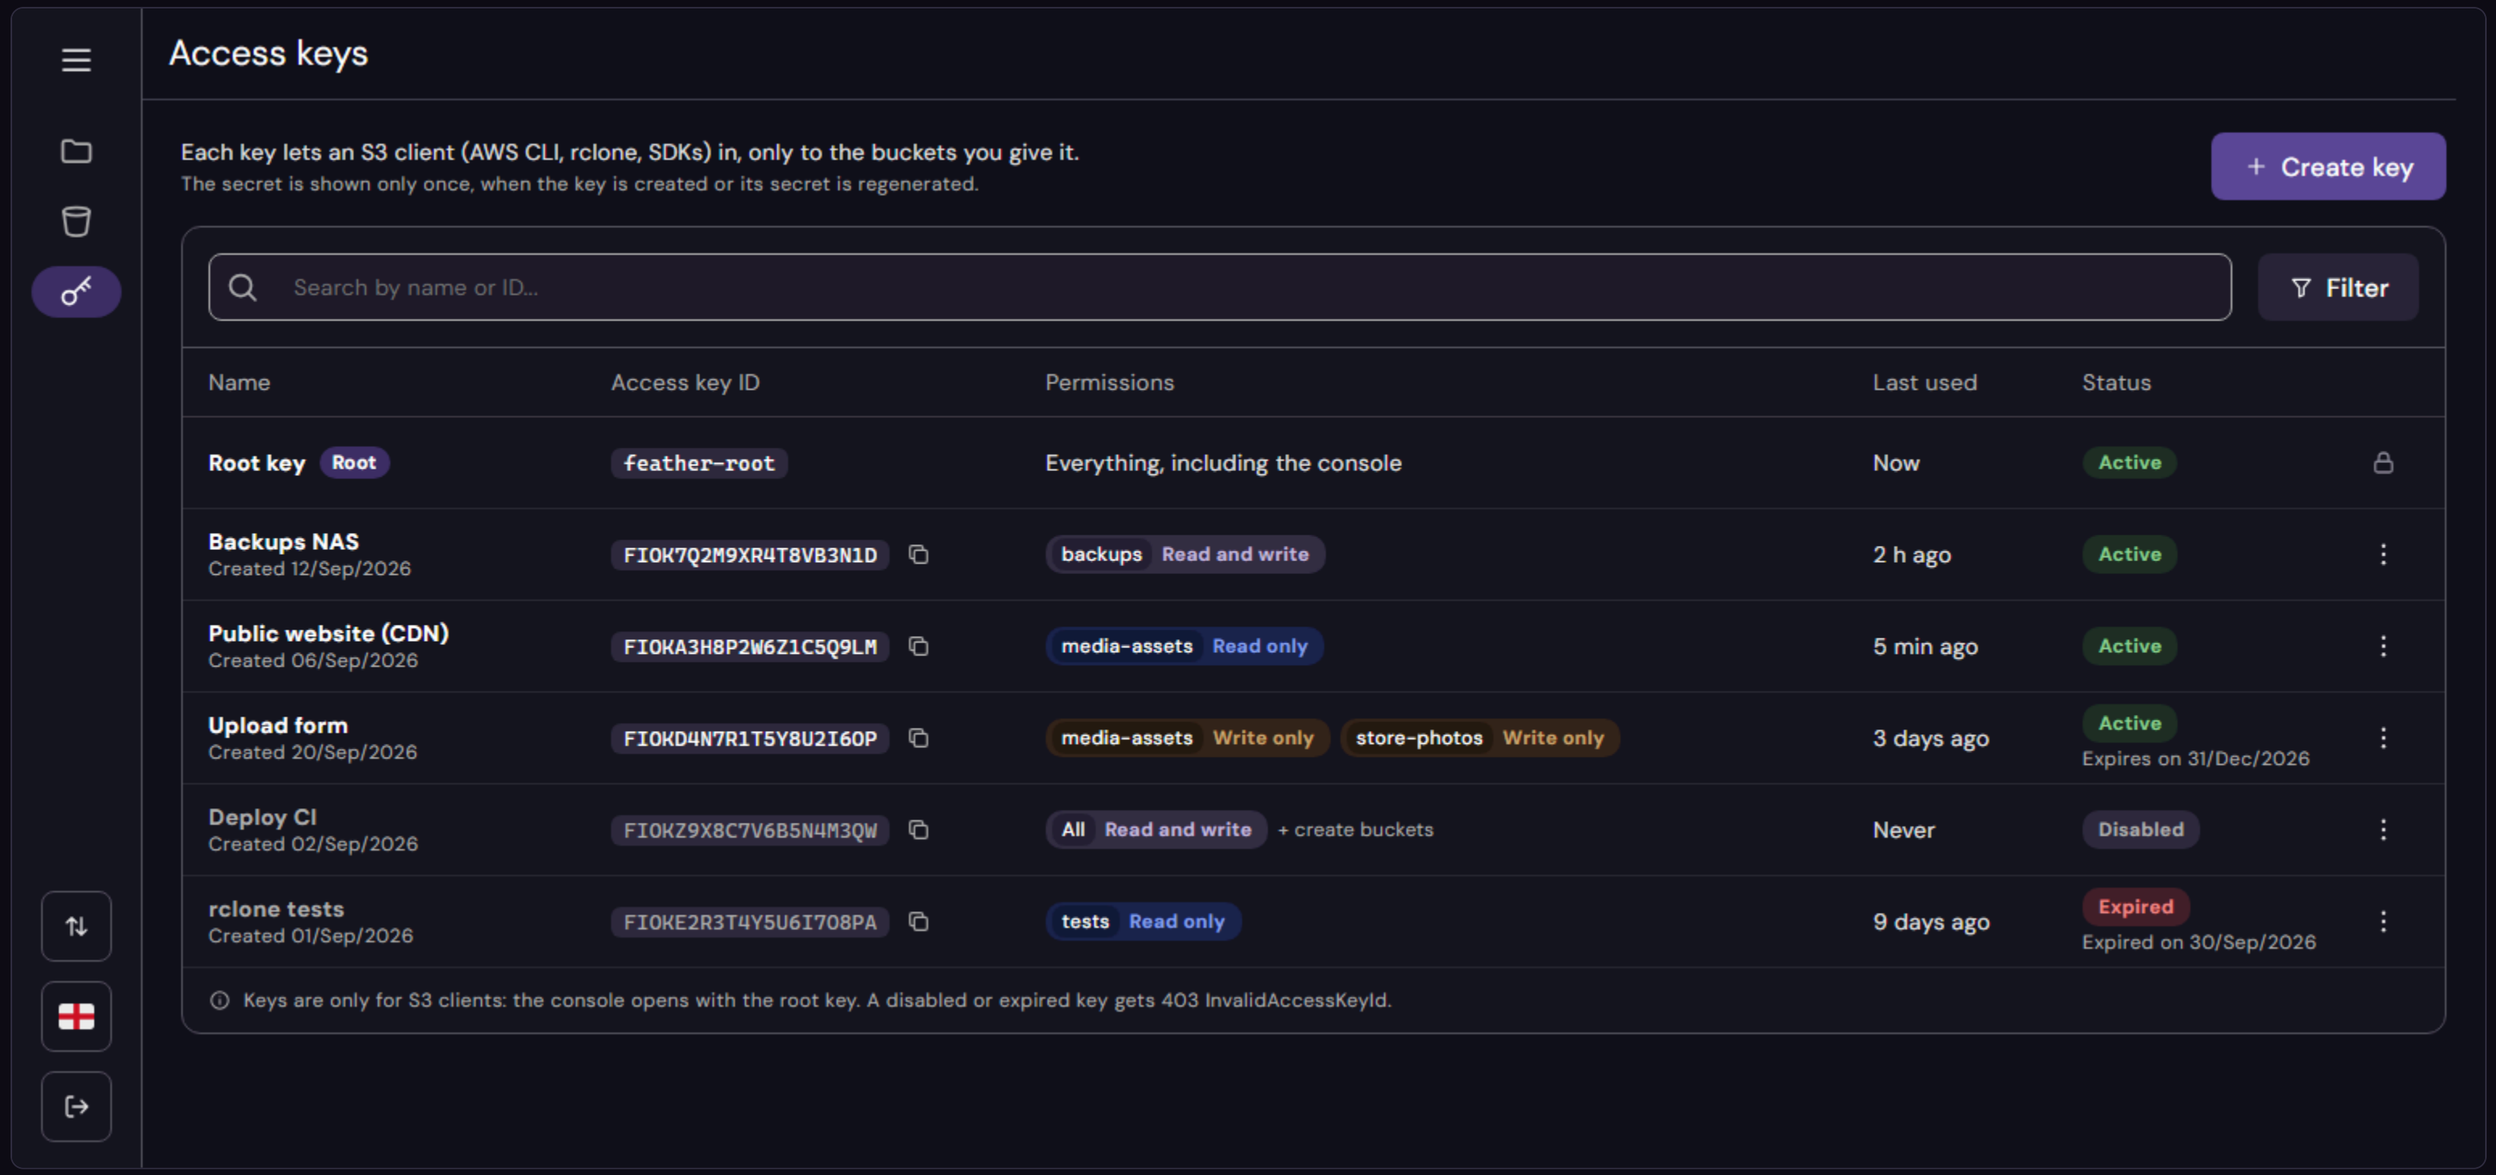


ACCESS KEYS

Menu of a key

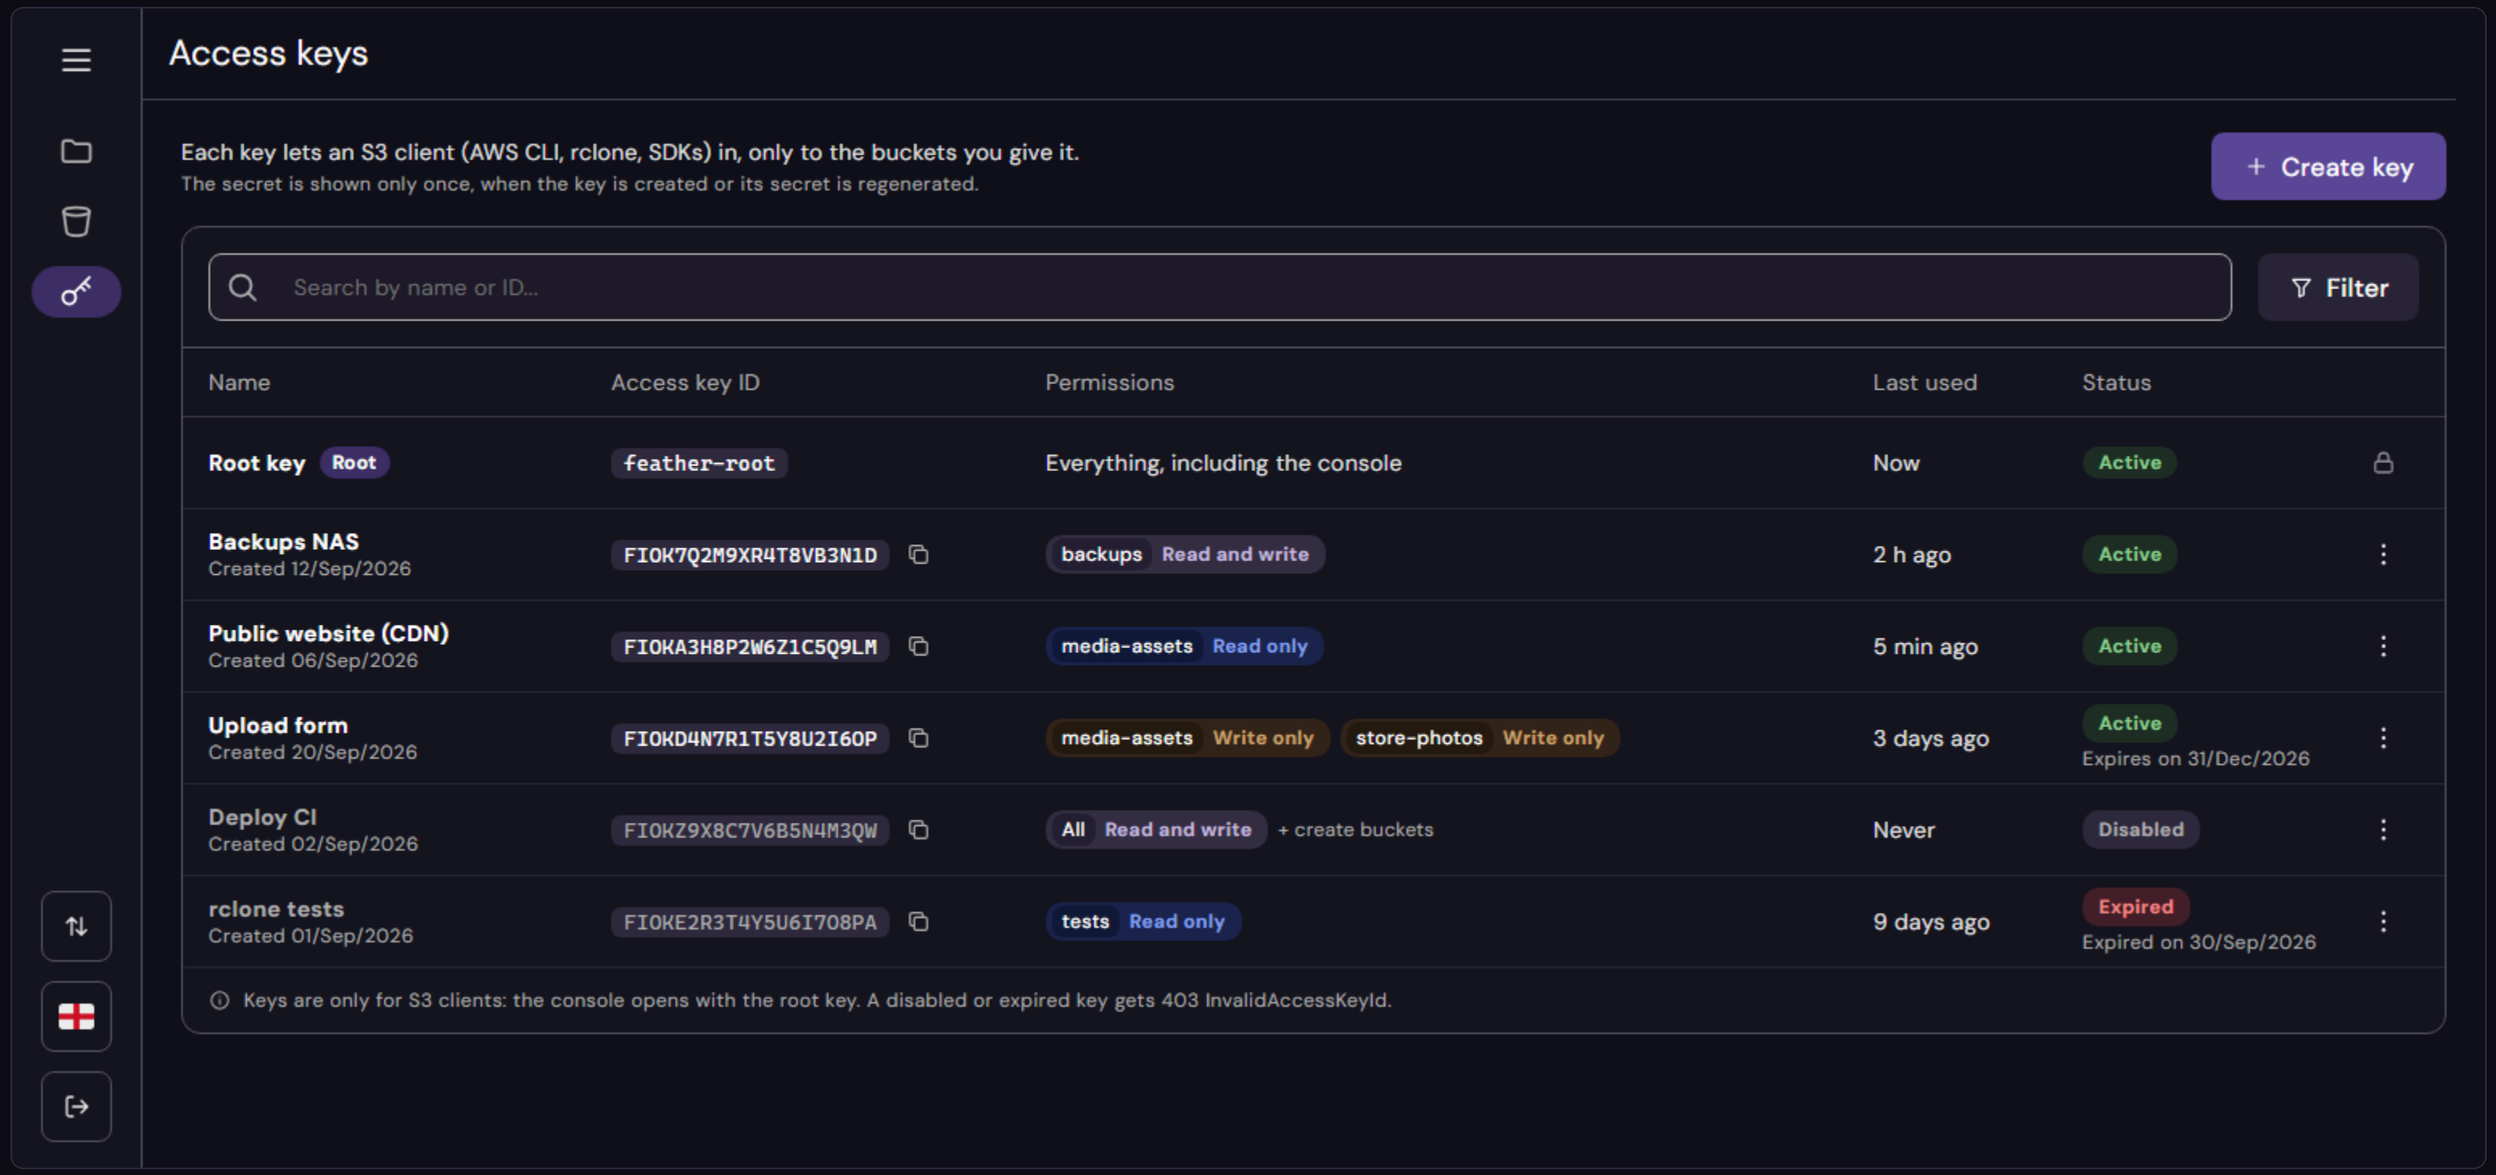


ACCESS KEYS

Create a key with permissions per bucket

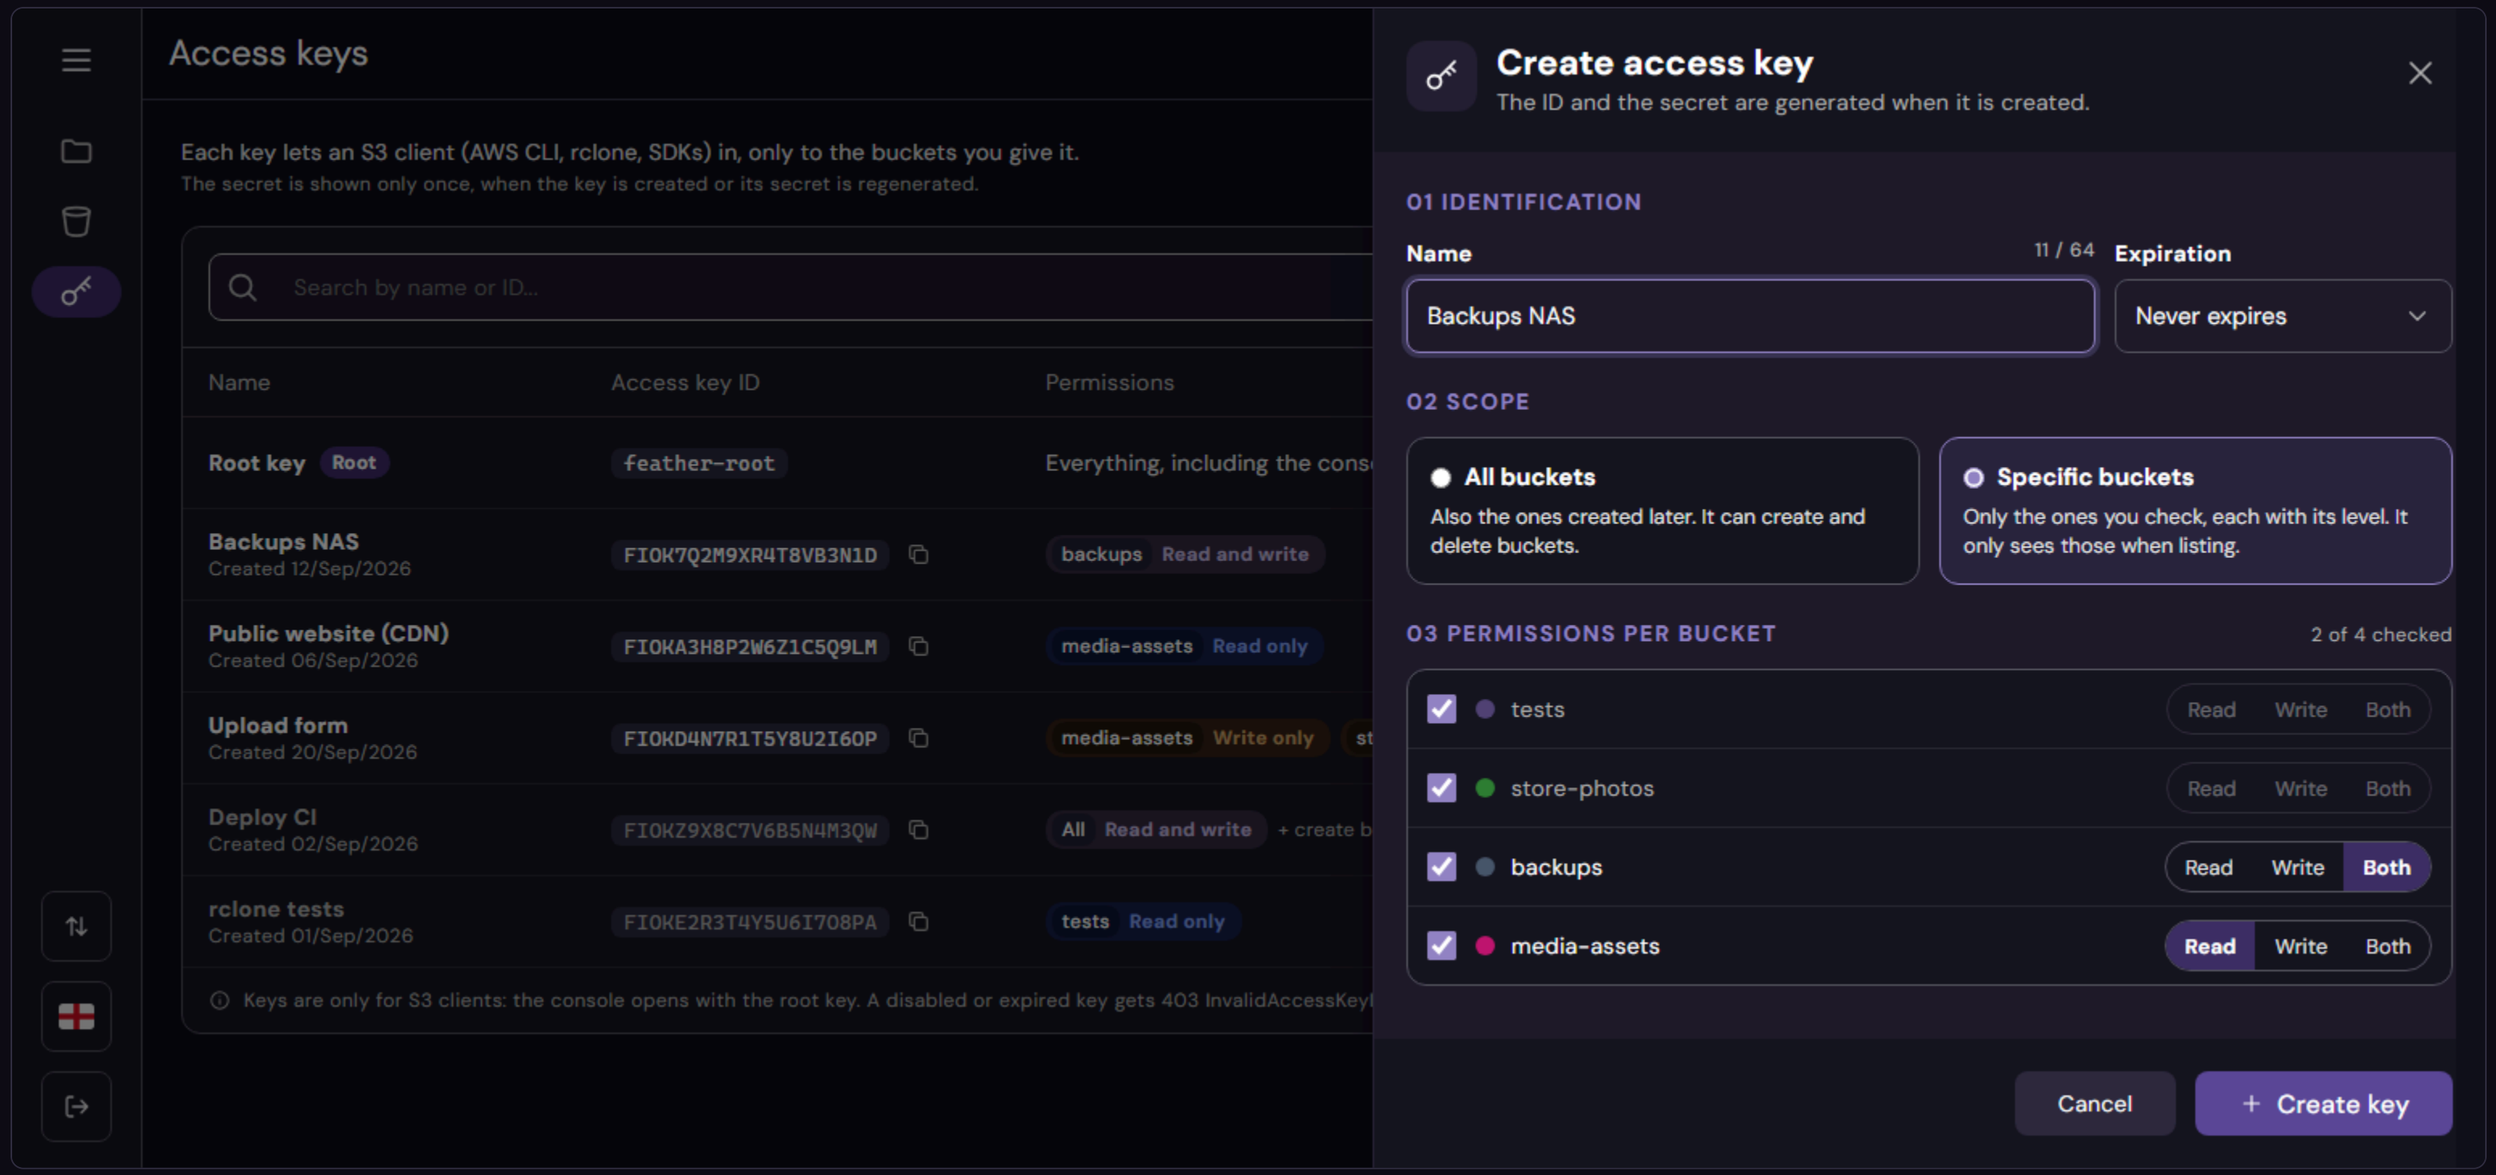

ACCESS KEYS

Key created: the secret is shown once

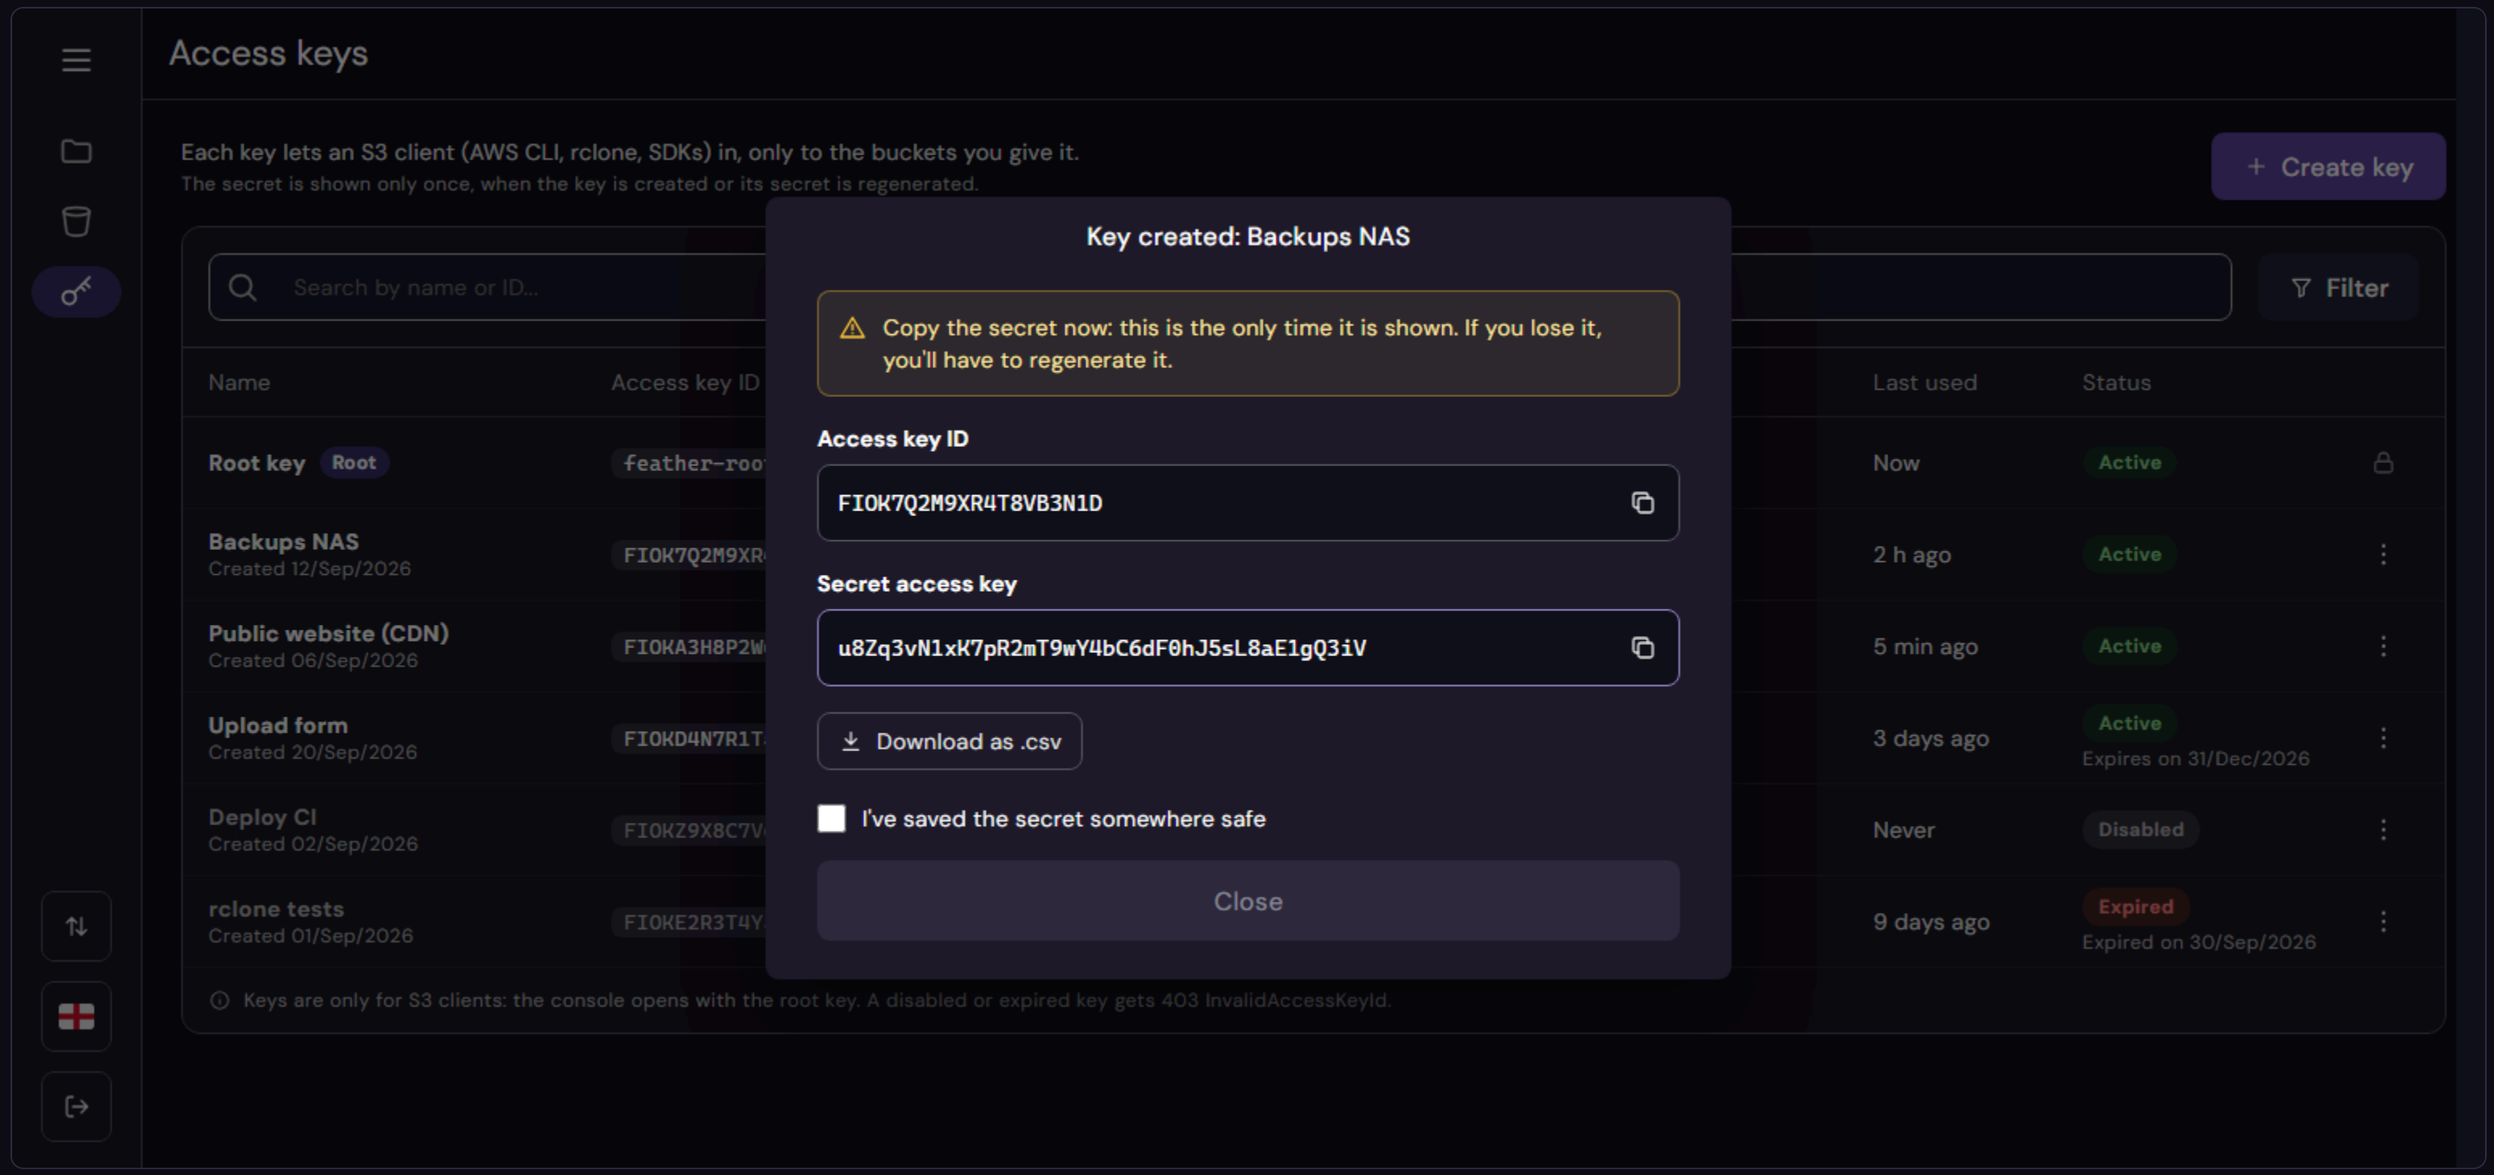

NAVIGATION

Navigation rail, expanded

