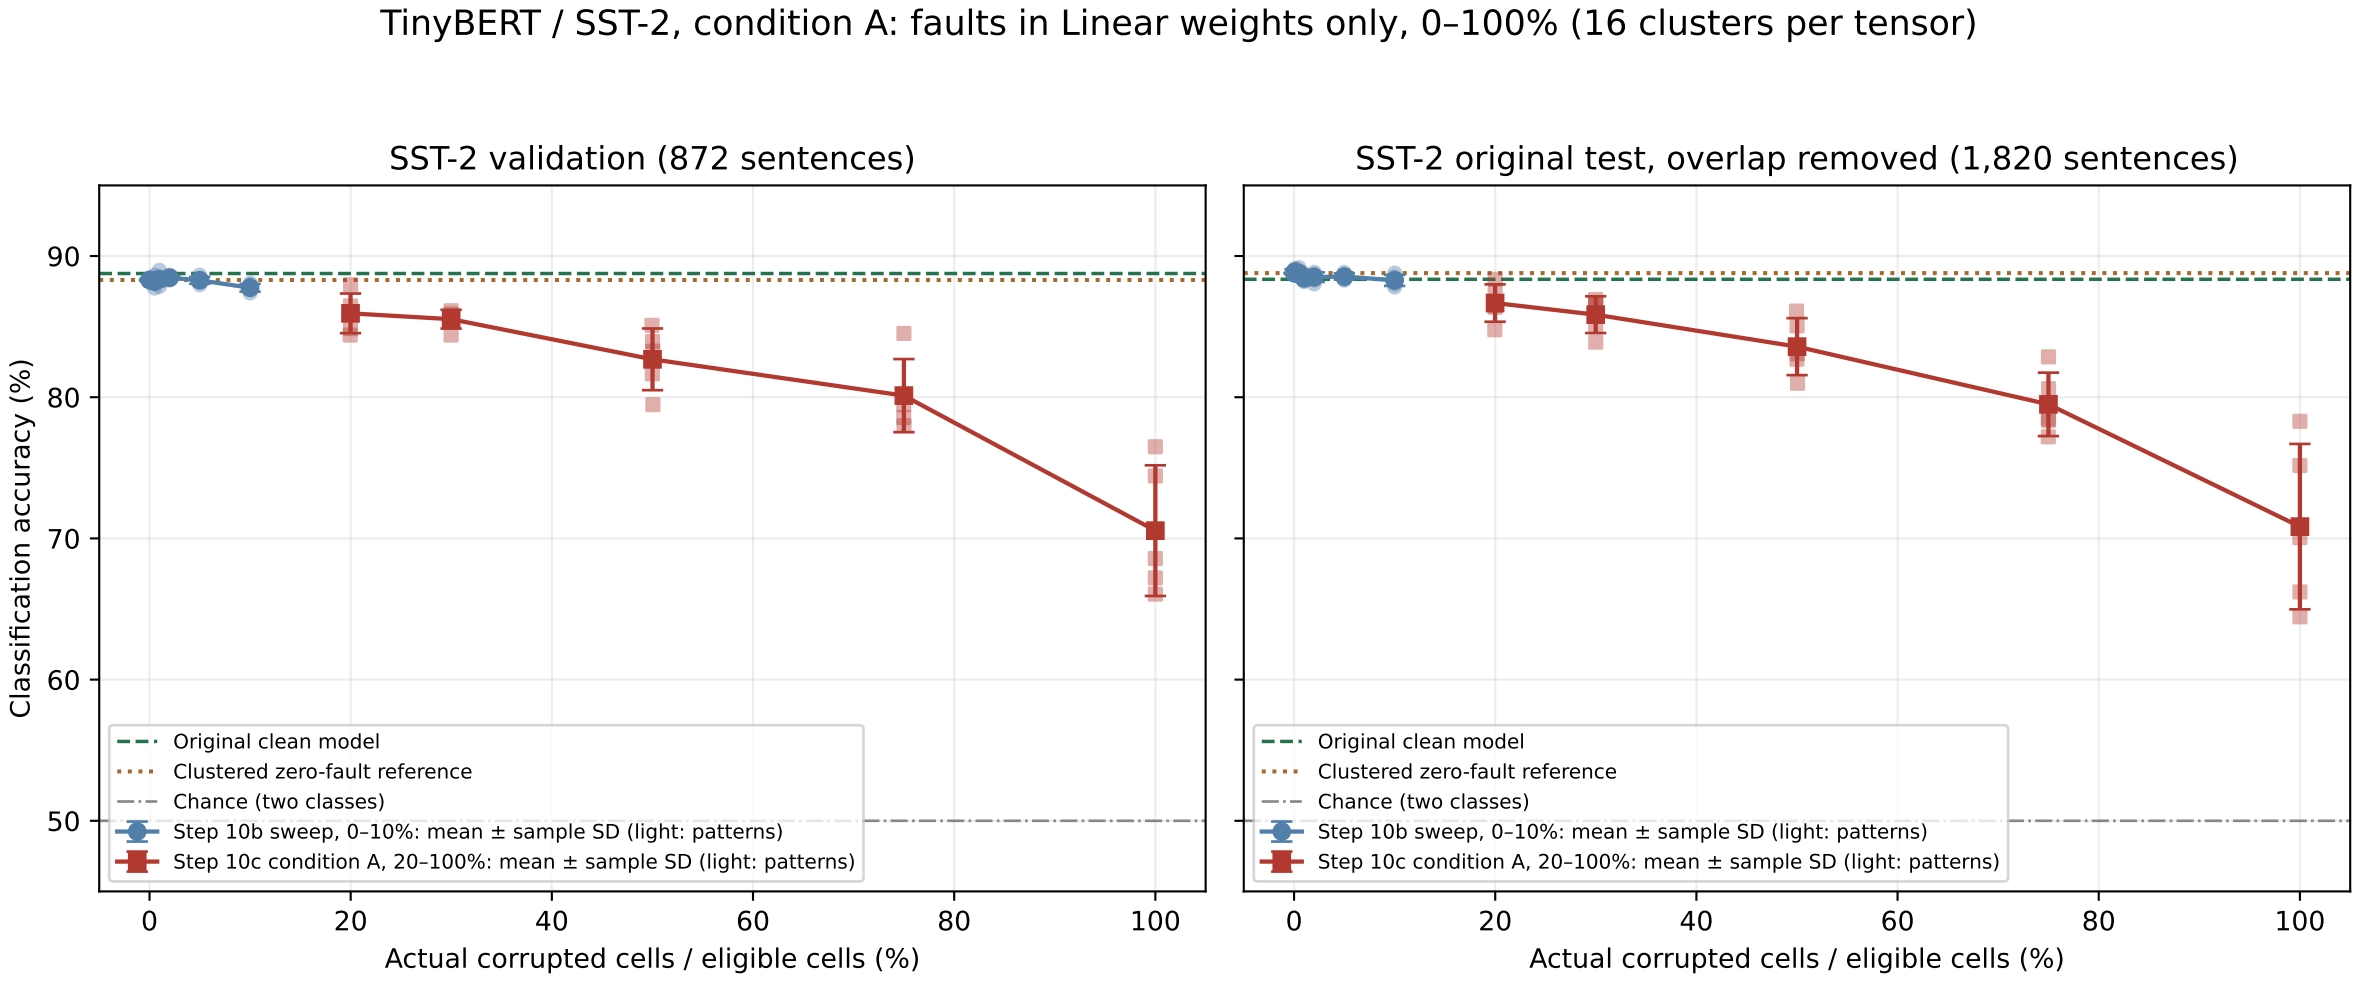

Circles: Step 10b run (0–10%); squares: Step 10c condition A run (20–100%); [5] patterns per nonzero rate. Same encoding and clustered reference; embeddings, LayerNorm, biases reliable.