AUTOMATED TEST CASES

HireKiwi QA Engineer Assessment

Reviewed: 13 October 2026 | Browsers: Chromium, Firefox, WebKit | Frameworks: Playwright, Cucumber

Document	Automated Test Cases
Project	HireKiwi QA Engineer Assessment
Review date	13 October 2026
Test environment	Local mock application (Node 22)
Automation tools	Playwright Test 1.56.0, Cucumber 13
Browsers	Chromium, Firefox, WebKit
Scope	Validation, submission, error-handling and responsive/cross-browser checks. Live-portal checks are read-only and listed only as future improvements.

1. Test Index and Coverage Summary

Test category	Count	Explanation
Documented automated test scenarios	**19**	Main test-case entries in this document
High-priority scenarios	**9**	P1
Medium-priority scenarios	**9**	P2
Low-priority scenarios	**1**	P3
Individual Playwright tests	**39**	Automated checks reported in the Playwright suite
Cucumber scenarios	**38**	BDD scenarios reported in the Cucumber suite

The 19 documented scenarios are the main test-case entries. The 39 Playwright tests and 38 Cucumber scenarios are execution counts: data-driven checks can expand one documented scenario into several Playwright tests, and Cucumber may overlap functionally with Playwright. Do not add these counts together as unique scenarios.

1.1 Priority-wise Scenario Index

Priority	Scenarios	Test case IDs
High (P1)	9	VAL-01, VAL-02, VAL-04, SUB-01, SUB-02, SUB-03, ERR-01, ERR-02, XBR-01
Medium (P2)	9	VAL-03, VAL-05, VAL-06, VAL-07, VAL-08, SUB-04, ERR-03, ERR-04, XBR-02
Low (P3)	1	SUB-05
Total	**19**	**All of the above**

2. Execution Setup and Commands

Environment: Node 22; Playwright Test 1.56.0; Cucumber 13; local mock application. Each test opens the form with its own unique job ID.

Command	Purpose
`npm run test:smoke`	Run the 4 @smoke Playwright tests as a quick health check.
`npm run test:p1`	Run High-priority Playwright tests (18 tests).
`npm run bdd:p1`	Run High-priority Cucumber scenarios.
`npm run test:chromium`	Run all 39 Playwright tests on Chromium.
`npm run test:firefox / npm run test:webkit`	Run the suite on Firefox or WebKit with one worker each.

All commands are defined in package.json. Playwright starts the mock server by itself, so npm start is only needed if you want to try the form by hand.

3. Documented Automated Test Cases

Each case uses the same fields: priority, requirement, test type, preconditions, test data, steps, expected result, the automation scenario, execution status and linked bug.

3.1 Form Validation (R3)

VAL-01 All required fields empty	
Priority	**High (P1)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Form is empty.
Test Data	None – all fields left empty.
Test Steps	1. Open the local mock application form. 2. Leave all fields empty. 3. Submit the form and inspect field errors, focus and network activity.
Expected Result	Full name, email and experience are flagged. Focus moves to the first invalid field. The optional cover note is not flagged. No request is sent.

Automation Scenario (Gherkin)	`@VAL-01 @P1 @smoke @negative`
	`Scenario: Empty form flags every required field and sends nothing`
	`  When I submit the application`
	`  Then every required field shows an error`
	`  And the first invalid field has the focus`
	`  And the cover note is not flagged`
	`  And no request is sent to the server`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-02 Invalid email formats are rejected

Priority	**High (P1)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Invalid emails: plain | a@ | @b.com | a@b | a b@c.com | a@@b.com
Test Steps	1. Open the local mock application form. 2. Submit an otherwise valid form once for each invalid email value. 3. Check the email validation message and confirm no request is sent.
Expected Result	Each value is rejected with an email error. No confirmation is shown and no request is sent.

Automation Scenario (Gherkin)	`@VAL-02 @P1 @negative`
	`Scenario Outline: Invalid email formats are rejected`
	`  When I submit a valid application with the email "<email>"`
	`  Then the "email" field shows the error "valid email address"`
	`  And no confirmation is shown`
	`  And no request is sent to the server`
	`  Examples:`
	`  | email |`
	`  | plain |`
	`  | a@ |`
	`  | @b.com |`
	`  | a@b |`
	`  | a b@c.com |`
	`  | a@@b.com |`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-03 Valid email formats are accepted

Priority	**Medium (P2)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Valid emails: a@b.co | first.last+tag@sub.example.com
Test Steps	1. Open the local mock application form. 2. Submit a valid application with each email in the test data. 3. Verify both are accepted and saved.
Expected Result	Both email formats are accepted and saved.

Automation Scenario (Gherkin)	`@VAL-03 @P2 @positive`
	`Scenario Outline: Valid email formats are accepted`
	`  When I submit a valid application with the email "<email>"`
	`  Then the application is accepted`
	`  Examples:`
	`  | email |`
	`  | a@b.co |`
	`  | first.last+tag@sub.example.com |`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-04 Blank names are rejected; real names are trimmed

Priority	**High (P1)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Names made of: 5 spaces | 3 tabs | 3 non-breaking spaces | 3 zero-width spaces. Valid name with outer spaces: " Asha Raman "
Test Steps	1. Open the local mock application form. 2. Submit the form with each whitespace-only name value. 3. Submit again with a valid name that has leading and trailing spaces. 4. Check the validation message and the saved/confirmed name.
Expected Result	Blank names are rejected like an empty name. The valid name is saved without the outer spaces.

Automation Scenario (Gherkin)	`@VAL-04 @P1 @negative @edge`
	`Scenario Outline: A name with no visible characters is rejected`
	`  When I submit a valid application with a full name made only of <kind>`
	`  Then the "fullName" field shows the error "Enter your full name."`
	`  And no request is sent to the server`
	`  Examples:`
	`  | kind |`
	`  | spaces |`
	`  | tabs |`
	`  | non-breaking spaces |`
	`  | zero-width spaces |`
	
	`Scenario: Spaces around a real name are removed before saving`
	`  When I submit a valid application with the full name " Asha Raman "`
	`  Then the confirmation shows the name "Asha Raman"`
	`  And the server stored the full name "Asha Raman"`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-05 Name length limits (2 to 60 characters)	
Priority	**Medium (P2)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Names of 1, 2, 60 and 61 characters.
Test Steps	1. Open the local mock application form. 2. Submit names of 1, 2, 60 and 61 characters. 3. Verify acceptance or rejection at each boundary.
Expected Result	1 and 61 characters are rejected. 2 and 60 characters are accepted.

Automation Scenario (Gherkin)	`@VAL-05 @P2 @boundary`
	`Scenario Outline: Name length limits are 2 to 60 characters`
	`When I submit a valid application with a full name of <length> characters`
	`Then the full name is <result>`
	`Examples:`
	`| length | result |`
	`| 1 | rejected |`
	`| 2 | accepted |`
	`| 60 | accepted |`
	`| 61 | rejected |`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-06 Experience limits (whole number 0 to 20)	
Priority	**Medium (P2)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Experience values: -1 | 0 | 20 | 21 | 1.5 | abc
Test Steps	1. Open the local mock application form. 2. Submit experience values -1, 0, 20, 21, 1.5 and abc. 3. Verify validation, and numeric storage for accepted values.
Expected Result	-1, 21, 1.5 and abc are rejected. 0 and 20 are accepted and stored as numbers.

Automation Scenario (Gherkin)	`@VAL-06 @P2 @boundary`
	`Scenario Outline: Years of experience must be a whole number from 0 to 20`
	`When I submit a valid application with the years of experience "<value>"`
	`Then the years of experience is <result>`
	`Examples:`
	`| value | result |`
	`| -1 | rejected |`
	`| 0 | accepted |`
	`| 20 | accepted |`
	`| 21 | rejected |`
	`| 1.5 | rejected |`
	`| abc | rejected |`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-07 Cover note limit (500 characters)

Priority	**Medium (P2)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Cover notes of 500 and 501 characters.
Test Steps	1. Open the local mock application form. 2. Enter cover notes of 500 and 501 characters. 3. Check validation and the displayed character counter.
Expected Result	500 characters are accepted. 501 are rejected. The counter shows the exact length.

Automation Scenario (Gherkin)	`@VAL-07 @P2 @boundary`
	`Scenario Outline: Cover note limit is 500 characters`
	`When I submit a valid application with a cover note of <length> characters`
	`Then the cover note is <result>`
	`Examples:`
	`| length | result |`
	`| 500 | accepted |`
	`| 501 | rejected |`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

VAL-08 Special and non-English input

Priority	**Medium (P2)** Requirement: R3 Form validation Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Name 1: <script>alert(1)</script> | Name 2 (Tamil): ரோஷினி
Test Steps	1. Open the local mock application form. 2. Submit the script-like text as the name and verify it is displayed literally. 3. Submit the Tamil name and verify it remains unchanged.
Expected Result	Script text is shown as plain text and never runs. The Tamil name is saved and shown intact.

Automation Scenario (Gherkin)	`@VAL-08 @P2 @negative @security`
	`Scenario: Script text is shown as plain text and never runs`
	`When I submit a valid application with the full name "<script>alert(1)</script>"`
	`Then the confirmation shows the name "<script>alert(1)</script>"`
	`And no browser dialog opened`
	
	`Scenario: A Tamil name is accepted and shown unchanged`
	`When I submit a valid application with the full name "ரோஷினி"`
	`Then the confirmation shows the name "ரோஷினி"`
	`And the server stored the full name "ரோஷினி"`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

3.2 Submission Behaviour (R4)

SUB-01 A valid application succeeds and saves exactly one record	
Priority	**High (P1)** Requirement: R4 Submission behaviour Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Asha Raman | asha.raman@example.com | 3 years | short cover note
Test Steps	1. Open the local mock application form. 2. Enter the valid applicant details from the test data. 3. Submit once. 4. Check the confirmation and verify the stored record.
Expected Result	A confirmation with a reference number (APP-0001 format) appears. The form is hidden. The server holds exactly one record with the typed values.

Automation Scenario (Gherkin)	`@SUB-01 @P1 @smoke @positive`
	`Scenario: A valid application shows a confirmation and saves one record`
	`When I submit a valid application`
	`Then I see a confirmation with my name and a reference number`
	`And the form is hidden`
	`And the server stores exactly 1 application`
	`And the stored application has my typed details`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

SUB-02 Repeated submit sends one request	
Priority	**High (P1)** Requirement: R4 Submission behaviour Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Server response delayed by 800 ms.
Test Data	Valid applicant details.
Test Steps	1. Configure the mock server to delay its response by 800 ms. 2. Fill the form with valid applicant details. 3. Double-click Submit, then verify request and record counts. 4. Repeat with two immediate submit events while the first is pending.
Expected Result	Only one request is sent and one record is saved. While pending, the button is disabled and reads "Submitting...".

Automation Scenario (Gherkin)	`@SUB-02 @P1 @smoke @negative`
	`Scenario: Double-clicking Submit sends only one request`
	`  Given the server takes 800 ms to answer`
	`  When I fill in the form with valid details`
	`  And I double-click the Submit button`
	`  Then the Submit button is disabled and reads "Submitting…"`
	`  And I see a confirmation`
	`  And the server received exactly 1 request`
	`  And the server stores exactly 1 application`
	
	`Scenario: A second submit event while the first is pending is ignored`
	`  Given the server takes 800 ms to answer`
	`  When I fill in the form with valid details`
	`  And two submit events fire back to back without a click`
	`  Then I see a confirmation`
	`  And the server received exactly 1 request`
	`  And the server stores exactly 1 application`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

SUB-03 Duplicate application is rejected	
Priority	**High (P1)** Requirement: R4 Submission behaviour Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. One valid application already submitted.
Test Data	Same email as the first application, second time in capital letters.
Test Steps	1. Submit one valid application. 2. Attempt a second application using the same email in different letter case. 3. Check the duplicate warning, retained form values and record count.
Expected Result	A message says the candidate has already applied. No second confirmation is shown. Typed details are kept. Still only one record.

Automation Scenario (Gherkin)	`@SUB-03 @P1 @negative`
	`Scenario: Applying twice with the same email is rejected`
	`  Given I have already submitted a valid application`
	`  When I apply again with the same email in capital letters`
	`  Then the form shows the message "already applied"`
	`  And no confirmation is shown`
	`  And my typed details are still in the form`
	`  And the server stores exactly 1 application`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

SUB-04 Refreshing after success does not resend	
Priority	**Medium (P2)** Requirement: R4 Submission behaviour Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. One valid application already submitted.
Test Data	Valid applicant details.
Test Steps	1. Submit a valid application. 2. Refresh the page after the success confirmation. 3. Verify the form is empty and the server still contains one record.
Expected Result	A fresh, empty form appears. Still only one record.

Automation Scenario (Gherkin)	`@SUB-04 @P2 @negative`
	`Scenario: Refreshing after success does not create a second record`
	`  Given I have already submitted a valid application`
	`  When I refresh the page`
	`  Then I see an empty application form`
	`  And the server stores exactly 1 application`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

SUB-05 Enter key submits once	
Priority	**Low (P3)** Requirement: R4 Submission behaviour Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID.
Test Data	Valid applicant details.
Test Steps	1. Open the local mock application form. 2. Enter valid applicant details. 3. Press Enter from the email field. 4. Verify exactly one request and one stored application.
Expected Result	The form submits exactly once.

Automation Scenario (Gherkin)	`@SUB-05 @P3 @positive`
	`Scenario: Pressing Enter in a field submits once`
	`When I fill in the form with valid details`
	`And I press Enter in the email field`
	`Then I see a confirmation`
	`And the server received exactly 1 request`
	`And the server stores exactly 1 application`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

3.3 Error Handling (R5)

ERR-01 Server error 500 keeps the details and allows a retry	
Priority	**High (P1)** Requirement: R5 Error handling Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Server configured to return HTTP 500, then recover.
Test Data	Valid applicant details.
Test Steps	1. Configure the server to return HTTP 500. 2. Submit a valid application and inspect the error state and retained values. 3. Restore the server and retry without retyping. 4. Verify the final confirmation and stored record count.
Expected Result	A plain-language error appears. Typed data is kept and nothing is saved. The retry succeeds without retyping.

Automation Scenario (Gherkin)	`@ERR-01 @P1 @smoke @negative`
	`Scenario: A server error shows a clear message and allows a retry`
	`Given the server fails with status 500`
	`When I submit a valid application`
	`Then the form shows the message "Something went wrong on our side"`
	`And no confirmation is shown`
	`And the Submit button is enabled`
	`And my typed details are still in the form`
	`And the server stores exactly 0 applications`
	`When the server recovers`
	`And I submit the application again`
	`Then I see a confirmation`
	`And the error message is gone`
	`And the server stores exactly 1 application`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

ERR-02 Network failure stops loading and keeps the details	
Priority	**High (P1)** Requirement: R5 Error handling Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Submission request aborted to simulate a dropped connection.
Test Data	Valid applicant details.
Test Steps	1. Fill the form with valid applicant details. 2. Abort the submission request to simulate a network failure. 3. Check the error message, button state, retained values and record count.
Expected Result	An error message appears. The button returns to "Submit application". Typed data is kept and nothing is saved.

Automation Scenario (Gherkin)	`@ERR-02 @P1 @negative`
	`Scenario: A network failure stops the loading and keeps the details`
	`  Given the network connection drops`
	`  When I submit a valid application`
	`  Then the form shows the message "Could not reach the server"`
	`  And the Submit button is enabled and reads "Submit application"`
	`  And no confirmation is shown`
	`  And my typed details are still in the form`
	`  And the server stores exactly 0 applications`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

ERR-03 Slow response shows a loading state	
Priority	**Medium (P2)** Requirement: R5 Error handling Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Server response delayed by 3 seconds.
Test Data	Valid applicant details.
Test Steps	1. Configure the server response delay to 3 seconds. 2. Submit a valid application. 3. Inspect the loading state while waiting. 4. Verify the confirmation appears after the response.
Expected Result	The button is disabled and reads "Submitting…". The form is marked busy. After the answer, the confirmation appears.

Automation Scenario (Gherkin)	`@ERR-03 @P2 @boundary`
	`Scenario: A slow response shows a loading state until the answer arrives`
	`  Given the server takes 3000 ms to answer`
	`  When I fill in the form with valid details`
	`  And I click the Submit button`
	`  Then the Submit button is disabled and reads "Submitting…"`
	`  And the form is marked as busy`
	`  And I see a confirmation`
	`  And the server stores exactly 1 application`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

ERR-04 A server rejection of one field appears next to that field	
Priority	**Medium (P2)** Requirement: R5 Error handling Type: Playwright + Cucumber
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Server configured to return HTTP 400 with an email-field error.
Test Data	Valid applicant details.
Test Steps	1. Configure the server to return HTTP 400 with an email-field error. 2. Submit a valid application. 3. Check the email error placement, focus, button state and retained details.
Expected Result	The message appears beside the email field. The field is flagged and focused. Other fields are untouched. Typed details are kept.

Automation Scenario (Gherkin)	`@ERR-04 @P2 @negative`
	`Scenario: A field error from the server appears next to that field`
	`  Given the server rejects the email with "This email address is not accepted."`
	`  When I submit a valid application`
	`  Then the "email" field shows the error "This email address is not accepted."`
	`  And the email field is flagged and has the focus`
	`  And the full name field is not flagged`
	`  And the Submit button is enabled`
	`  And my typed details are still in the form`

Execution Status	**Pass (Playwright + Cucumber)**
Linked Bug	None documented

3.4 Cross-browser and Responsive (R6)

XBR-01 Whole suite passes on Chromium, Firefox and WebKit	
Priority	**High (P1)** Requirement: R6 Cross-browser behaviour Type: Playwright
Preconditions	playwright.config.js defines projects: chromium, firefox, webkit.
Test Data	Full Playwright suite (39 tests) run on each browser project.
Test Steps	1. Run the full Playwright suite against Chromium. 2. Run the same suite against Firefox and WebKit with one worker each. 3. Compare results across browsers.
Expected Result	All tests give the same result in all three browsers.

Automation Scenario (Gherkin)	`Scenario Outline: The whole suite passes on every browser`
	`  Given the test suite is configured for "<browser>"`
	`  When I run the suite`
	`  Then all tests give the same result as on Chromium`
	`  Examples:`
	`  | browser  |`
	`  | chromium |`
	`  | firefox  |`
	`  | webkit   |`

Execution Status	**Pass (Playwright)**
Linked Bug	None documented

XBR-02 Form fits a 375 px wide screen	
Priority	**Medium (P2)** Requirement: R6 Cross-browser behaviour Type: Playwright
Preconditions	Mock server running (npm start); application form opened with a unique job ID. Viewport set to 375 × 667.
Test Data	Viewport 375 × 667 px.
Test Steps	1. Open the mock application form at a 375 × 667 viewport. 2. Check horizontal overflow and whether all fields remain visible. 3. Check that Submit is reachable and at least 44 px tall.
Expected Result	No sideways scrolling. Every field is inside the screen. The Submit button is reachable and at least 44 px tall.

Automation Scenario (Gherkin)	`Scenario: Form fits a 375 px wide screen`
	`  Given I open the application form on a 375 x 667 screen`
	`  Then there is no sideways scrolling`
	`  And every field is inside the screen`
	`  And the Submit button is reachable and at least 44 px tall`

Execution Status	**Pass (Playwright)**
Linked Bug	None documented

4. Automation Execution Results

Test suite	Browser	Result	Execution status
Playwright	Chromium	39/39 passed	**Passed**
Cucumber	Chromium	38/38 scenarios passed (258 steps)	**Passed**
Playwright	Firefox	39/39 passed	**Passed**
Playwright	WebKit	39/39 passed	**Passed**

All suites were run on 13 October 2026. Firefox and WebKit were run with one worker each. A screenshot from each browser is shown in section 6, and the full set is in the evidence folder.

5. Future Improvements


The following items are ideas for future work. They are not implemented and are not counted in the 19 documented scenarios or in the passing execution counts.

Proposed ID	Improvement	Priority	Source / Effort
ERR-05-A	A hung request is cancelled after a time-out and the form works again	**High**	ERR-05 / S
SUB-07-A	Lost response after the server saved: retry creates no duplicate	**High**	SUB-07 / S
API-02-A	Two parallel POSTs with the same email give one 201 and one 409	**High**	API-02 / S
LST-05-A	Live portal: searching "qa" lists only QA Engineer	**High**	LST-05 / S
LST-01-A	Live portal: the salary on the QA Engineer card states its pay period	**High**	LST-01 / S
XBR-01-A	CI workflow runs the suite on Chromium, Firefox and WebKit	**High**	XBR-01 / M

Proposed ID	Improvement	Priority	Source / Effort
API-01-A	API rejects wrong data types with 400	Medium	API-01 / S
VAL-09-A	Email edge cases (leading dot, double dot, 254 and 255+ characters)	Medium	VAL-09 / S
VAL-10-A	Name length is counted on visible characters	Medium	VAL-10 / S
SUB-06-A	Same email on another job is accepted; other email on same job is accepted	Medium	SUB-06 / S
ERR-06-A	Status matrix: 429, 502, 503, 504 and HTML error body	Medium	ERR-06 / S
ERR-07-A	Browser goes offline while submitting	Medium	ERR-07 / S
ERR-08-A	Oversized request gets a specific message	Medium	ERR-08 / S
LST-06-A	Live portal: search trims leading and trailing spaces	Medium	LST-06 / S
LST-08-A	Live portal: an unknown job address shows a 404 page	Medium	LST-08 / S
LST-09-A	Live portal: invalid URL parameters fall back consistently	Low	LST-09 / S

6. Screenshots

CHROME TEST CASES:

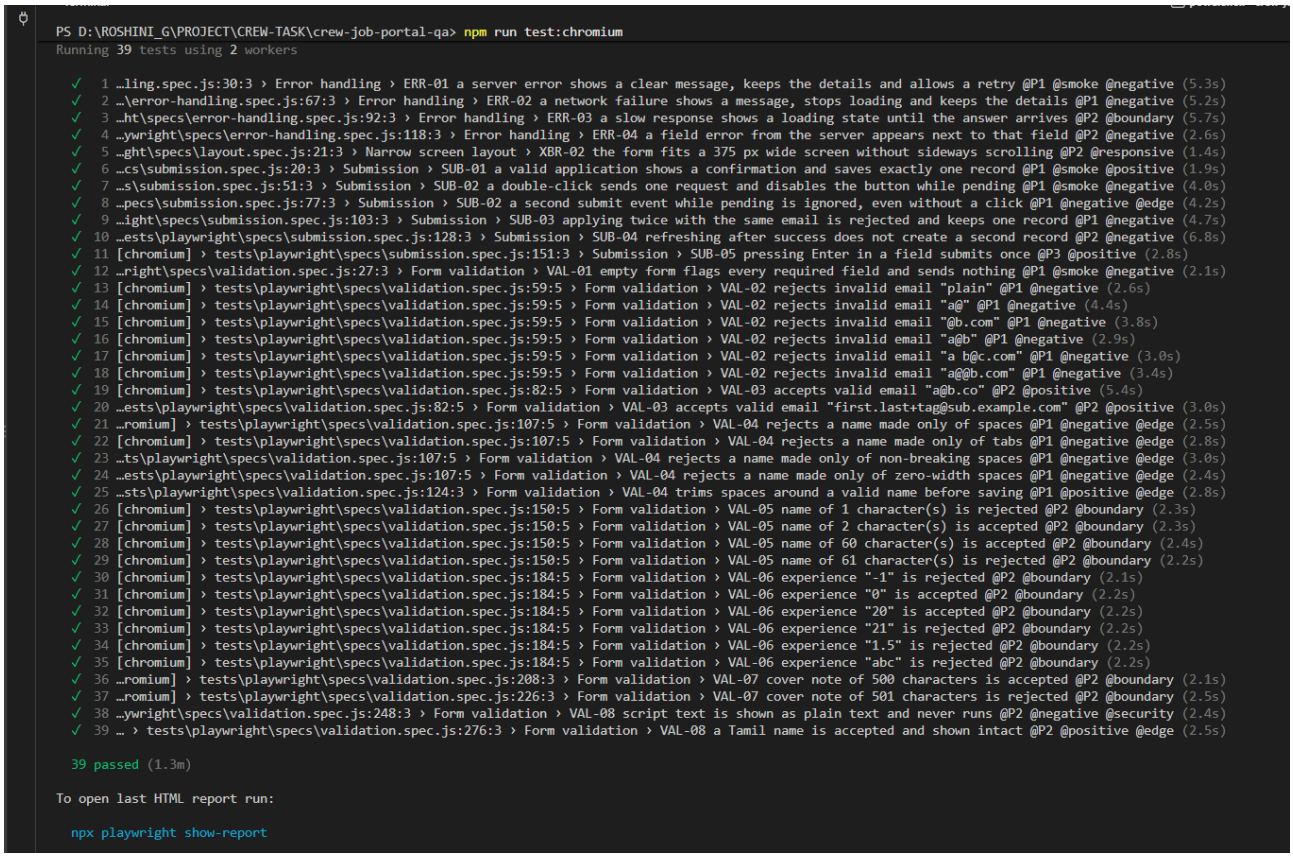

FIREFOX TEST CASE:

```
PS D:\ROSHINI_G\PROJECT\CREW-TASK\crew-job-portal-qa> npm run test:firefox
Running 39 tests using 1 worker

  ✓   1 …s\playwright\specs\error-handling.spec.js:30:3 › Error handling › ERR-01 a server error shows a clear message, keeps the details and allows a retry @P1 @smoke @negative (18.8s)
  ✓   2 …efox] › tests\playwright\specs\error-handling.spec.js:67:3 › Error handling › ERR-02 a network failure shows a message, stops loading and keeps the details @P1 @negative (5.1s)
  ✓   3 [firefox] › tests\playwright\specs\error-handling.spec.js:92:3 › Error handling › ERR-03 a slow response shows a loading state until the answer arrives @P2 @boundary (7.5s)
  ✓   4 [firefox] › tests\playwright\specs\error-handling.spec.js:118:3 › Error handling › ERR-04 a field error from the server appears next to that field @P2 @negative (3.7s)
  ✓   5 [firefox] › tests\playwright\specs\layout.spec.js:21:3 › Narrow screen layout › XBR-02 the form fits a 375 px wide screen without sideways scrolling @P2 @responsive (3.0s)
  ✓   6 …irefox] › tests\playwright\specs\submission.spec.js:20:3 › Submission › SUB-01 a valid application shows a confirmation and saves exactly one record @P1 @smoke @positive (2.9s)
  ✓   7 …refox] › tests\playwright\specs\submission.spec.js:51:3 › Submission › SUB-02 a double-click sends one request and disables the button while pending @P1 @smoke @negative (3.5s)
  ✓   8 [firefox] › tests\playwright\specs\submission.spec.js:77:3 › Submission › SUB-02 a second submit event while pending is ignored, even without a click @P1 @negative @edge (4.4s)
  ✓   9 [firefox] › tests\playwright\specs\submission.spec.js:103:3 › Submission › SUB-03 applying twice with the same email is rejected and keeps one record @P1 @negative (5.8s)
  ✓  10 [firefox] › tests\playwright\specs\submission.spec.js:128:3 › Submission › SUB-04 refreshing after success does not create a second record @P2 @negative (6.3s)
  ✓  11 [firefox] › tests\playwright\specs\submission.spec.js:151:3 › Submission › SUB-05 pressing Enter in a field submits once @P3 @positive (2.3s)
  ✓  12 [firefox] › tests\playwright\specs\validation.spec.js:27:3 › Form validation › VAL-01 empty form flags every required field and sends nothing @P1 @smoke @negative (2.2s)
  ✓  13 [firefox] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "plain" @P1 @negative (2.5s)
  ✓  14 [firefox] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a@" @P1 @negative (4.9s)
  ✓  15 [firefox] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "@b.com" @P1 @negative (3.8s)
  ✓  16 [firefox] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a@b" @P1 @negative (2.3s)
  ✓  17 [firefox] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a b@c.com" @P1 @negative (4.1s)
  ✓  18 [firefox] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a@@b.com" @P1 @negative (2.2s)
  ✓  19 [firefox] › tests\playwright\specs\validation.spec.js:82:5 › Form validation › VAL-03 accepts valid email "a@b.co" @P2 @positive (1.4s)
  ✓  20 [firefox] › tests\playwright\specs\validation.spec.js:82:5 › Form validation › VAL-03 accepts valid email "first.last+tag@sub.example.com" @P2 @positive (1.1s)
  ✓  21 [firefox] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of spaces @P1 @negative @edge (1.5s)
  ✓  22 [firefox] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of tabs @P1 @negative @edge (2.0s)
  ✓  23 [firefox] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of non-breaking spaces @P1 @negative @edge (1.3s)
  ✓  24 [firefox] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of zero-width spaces @P1 @negative @edge (1.5s)
  ✓  25 [firefox] › tests\playwright\specs\validation.spec.js:124:3 › Form validation › VAL-04 trims spaces around a valid name before saving @P1 @positive @edge (1.5s)
  ✓  26 [firefox] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 1 character(s) is rejected @P2 @boundary (1.2s)
  ✓  27 [firefox] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 2 character(s) is accepted @P2 @boundary (2.5s)
  ✓  28 [firefox] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 60 character(s) is accepted @P2 @boundary (2.4s)
  ✓  29 [firefox] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 61 character(s) is rejected @P2 @boundary (2.2s)
  ✓  30 [firefox] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "-1" is rejected @P2 @boundary (3.2s)
  ✓  31 [firefox] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "0" is accepted @P2 @boundary (1.6s)
  ✓  32 [firefox] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "20" is accepted @P2 @boundary (1.5s)
  ✓  33 [firefox] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "21" is rejected @P2 @boundary (1.8s)
  ✓  34 [firefox] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "1.5" is rejected @P2 @boundary (1.7s)
  ✓  35 [firefox] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "abc" is rejected @P2 @boundary (1.8s)
  ✓  36 [firefox] › tests\playwright\specs\validation.spec.js:208:3 › Form validation › VAL-07 cover note of 500 characters is accepted @P2 @boundary (3.3s)
  ✓  37 [firefox] › tests\playwright\specs\validation.spec.js:226:3 › Form validation › VAL-07 cover note of 501 characters is rejected @P2 @boundary (4.0s)
  ✓  38 [firefox] › tests\playwright\specs\validation.spec.js:248:3 › Form validation › VAL-08 script text is shown as plain text and never runs @P2 @negative @security (1.9s)
  ✓  39 [firefox] › tests\playwright\specs\validation.spec.js:276:3 › Form validation › VAL-08 a Tamil name is accepted and shown intact @P2 @positive @edge (3.2s)

  39 passed (2.4m)

To open last HTML report run:

  npx playwright show-report
```

WEBKIT TEST CASE:

```
PS D:\ROSHINI_G\PROJECT\CREW-TASK\crew-job-portal-qa> npm run test:webkit
Running 39 tests using 1 worker

  ✓   1 …s\playwright\specs\error-handling.spec.js:30:3 › Error handling › ERR-01 a server error shows a clear message, keeps the details and allows a retry @P1 @smoke @negative (11.1s)
  ✓   2 …bkit] › tests\playwright\specs\error-handling.spec.js:67:3 › Error handling › ERR-02 a network failure shows a message, stops loading and keeps the details @P1 @negative (4.0s)
  ✓   3 [webkit] › tests\playwright\specs\error-handling.spec.js:92:3 › Error handling › ERR-03 a slow response shows a loading state until the answer arrives @P2 @boundary (5.5s)
  ✓   4 [webkit] › tests\playwright\specs\error-handling.spec.js:118:3 › Error handling › ERR-04 a field error from the server appears next to that field @P2 @negative (2.7s)
  ✓   5 [webkit] › tests\playwright\specs\layout.spec.js:21:3 › Narrow screen layout › XBR-02 the form fits a 375 px wide screen without sideways scrolling @P2 @responsive (1.6s)
  ✓   6 [webkit] › tests\playwright\specs\submission.spec.js:20:3 › Submission › SUB-01 a valid application shows a confirmation and saves exactly one record @P1 @smoke @positive (2.6s)
  ✓   7 …ebkit] › tests\playwright\specs\submission.spec.js:51:3 › Submission › SUB-02 a double-click sends one request and disables the button while pending @P1 @smoke @negative (3.5s)
  ✓   8 [webkit] › tests\playwright\specs\submission.spec.js:77:3 › Submission › SUB-02 a second submit event while pending is ignored, even without a click @P1 @negative @edge (3.1s)
  ✓   9 [webkit] › tests\playwright\specs\submission.spec.js:103:3 › Submission › SUB-03 applying twice with the same email is rejected and keeps one record @P1 @negative (4.3s)
  ✓  10 [webkit] › tests\playwright\specs\submission.spec.js:128:3 › Submission › SUB-04 refreshing after success does not create a second record @P2 @negative (3.3s)
  ✓  11 [webkit] › tests\playwright\specs\submission.spec.js:151:3 › Submission › SUB-05 pressing Enter in a field submits once @P3 @positive (2.3s)
  ✓  12 [webkit] › tests\playwright\specs\validation.spec.js:27:3 › Form validation › VAL-01 empty form flags every required field and sends nothing @P1 @smoke @negative (2.3s)
  ✓  13 [webkit] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "plain" @P1 @negative (2.7s)
  ✓  14 [webkit] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a@" @P1 @negative (2.0s)
  ✓  15 [webkit] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "@b.com" @P1 @negative (2.3s)
  ✓  16 [webkit] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a@b" @P1 @negative (2.7s)
  ✓  17 [webkit] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a b@c.com" @P1 @negative (3.4s)
  ✓  18 [webkit] › tests\playwright\specs\validation.spec.js:59:5 › Form validation › VAL-02 rejects invalid email "a@@b.com" @P1 @negative (3.2s)
  ✓  19 [webkit] › tests\playwright\specs\validation.spec.js:82:5 › Form validation › VAL-03 accepts valid email "a@b.co" @P2 @positive (2.6s)
  ✓  20 [webkit] › tests\playwright\specs\validation.spec.js:82:5 › Form validation › VAL-03 accepts valid email "first.last+tag@sub.example.com" @P2 @positive (2.1s)
  ✓  21 [webkit] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of spaces @P1 @negative @edge (2.5s)
  ✓  22 [webkit] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of tabs @P1 @negative @edge (2.1s)
  ✓  23 [webkit] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of non-breaking spaces @P1 @negative @edge (1.9s)
  ✓  24 [webkit] › tests\playwright\specs\validation.spec.js:107:5 › Form validation › VAL-04 rejects a name made only of zero-width spaces @P1 @negative @edge (2.3s)
  ✓  25 [webkit] › tests\playwright\specs\validation.spec.js:124:3 › Form validation › VAL-04 trims spaces around a valid name before saving @P1 @positive @edge (2.5s)
  ✓  26 [webkit] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 1 character(s) is rejected @P2 @boundary (2.6s)
  ✓  27 [webkit] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 2 character(s) is accepted @P2 @boundary (2.7s)
  ✓  28 [webkit] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 60 character(s) is accepted @P2 @boundary (2.9s)
  ✓  29 [webkit] › tests\playwright\specs\validation.spec.js:150:5 › Form validation › VAL-05 name of 61 character(s) is rejected @P2 @boundary (2.2s)
  ✓  30 [webkit] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "-1" is rejected @P2 @boundary (2.1s)
  ✓  31 [webkit] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "0" is accepted @P2 @boundary (2.9s)
  ✓  32 [webkit] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "20" is accepted @P2 @boundary (3.0s)
  ✓  33 [webkit] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "21" is rejected @P2 @boundary (2.4s)
  ✓  34 [webkit] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "1.5" is rejected @P2 @boundary (2.8s)
  ✓  35 [webkit] › tests\playwright\specs\validation.spec.js:184:5 › Form validation › VAL-06 experience "abc" is rejected @P2 @boundary (2.2s)
  ✓  36 [webkit] › tests\playwright\specs\validation.spec.js:208:3 › Form validation › VAL-07 cover note of 500 characters is accepted @P2 @boundary (2.9s)
  ✓  37 [webkit] › tests\playwright\specs\validation.spec.js:226:3 › Form validation › VAL-07 cover note of 501 characters is rejected @P2 @boundary (2.7s)
  ✓  38 [webkit] › tests\playwright\specs\validation.spec.js:248:3 › Form validation › VAL-08 script text is shown as plain text and never runs @P2 @negative @security (2.5s)
  ✓  39 [webkit] › tests\playwright\specs\validation.spec.js:276:3 › Form validation › VAL-08 a Tamil name is accepted and shown intact @P2 @positive @edge (3.1s)

  39 passed (2.1m)

To open last HTML report run:

  npx playwright show-report
```