Creating a Virtual Reality Meditation Visualisation System

Requirement Specification

Simon Zaragoza-Dorwald, Rosie Bartlett, Lavish Bhojani, Dravin Gupta, Joseph Dunne, Callum Gray

November 23, 2022

Contents

1	Intr	oducti	on	1
	1.1	Overvi	ew and Justification	1
	1.2	Project	t Scope	1
	1.3	System	Description	2
		1.3.1	Current systems	3
2	Solu	ıtion R	equirements	4
	2.1	Function	onal Requirements	4
		2.1.1	Sensor Requirements	5
		2.1.2	Data Collection Requirements	6
		2.1.3	Environmental Requirements	8
	2.2	Non-fu	nctional Requirements	10
	2.3	Risks a	and Issues	12
		2.3.1	Technical Risks	12
		2.3.2	Project Risks	14
		2.3.3	Other Risks	15
		2.3.4	Risk Matrix	16
3	Pro	ject De	evelopment	16
	3.1	Develo	pment Approach	16
		3.1.1	Advantages of Extreme Programming	16
		3.1.2	Disadvantages of other methods	17
	3.2	Project	t Schedule	17
		3.2.1	Code	17
		3.2.2	Assessments	17
A	ХM	I. DTI)	20

1 Introduction

1.1 Overview and Justification

This document provides the requirement specifications for our virtual reality (VR) meditation application, referred to henceforth as 'the product'; the specific software for the product shall be referred to as 'the software'. This document provides an introduction (section 1) to the project, covering the justification (section 1.1), scope (section 1.2), and systems (section 1.3); the requirements for the system (section 2), both functional (section 2.1) and non-functional (section 2.2), and potential risks and issues (section 2.3); the development of the project (section 3) in terms of the approach (section 3.1) and schedule (section 3.2).

This project is for Professor Alexandra Cristea who shall henceforth be referred to as 'the client'. The client has given us the project of developing a VR meditation application with the possible use as a basis for research into the topic. This project aims to help those who have not done any, or have done very little, meditation before by giving them an immersive VR world to aid concentration and relaxation.

1.2 Project Scope

This project is intended for those who have never done any, or done very little, meditation before. It is aimed primarily at adults. The app is intended to help with mindfulness meditation (MM) practice through the use of gamification concepts and VR. The primary objectives are as follows:

• Personalisation over customisation

The client would prefer for the project to personalise, that is automatic adjustments to suit the user, itself rather than have the user customise the project, that is allowing the user to alter the environment

Stability

The client would prefer fewer stable features over more less-stable features

Modularity

The client would prefer the software to be modular to allow for ease of reuse in future projects

The client would also like the potential to use the project later on in a research context. This is not a primary consideration of ours, but we will use this to guide our development. To ensure that our project can be as seamlessly used in this context with little impact on the project itself, we will make reference to relevant literature where necessary to ensure our implementations of MM is as concurrent with current literature as we can make it¹.

For some examples of literature we will likely make reference of, see [1–3]. We will also make significant reference to [4] as a good example of research into a similar topic.

1.3 System Description

The system will be a VR app intended for meditation with aspects of gamification[5] using the Meta Quest². The app is intended to aid with visualisation based meditation and to accelerate the progression through meditation training.

The primary section of the app will be set in an environment designed to have as little distraction as possible whilst still allowing the app to be engaging. At present, we intend for the environment to be relatively featureless, with some objects orbiting the user. The objects will themselves have particles around them to obfuscate any highly contrasting areas. Each session will be approximately 10 to 20 minutes in length and various metrics will be measured throughout such as heart rate, EEG data, and eye tracking. This will be analysed and stored externally in accordance with the GDPR.

Evaluation metrics will be applied to the raw data, the results of which will be used to compare sessions and measure improvement. These metrics will be user-specific and will require user-specific baseline data, as well as general data. To gather this baseline data, a short (90 seconds) baseline test will be required before the user can complete any meditation.

The data metrics will be constructed to account for global limits and will be personalised, via user-specific data, to ensure that any change can be measured relatively to the user and not to some global standard. With this we aim to ensure that all users can see a clear progression from session to session.

Each user will have an associated account that will communicate with the server. This account will contain the user's name and personalisation data. The user will be able to access a history of sessions via a request to the server.

The server itself will be run by a Python script that can be run on any computer. For the purpose of product demonstration, we will ensure the same computer runs both the server and Quest app in lieu of a server with a static IP. The server will store user account data, raw session data, and session metric results. Data will be stored in a XML format, with each user having a folder under their username, with sessions and user data within that folder. Current, incomplete, XML DTD are given in appendix A.

¹The authors can find little research on MM with VR implementations. There is a significant amounts of research into VR applications and MM separately which we will use to guide our development

²Previously Oculus Quest

1.3.1 Current systems

There exists several current systems for integrating VR into meditation. We will briefly discuss two of these such systems here.

Lan et al. [4] demonstrated a feasible study for multimodal feedback meditation in VR. They used g-tummo meditation which has some well researched benefits [6] but is a fairly advanced technique. As such the multimodal feedback system allows less experienced meditators to feel a more immediate feedback from meditation and thus attempt to help motivate people to continue meditation. This research showed that the multimodal feedback correlated with a decrease in breathing rate and helped maintain user attention, measured via tiredness.

Hølledig et al. [7] demonstrated a VR based meditation environment also using biofeedback. Their environment was a generated forest environment with different amounts of fog depending on real-time evaluation of the user's meditative state. Whilst they failed to show any meaningful benefits, they do note that the use of biofeedback has potential to be useful. The authors also note of significant issue with the Myndplay headband that resulted in having to redesign their tests.

2 Solution Requirements

2.1 Functional Requirements

The functional requirements of our system can be broken down into three main types which are explained below:

Sensor

For the app to be adaptive, we need data that will inform us of the user's physiological state. To achieve this, we need to be reading data from sensors fitted on the user and passing it into the software. Any sensor requirement relates to the proper functioning of such sensors through them being correctly fitted, configured, and consistently and reliably transferring data.

Environmental

To utilise the advantages that VR has, when compared to more conventional types of meditation, we shall build an environment that the user can become immersed within. This will be achieved by designing the visual and audio elements to be coherent with one another. Such an environment should immerse the user not just through its design but through it adapting based upon the user's physiological state. When referring to environmental requirements, this encompasses the design of the environment, whether that is the UI, meditation, user interaction, or how the environment adapts to sensory data.

Data Collection

Because of the potential for the app to be used in research, it is important for the data not only to be used live to adapt the environment, but for it to also be stored for further analysis. When speaking with the client, the importance of data storage was made very clear to us, as she commented in our meeting that 'if you remember anything from all of this, generate data from the people and from the environment and their interactions'. We have thus designated all objectives related to the collection, storage, and processing of data under the data collection requirement heading.

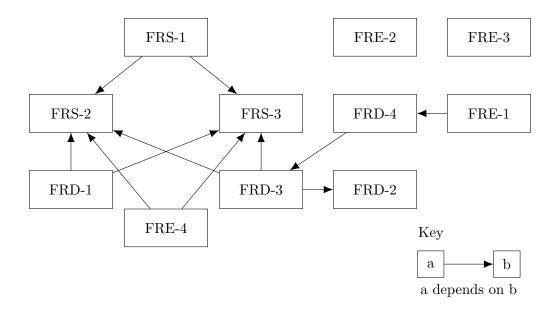


Figure 2.1: Functional dependency graph

2.1.1 Sensor Requirements

ID - Name	FRS-1 - Baseline Readings
Description	Baseline readings should be taken for each new user of the software. This
	should occur over 90 seconds where the user remains seated without the
	VR headset on
Priority - MuShCo	Medium - Should have
	Baseline values could be inferred from averages i.e. average heart rate for
	someone the same age, however, this wouldn't be ideal
Dependencies	FRS-2, FRS-3
Expected Results	Obtain an average value for the heart rate, concentration and meditation
	values of the user prior to meditating.
Exception handling	If calibration fails then check the positioning of the sensors on the user and
	reposition if necessary. If that fails try again after resetting and restarting
	the failing sensor

ID - Name	FRS-2 - Heart Rate Monitor Connectivity
Description	The heart rate monitor should return readings at regular intervals through
	a Bluetooth connection

Priority - MuShCo	High - Must have
	For the application to be adaptive, it needs to have a constant data stream
	of heart rate data
Dependencies	None
Expected Results	Obtain a constant stream of data detailing the heart rate of the user at
	specific times
Exception handling	If calibration fails then check the positioning of the sensor on the user and
	reposition if necessary. If that fails try again after resetting and restarting
	the heart rate monitor

ID - Name	FRS-3 - EEG Connectivity
Description	The EEG should return readings at regular intervals through a Bluetooth
	connection
Priority - MuShCo	High - Must have
	For the application to be adaptive, it needs to have a constant data stream
	of values from the EEG
Dependencies	None
Expected Results	Obtain a constant stream of data detailing the concentration and medita-
	tion score of the user at specific times
Exception handling	If calibration fails then check the positioning of the sensor on the user and
	reposition if necessary. If that fails try again after resetting and restarting
	the EEG

2.1.2 Data Collection Requirements

ID - Name	FRD-1 - Storing Sensor Data
Description	EEG and Heart Rate readings should be stored with timestamps through-
	out the session
Priority - MuShCo	High - Must have
	As emphasised by our client, making sure to generate data that can be
	studied is perhaps the most important requirement of our system
Dependencies	FRS2, FRS3
Expected Results	Obtain an XML file for each session with EEG and heart rate data fields
	included

Exception handling	Identify whether the exception occurs because of the connectivity of the
	sensors or the code for producing data files. If it is the former case, then
	refer to exception handling for FRS2 and FRS3. If it is the latter case
	then not much can be done apart from providing a form for feedback as
	this would be a bug in the code

ID - Name	FRD-2 - Storing User Behaviour
Description	Behaviour about how the user interacts with the virtual environment
	should be stored with timestamps. This includes what their attention
	is focussed on and their movement
Priority - MuShCo	High - Should have
	Although generating data that can be studied is very important for our
	application, data that is collected from the sensors is of greater impor-
	tance. Collecting data from how the user interacts with the environment
	could be difficult and so although we would like this to be done, it is not
	a must have requirement
Dependencies	None
Expected Results	Obtain an XML file for each session with user gaze tracking data
Exception handling	An exception occurring would mean a failure of the code. Not much can
	be done apart from providing a form for feedback as this would be a bug
	in the code

ID - Name	FRD-3 - Performance of meditation is measured and displayed
	at the end of a session
Description	The user's performance throughout the meditation exercise should be eval-
	uated, and then displayed to them at the end of a session
Priority - MuShCo	Medium - Could have
	Seeing how you performed after a session gamifies the program and gives
	the user insight into how well they have performed, but it is not a crucial
	feature from speaking to the client
Dependencies	FRS2, FRS3, FRD2

Expected Results	A value, calculated from a mixture of variables, including heart rate, med-
	itation value (from the EEG), head movement. This value would indicate
	how well the user meditated
Exception handling	Two main types of exception could occur for this requirement. If the value
	is not well computed, i.e the formula used does not accurately indicate how
	well the user has meditated, a feedback form could be provided where users
	could share their opinion. The formula could be perhaps reworked in this
	case.
	If some code means that the value calculated is not displayed or produces
	a value outside of the range of 1 to 100 then this is an error in the code.
	Not much can be done apart from providing a form for feedback

ID - Name	FRD-4 - Past meditations performance is stored and can be dis-
	played against session number in a graph
Description	For a particular user, performance from session to session will be stored
	and can be displayed in a graph for them against the session number
Priority - MuShCo	Medium - Could have
	Gamifying the meditation would help users become more motivated to
	continue as they would tangibly be able to see their progress. Despite
	this, we have called this objective Could Have as such a feature might
	make the experience more stressful. It is therefore a more experimental
	requirement, that could be implemented if it was known to aid motivation
Dependencies	FRD-3
Expected Results	A graph, where the y axis is meditation score (from 1 to 100) and the x
	axis is the session number. Data points will be plotted in this graph with
	a line connecting them
Exception handling	If the graph is not formatted correctly, or does not display the most recent
	results, we could have a refresh button to run the code again that produces
	it

2.1.3 Environmental Requirements

D - Name FRE-1 - Start Menu

Description	There should be a start menu that allows the user to select whether to do
	a walkthrough/tutorial, to complete a meditation session or to view their
	progress
Priority - MuShCo	High - Must have
	A menu would be necessary to be able to access the various functionality
	of the software
Dependencies	FRD-4
Expected Results	The user can select one of the three possible options using their hand
	controllers and then once selected, get access to it
Exception handling	An exception occurring would mean a failure of the code. Not much can
	be done apart from providing a form for feedback as this would be a bug
	in the code

ID - Name	FRE-2 - The user should be immersed in a virtual reality envi-
	ronment
Description	The user should be immersed in a virtual world for meditation. At the
	moment we want to do this in a relatively featureless space themed envi-
	ronment
Priority - MuShCo	High - Must have
	This is a fundamental requirement for the software so that we can take
	advantage of VR when compared to more conventional ways of meditating
Dependencies	None
Expected Results	The user's presence should be simulated in a virtual environment. They
	should be able to look around, move and interact with it
Exception handling	If the user is not properly immersed in the environment we will display
	a warning message telling them to restart the application and reconfigure
	their headset

ID - Name	FRE-3 - The user can access a pause menu
Description	During the meditation, if the user is feeling uncomfortable or needs to
	adjust a or refit a sensor they should be able to easily pause the session

Priority - MuShCo	Medium - Should have
	The application can always be left through taking the headset off however,
	it would be preferred to pause the meditation, and when the user comes
	back for them to choose whether to resume, or to quit and start a new
	session
Dependencies	None
Expected Results	The user's presence should be simulated in a virtual environment. They
	should be able to look around, move and interact with it
Exception handling	If the user is not properly immersed in the environment we will display
	a warning message telling them to restart the application and reconfigure
	their headset

ID - Name	FRE-4 - The environment should adapt to the user
Description	Different aspects of the environment should adapt based upon the incom-
	ing heart rate and EEG data from the user
Priority - MuShCo	Very High - Must have
	One of our main aims of this software is personalisation. The intended way
	of adding personalisation is through the environment adapting to sensory
	data, so this requirement is mandatory and of very high importance
Dependencies	FRS-2, FRS-3
Expected Results	In response to increases in the meditation value the particles shall become
	more clear and vivid. In response to reduced heart rate the users camera
	view distance should increase, so they can see further into the environment
Exception handling	If the bluetooth signal is not being correctly sent and received by the
	system then use the exception handling from FRS2 and FRS3. If that
	appears to work then it is likely an error in the code. Not much can be
	done apart from providing a form for feedback as this would be a bug

2.2 Non-functional Requirements

ID - Name	NFR-1 - The meditation should be accessible and easy to complete
Type	Usability Requirement
Priority	High - For our client to faithfully test the potential of VR meditation on our
	target audience, it is important for it to be easy to complete

Description	This software is targeted at people who have little if any meditation experience.
	The walkthrough must allow users to become quickly comfortable in using the
	software to meditate
Metrics	The mean time of progressing from the walkthrough to starting a meditation
	session should be ≤ 5 minutes
Constraints	Constraints of our teams limited knowledge of meditation and being able to design
	something accessible (see risk RT2)

ID - Name	NFR-2 - The buttons should feel like they respond instantaneously to
	the user
Type	Performance Requirement
Priority	High - We want to prevent the user becoming frustrated using our meditation
	software through slow menus
Description	The software should feel instantaneous to the user after selecting one of the main
	menu buttons
Metrics	From pressing a button, the next scene should begin loading within $\leq 400 \text{ ms}$
Constraints	Constraints of Unity being able to quickly load the required scenes and the Oculus
	Quest being able to update its display

ID - Name	NFR-3 - The environment should react in real-time to the users sensor
	data
Type	Performance Requirement
Priority	High - For us to utilise the effects of biofeedback for meditation, the user needs
	to be constantly aware of their physiology through the environment
Description	The software should work in real-time to display through the environment, the
	users physiological parameters
Metrics	From the sensor data coming into Unity, the environment should adapt within
	≤ 1 second
Constraints	Constraints on the Oculus Quest, Unity and C# on updating the environment
	to meet this metric

ID - Name	NFR-4 - All personal data collected shall be kept securely
Type	Security Requirement

Priority	The software should adhere to GDPR through getting consent to collect personal
	data. In addition, there must be appropriate security measures to protect it
Description	Very High - In complying with the law, we must treat this requirement with the
	utmost importance
Metrics	No personal data shall be accessible to any unauthorised user
Constraints	Constraints on how the Oculus Quest is used, for example, another user might
	have access to the same account

ID - Name	NFR-5 - The client should feel confident in learning to use the system
	once it is handed over
Type	Operational Requirement
Priority	The software shall be documented clearly and the user manual should detail the
	functional aspects and maintenance of the system
Description	High - For our client to be satisfied with our work, and for it to have potential
	in research, we need to ensure that it can be operated without our assistance
Metrics	The mark awarded to us by our client for the quality of our communication in
	the "Product Handover" section
Constraints	The client may be less familiar in things we assumed knowledge of in our docu-
	mentation

2.3 Risks and Issues

2.3.1 Technical Risks

ID - Risk	RT-1 - Limited knowledge of Unity
Risk	Very few members of our team has previous experience working in Unity and the
	programming language used within it (C#). This means that our abilities may be
	overestimated when creating the product for the client which will cause a worse
	quality product than was expected. Additionally, progress could be significantly
	delayed due to our team having to research and learn methods to implement the
	project requirements.

Mitigation	During the year our team will learn C# using tutorials and through practical use.
	This includes the time before project development is due to start so that the devel-
	opment process can be as streamlined as possible. We will also regularly collaborate
	to ensure no one is stuck on issues and improve as a group on any problems we
	encounter.

ID - Risk	RT-2 - Limited knowledge of meditation practices
Risk	None of our team have done any meditation before starting the project. This could
	cause incorrect meditation practices being used within the VR meditation project
	which could lead to inaccurate data not actively reflecting proper types of meditation.
	This means that the client will not be satisfied with the product as it is not usable
	for their research.
Mitigation	We have researched into meditation and will continue to do so during development.
	This includes finding research papers focussing on meditation and VR environments,
	and iteratively developing the project to increase the effectiveness of the meditation
	methods used by analysing the data collected.

ID - Risk	RT-3 - Low accuracy of data from sensors
Risk	Data produced by sensors could be inaccurate causing the project to incorrectly
	adapt to changes. The data is also required to be stored so it can potentially be
	used for research in the future and inaccurate data would hinder this research.
Mitigation	Where possible, we will try to get reliable data sensors and ensure our systems in
	place to send and process this data are also reliable by testing them extensively.
	We will try to detect inaccuracy in data by collecting large amounts of reliable data
	and prevent this data from being used both in the program and saved for further
	research.

ID - Risk	RT-4 - Data Security
Risk	Data that is saved could contain personal data and can be used in the program
	again. If the security of this data is compromised, personal data could be leaked
	and the data could be modified to affect the program maliciously.

Mitigation	Ensure that the data that is saved is secure on the machine it is stored on. This can
	be expected since it is within university and only our client will have the program
	(since there is no suggestion of further software distribution). Data that could
	be modified maliciously should be detected by the program to prevent errors and
	malicious use of the software.

2.3.2 Project Risks

ID - Risk	RP-1 - Budget Constraints
Risk	Unity is free to use however the hardware used is not. The Meta Quest headset and
	sensors can cost a considerable amount. For example, EEG headsets can be very
	expensive. These pieces of hardware are essential to the project as we require VR
	and a method to collect data.
Mitigation	We will use our available budget effectively in obtaining relevant hardware that is
	reliable while remaining within the budget. We have planned what data we want to
	use and what hardware we already have to minimise further costs of the project.

ID - Risk	RP-2 - Ill-defined project requirements
Risk	If the project requirements are not properly defined this can mean that features the
	client wants could be excluded from the final product and unnecessary features could
	be included. This can make the final product quality worse and waste our time.
Mitigation	After our initial client meeting, we have sent over a project specification draft to the
	client to ensure that all aspects of the project are correctly specified and correcting
	any that are not using feedback from the client. Additionally, we will remain in
	contact with our client to ensure the product is always what they expect it to be,
	especially if there are issues not explicitly covered in the project specification.

ID - Risk	RP-3 - Poor communication with client
Risk	Due to the busy schedules of both our team and our client, regular meetings are
	not feasible. Limited meetings and engagement with our client can lead to miscom-
	munications and incorrect assumptions about the final product. This can lead to
	an undesirable VR meditation product which would not be suitable for the client's
	needs.

Mitigation	Where we have in-person meetings, we will ensure we are prepared and have all
	issues, questions and queries ready. Additionally, we will continue to be in contact
	with our client via email on a regular basis for any more urgent issues or questions.

2.3.3 Other Risks

ID - Risk	RO-1 - Poor usability and user experience
Risk	A poor user experience can be undesirable for the client and any users of the system.
	Additionally, if the system is not easy-to-use, this could affect the data from sensors
	affecting our client's further research into the topic.
Mitigation	We will iteratively develop our program to ensure that the user experience is enjoy-
	able and easy. Where possible we will get our client and other potential users to test
	the usability and give feedback so that it can be updated.

ID - Risk	RO-2 - Poor output data
Risk	One of the main needs for the system is to output data which can be used in further
	research by our client. If there is not enough usable data, this could hinder our
	client's research.
Mitigation	Due to the data collection being collected by hardware and software not created
	by us, issues with these can be difficult to fix. We will make sure out data set we
	collect is large meaning that outliers do not greatly affect the population. If issues
	are persistent in data collection, we can process this data to try to fix or remove it.

ID - Risk	RO-3 - Poor documentation and lack of modular code			
Risk	Poor product documentation and a lack of modular source code can prevent the			
	product from being further scaled by the client after it has been handed over to			
	them.			
Mitigation	We will ensure that as code is written modularly, and documentation is written			
	alongside it. We will plan code and objects before creating them. Where applicable			
	we will review code to ensure documentation is of a high quality and code is modular			
	so can be easily built upon. We will also use linting tools to ensure no documentation			
	is missing and lightly enforce a coding style for readability.			

2.3.4 Risk Matrix

		Impact			
		Low	Medium	High	
Probability	Unlikely	RO-3	RP-1, RP-3	RT-3, RT-4	
	Possible	RO-2		RP-2, RO-1	
	Likely		RT-1, RT-2		

3 Project Development

3.1 Development Approach

For the project, we have decided that an agile approach, specifically Extreme Programming (XP), fits our needs the best. It ensures that we can work on multiple tasks simultaneously and stipulates thorough planning and collaboration, which is inline with our concept.

3.1.1 Advantages of Extreme Programming

• Extensive planning

As detailed in our Project Schedule, our approach has to rely significantly on prior planning and communication. Each piece of code / assessment is meticulously divided into smaller sub-tasks and evaluated based on its length and difficulty. Additionally, the group always confers with the client first to make sure the vision of the client still matches the production code.

• Pair programming

Two people from the group focus solely on the actual development of the software / code and cross check each other's work.

• Simple design

After meeting with the client, its has become clear that the data is the primary focus of this project. Personalisation (the collection of data and the subsequent adapting of the meditation) will be the goal of this project, rather than creating a customizable environment, e.g. prioritizing eye tracking over more colors the user can choose from at the beginning of the meditation. This follows the principle of simple design, since we will focus on raw data collection rather than "bells and whistles".

• Refactoring and continuous integration

During the primary development phase outlined in section 3.2 we will have to adapt and refactor the code multiple times for adjustment. This could be due to technical limitations and feedback given in the feedback stage in section 3.2. Since the client has requested the code be as clean and understandable as possible due to the fact that it might be used for further research later, we will periodically refactor and simplify the code. This will happen frequently, since we are not experienced with VR or C #.

3.1.2 Disadvantages of other methods

• Waterfall

The Waterfall method does not offer the flexibility we need to manage this project in the given time frame. Implementing new requirements or coding practices is virtually impossible because everything has to stick to a rigid schedule. Dividing the workload would also not work with this method. In contrast, the XP method allows for more dynamic workflows and and reflects a realistic relationship with the client

• SCRUM

SCRUM has fixed, predefined roles which we feel are not suited for our project. Since we decide everything together and everyone cross checks everyone, there is no need for a SCRUM Master or a product owner. Additionally, the frequency of meetings and the general time spent on a sprint does not coincide with our project schedule. However, XP does not have a predefined time structure and does not have hierarchical structures.

3.2 Project Schedule

Figure 3.1 illustrates our timeline for the duration of this project. The Gantt chart is split into two parts: The actual developing stages of the software/code and the completion of the assessments themselves.

3.2.1 Code

For the software we have the phases familiarisation with the VR-Headsets and C#, the development of the code, feedback from users, testers and the client and minor adjustments in accordance with the provided feedback. Two people will always be working on solely writing the code.

3.2.2 Assessments

Since we have opted for a modular code and work approach, each piece of work we submit is extensively planned and reviewed:

• During the 3-5 days before we start on the assessment we divided up the work and discuss key targets

- Over the next few weeks each person completes their part of the project, while continuously communicating their progress to other members of the group and if they need advice
- When everyone has completed their work, one person reviews every section to help ensure proper spelling, formatting and that every section meets / exceeds expectations
- The revision period does not necessarily only mean revising the actual material. It also means reflecting on the work submitted and figuring out how to improve our collaboration process
- The arrows between different sections illustrate the workflow of our project.

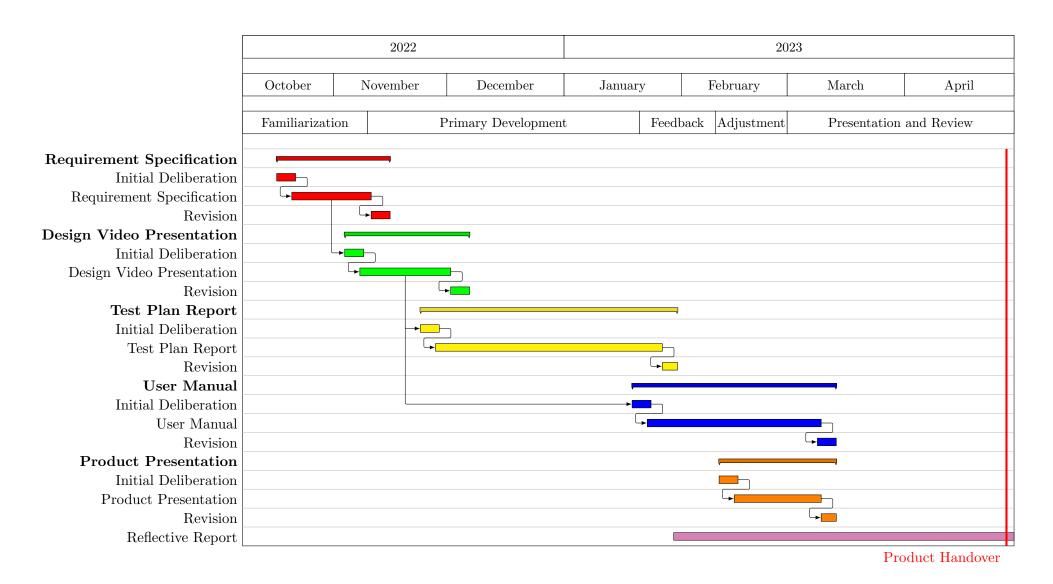


Figure 3.1: Project Schedule Gantt Chart

A XML DTD

This appendix includes the document type definitions (DTD) for the user and session databases. Each DTD is semi-commented to describe the intended purpose of the given tag or attribute. Due to the project not being complete, the DTD are partially incomplete and the complete parts are best estimates. Any unknown section in the DTDs will be indicated by an ellipsis.

```
1 <?xml version="1.0"?>
  <!DOCTYPE user [
    <!ELEMENT user (name, pers_data)>
    <!ATTLIST user id ID #REQUIRED>
    <!-- User name string -->
6 <!ELEMENT name (#PCDATA)>
    <!-- User personal data -->
    <!ELEMENT pers_data (...)>
]>
```

Listing 1: General DTD for user database

```
1 <?xml version="1.0"?>
  <!DOCTYPE session [</pre>
  <!ELEMENT session (time, HR_data, EEG_data, gaze)>
  <!ATTLIST session id ID #REQUIRED>
  <!-- Date and time stored as epoch time -->
6 <! ELEMENT time (#PCDATA)>
  <!-- Hear rate data as a list of datapoints -->
  <!ELEMENT HR_data ((...)+)>
  <!-- EEG data as a list of datapoints -->
  <!ELEMENT EEG_data ((...)+)>
11 <!-- Gaze data as a list of timed datapoints -->
  <!ELEMENT gaze ((gaze_element)+)>
  <!ELEMENT gaze_element (yaw, pitch)>
  <!-- Yaw of the user view -->
  <!ELEMENT yaw (#PCDATA)>
16 <!-- Pitch of the user view -->
  <!ELEMENT pitch (#PCDATA)>
  <!ATTLIST gaze_element time CDATA #REQUIRED>
  1>
```

Listing 2: General DTD for session database

Note that for the child nodes of HR_data and EEG_data in the session DTD, each will have a time attribute as with the gaze datapoint.

```
1 <?xml version = "1.0" encoding = "UTF-8" standalone = "no" ?>
```

Listing 3: Sample session XML file

References

- [1] Ilkka Kosunen et al. "RelaWorld: Neuroadaptive and Immersive Virtual Reality Meditation System". In: Proceedings of the 21st International Conference on Intelligent User Interfaces. IUI'16: 21st International Conference on Intelligent User Interfaces. Sonoma California USA: ACM, 2016-03-07, pp. 208-217. ISBN: 978-1-4503-4137-0. DOI: 10.1145/2856767.2856796. URL: https://dl.acm.org/doi/10.1145/2856767.2856796 (visited on 2022-10-20).
- [2] Yi-Yuan Tang, Britta K. Hölzel, and Michael I. Posner. "The neuroscience of mindfulness meditation". In: Nature Reviews Neuroscience 16.4 (2015-04), pp. 213-225. ISSN: 1471-003X, 1471-0048.

 DOI: 10.1038/nrn3916. URL: http://www.nature.com/articles/nrn3916 (visited on 2022-11-08).
- [3] Xian Wang et al. Reducing Stress and Anxiety in the Metaverse: A Systematic Review of Meditation, Mindfulness and Virtual Reality. 2022-09-29. arXiv: 2209.14645 [cs]. URL: http://arxiv.org/abs/2209.14645 (visited on 2022-11-10).
- [4] Kun-Chan Lan, Che-Wei Li, and Yushing Cheung. "Slow Breathing Exercise with Multimodal Virtual Reality: A Feasibility Study". In: Sensors 21.16 (2021-08-13), p. 5462. ISSN: 1424-8220. DOI: 10.3390/s21165462. URL: https://www.mdpi.com/1424-8220/21/16/5462 (visited on 2022-10-20).
- [5] Armando M. Toda et al. "A Taxonomy of Game Elements for Gamification in Educational Contexts: Proposal and Evaluation". In: 2019 IEEE 19th International Conference on Advanced Learning Technologies (ICALT). 2019 IEEE 19th International Conference on Advanced Learning Technologies (ICALT). Maceió, Brazil: IEEE, 2019-07, pp. 84-88. ISBN: 978-1-72813-485-7. DOI: 10.1109/ICALT.2019.00028. URL: https://ieeexplore.ieee.org/document/8820847/ (visited on 2022-11-08).
- [6] Maria Kozhevnikov et al. "Neurocognitive and Somatic Components of Temperature Increases during g-Tummo Meditation: Legend and Reality". In: *PLoS ONE* 8.3 (2013-03-29). Ed. by

- Andrej A. Romanovsky, e58244. ISSN: 1932-6203. DOI: 10.1371/journal.pone.0058244. URL: https://dx.plos.org/10.1371/journal.pone.0058244 (visited on 2022-10-20).
- [7] Malte Lindholm Hølledig and Rikke Katrine Petersen. "ZenVR: A biofeedback virtual reality experience for assisting meditation". PhD thesis. Aalborg University, 2018. 103 pp. (Visited on 2022-10-09).