


# Manually Create Collection Variable

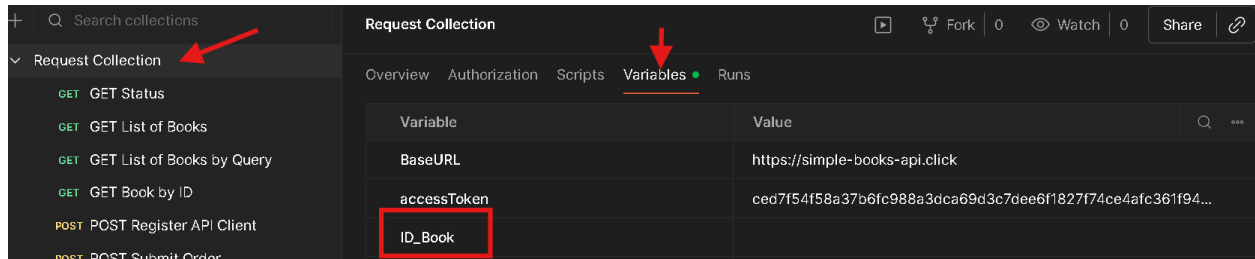


This screenshot shows the 'Request Collection' interface in Postman. On the left sidebar, the 'Request Collection' is selected, indicated by a red arrow. The main panel displays the 'Variables' tab, also indicated by a red arrow. A table lists the collection variables:

Variable	Value
BaseUrl	https://simple-books-api.click
accessToken	ced7f54f58a37b6fc988a3dca69d3c7dee6f1827f74ce4afc361f94...
ID_Book	

The 'ID\_Book' variable is highlighted with a red box.

## Add Script and send

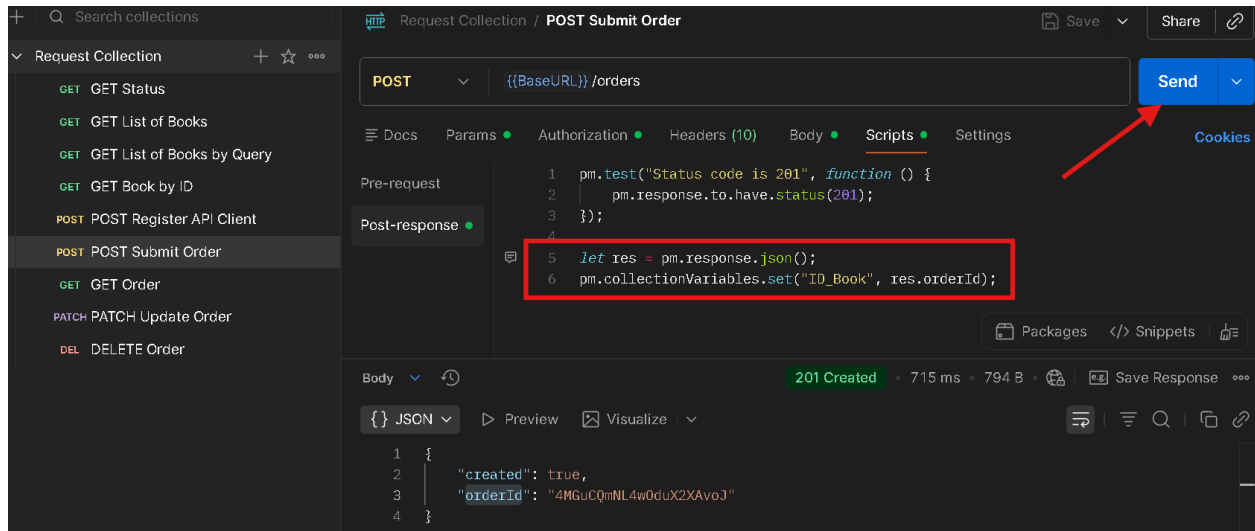


This screenshot shows the 'POST Submit Order' request in Postman. The 'Scripts' tab is selected, and a script is added to the 'Post-response' section, highlighted with a red box:


```
1 pm.test("Status code is 201", function () {  
2   pm.response.to.have.status(201);  
3 });  
4  
5 let res = pm.response.json();  
6 pm.collectionVariables.set("ID_Book", res.orderId);
```

A red arrow points to the 'Send' button in the top right corner. Below the script, the response body is shown as JSON:

```
1 {  
2   "created": true,  
3   "orderId": "4MGuCQmNL4w0duX2XAvo3"  
4 }
```

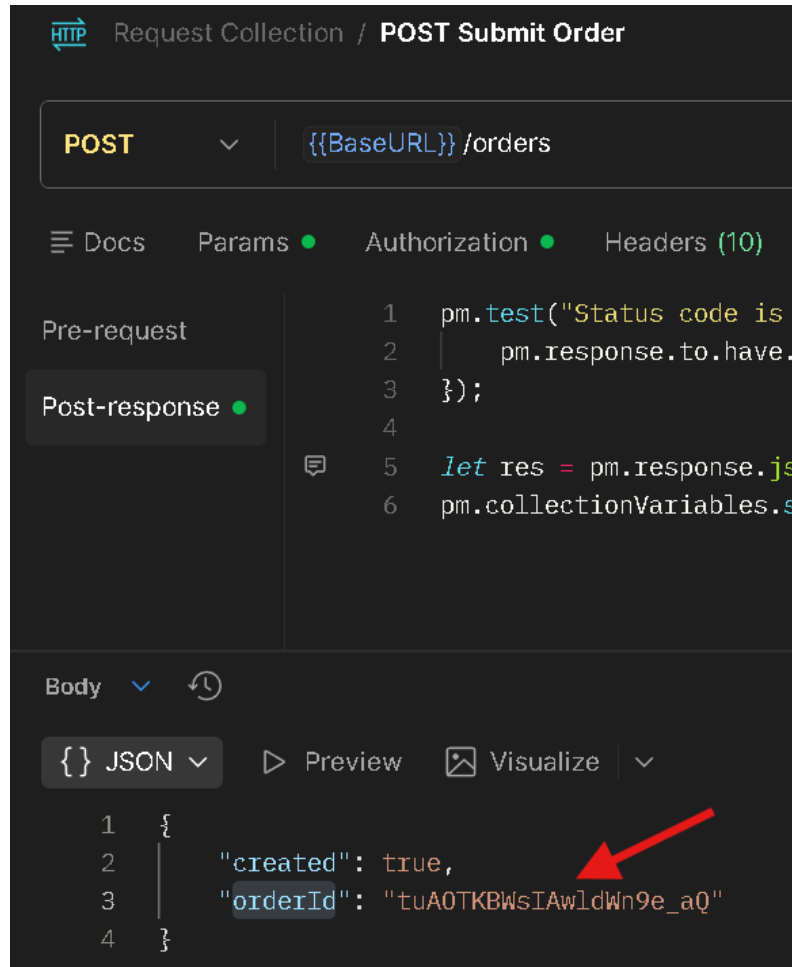

*Let's Check is it saved in collection Variable*

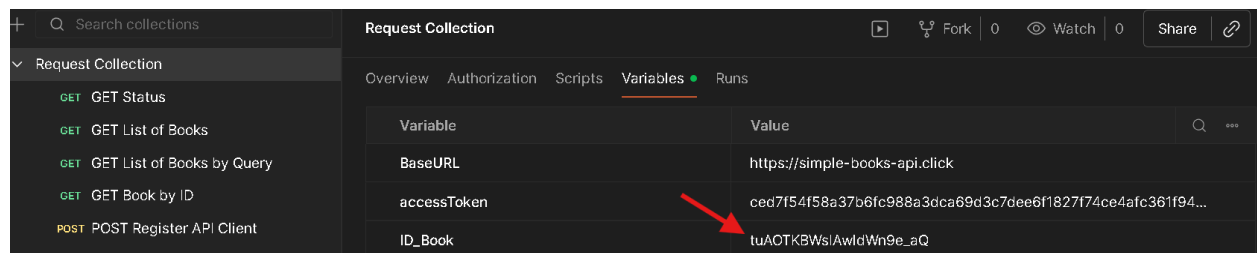

*Now let's Use this variable in update, delete, etc*

Q Search collections

Request Collection

GET GET Status

GET GET List of Books

GET GET List of Books by Query

GET GET Book by ID

POST POST Register API Client

POST POST Submit Order

GET GET Order

PATCH PATCH Update Order

DEL DELETE Order

HTTP Request Collection / GET Order

Save Share

GET {{BaseURL}}/orders/:orderId

Send

Docs Params Authorization Headers (8) Body Scripts Settings Cookies

Path Variables

Key	Value	Description	Bulk Edit
orderId	{{ID_Book}}	Description	

Body 200 OK + 651 ms + 848 B Save Response

JSON Preview Visualize

```
1 {
2   "id": "tuA0TKBWsIAwldWn9e_aQ",
3   "bookId": 1,
4   "customerName": "PostmanAPI",
5   "quantity": 1,
6   "timestamp": 1768401118156
7 }
```