Environmental Variables:

If we have the python code:

```
app.py
import os
from flask import Flask

app = Flask(__name__)

…
…

color = "red"

@app.route("/")
def main():
    print(color)
    return render_template('hello.html', color=color)


if __name__ == "__main__":
    app.run(host="0.0.0.0", port="8080")
```

Its a good practice to have variable outside the code, to provide values to the application. Such as using environmental Variables named as APP_COLOR.

app.py

```python
import os
from flask import Flask

app = Flask(__name__)

...
...

color = os.environ.get('APP_COLOR')

@app.route("/")
def main():
    print(color)
    return render_template('hello.html', color=color)


if __name__ == "__main__":
    app.run(host="0.0.0.0", port="8080")
```

```
export APP_COLOR=blue; python app.py
```

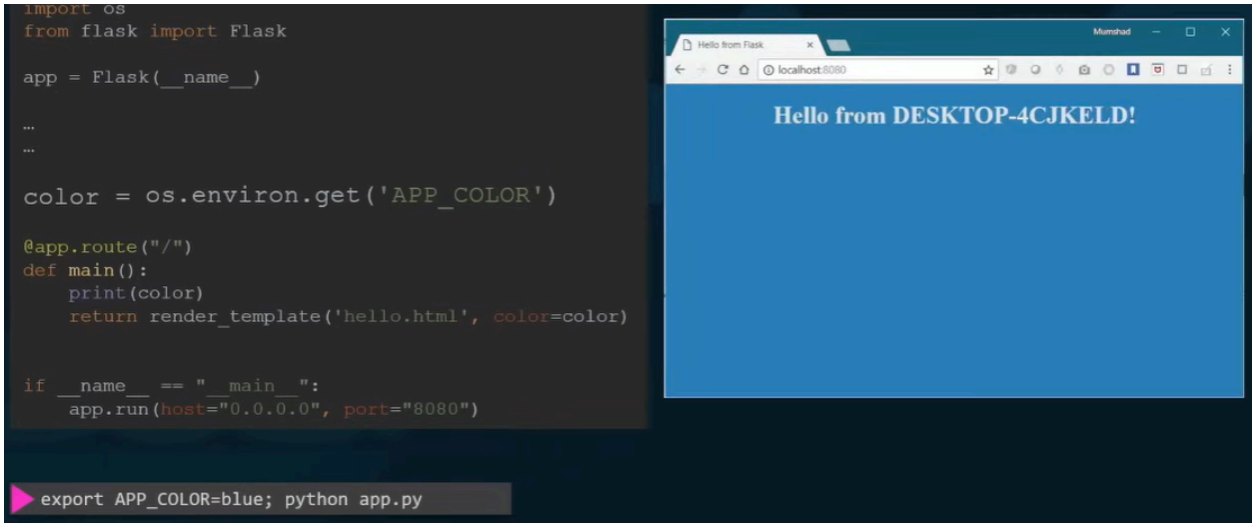

Once the application is packed inside a docker image,

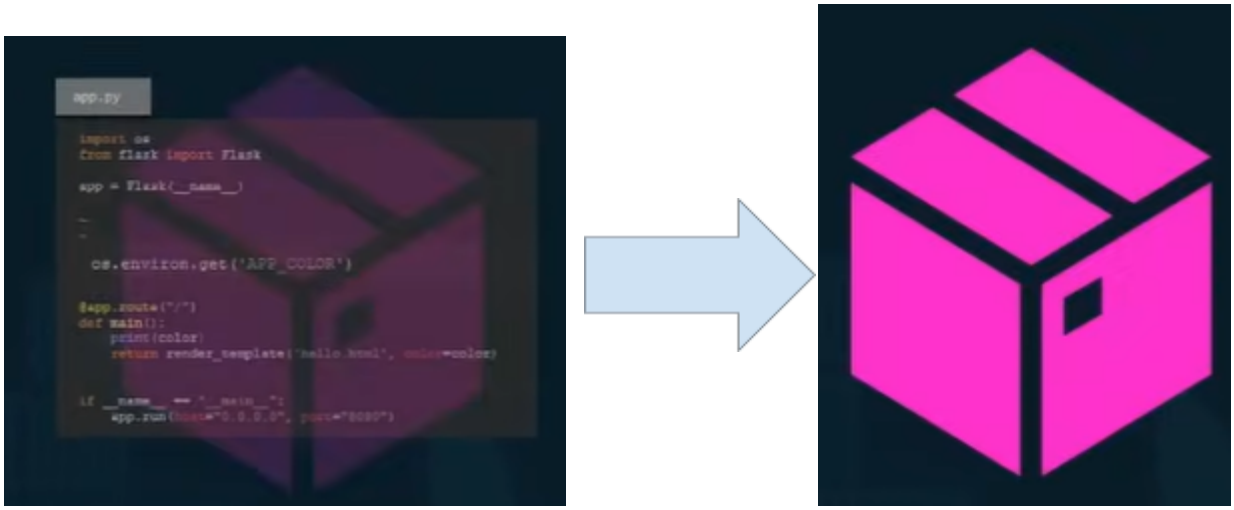

Then you can run using docker run command, fallowed by name of the image.
However, if you wish to pass the environment variables **use -e APP_COLOR=blue**

```
docker run -e APP_COLOR=blue    simple-webapp-color
```

Other examples,

How to find the environment variable from the container that already running,
Use inspect command:

```
docker inspect blissful_hopper
[
    {
        "Id": "35505f7810d17291261a
        "State": {
            "Status": "running",
            "Running": true,
        },

        "Mounts": [],
        "Config": {
            "Env": [
                "APP_COLOR=blue",
                "LANG=C.UTF-8",
```