What if we update Project

Updating the project, happens due to bug fixes, new features, scalability, performance, etc.

```
EXPLORER
OPEN EDITORS
  Dockerfile testapp                U
  App.js testapp\src                M
WEB APPLICATION
  testapp
    public
    src
      App.css
      App.js                        M
      App.test.js
      index.css
      index.js
Dockerfile U   App.js M
testapp > src > App.js > App
4  function App() {
6      <div className="App">
7        <header className="App-heade
8          <img src={logo} className=
9          <p>
10           Demo project for Docker.
```

Is changed to:

```
EXPLORER
OPEN EDITORS
  Dockerfile testapp                U
  App.js testapp\src                M
WEB APPLICATION
  testapp
    public
    src
      App.css
      App.js                        M
      App.test.js
      index.css
Dockerfile U   App.js M
testapp > src > App.js > App
4  function App() {
7        <header className="App-heade
8          <img src={logo} className=
9          <p>
10           New Project for Testing.
```

```
\testapp> docker image ls -a
```

```
IMAGE          ID             DISK USAGE   CONTENT SIZE   EXTRA
mywebapp:01    89eacf391531       2.11GB         491MB     U
<untagged>     2ca300af969a       2.11GB         491MB     U
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp>
```

Already having version 01, since we have made changes to the code. So let's create a version 02.

```
testapp> docker build -t mywebapp:02 .
```

Checking list of images:

```
\testapp> docker image ls
```

```
IMAGE          ID             DISK USAGE   CONTENT SIZE   EXTRA
mywebapp:01    89eacf391531       2.11GB         491MB     U
mywebapp:02    b90c1a14ca28       2.11GB         491MB
```

In docker desktop:

Name	Tag	Image ID
<none>	<none>	2ca300af969a
mywebapp	01	89eacf391531
mywebapp	02	b90c1a14ca28

-d: detached mode
–rm: during removing image, it also removes the container automatically.
3001:3000: binding ports, binded at port 3001
mywebapp:02: where mywebapp is for name of the image, 02 for version

```
docker run -d --rm --name "mywebapp" -p 3001:3000 mywebapp:02
7d252
```

To check running using **docker ps:**

```
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp> docker ps
CONTAINER ID   IMAGE          COMMAND                  CREATED
b97dc1c80086   mywebapp:02    "docker-entrypoint.s…"   41 seconds ago
```

```
STATUS            PORTS                                        NAMES
Up 41 seconds     0.0.0.0:3001->3000/tcp, [::]:3001->3000/tcp   mywebapp
```

Open is port 3001:

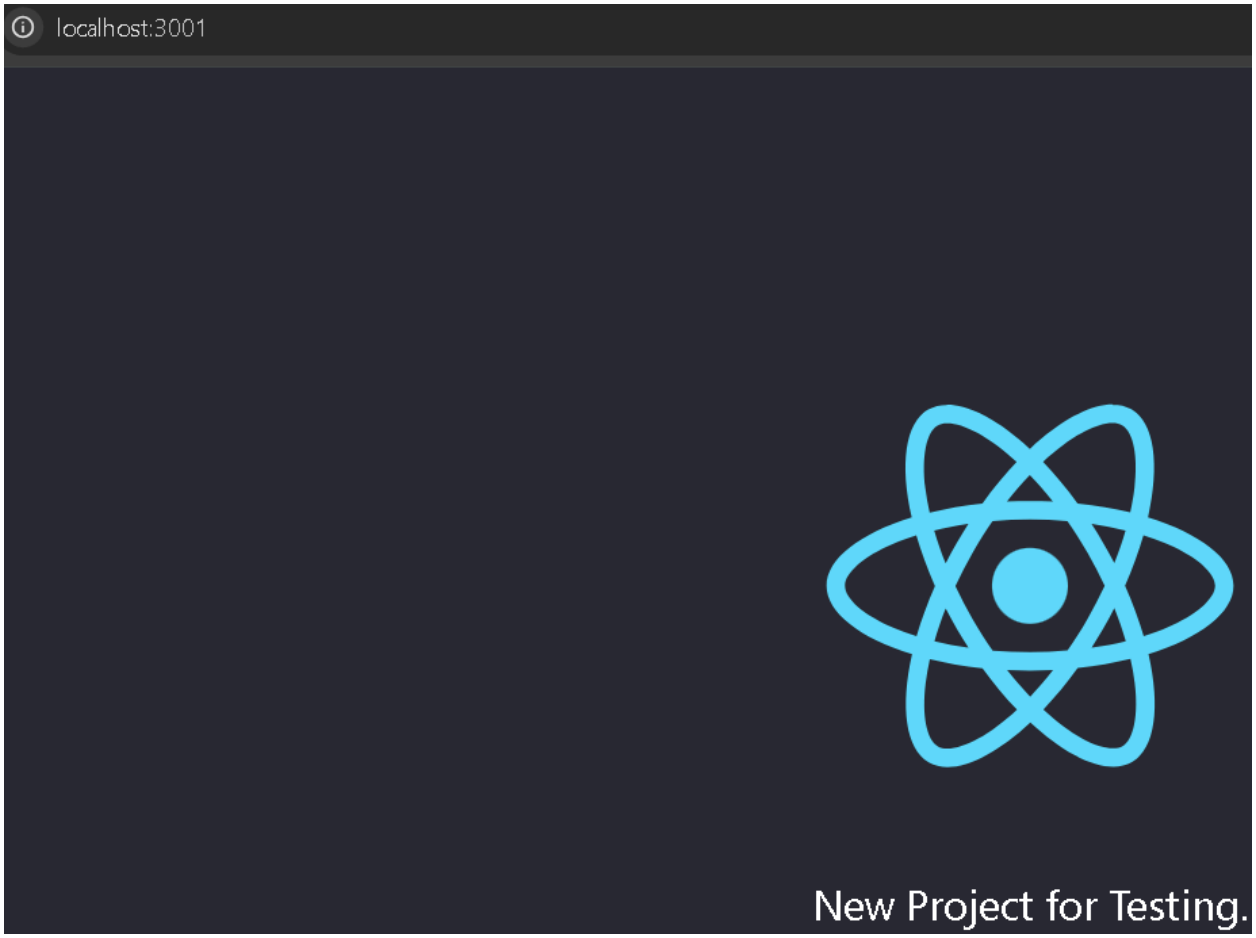

For port 3000:

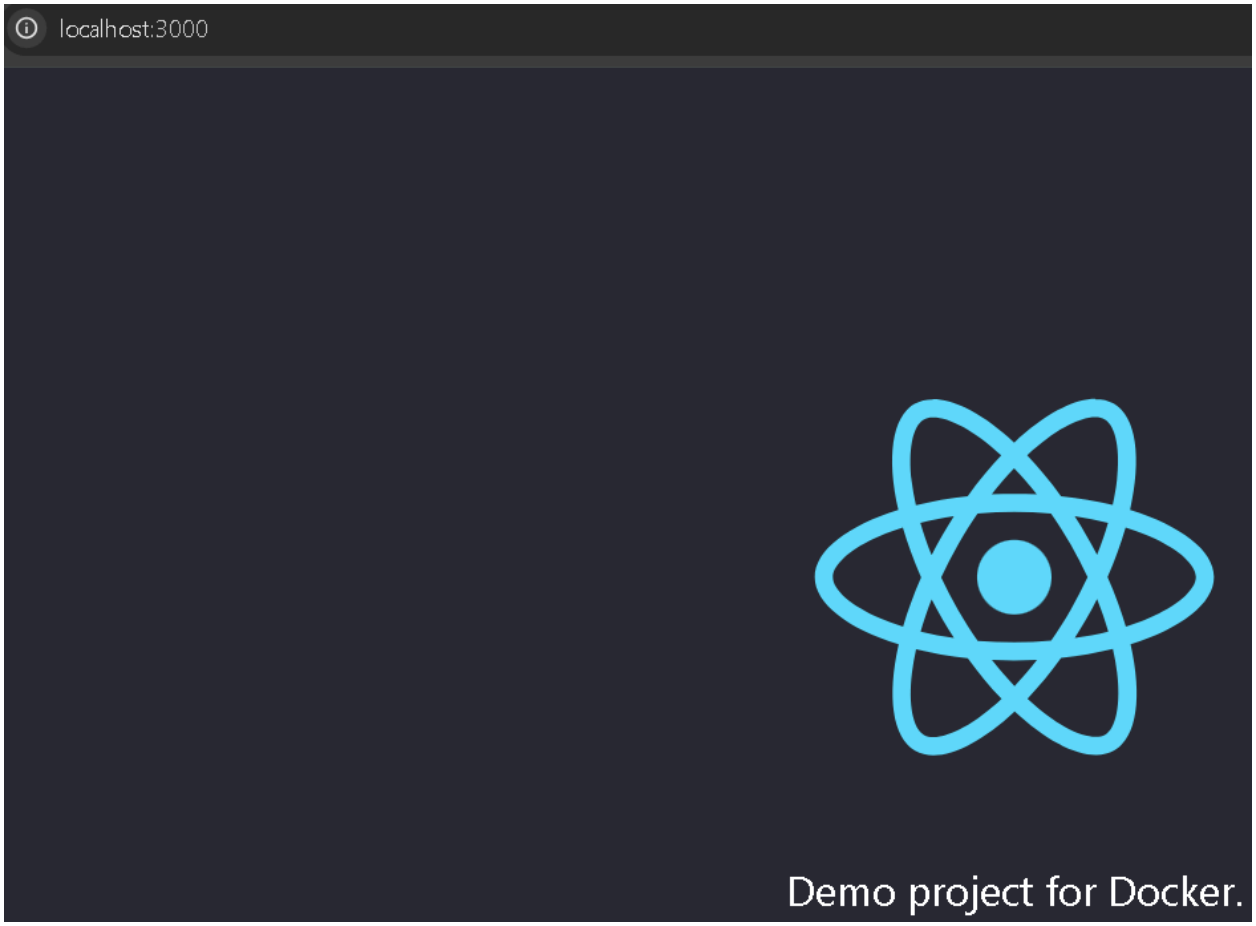

Let’s also run the previous version 01, port cant be same so make 3002, make sure to provide different name,

```
docker run -d --rm --name "mywebapp01" -p 3003:3000 mywebapp:01
```

To check

```
tapp> docker ps
 CREATED            STATUS            PORTS                                          NAMES
 48 seconds ago     Up 48 seconds     0.0.0.0:3003->3000/tcp, [::]:3003->3000/tcp    mywebapp01
```

For port 3003:

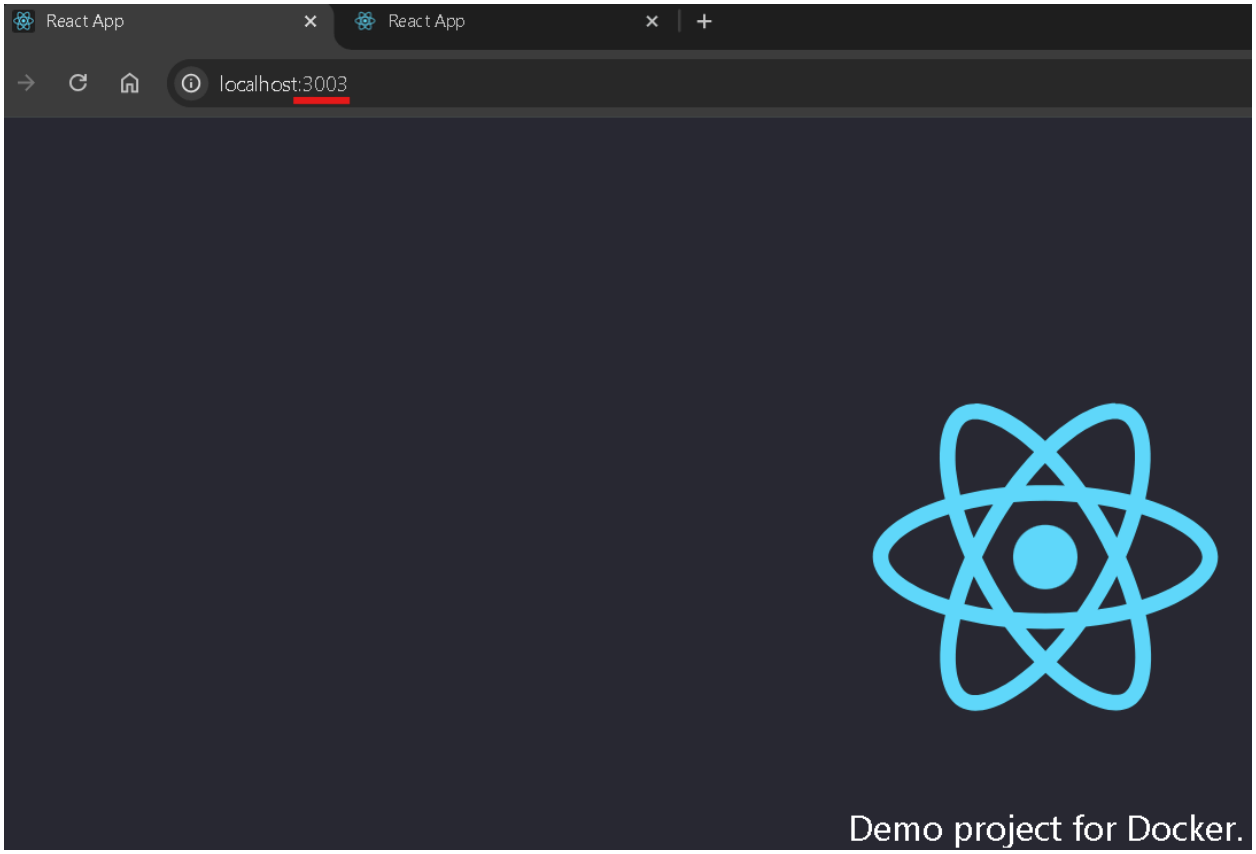

For port 3001:

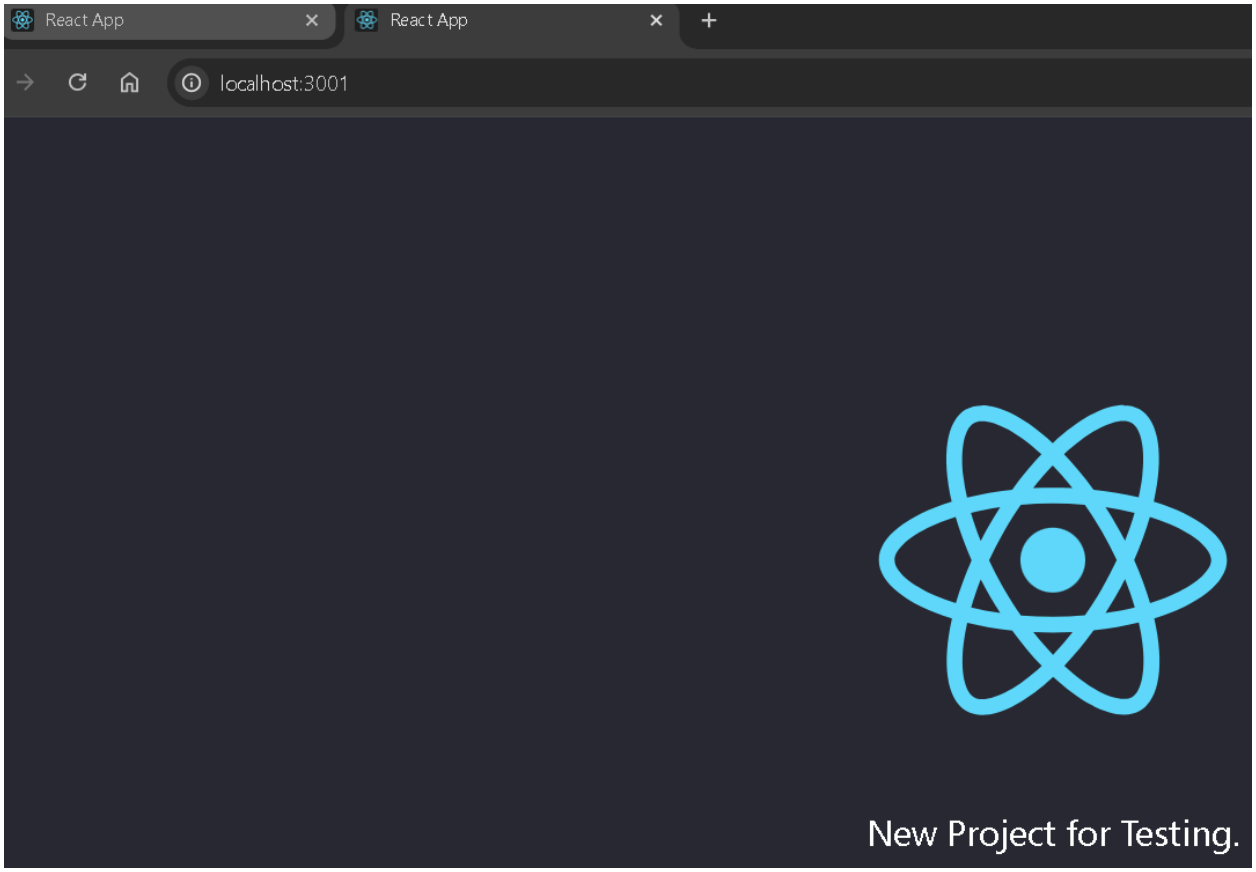

Advantage: analysis multiple versions at same time.