# Sharing Images DockerHUB

Let know how to use Docker  Registry, whatever images we have created, then how to share the images to the team member, public, etc or in remote area, Eg: developer created a image and shared with the tester.

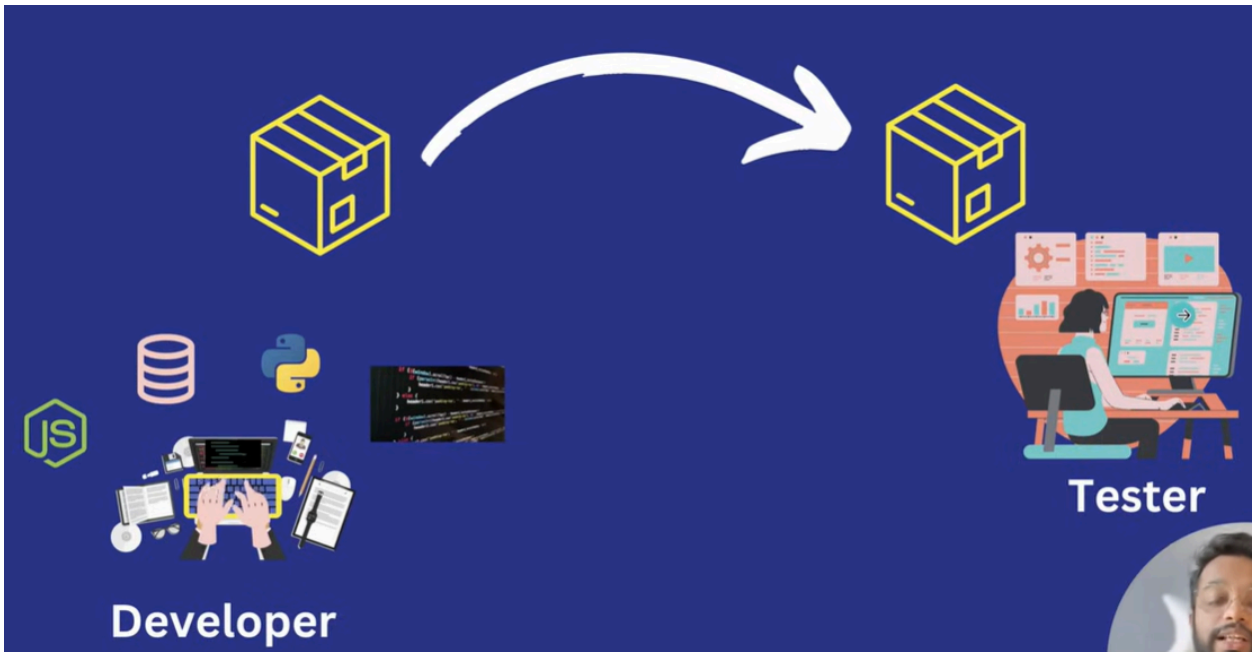


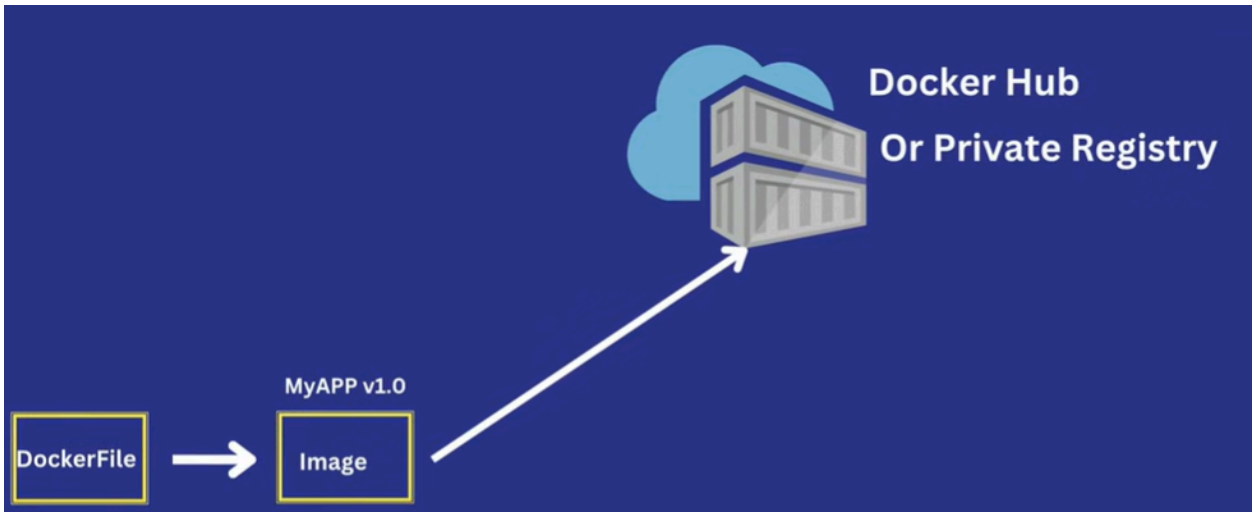


Above example is for uploading/pushing the image to the Docker Hub or Private Registry. If an team member wants to use that image irrespective on different image.
Visit: [docker.com](docker.com)

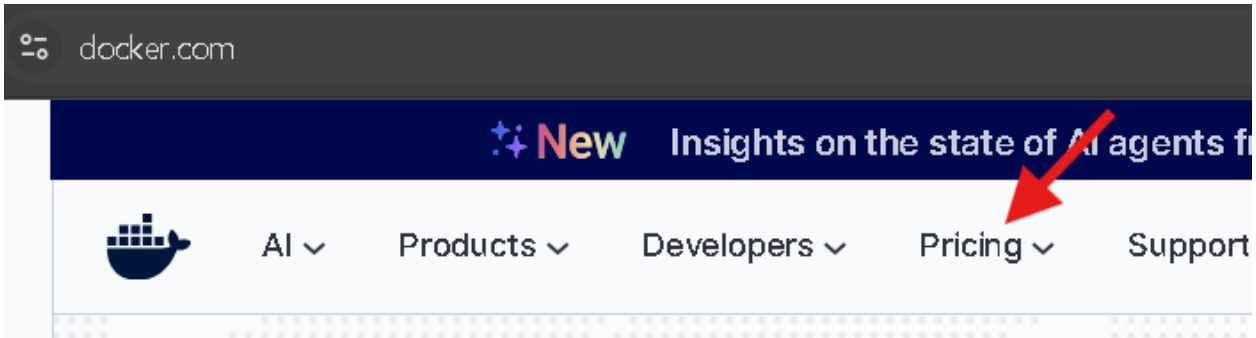
docker.com
New
Insights on the state of AI agents f
AI
Products
Developers
Pricing
Support

Free use:

# $0

For individual developers who need the essential tools to build and deploy containers.

Get started

Includes:

- Docker Desktop
- Docker Engine + Kubernetes
- Docker Hub
- Docker Scout
- Docker Debug

| | Personal<br>**$0**<br>/mo<br><br>Buy Now |
|---|---|
| **General** | |
| Price per user per month (monthly plan) | $0 |
| Price per user per month (annual plan) | – |
| Maximum number of Users | 1 |
| **Docker Desktop** | |
| Docker Engine | ✓ |
| Containerd | ✓ |

| Docker Subscriptions<br>Yearly Monthly | Personal<br>$0 /mo<br>Buy Now |
|---|---|
| **Docker Desktop** | |
| Docker Engine | ✓ |
| Containerd | ✓ |
| Docker CLI | ✓ |
| Docker GUI | ✓ |
| Docker Compose | ✓ |
| Docker Build | ✓ |
| Docker Kubernetes | ✓ |
| Docker Desktop Extensions | ✓ |
| Volume Exports | ✓ |
| Synchronized File Shares | – |

| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
|---|---|
| **Docker Hub** | |
| Trusted Content Catalog | ✓ |
| Webhooks | ✓ |


| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
|---|---|

| Local Vulnerability Analysis* | ✓ |
|---|---|
| Image Remediation | ✓ |
| Docker Integrations | ✓ |

| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
|---|---|
| Included Docker Scout Enabled Repositories | 1 |

| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
|---|---|
| Included build minutes (per subscription per month) | Free Trial |

| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
|---|---|
| Max Concurrent Workers Per User (Desktop) | 1 |
| Max Concurrent Workers Per CI Account (CI) | 1 |
| Included Cloud Runtime Minutes per month for both CI and Desktop per subscription | Free Trial |

| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
| --- | --- |
| **Standard Support** | |
| Community forums | ✓ |


| Docker Subscriptions<br>Yearly Monthly | Personal $0 /mo<br>Buy Now |
| --- | --- |


| | |
| --- | --- |
| External email address to report security concerns | ✓ |

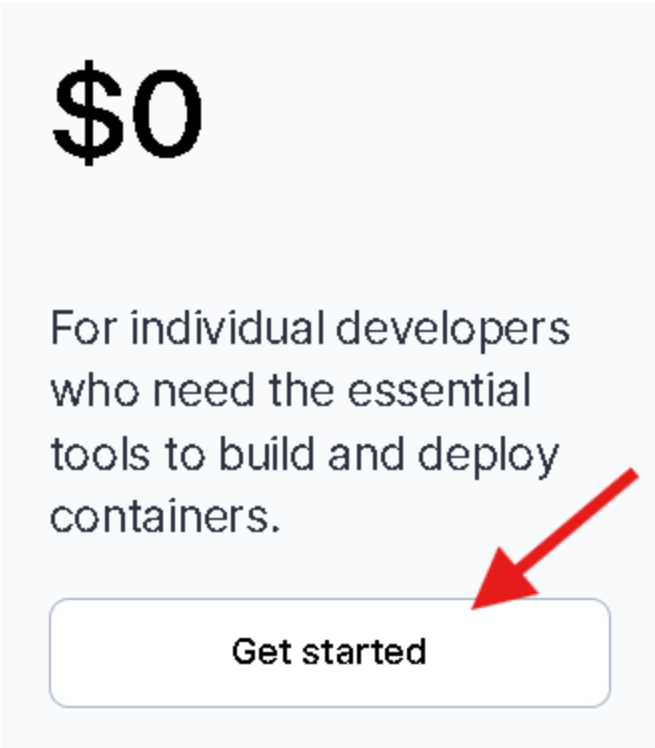


Visit: [https://hub.docker.com/repositories/routhkiranbabu](https://hub.docker.com/repositories/routhkiranbabu)

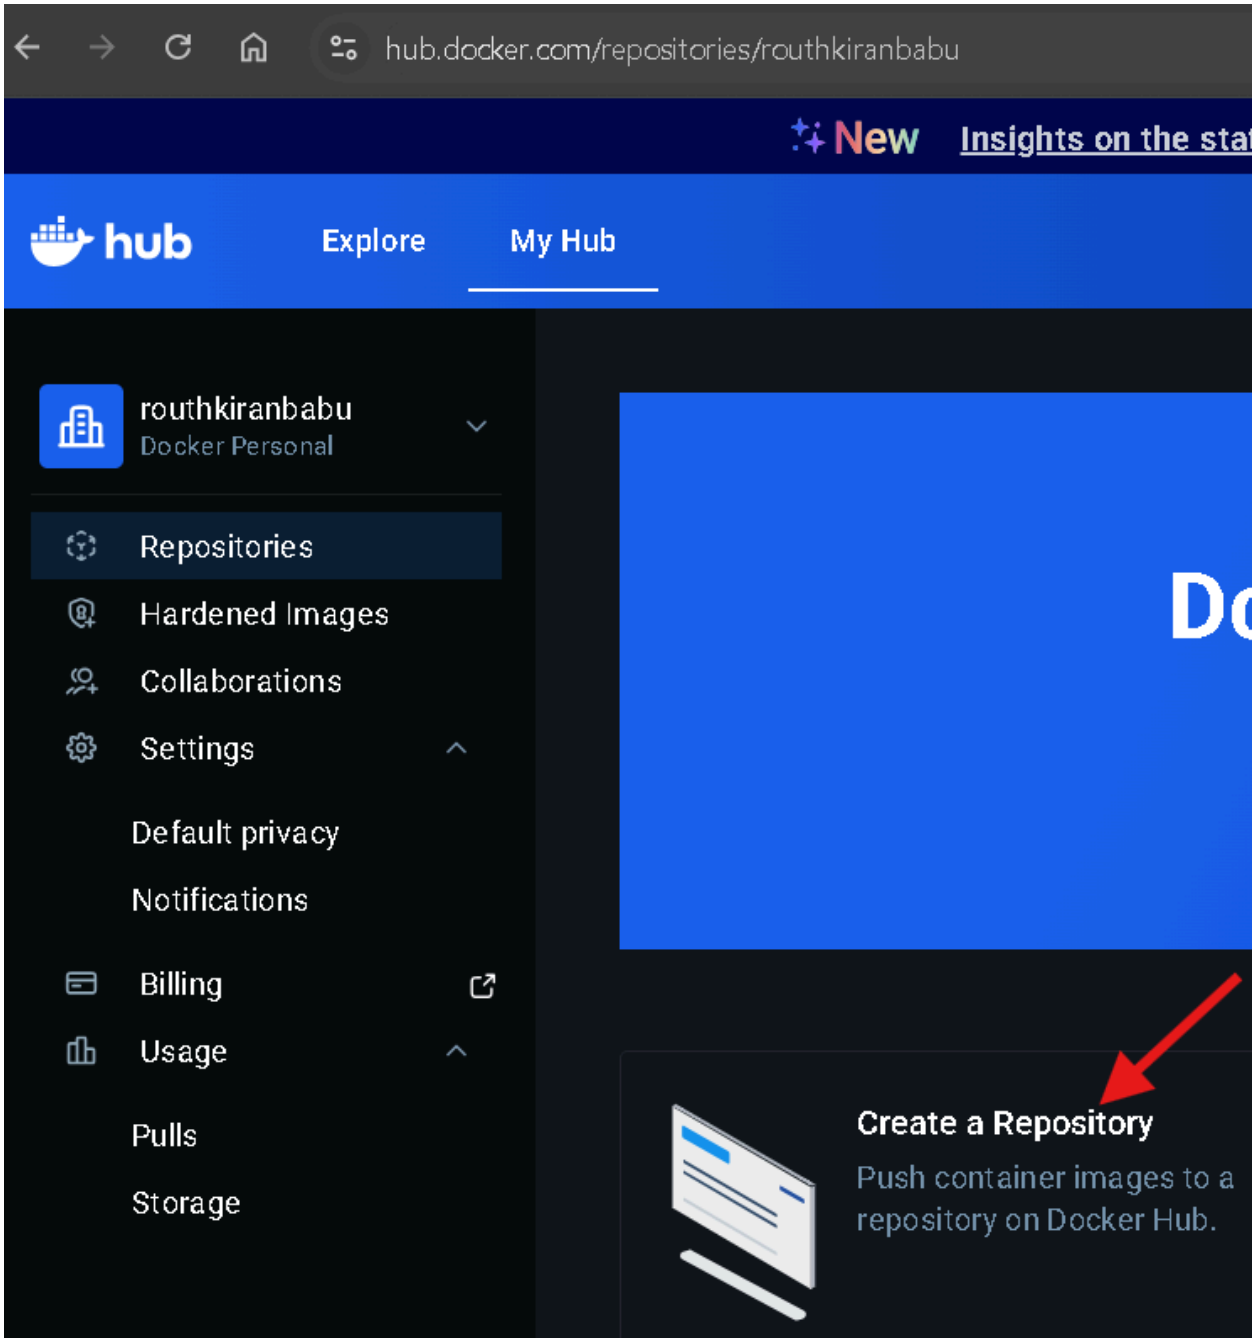


Provide a repository name: webapp-demo, description: Repo for learning hub.

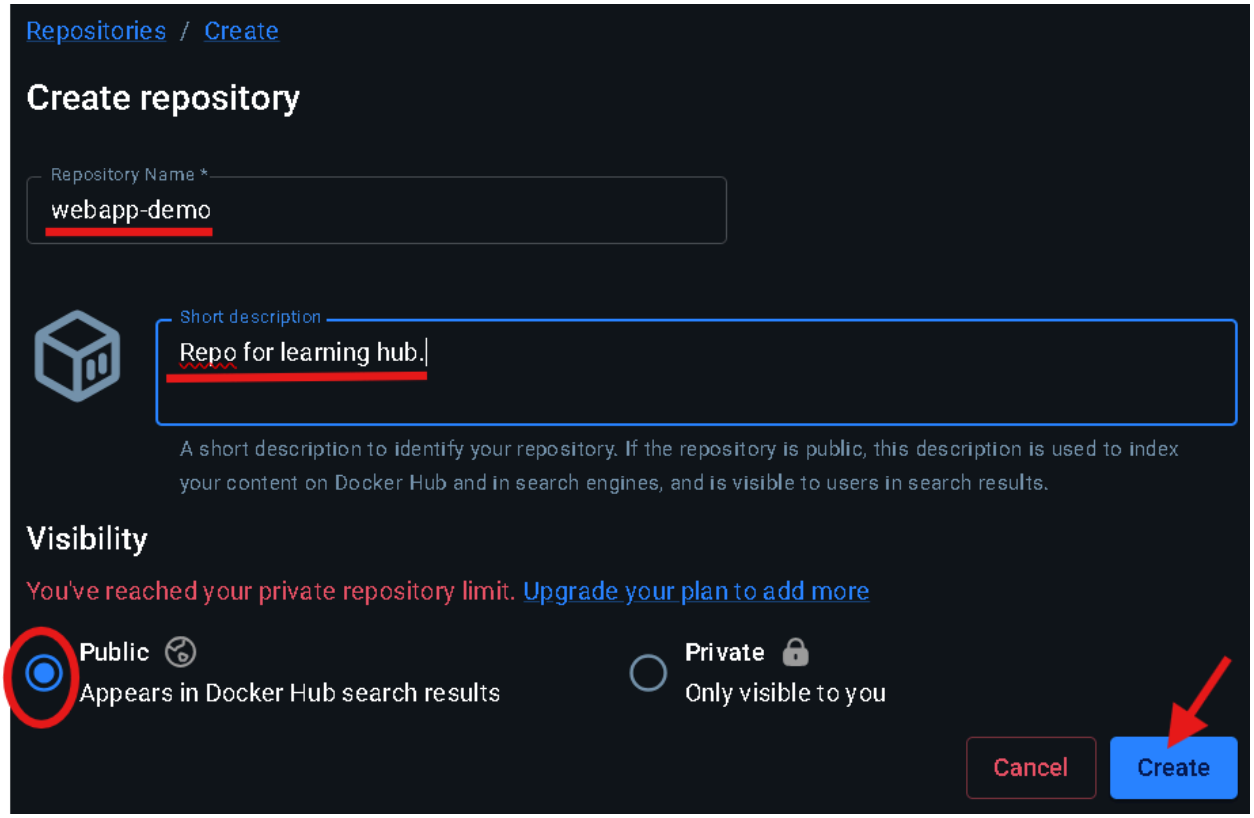


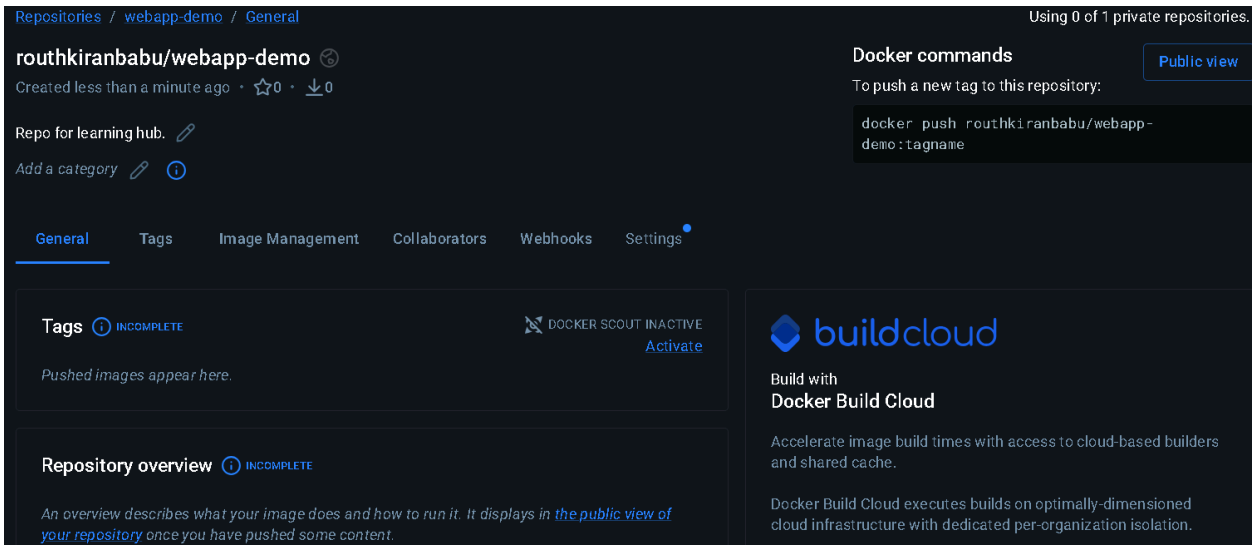


Repo name: this can also be name of the image

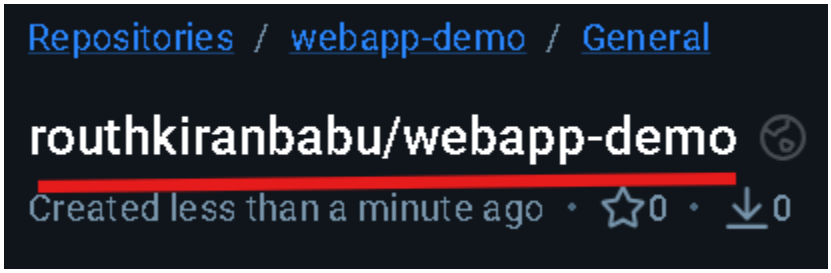

Whatever images is created is at the local system, and need to push to the docker hub. Where we have the command,

**Docker commands**

Public view

To push a new tag to this repository:

```
docker push routhkiranbabu/webapp-demo:tagname
```

If tag name is not provided, then it becomes latest.

```
PS C:\Users\kiran\OneDrive\Desktop> docker login
Authenticating with existing credentials... [User

i Info → To login with a different account, run


Login Succeeded
PS C:\Users\kiran\OneDrive\Desktop>
```

**Docker commands**

Public view

To push a new tag to this repository:

```
docker push routhkiranbabu/webapp-demo:tagname
```

Where **routhkiranbabu/webapp-demo,** must be a image name, so let's check the images:

```
PS C:\Users\kiran\OneDrive\Desktop> docker images -a

IMAGE                    ID            DISK USAGE   CONTENT SIZE   EXTRA
java-input-app:latest    2ee3d21b2faa       636MB         198MB    U
mywebapp:01              89eacf391531      2.11GB         491MB    U
mywebapp:02              b90c1a14ca28      2.11GB         491MB
nginx:latest             dec7a90bd097       240MB        65.8MB    U
openjdk:27-ea-trixie     4a7da6fcd5de      1.25GB         396MB
python:latest            0040600478fe      1.63GB         432MB    U
<untagged>               2ca300af969a      2.11GB         491MB    U
```

In the terminal, visit to the path where dockerfile exist to upload,

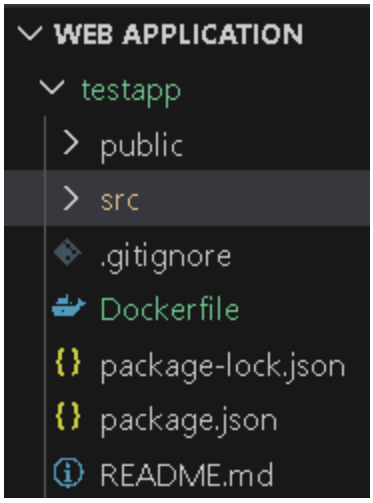


In terminal,

```
\Desktop\Web Application\testapp> docker build -t routhkiranbabu/webapp-demo:01 .
```

```
 => => naming to docker.io/routhkiranbabu/webapp-demo:01
 => => unpacking to docker.io/routhkiranbabu/webapp-demo:01
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp>
```

```
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp> docker images

IMAGE                          ID            DISK USAGE   CONTENT SIZE   EXTRA
java-input-app:latest          2ee3d21b2faa       636MB         198MB    U
mywebapp:01                    89eacf391531      2.11GB         491MB    U
mywebapp:02                    b90c1a14ca28      2.11GB         491MB
nginx:latest                   dec7a90bd097       240MB        65.8MB    U
openjdk:27-ea-trixie           4a7da6fcd5de      1.25GB         396MB
python:latest                  0040600478fe      1.63GB         432MB    U
routhkiranbabu/webapp-demo:01  7023f47e1922      2.11GB         491MB
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp>
```

Then push it:

```
\Desktop\Web Application\testapp> docker push routhkiranbabu/webapp-demo:01
```

```
The push refers to repository [docker.io/routhkiranbabu/webapp-demo]
74d64e4ff899: Pushing [================================>]  31.46MB/48.62MB
505954b66245: Pushing [========>]  37.75MB/211.5MB
3b8eacc2eb1c: Pushed
26fa3468d221: Pushed
a15458351728: Pushed
cca23addd357: Pushed
003342688f85: Pushed
5eb31887b699: Pushed
433fcb066203: Pushed
9d2f29087bcd: Pushing [================================>]  31.46MB/48.49MB
6cf051f1897b: Pushing [==============================>]  37.75MB/64.4MB
d426354ea29e: Pushing [==================>]  33.55MB/92.66MB
```

```
01: digest: sha256:7023f47e19229f8cae7024cf18b5b8528ab6c0859ac4b60d5b8aa8246b1c50da size: 856
```

Then refresh,

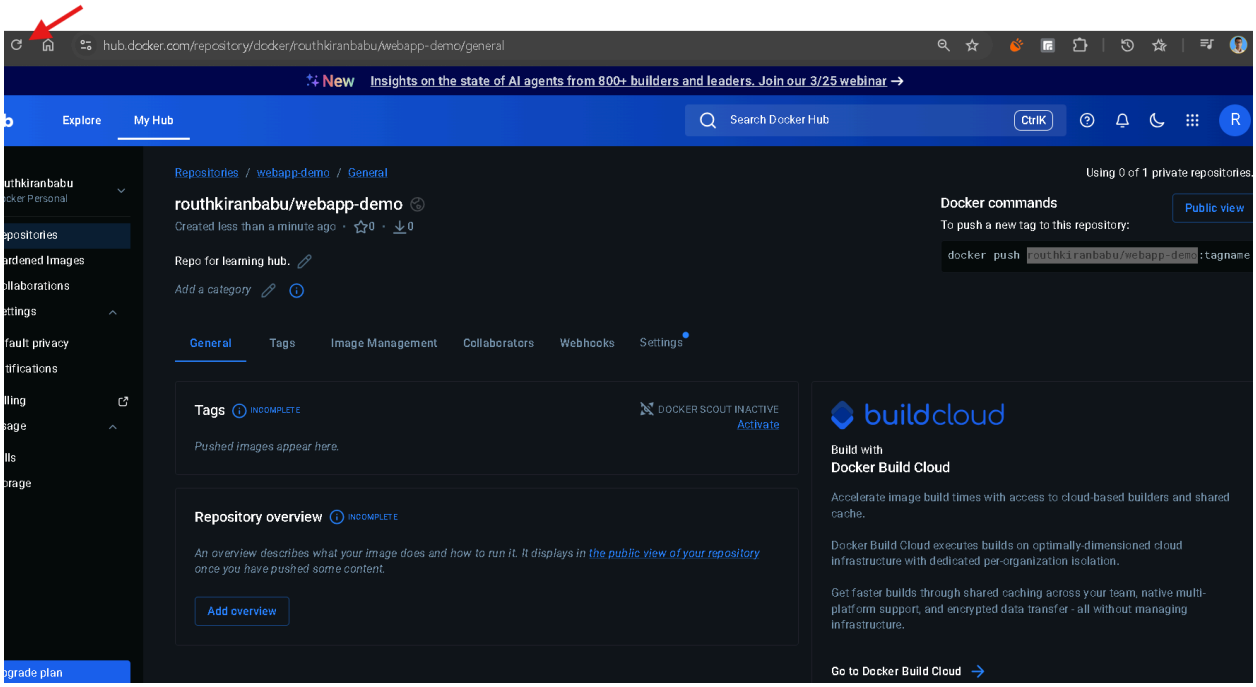


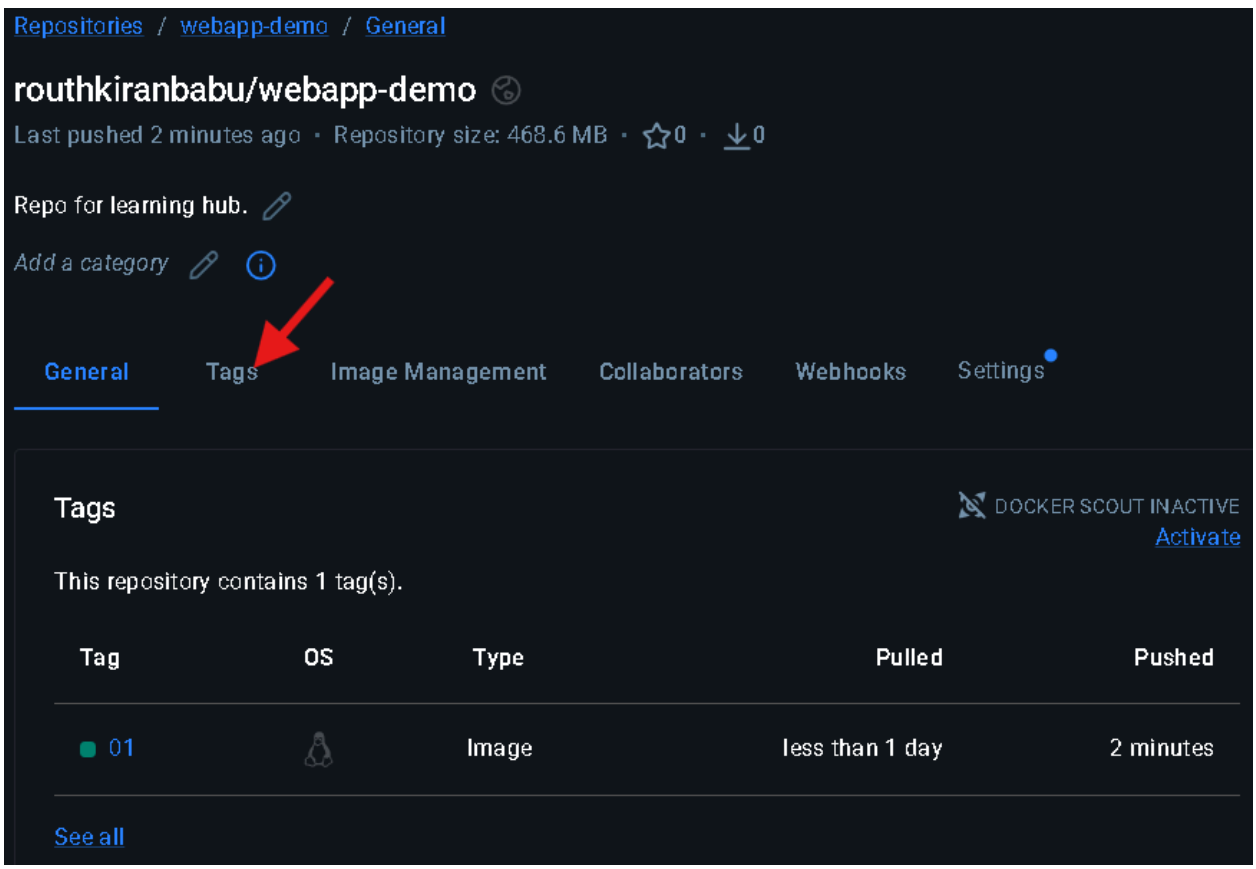

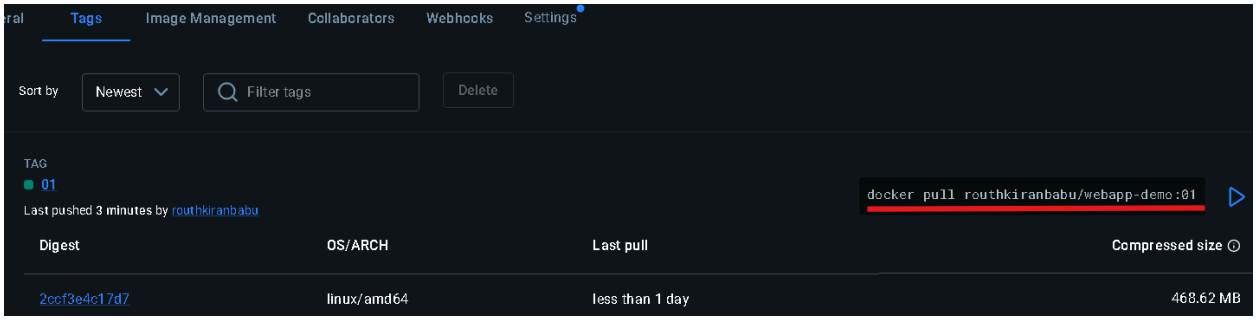


```
docker pull routhkiranbabu/webapp-demo:01
```

Now to rename the tag:

```
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp> docker images

IMAGE                          ID            DISK USAGE   CONTENT SIZE   EXTRA
java-input-app:latest          2ee3d21b2faa       636MB         198MB    U
mywebapp:01                    89eacf391531      2.11GB         491MB    U
mywebapp:02                    b90c1a14ca28      2.11GB         491MB
nginx:latest                   dec7a90bd097       240MB        65.8MB    U
openjdk:27-ea-trixie           4a7da6fcd5de      1.25GB         396MB
python:latest                  0040600478fe      1.63GB         432MB    U
routhkiranbabu/webapp-demo:01  7023f47e1922      2.11GB         491MB
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp>
```

```
\Web Application\testapp> docker tag mywebapp:02 routhkiranbabu/webapp-demo:02
```

```
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp> docker images

IMAGE                          ID            DISK USAGE   CONTENT SIZE   EXTRA
java-input-app:latest          2ee3d21b2faa       636MB         198MB    U
mywebapp:01                    89eacf391531      2.11GB         491MB    U
mywebapp:02                    b90c1a14ca28      2.11GB         491MB
nginx:latest                   dec7a90bd097       240MB        65.8MB    U
openjdk:27-ea-trixie           4a7da6fcd5de      1.25GB         396MB
python:latest                  0040600478fe      1.63GB         432MB    U
routhkiranbabu/webapp-demo:01  7023f47e1922      2.11GB         491MB
routhkiranbabu/webapp-demo:02  b90c1a14ca28      2.11GB         491MB
PS C:\Users\kiran\OneDrive\Desktop\Web Application\testapp>
```

Now let’s try to push version 02:

```
\Web Application\testapp> docker push routhkiranbabu/webapp-demo:02
```

```
fa27031269f0: Pushed
84f58084391d: Pushed
cca23addd357: Layer already exists
ff1f6c3161bf: Pushed
9b5e565fb66d: Pushed
9e78956da810: Pushed
6a7e0620566c: Pushed
c032818082ff: Pushed
f8b2d7ae36bc: Pushed
02: digest: sha256:b90c1a14ca2810ea45176205884c480e61a4b1da4364c765f4d8fcfbc43b4b89 size: 856
```

Does not push the layer that already exist. Saves time and storage.
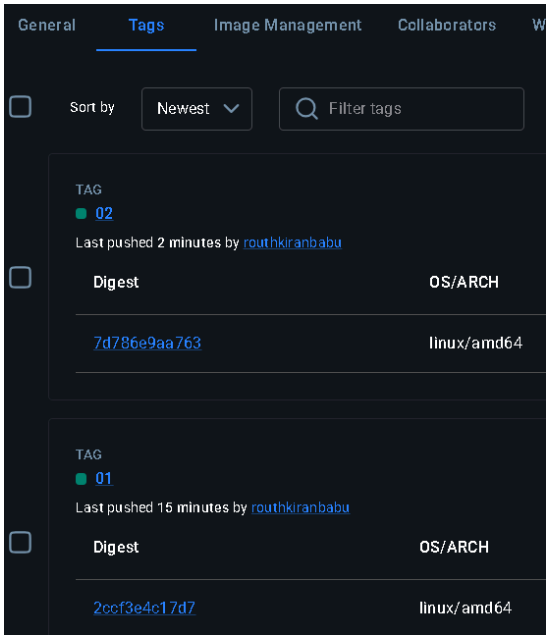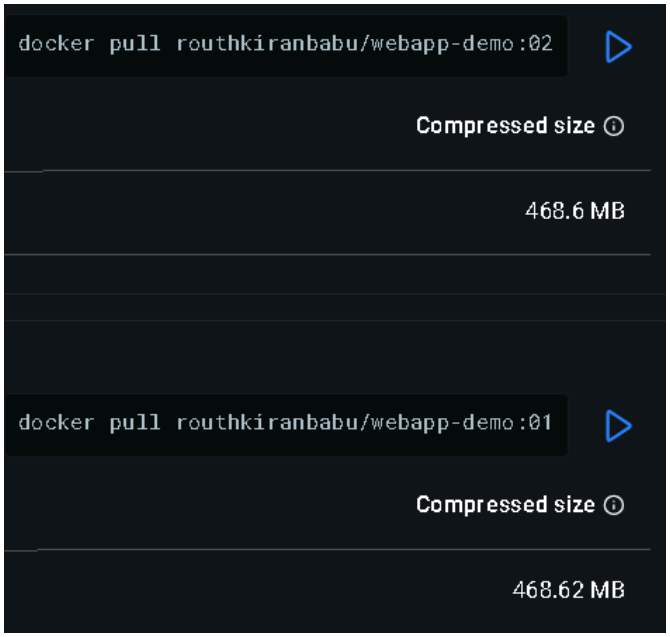
Then refresh the page: