Using Our Image Remotely PULL Images

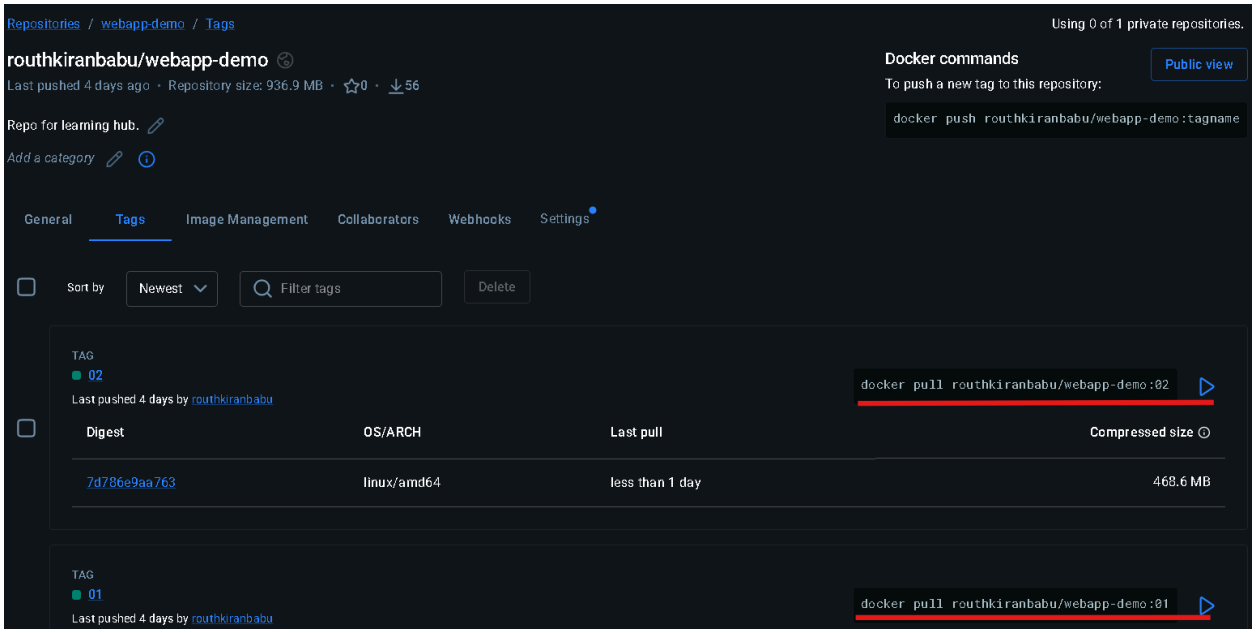

Since we have pushed images to the docker hub, now let's pull these images to the Ubuntu in virtual box machine. After pulling these images these images are working properly in the different images or not.

```
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$ docker -v
Docker version 29.3.0, build 5927d80
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$
```

Lets check the images in other machine:

```
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$ docker images
                                                                    i Info →   U  In Use
IMAGE    ID             DISK USAGE   CONTENT SIZE   EXTRA
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$
```

These no images.

To pull this image:

```
TAG
■ 02                                                    docker pull routhkiranbabu/webapp-demo:02
Last pushed 4 days by routhkiranbabu
```

```
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$ docker pull routhkiranbabu/webapp-demo:02
02: Pulling from routhkiranbabu/webapp-demo
fa27031269f0: Downloading  12.58MB/64.4MB
6a7e0620566c: Downloading  8.389MB/48.49MB
aab3b37e4807: Downloading  2.097MB/24.04MB
ff1f6c3161bf: Downloading  4.194MB/92.66MB
f1bca536b139: Download complete
c032818082ff: Downloading  3.146MB/211.5MB
9e78956da810: Downloading  11.53MB/48.62MB
```

```
Digest: sha256:b90c1a14ca2810ea45176205884c480e61a4b1da4364c765f4
Status: Downloaded newer image for routhkiranbabu/webapp-demo:02
docker.io/routhkiranbabu/webapp-demo:02
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$
```

Now lets check list of images:

```
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$ docker images
                                                                    i Info →   U  In Use
IMAGE                          ID             DISK USAGE   CONTENT SIZE   EXTRA
routhkiranbabu/webapp-demo:02  b90c1a14ca28       2.11GB          491MB
routhkiranbabu@routhkiranbabu-VirtualBox:~/Downloads$
```

Not let's run, using port binding **-p:**

```
/Downloads$ docker run -p 3000:3000 routhkiranbabu/webapp-demo:02
```

```
You can now view testapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://172.17.0.2:3000

Note that the development build is not optim
To create a production build, use npm run bu

webpack compiled successfully
Compiling...
Compiled successfully!
webpack compiled successfully
```

Now use this url in Ubuntu machine.

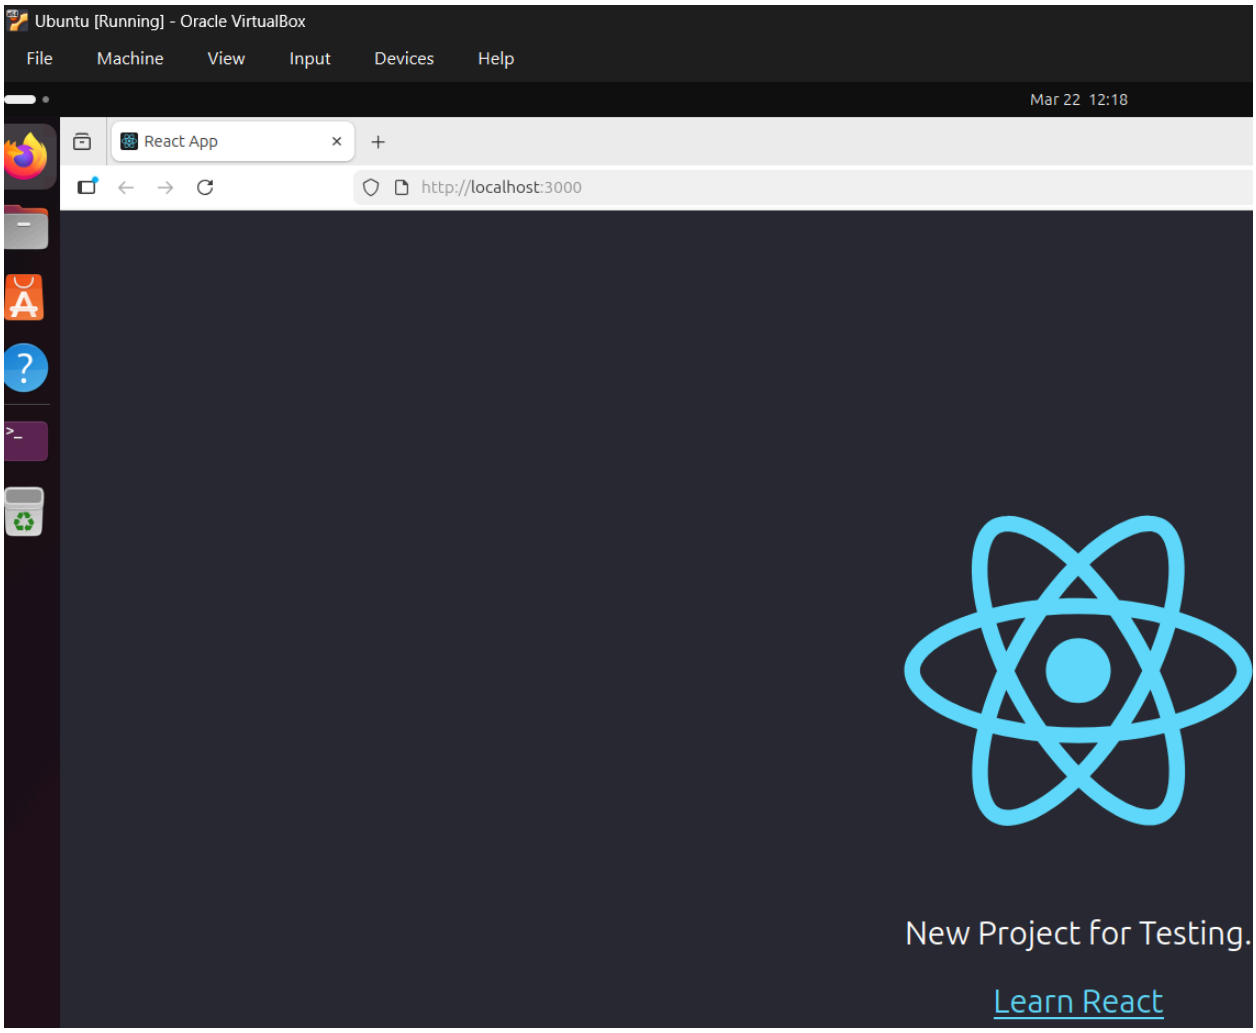

So, its work on ubuntu machine:

```
routhkiranbabu@routhkiranbabu-VirtualBox:~$ lscpu | more
Architecture:                            x86_64
CPU op-mode(s):                          32-bit, 64-bit
Address sizes:                           39 bits physical, 48 bits virtual
Byte Order:                              Little Endian
CPU(s):                                  2
On-line CPU(s) list:                     0,1
Vendor ID:                               GenuineIntel
Model name:                              11th Gen Intel(R) Core(TM) i7-11800H @ 2.
30GHz
CPU family:                              6
Model:                                   141
Thread(s) per core:                      1
Core(s) per socket:                      2
Socket(s):                               1
Stepping:                                1
--More--
```

Meaning there is no need of extra setup, like installing node.js with less effort we can deploy these images to other machines, track compactibility issues faster.