





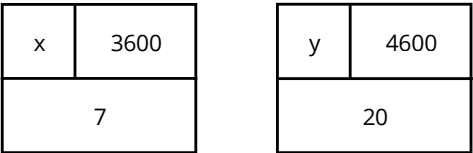

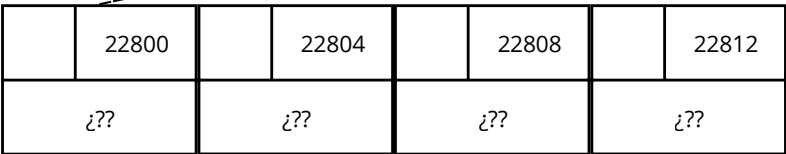





```
int x = 7 , y = 20 , *m , *n , * k ;  
int * arr ;
```




```
arr = ( int *) malloc ( MAX * sizeof ( int ) );
```

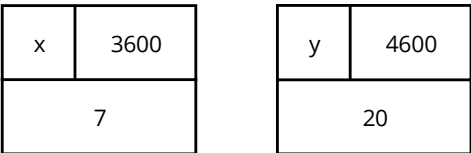


```
m = &x;  
n = m;  
k = &y;
```

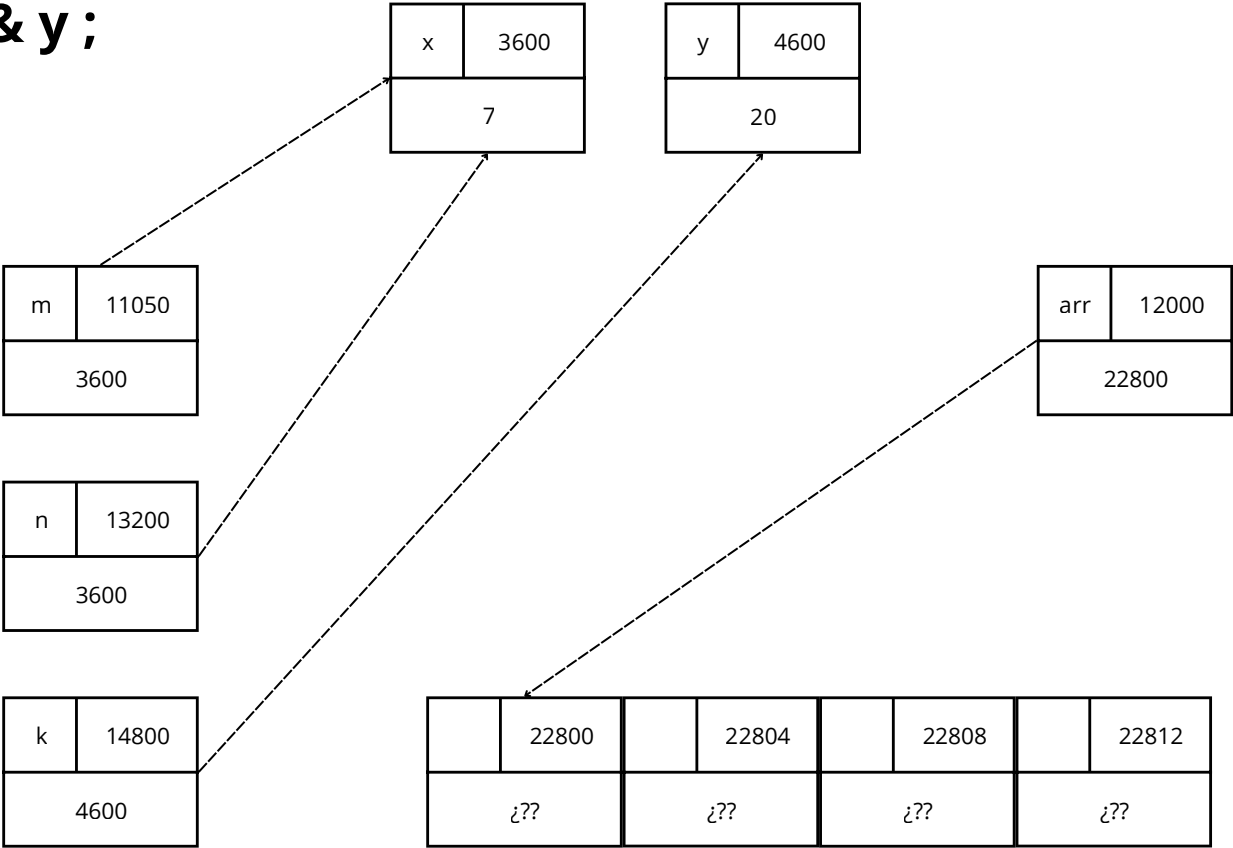


```
* m = 3;
```

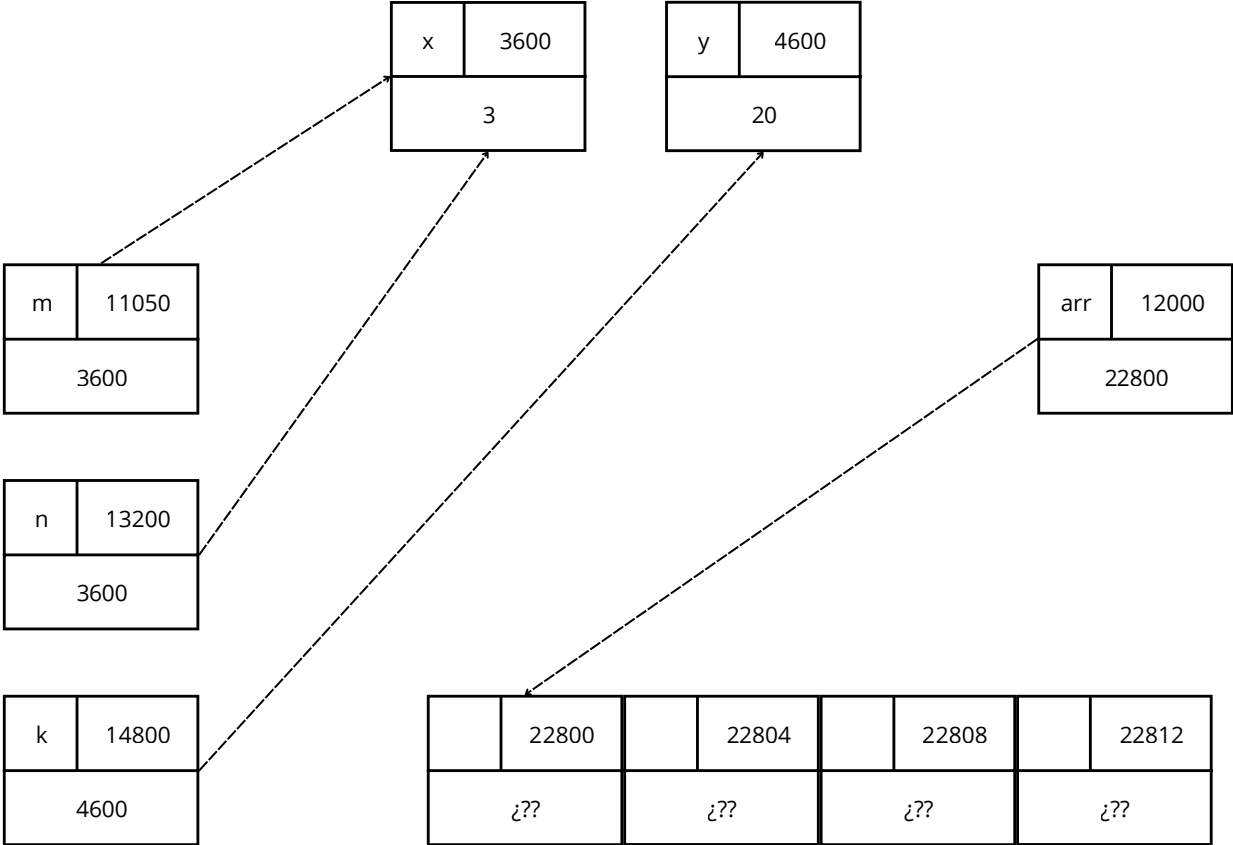

*** n = * k ;**

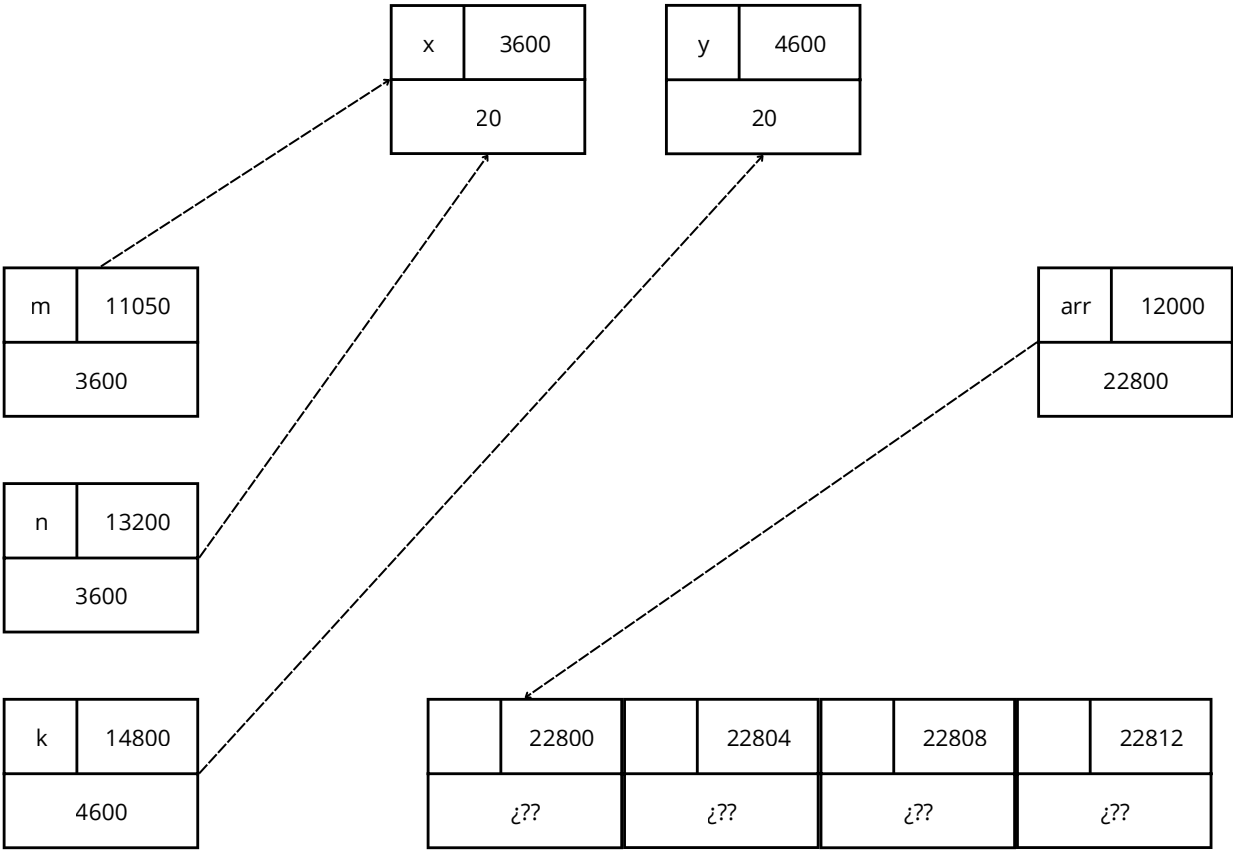


***(arr) = * m ;**
***(arr +1) = * k ;**
***(arr +2) = x + y ;**

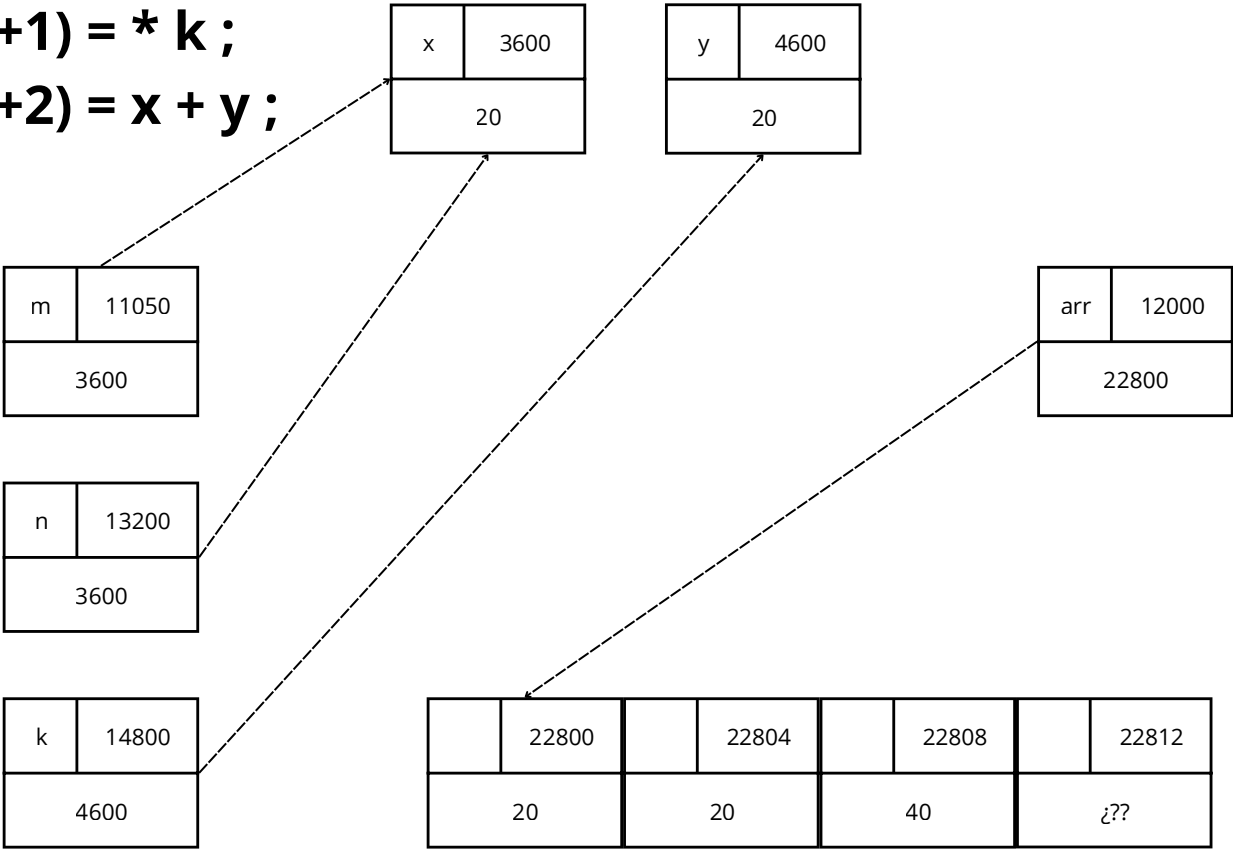

n = & y ;

*** n += 5;**

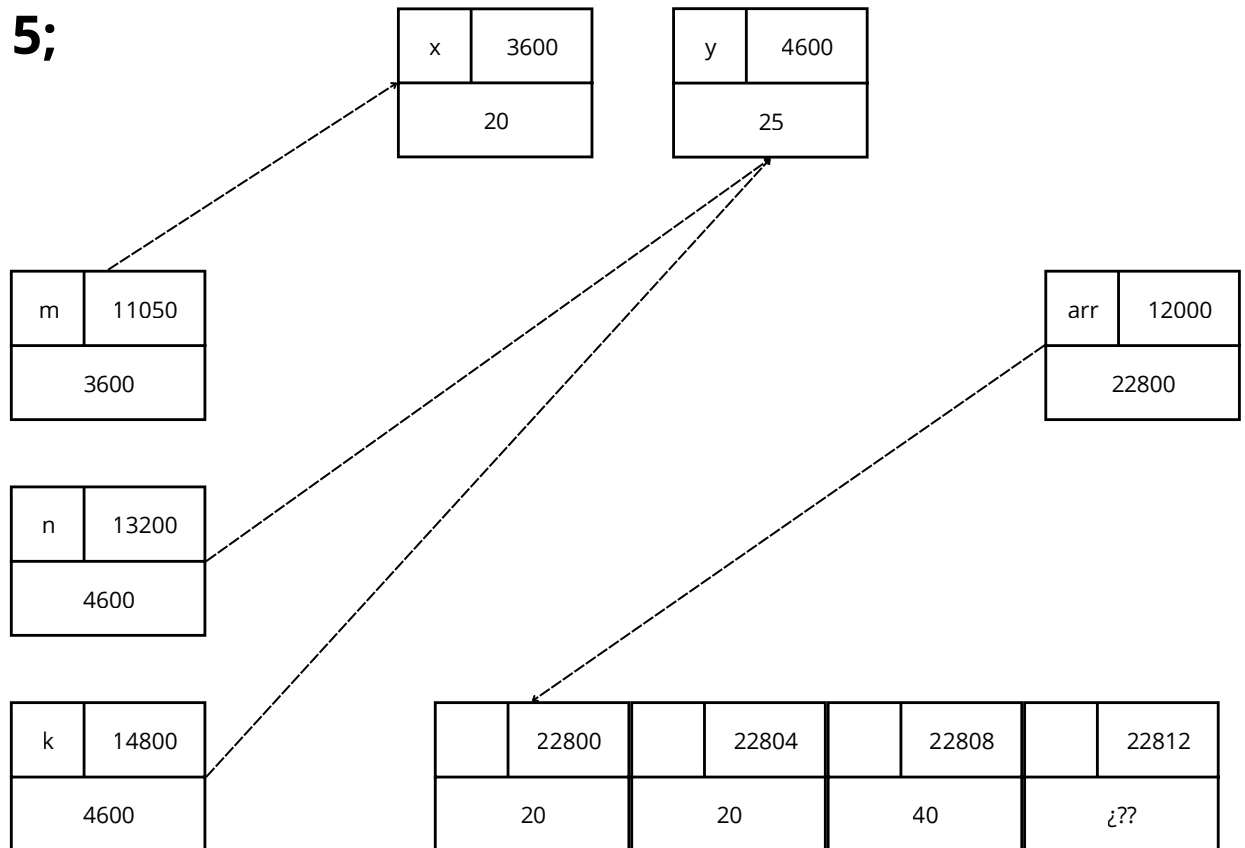

printf (" %d, %d, %d, %d, %d, %d", x , y , * arr , *(arr +1) , *(arr +2) , *m) ;

x = 20

y = 25

***arr = 20**

***(arr + 1) = 20**

***(arr + 2) = 40**

***m = 20**