

Data 572: Project working title

Avalvir Kaur Sekhon, Zihuan Liu & Jordan Kaseram

February 6, 2026

Abstract

single spaced abstract
cause it looks better

Introduction

hello

Methodology

Titanic Data Set

The Titanic dataset consists of passenger-level information from the sinking of the RMS *Titanic*. Each observation corresponds to an individual passenger, with the response variable indicating survival status (1 = survived, 0 = did not survive). The dataset contains a mixture of demographic, socioeconomic, and voyage-related features, including age, sex, passenger class, fare paid, family composition, and cabin information.

In total, the dataset contains 891 observations with a diverse set of categorical and numerical variables. As is typical of real-world data, the raw dataset presents several challenges,

including missing values, highly sparse columns, and correlated features derived from similar underlying information.

These characteristics make the Titanic dataset well suited for evaluating classification methods while also requiring careful preprocessing and feature selection prior to model fitting.

Data Preprocessing

Data preprocessing was performed using Python and the pandas library, which provides flexible and efficient tools for data cleaning, transformation, and preparation prior to machine learning analysis. Identifier variables such as passenger identifiers, ticket numbers, and booking references were removed, as they do not contain predictive information and may introduce unnecessary noise into the models.

Missing data were handled using simple, distribution-preserving imputation techniques. Missing values in passenger age, a numerical variable, were imputed using the median age within each passenger class. This approach allows age estimates to reflect socioeconomic differences across classes while remaining robust to outliers. Missing values in the port of embarkation, a categorical variable, were imputed using the mode, preserving the empirical distribution of this feature.

Categorical predictors were converted into numerical form using one-hot encoding creating dummy variables. To reduce redundancy and limit multicollinearity, several highly correlated or derived features were evaluated and pruned. For example, the variables `SibSp`, `Parch`, and `is_alone` were removed since `family_size` contains this information.

The resulting feature set provides a stable and interpretable foundation for training supervised machine learning models for binary classification.

Resampling and Validation Strategy

To ensure reliable model evaluation and reduce over-fitting, the dataset was partitioned into training (75%) and testing (25%) sets using a stratified split to preserve the original survival

class proportions. Stratification is particularly important for the Titanic dataset due to its class imbalance between survivors and non-survivors.

All model training, hyperparameter tuning, and feature selection were performed exclusively on the training set using stratified k -fold cross-validation with $k = 5$. This resampling strategy maintains class balance within each fold and provides stable performance estimates while preventing information leakage.

Final model performance was evaluated on the held-out test set, which remained untouched during model selection. This approach yields an unbiased estimate of generalization performance and ensures fair comparison across all classification methods.

Model Selection

Three classification methods were selected to evaluate the predictive performance of the features present in the Titanic data set. These methods include: Logistic Regression, Linear Discriminant Analysis (LDA) and K-Nearest Neighbours (KNN). Logistic Regression and LDA were considered for their interpretability due to linearity [2], and the Titanic prediction task is a binary response with a mix of numeric and categorical variables which these models perform well on [1].

These parametric tests assume a structured relationship between the predictors and the response, enabling stable parameter estimation and favourable bias-variance trade-offs. In contrast, KNN was included as a non-parametric test to capture potential non-linear patterns without assuming strong distribution assumptions. KNN provides a useful comparison model by classifying passengers based on identifying the observations that are nearest it rather than a global decision boundary [1].

Hyperparameter Tuning Strategy

Hyperparameter tuning was conducted using grid search, which is a simple memoryless method that can be used to explore predefined hyperparameter values [4]. This was combined

with stratified cross-validation to identify the optimal model configuration.

For Linear Discriminant Analysis, hyperparameter tuning focused on the choice of solver (`svd` versus `lsqr`) and the use of covariance shrinkage, as shrinkage regularization is known to stabilize covariance estimation in the presence of correlated predictors and limited sample sizes [2, 4].

For Logistic Regression, tuning was performed over the regularization strength parameter C and the choice of ℓ_1 and ℓ_2 penalties, allowing control over model complexity and coefficient sparsity, which directly affects bias–variance trade-offs and interpretability in high-dimensional settings [1, 5].

For K-Nearest Neighbours, hyperparameters including the number of neighbours, distance metric, and weighting scheme were tuned to balance local versus global decision behaviour and to regulate model sensitivity to noise and class overlap [1, 5].

Experiment

Experimental Design

The experimental design compared the predictive performance and interpretability of multiple classification models under a consistent evaluation framework. All models were trained on the same preprocessed feature set and evaluated using identical performance metrics to isolate the effect of model choice and tuning.

Each method was first evaluated in a baseline configuration to establish a reference level of performance. Hyperparameter tuning was then applied to assess whether controlled increases in model flexibility improved generalization. Performance comparisons were based on cross-validated accuracy on the training data, followed by final evaluation on a held-out test set.

Results and Analysis

Baseline Model Performance Overall, Linear Discriminant Analysis achieved the strongest test performance, while Logistic Regression performed comparably

Table 1: Performance of baseline classification models on the Titanic dataset.

Baseline Model	CV Accuracy (Mean)	CV Accuracy (Std)	Test Accuracy	Test MSE
LDA	0.8249	0.0439	0.8386	0.1614
Logistic Regression	0.8368	0.0452	0.8251	0.1749
KNN	0.8139	0.0483	0.8027	0.1973

K-Nearest Neighbours exhibited lower predictive performance, which is consistent with its sensitivity to class overlap and noise in feature space.

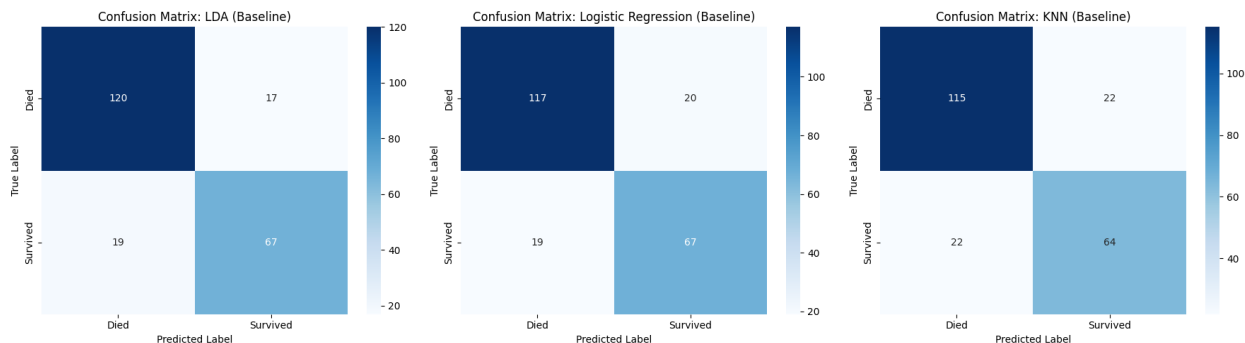


Figure 1: Confusion matrices for baseline classification models.

Both LDA and Logistic Regression maintain a balanced trade-off between precision and recall across survival classes. In contrast, KNN shows reduced recall for the survivor class, indicating greater difficulty separating survivors from non-survivors when observations overlap.

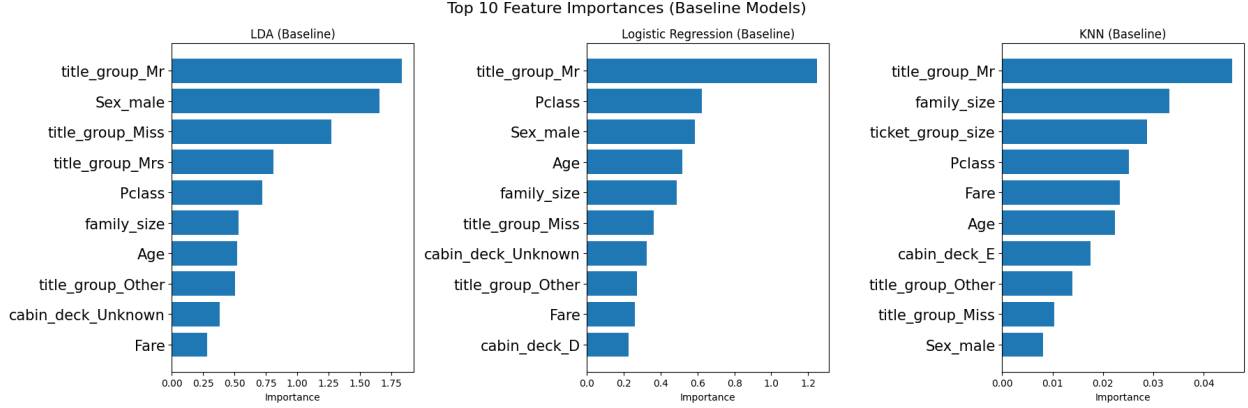


Figure 2: Top 10 features from baseline models for LDA, Logistic Regression, and KNN.

For the linear models, passenger title, sex, passenger class, and age were consistently identified as influential predictors. In contrast, KNN relied more heavily on proximity-based features such as family size and ticket group size.

Effect of Hyperparameter Tuning The optimal hyperparameter configurations selected via cross-validated grid search differed across models. For Linear Discriminant Analysis, the best-performing configuration used the `lsqr` solver with a shrinkage parameter of 0.05, indicating mild regularization of the covariance estimate. Logistic Regression achieved its best performance with an ℓ_1 penalty and regularization strength $C = 1$, encouraging sparse and interpretable coefficient estimates. For K-Nearest Neighbours, the optimal configuration used $k = 5$ nearest neighbours, the L_1 -norm, and uniform weighting.

Table 2: Performance of tuned classification models on the Titanic dataset.

Tuned Model	CV Accuracy (Mean)	CV Accuracy (Std)	Test Accuracy	Test MSE
LDA	0.8269	0.0477	0.8117	0.1883
Logistic Regression	0.8408	0.0441	0.8251	0.1749
KNN	0.8249	0.0479	0.7713	0.2287

Hyperparameter tuning produced small improvements in cross-validation accuracy for Lo-

gistic Regression, increasing from 0.8368 to 0.8408, while test accuracy remained unchanged at 0.8251. This suggests that tuning improved validation performance without improving generalization to unseen data. In contrast, Linear Discriminant Analysis exhibited a slight increase in cross-validation accuracy but a noticeable decrease in test accuracy, indicating that shrinkage regularization introduced additional bias that did not translate to improved out-of-sample performance. K-Nearest Neighbours experienced the largest decline after tuning, highlighting the sensitivity of distance-based classifiers to hyperparameter choices in datasets with overlapping class distributions.

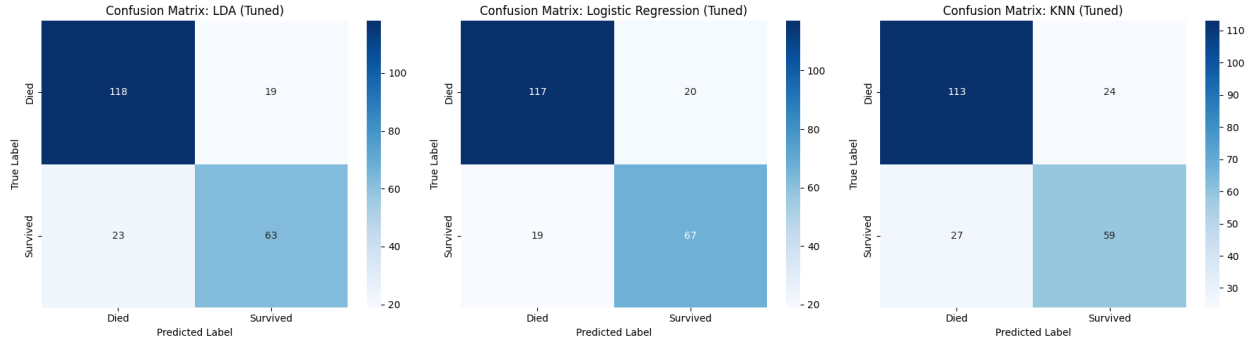


Figure 3: Confusion matrices for tuned classification models.

Compared to the baseline setting, tuned models generally show a similar error profile, with misclassification concentrated among passengers whose covariates provide ambiguous survival signals. The tuned KNN model exhibits a larger reduction in recall for the survivor class, consistent with its lower test accuracy and increased susceptibility to overlapping neighbourhoods.

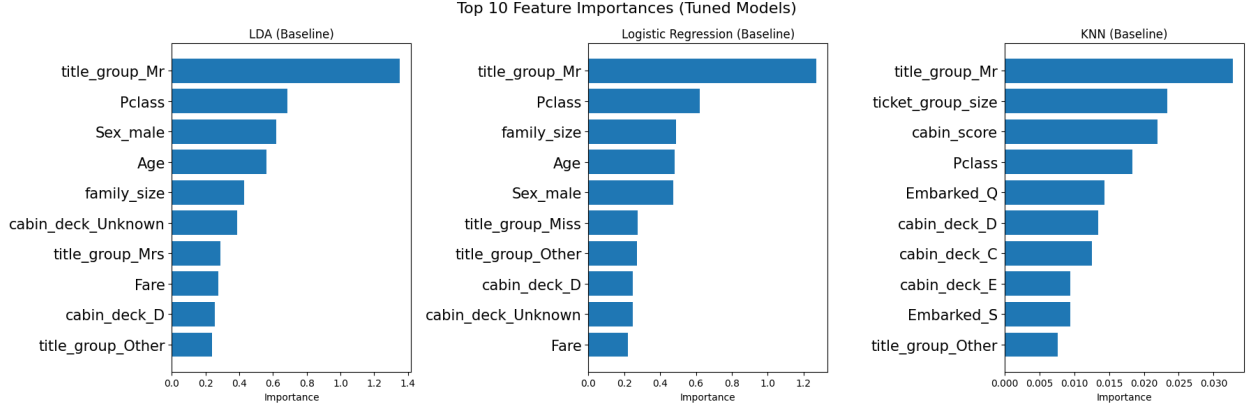


Figure 4: Top 10 features from tuned models for LDA, Logistic Regression, and KNN.

The tuned models largely preserved the same dominant predictors identified in the baseline analysis, including passenger title group, sex, passenger class, and age. This consistency indicates that the primary survival signal in the dataset is robust to moderate changes in model configuration, and that tuning primarily affects coefficient regularization rather than altering the overall feature ranking.

Discussion

Overall, linear models outperformed the non-parametric KNN approach on the Titanic dataset, suggesting that survival outcomes are primarily governed by global, structured relationships among predictors rather than highly localized decision boundaries. Logistic Regression and LDA benefited from their ability to model these global trends and remained robust under both baseline and tuned configurations.

Hyperparameter tuning improved cross-validation performance but did not consistently improve test accuracy. In particular, tuning introduced additional bias for LDA and increased sensitivity for KNN, resulting in reduced generalization performance on the test set.

Feature importance analyses indicate that survival was most strongly associated with passenger sex, title group, passenger class, age, and family size, reflecting the combined

influence of demographic and socioeconomic factors on survival outcomes. These findings align with historical accounts of the Titanic disaster, where it adopted a “*women and children first*” policy for getting on the lifeboats.

These findings underscore the bias–variance trade-off in supervised classification and demonstrate that increased model flexibility does not guarantee improved predictive performance, particularly when the underlying signal is driven by low-dimensional, interpretable features.

Conclusion

This project applied supervised machine learning methods to the Titanic survival prediction task in order to compare model performance, interpretability, and robustness under a unified evaluation framework. Logistic Regression, LDA, and KNN were assessed using consistent preprocessing, resampling, and validation strategies.

The results indicate that linear classification methods provided strong and stable predictive performance on this dataset. Logistic Regression and Linear Discriminant Analysis effectively captured the primary survival patterns using a small number of interpretable demographic and socioeconomic features. In contrast, the non-parametric K-Nearest Neighbours model exhibited lower and less consistent performance, particularly after tuning, reflecting its sensitivity to overlapping class structures.

Overall, the findings suggest that survival outcomes in the Titanic dataset are largely driven by demographic and socioeconomic factors, with passenger sex, title group, passenger age and family size emerging as the most influential features.

References

- [1] James, G., Witten, D., Hastie, T., Tibshirani, R., & Taylor, J. (2023). *An introduction to statistical learning: Python edition*.

- [2] Hastie, T., Tibshirani, R., & Friedman, J. (2009). *The elements of statistical learning*.
- [3] Kaseram, J., Liu, Z., Sekhon, A. (2026). *Titanic survival classification project*. GitHub repository. Available at: https://github.com/RoxyLiu66/data_572_group_5
- [4] Franceschi, L., Donini, M., Perrone, V., Klein, A., Archambeau, C., Seeger, M., ... & Frasconi, P. (2025). *Hyperparameter optimization in machine learning*. *Foundations and Trends in Machine Learning*, 18(6), 975-1109.
- [5] Kuhn, M., & Johnson, K. (2013). *Applied predictive modelling (Vol. 26, p. 13)*. New York: Springer.