



Bug / Error Location Map — Enatega Multivendor

Purpose: a precise, layer-by-layer map of *where* the defects live in the running project (customer app + backend), so they can be reproduced on screen and captured. **Nothing here is fixed** — this is a findings map only. Each item lists the **layer**, the **exact file:line**, what is wrong, and **how to see it** (so you can take the screenshot yourself).

- **App under test:** enatega-multivendor-app (React Native / Expo, customer)
- **Backend:** <https://aws-server-v2.enatega.com/graphql> (hosted, separate repo)
- **Flow:** Login → Browse Restaurant → Add to Cart → Checkout
- Paths are relative to `enatega-multivendor-app/` unless a full repo path is given.

Layers: ■ **UI** · ■ **Frontend logic/state** · ■ **Backend/API/data** · ■ **Config/Security** · ■ **Build/Env**

■ UI layer (what the user sees)

#	Where to see it (screen)	Exact code location	What is wrong	How to reproduce on screen
U1	Login → email step	<code>src/screens/Login/useLogin.js:80</code>	Email regex <code>...(\.\\w{2,3})+\$</code> rejects any TLD of 4+ chars (<code>.store</code> , <code>.online</code> , <code>.email</code>). Also <code>[\\.-]</code> wrongly escapes to <i>backslash-or-dot</i> .	Type <code>user@company.store</code> → tap Continue → “Please enter a valid email”.
U2	Login → password step	<code>src/screens/Login/useLogin.js:33</code> + <code>src/screens/Login/Login.js:88-89</code>	Password “eye” icon is inverted: <code>showPassword</code> starts true , <code>secureTextEntry={showPassword}</code> → field is masked yet the icon already shows <i>eye-slash</i> .	Reach the password step; the eye affordance points the wrong way; tapping toggles opposite of expectation.
U3	Every input / button (whole app)	<code>src/screens/Login/Login.js:69,88,117</code> (+ 25 <code>TextInput</code> total, 0 <code>testID</code> , 1 <code>accessibilityLabel</code> app-wide)	No <code>testID</code> / <code>accessibilityLabel</code> → empty <code>resource-id</code> & <code>content-desc</code> . Breaks automation and TalkBack reads buttons as “unlabeled”.	Enable TalkBack, or <code>adb shell uiautomator dump</code> ; inspect the login controls.
U4	Browse → Offers filter	<code>src/screens/Menu/Menu.js</code> (reads <code>item?.freeDelivery</code> / <code>item?.acceptVouchers</code>) · analysis in <code>QUAL-012_BACKEND_INSTRUCTIONS.md</code>	Selecting Free Delivery / Accept Vouchers empties the whole list (backend never sets those flags → see B1).	Restaurant list → Offers → Free Delivery → Apply → list becomes empty.

■ Frontend logic / state layer

#	Where	Exact code location	What is wrong	How to see it
F1	Cart state	<code>src/context/User.js:126</code>	<code>deleteItem</code> does <code>cart.splice(cartIndex, 1)</code> — mutates React state array in place , contradicting the “never mutate” pattern used in <code>addQuantity</code> / <code>removeQuantity</code> (lines 115, 135). Can cause stale renders / off-by-one UI.	Add 2 items → delete one → occasional wrong count / item not disappearing until re-render.

#	Where	Exact code location	What is wrong	How to see it
F2	Cart quantity	src/context/User.js:114 addQuantity	No upper bound / stock check — quantity grows unbounded.	Item detail → press + repeatedly (e.g. 99+) → cart accepts it, line total keeps multiplying.
F3	Auth / demo	src/screens/Login/useLogin.js:63-64	Client injects password 123123 for demo-customer@enatega.com (hard-coded credential in the shipped bundle).	Enter the demo email → password auto-fills → login without typing a password.
F4	Code hygiene	src/screens/** — 58 console.log left in screen code	Debug logging shipped to production; leaks state to logcat, minor perf/noise.	adb logcat while using the app shows app logs.

Backend / API / data layer (verified live)

#	Where	Endpoint / evidence	What is wrong	How to see it
B1	Restaurant data	aws-server-v2.enatega.com/graphql (nearByRestaurantsPreview)	freeDelivery / acceptVouchers are false / null for every restaurant — no admin UI ever sets them ⇒ root cause of U4.	Query the list; every restaurant has the flags falsy.
B2	Auth contract	POST /graphql (login mutation)	login variable \$type must be String! ; declaring it nullable → GRAPHQL_VALIDATION_FAILED . Contract is strict/undocumented for clients.	Postman folder 2 “invalid types” request returns HTTP 400.
B3	Spec route missing	POST /api/v1/auth/login on the real backend	Returns 404 — the assignment’s REST route does not exist; the app uses GraphQL. Worth flagging as an API/documentation mismatch.	Postman → request returns 404 (captured in 03-api-testing/results/).

Config / Security layer


#	Where	Exact location	What is wrong	How to see it
C1	Secrets in repo	enatega-multivendor-app/google-services.json , GoogleService-Info.plist committed	Firebase config / keys committed to source.	Open the files in the repo.
C2	Dead demo default	src/screens/Login/Login.js:74	Commented defaultValue='demo-customer@enatega.com' left in source (info leak / dead code).	View the file.

Web frontend — observed while the app was actually running (npm run dev)

The `enatega-multivendor-web` (Next.js 16) app **was run** against the live backend (`aws-server-v2.enatega.com`). It boots and the landing page renders (see `01-manual-testing/web-run-screenshots/web-home.png` , `GET / 200`). While running, the dev server printed these **real** errors/warnings on every render:

#	Where to see it	Exact code location	What is wrong (seen in the console)
W1	Server/browser console on any page	<code>enatega-multivendor-web/lib/hooks/useSetApollo.tsx:218</code>	Apollo Client 3.14 deprecation: <code>connectToDevTools</code> → “Please use <code>devtools.enabled</code> instead.” Prints An error occurred! repeatedly.
W2	Console, repeated many times	<code>enatega-multivendor-web/lib/hooks/useLazyQueryQL.tsx:37-41</code> (13 <code>useLazyQuery</code> usages app-wide)	Deprecated <code>useLazyQuery</code> options <code>onCompleted</code> / <code>onError</code> / <code>variables</code> — Apollo warns to move to derived state and to pass variables to <code>execute()</code> . Floods the console on each render.
W3	Dev-server build output	<code>enatega-multivendor-web/next.config.mjs:1</code> (<code>next-intl/plugin</code>)	Webpack warning: “Parsing of <code>.../next-intl/.../extractor/format/index.js</code> for build dependencies failed at <code>'import(t)'</code> ” — dynamic import breaks cache dependency tracking.

How to reproduce: `cd enatega-multivendor-web` , install, then `NEXT_PUBLIC_SERVER_URL="https://aws-server-v2.enatega.com/" npx next dev --webpack` → open `http://localhost:3000` → watch the terminal / browser console.

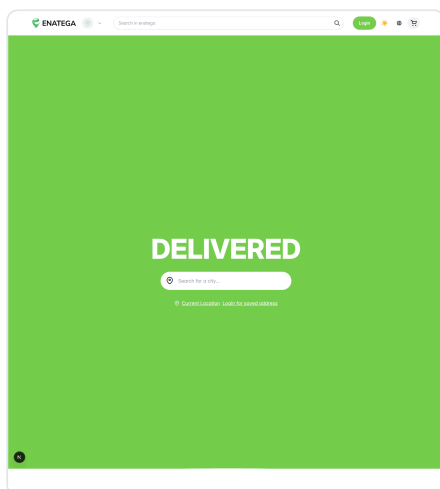

Build / Environment layer (blockers you hit while running)

#	Where	Symptom you saw	Cause	What QA does
E1	<code>pip install -r requirements.txt</code>	<code>error: externally-managed-environment</code>	PEP 668 — system Python is protected.	Use a venv (you did): <code>python3 -m venv .venv && source .venv/bin/activate</code> . ✓
E2	<code>appium</code>	<code>appium: command not found</code>	Appium 2 server not installed (the <code>npm i -g appium</code> was cancelled).	<code>npm i -g appium && appium driver install uiautomator2</code> , then run <code>appium</code> .
E3	<code>pytest</code> (both tests)	<code>ConnectionRefusedError ... 127.0.0.1:4723</code>	No Appium server + no Android emulator/device	Start emulator + Appium server first (see <code>02-appium-automation/README.md</code>). The

#	Where	Symptom you saw	Cause	What QA does
			running. This is an <i>environment</i> error, not a code bug.	suite now skips with a clear message instead of a stack trace — see E-note below.
E4	npm install (app/web)	risk of failure	Disk is 100% full (~2 GB free). Expo + Next.js need several GB.	Free disk space first (docker system prune , clear caches), then install.

E-note (what a QA reports for E1-E4): these are **not product bugs** — they are test-environment setup issues. A QA distinguishes *product defects* (U/F/B/C above — file them as bugs) from *environment problems* (E — fix the setup or note them as blockers in the test run report). See [02-appium-automation/WHY-TESTS-ERROR.md](#) for the full explanation.

Summary by layer

Layer	Findings
 UI (mobile)	U1 email regex · U2 eye icon · U3 no testID/a11y · U4 offer filter empties list
 Frontend logic (mobile)	F1 state mutation in <code>deleteItem</code> · F2 no quantity cap · F3 hard-coded demo password · F4 58× console.log
 Web frontend (RAN)	W1 Apollo <code>connectToDevTools</code> deprecated · W2 <code>useLazyQuery</code> deprecated options (13×) · W3 next-intl webpack warning
 Backend/API	B1 offer flags never set · B2 strict/undocumented login contract · B3 spec REST route 404
 Config/Security	C1 committed Firebase config · C2 dead demo default
 Build/Env	E1 PEP668 · E2 appium missing · E3 no Appium server/emulator · E4 disk full

These are **findings only** — not fixed, per your request. Use them to build your own bug reports and take the screenshots at the “How to see it” step.