


Setting up Eclipse for Java Batch


You can use any IDE for coding your java. Here are quick instructions for using eclipse.

1. Create your folder for your workspace, like documents/javabatchworkspace
2. The next step assumes you have created your source or started to build the folders in your repo
banner_product/product_<folder>/code/java-src.
3. You may also need to clone the banner_general repo so you have easy access to the gurjbif.jar. All java batch programs require the General gurjbif.jar for Banner Security and other standard processes.
4. Open Eclipse, and open the workspace documents/javabatchworkspace

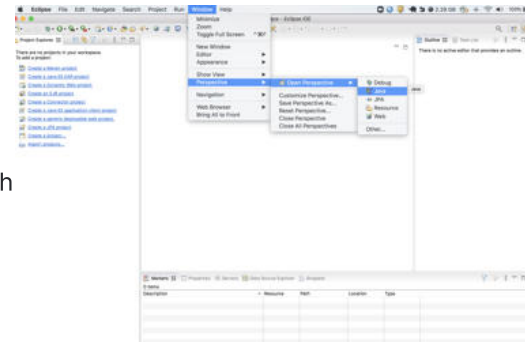


5. Set the perspective to java project, and open the workbench

6. Create a new java project from source . You need to uncheck the default location and enter the path for your java program.

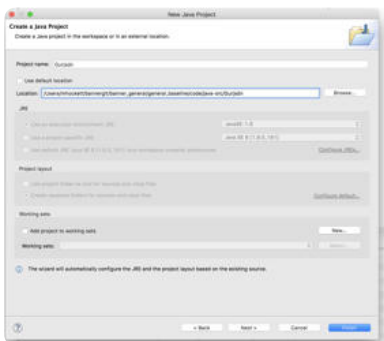


We now need to add the `gurbif.jar`, `ojdbc.jar` and any other jar files your project needs.


Right click on project and select build path / configure build path

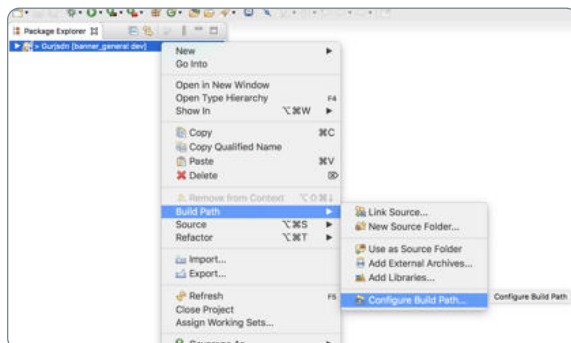

Click the add external jars, locate the gurjbif.jar from Banner General, and any local copy of an OJDBC driver and select.

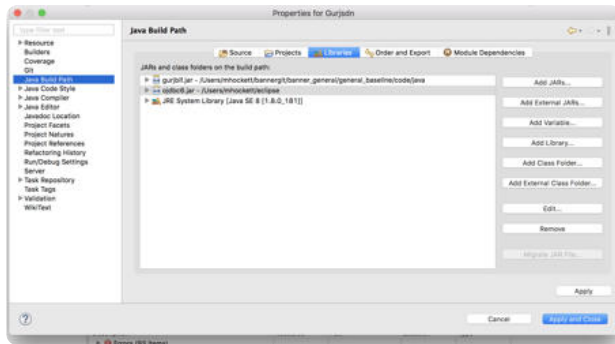


Make sure the src folder is listed under the source file and the conf folder under the libraries.

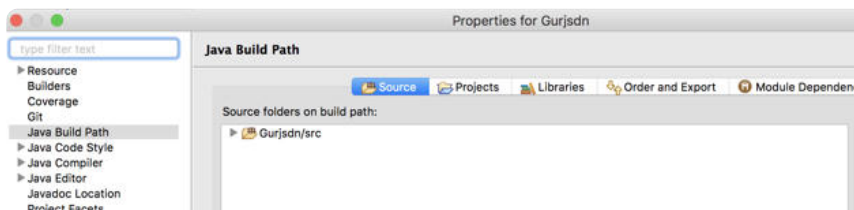


7. Set up the run configurations so you can run from inside eclipse which will be easier to debug

From toolbar, select Run / Run Configurations.

Click on the Java Application on the left and insert new. Enter `com.sct.messaging.bif.banner.BannerBatchProcessor` in the main class.

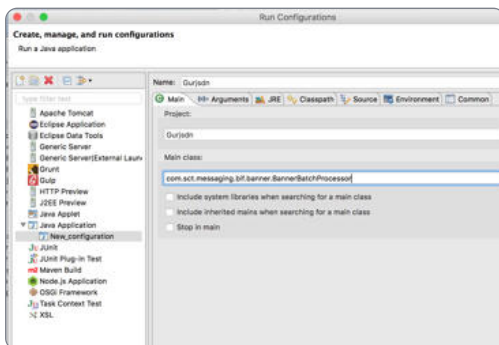

You need to enter the submission information in the arguments

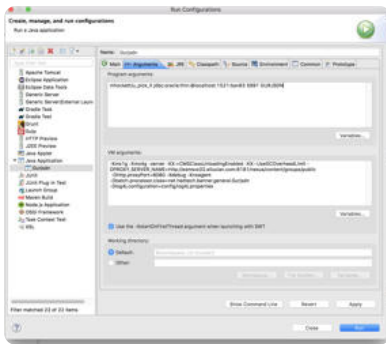

Here is the program arguments I added

mhockett/u_pick_it jdbc:oracle:thin:@localhost:1521/ban83 5991 GURJSDN

⚠ In August 2022 we delivered a new docker container with Oracle 19c, which requires the jdbc string to reference a Service rather than a SID. This is done by changing <port>:<sid> to <port>/<service> as show above.

and the vm parameters I added

```
-Xms1g -Xmx4g -server -XX:+CMSClassUnloadingEnabled -XX:-UseGCOverheadLimit -
DPROXY_SERVER_NAME=http:// esmsvc02.ellucian.com :8181/nexus/content/groups/public
-Dhttp.proxyPort=8080 -Xdebug -Xnoagent
-Dbatch.processor.class=net.hedtech.banner.general.Gurjsdn
-Dlog4j.configuration=config/log4j.properties
```

The program arguments has your User ID, password and oracle information and the job oneup and job name.

Note that if you set the log4j to run bannerBatchProcessor in debug mode the job submission parameters are not deleted.

Here is my quick sql script to create my jobsub params.

insert script for oneup number and parameters

✓ Easy script to create job sub params

```
1 variable seq number;
2
3 begin
4 --select gjbpseq.NEXTVAL into :seq from dual ;
5 :seq := 6008;
6 end;
7 /
8 select :seq from dual;
9
10 insert into gjbprun (GJBPRUN_JOB,
11 GJBPRUN_ONE_UP_NO,
12 GJBPRUN_NUMBER,
13 GJBPRUN_ACTIVITY_DATE,
```

```
14 GJBPRUN_VALUE)
15 values ('GURJSDN', :seq, '01', sysdate, 'SFRFASC');
16
17 insert into gjbprun (GJBPRUN_JOB,
18 GJBPRUN_ONE_UP_NO,
19 GJBPRUN_NUMBER,
20 GJBPRUN_ACTIVITY_DATE,
21 GJBPRUN_VALUE)
22 values ('GURJSDN', :seq, '02', sysdate, 'forms_with_prepost.txt');
23
24 insert into gjbprun (GJBPRUN_JOB,
25 GJBPRUN_ONE_UP_NO,
26 GJBPRUN_NUMBER,
27 GJBPRUN_ACTIVITY_DATE,
28 GJBPRUN_VALUE)
29 values ('GURJSDN', :seq, '03', sysdate, 'N');
30
31 insert into gjbprun (GJBPRUN_JOB,
32 GJBPRUN_ONE_UP_NO,
33 GJBPRUN_NUMBER,
34 GJBPRUN_ACTIVITY_DATE,
35 GJBPRUN_VALUE)
36 values ('GURJSDN', :seq, '04', sysdate, 'STVTERM.out2');
37
38 commit;
39 select gjbprun_one_up_no, gjbprun_number from gjbprun where gjbprun_job = 'GURJSDN';
```