

{**TODO**: Should I change the title? I feel like its such a small part of the paper that it doesn't require a mention of multi perspective or it might be deceptive}

Highlights

SolidSessionBench: Realistic Query Sequences for User-Oriented Decentralized Environments

Ruben Eschauzier, Ruben Taelman

- Research highlights item 1
- Research highlights item 2
- Research highlights item 3

SolidSessionBench: Realistic Query Sequences for User-Oriented Decentralized Environments

Ruben Eschauzier^{a,*}, Ruben Taelman^a

^aDepartment of Electronics and Information Systems, Ghent University – imec, Universiteitsstraat 4, Ghent, 9000, Flanders, Belgium

ARTICLE INFO

Keywords:

Multi-perspective data
Link Traversal-based Query Processing
Client-side caching
Query sequence simulation

ABSTRACT

Update the README.md to point to new experiments Emerging decentralized architectures give users complete control over their own data, spreading information across heterogeneous sources. Without a central authority to enforce consistency, users freely publish overlapping and potentially conflicting claims, generating a multi-perspective decentralized environment. Integrating this fragmented data is challenging because no single authoritative endpoint exists to aggregate results or resolve conflicts. Client-side query engines overcome this by shifting execution locally, enabling users to dynamically fetch and reconcile information on the fly. However, optimizing this execution remains challenging due to a lack of prior knowledge regarding data distribution. By exploiting access patterns across repeated user query sequences, engines can overcome this knowledge gap. However, accurately evaluating these personalized optimizations is difficult. Public query logs for decentralized environments are scarce, and existing benchmarks rely on static, template-based structures that fail to capture realistic behavioral variability. To fill this gap, we introduce an evidence-based simulation of client query usage patterns as a reusable benchmark enabling realistic and reproducible evaluation of client-side optimization techniques. We demonstrate its utility by evaluating novel client-side caching strategies for link traversal query processing. By comparing our sequence-based approach against traditional, non-sequence-based workloads, we highlight how realistic sequence simulation heavily influences performance evaluations. Ultimately, our benchmark reveals important performance dynamics, such as the impact of session switching and query refinement, that traditional workloads do not. We conclude that modeling realistic user interactions provides an essential foundation for accurately evaluating client-side optimization techniques in decentralized environments.

1. Introduction

Emerging web applications increasingly rely on decentralized architectures to give users control over their personal data. Structured decentralized ecosystems, such as Solid [51] and Mastodon [47], encourage users to keep their data in small, independent stores following shared data models. This paradigm shift is increasingly vital for automated systems, such as LLM-based AI agents, which query these decentralized structures to extract facts for task performance or question answering [64, 34, 10]. While this approach strengthens user autonomy, the absence of a central data authority naturally creates a highly multi-perspective environment. Data spreads across thousands of heterogeneous sources that frequently contain overlapping, diverse, or potentially conflicting claims. Query engines must therefore dynamically fetch and integrate this information at runtime [56], not only to discover conflicting statements and multiple perspectives, but to reconcile these claims to provide a coherent answer to the user or agent.

Traditional federated querying approaches [54, 52, 32] support the integration of decentralized data sources, but they typically assume a small (10-100) set of well-described and consistently available endpoints [18]. These assumptions fail once data is spread across thousands of small

units that enforce local access-control policies. In addition, enforcing fine-grained access control policies [21] on large sources with expressive interfaces introduces notable overhead [43], making standard approaches unsuitable for highly decentralized environments.

Newer decentralized environments, such as Solid, often expose data as lightweight HTTP resources instead of highly expressive query interfaces. Many of these resources are not known in advance and can only be discovered during query execution. While their simplicity lowers the cost of enforcing fine-grained controls, this setting requires a federation model that can operate over a very large number of small sources, many of which may be encountered at runtime, without relying on prior aggregation. Traditional federated approaches are insufficient in this setting due to the assumption of a small number of large endpoints. Additionally, these approaches often assume prior knowledge of the sources, which is not feasible in decentralized environments where discovery is a key requirement. Executing SPARQL queries using Link Traversal-based Query Processing (LTQP) [30] fits these needs. It discovers documents incrementally by following URIs encountered during execution, starting from an initial set of seed documents provided by either the user or the query. Its link-driven, asynchronous traversal supports fine-grained permissions and allows systems to discover without knowing the location of all decentralized data sources beforehand.

However, the fact that LTQP discovers documents incrementally creates significant challenges for efficient execution. Using the traditional optimize-then-execute query

 ruben.eschauzier@gmail.com (R. Eschauzier);

ruben.taelman@ugent.be (R. Taelman)

 www.rubensworks.net (R. Taelman)

ORCID(s): 0000-0001-0000-0000 (R. Eschauzier); 0000-0001-5118-256X (R. Taelman)

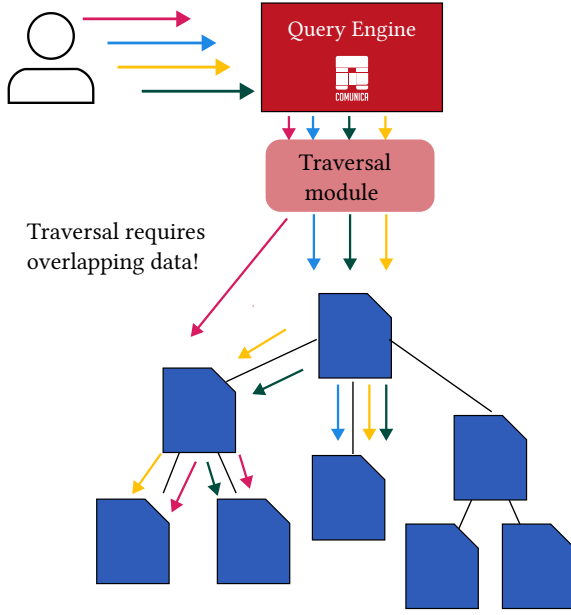


Figure 1: When users interact with query engines, their queries intentions and thus relevant data to the query can overlap, leading to opportunities for personalized optimization.

processing paradigm is difficult, as the query itself determines which data will be accessed. As a result, the optimizer has no prior knowledge of the relevant data until the query’s traversal has already begun. Some approaches optimize query execution without prior knowledge by using zero-knowledge query planning [28] or adaptive query processing [26]. These yield modest but inconsistent performance gains, depending on the decentralized environment and the heuristics used [59]. However, other aspects of zero-knowledge LTQP optimization, such as link prioritization [31], are unlikely to improve query result arrival times in emerging decentralized environments [20].

Consequently, other works explore using precomputed server-side information as prior knowledge or relevance indexes to efficiently execute LTQP queries [60, 61, 25]. While these approaches offer greater performance benefits, they require the server to maintain these indexes. This raises the cost of serving resources and complicates privacy and access control.

To avoid server-side overhead, engines can derive prior knowledge directly on the client. In decentralized settings, LTQP operates inherently client-side, with a single engine instance serving one or more applications, often specific to a particular user. As these users and thus the used applications issue sequences of correlated queries, the engine identifies frequently accessed data and its characteristics. This allows engines to implement *personalized* query optimization algorithms that leverage local access patterns to build necessary prior knowledge.

Benchmarking these approaches requires realistic query sequences. Traditional benchmarks (e.g., WatDiv [1],

BSBM [11], LargeRDFBench [50]) execute isolated or repeated query templates, which fails to capture client-side dynamics accurately. Furthermore, while centralized SPARQL optimization relies on real query logs [9, 45, 13, 55], such logs do not yet exist for decentralized LTQP environments. Consequently, we need a standardized benchmark that realistically simulates user query sequences to prevent fragmented evaluation practices.

In this paper, we address this gap by introducing SolidSessionBench, a benchmark extending SolidBench [59] to generate realistic query sequences. These sequences capture usage patterns identified in social network literature, a domain naturally rich in multi-perspective data, alongside patterns observed in real-world SPARQL logs.

To evaluate the realism of our generated query sequences without access to real-world query logs, we investigate **{TODO: insert (when disk-based works for sure)}** and evaluate **{TODO: insert}** baseline client-side caching strategies in the Comunica LTQP engine [57, 59]. We use these simple algorithms to establish a performance baseline and demonstrate the necessity of sequence-based evaluation. Comparing this baseline against existing literature shows that current evaluation techniques are insufficient for client-side caching in LTQP.

By enabling researchers to evaluate personalized query optimization against actual user behaviors, SolidSessionBench lays the foundation for performant client-side querying. Ultimately, efficient LTQP execution over decentralized sources facilitates the rapid identification of conflicting information and the application of consistency fixes across multi-dimensional knowledge graphs.

In summary, this paper makes the following contributions:

- We review empirical usage patterns in web and query-based systems to establish a foundation for realistic sequence simulation.
- We propose a simulation methodology based on the literature review that models logical query sessions, user interest-driven data locality, and dynamic query refinements mapped to query engine choke points.
- We introduce SolidSessionBench, a fully configurable benchmark integrating this methodology to evaluate client-side query optimization under realistic conditions.
- We implement four baseline client-side caching strategies for Link Traversal Query Processing (LTQP), alongside two cache-based cardinality estimation techniques.
- We evaluate these strategies, demonstrating that realistic query sequences reveal critical performance dynamics that traditional benchmarking approaches miss.

The remainder of this paper is structured as follows. Section 2 reviews prior benchmarking approaches and real-world query usage patterns. Section 3 outlines our simulation methodology and defines the resulting hyperparameters. Section 4 introduces the technical mechanics of client-side caching strategies in LTQP. Section 5 evaluates the benchmark using proxy measures of realism. Finally, Section 6 concludes the paper and presents a plan for benchmark sustainability.

2. Literature Review

To ground our benchmark design in existing research and ensure a realistic sequence generator, this section reviews prior benchmarking approaches for client-side query optimization and real-world query usage patterns.

2.1. Existing Benchmarking Approaches

For the evaluation of client-side benchmarking techniques that rely on previous queries, we primarily investigate caching literature, as this is a well-studied problem relevant to our work.

In the literature, we find three distinct benchmarking approaches: simulated micro benchmarks, simulated end-to-end query benchmarks, and real-world query logs.

Simulated micro benchmarks attempt to isolate performance gains of the benchmarked approaches by fixing certain aspects of query execution. This can range from fixing the cached data size [27] to controlling the percentage of query-relevant data present in the cache [41]. Fixing aspects of query execution makes it easier to isolate and understand the effect of specific caching mechanisms. However, it also gives an incomplete picture, because we don't know how those fixed conditions relate to real workloads or how the methods perform when those assumptions don't hold.

Simulated end-to-end query benchmarks use generated query sequences to evaluate performance. They aim to measure cache hit rate and overall execution behavior under the assumption that the simulated sequences reflect realistic usage. In practice, the simulation is usually built by extending an existing benchmark so that it generates sequences instead of isolated queries. The sequence order is often determined by simple rules or by random selection.

A common approach is to use queries from existing benchmarks such as the Star Schema Benchmark [42] or the Berlin SPARQL Benchmark [11]. These queries are then randomly divided into sequences [27, 41, 23], with each sequence executed using a shared cache. This approach is straightforward but not realistic. Prior work shows that real workloads contain user behavior patterns and temporal locality, and these patterns can be exploited by caching methods. Random sequences fail to capture these properties.

More realistic is to adjust the query generators of existing benchmarks to include patterns in the query sequences. Some works [65, 37] use a Pareto distribution to decide what entity is used to instantiate a query template. This follows from the observation that many human activities follow a

Pareto distribution [6], with many queries relating to a small portion of the entities.

A third approach uses simulated query sequences that reflect the access patterns of specific applications. One example is a workload that models data scientists exploring different aspects of the same entity—such as an author in a scholarly network—through consecutive, thematically related queries [16]. Such simulations often include multiple query sessions, with new sessions beginning according to a probability parameter p . Another example is a simulated application scenario focused on retrieving information about vacation destinations, which is used to assess caching effectiveness [37].

Real-world query logs Whenever available, query logs from actual applications form a highly relevant benchmarking approach. However, obtaining these query logs can be challenging. For SPARQL query optimization, query logs for a variety of endpoints are available, such as DBpedia [49, 55, 9] and Wikidata [55]. These logs are extensively used in benchmarking SPARQL-based approaches [66, 44, 35].

The evaluation of personalized LTQP optimization would ideally use real-world query logs, but such logs do not exist. To avoid the fragmented evaluation practices of current simulated approaches, the next best option is a unified simulated benchmark. A shared benchmark would provide a common basis for comparison, improve reproducibility, and prevent each paper from recreating its own evaluation setup.

2.2. Real-world Query Usage Patterns

To inform the benchmark design on what patterns should be simulated, we will outline three relevant client query usage patterns observed in the literature. The relevance is determined for our social network application use case.

User Interest-Based Query Behavior Work on social networks shows users form communities based on shared interests [39, 17, 7, 33]. These networks exhibit power-law degree distributions, small-world structures, and scale-free properties. This topology creates a dense core of high-degree nodes that connect many smaller, strongly clustered groups [39]. Simulation studies confirm that this interest-driven group formation is stable and reliably modeled [2, 24].

Furthermore, empirical research formally establishes that shared interests directly drive a higher degree of explicit and implicit interactions between users [40]. These findings justify our simulation of user-relatedness and interest-driven behavior when generating query sequences.

Logical Query Sessions Analysis of web browsing behavior shows that activity is best grouped into *logical sessions*: sequences of user interactions focused on specific goals, rather than purely time-bound intervals [38, 48, 53]. These task-oriented sessions frequently involve non-linear navigation, including backtracking. New sessions begin in approximately 15% of clicks, following a log-normal distribution with average size and depth means of 6.1 and 3, respectively.

These patterns also appear in application navigation. In a decentralized social media application, for example, a user viewing a feed might click a creator's username, view comments, or like a post. Because the parameters of each new query derive directly from the preceding query's results, these queries chain together into structures mirroring logical web sessions. Additionally, direct searches for specific posts or topics reflect standard session-switching behavior.

Consequently, interactive applications generate sequences of interdependent requests [63]. This dynamic informs the design of Facebook's TAO data store, which is explicitly optimized for workloads driven by the user's step-by-step traversal of the social graph within the interface [15].

Query Refinement Analysis of SPARQL queries issued to the DBpedia endpoint reveals that users frequently submit related queries in streaks [14, 67]. These streaks consist of query sequences that share an underlying intention but undergo iterative refinement to achieve the user's objective. Previous studies initially introduced the concept of SPARQL query sessions specifically to analyze robotic queries [67, 14].

In this benchmark, we focus on organic query sequences [67], which users generate through interactions with software or browsers [36]. Because organic interactions are driven by application design rather than underlying data organization, we assume these user behaviors will also emerge in applications navigating structured decentralized environments. Furthermore, we deprioritize robotic queries because their sequences can already be simulated by traditional benchmark approaches [59, 11, 1].

For both organic and robotic queries, analysis of total usage and reformulations (removals and additions) of operators over all query logs shows that filter, union, and optional operators account for the vast majority of reformulated queries.

Recent analyses of Wikidata query logs further demonstrate that query development is an iterative process of design, debugging, and maintenance [5]. Based on this empirical data, exploratory querying encompasses six core behaviors [5]: **result refinement** to reduce records via filters or selective triple patterns, **result generalization** to retrieve more entities by broadening parameters, such as adding superclasses or increasing limits, **result extension** to fetch additional attributes by appending new triple patterns, **bug fixing** to correct structural errors like invalid URIs, **query refinement** to adjust complex language features, and **shifting query intent** to pivot topics by altering core predicates.

These findings confirm that real-world querying relies on dynamic, step-by-step modifications rather than the static execution of independent templates. Consequently, existing evaluation frameworks fail to capture how users actively interact with data systems. Evaluating system performance for these exploratory query sequences remains a critical research challenge, explicitly requiring new benchmarks to validate progress [5]. Therefore, modeling these empirical sequence patterns is essential to accurately assess client-side query optimization techniques.

3. Query Sequence Benchmark

In this section, we detail our simulation methodology and the resulting hyperparameters. We base our sequence generator on SolidBench [59], which simulates realistic decentralized social media applications within the Solid ecosystem. SolidBench utilizes the Social Network Benchmark (SNB) dataset [19, 3] and applies the Linked Data Benchmark Council (LDBC) choke point methodology [4].

The choke point methodology is a benchmark design strategy that targets specific query execution and optimization bottlenecks in current database management systems [12]. Inspired by classical benchmarks like TPC-H, this approach uses these technical challenges to guide research and system development. For graph data, choke points include estimating cardinality during traversals with data skew, determining optimal join orders, and handling scattered index access patterns that lack predictable locality [19]. In practice, a choke point-based benchmark design strategy first identifies critical execution challenges, then designs queries or modifications that explicitly test them.

We evaluate our prioritization algorithms using SolidBench [59], the state-of-the-art benchmark for structured decentralized environments. SolidBench simulates a social network containing users, posts, and comments, all described by a single ontology. To represent Solid pods, the benchmark fragments data so that all information related to a specific user resides in a single pod. Under default settings, SolidBench generates 158,233 RDF files across 1,531 data vaults, totaling 3,556,159 triples.

To simulate a highly distributed network, SolidBench partitions the Social Network Benchmark (SNB) dataset into individual data pods. Its sequential architecture executes in four modular steps:

1. The LDBC Datagen generates the underlying dataset.
2. An enhancer creates additional data, such as noise triples that do not participate in queries.
3. A dataset fragmenter partitions the triples into a Solid-like structure.
4. The SPARQL queries are instantiated.

The workload combines standard SNB *interactive* queries (*short* and *complex*) with custom *discover* templates that explicitly target Link Traversal Query Processing (LTQP) choke points. During execution, a client-side engine dynamically traverses links between these scattered pods to resolve the queries.

To support sequence-based evaluation, we significantly extend and restructure three core SolidBench components:

- **Query Generator:** Modified to produce correlated query sequences that reflect empirical usage patterns.
- **Dataset Generator:** Enhanced to model interest-based similarities among simulated users.

- **Benchmark Runner:** Updated with sequence execution logic to facilitate reproducible experiments and simplify the generation of default configuration files.

Link traversal engines cannot currently solve *complex* queries in a feasible timeframe, so we omit them from our default benchmark configuration. However, because the sequence generator is fully configurable, researchers can easily include complex query templates in future benchmarks as traversal engines improve.

3.1. Realism of Query Sequences

To ensure SolidSessionBench accurately reflects user behavior in decentralized environments, we base our simulation methodology on the LDBC methodology used for data generation. The sequence generator synthesizes empirical usage patterns established in Section 2 to form a grounded simulation methodology that reflects real-world patterns.

Because direct, real-world query logs for highly decentralized LTQP environments do not currently exist, we maintain and evaluate realism through a three-pillared approach:

- **Topological Realism (User Interests):** We utilize the established LDBC social network topology to model explicit and implicit user relatedness, ensuring data access patterns mirror natural community formations rather than uniform distributions. Due to the proven realism of the LDBC data generator [46], our simulations inherit this empirically proven structure.
- **Navigational Realism (Logical Sessions):** We restrict query sequences to directed dependency graphs. This simulates realistic “click-through” application navigation, accounting for empirically observed session lengths and log-normal transition probabilities.
- **Exploratory Realism (Query Refinement):** We replace static templates with dynamic query transformations. Mapping real-world SPARQL refinements (e.g., result generalization, intent shifting) directly to execution choke points ensures engines face realistic structural variability.

We evaluate the success of this simulation by measuring proxy variables such as cache hit rates, execution times, and relatedness of relevant data accessed during queries. We then compare these outcomes against theoretical baselines and random sequence generation. This comparative evaluation demonstrates that our query sequence simulation captures essential performance dynamics that existing benchmarks miss.

3.2. Simulation Methodology

Our methodology models three interdependent behaviors: task-oriented logical sessions, user interests for data locality, and refinement patterns for iterative query development.

3.2.1. Logical Query Sessions

To model logical sessions, we categorize queries into four primary topics: person-specific messages, forum information, person attributes, and message attributes. Because queries in decentralized environments often depend on preceding results, we map the output types of each template to valid subsequent templates. This creates a directed graph of query progression that governs the flow of a logical session.

Within a session, a template’s *instantiation values* are typically derived from the previous query’s results. To realistically simulate this “click-through” behavior, we execute centralized equivalents of the LDBC SNB queries using QLever [8]. We then randomly sample the returned result set to instantiate the subsequent query template. If a query yields no results, we fall back to our default, interest-based instantiation methodology.

As an example, consider the following data distributed across a decentralized environment:

Listing 1: (a) Alice’s profile document
(<https://pod.example/alice/profile.ttl>).

```
1 <https://pod.example/alice/profile.ttl#me> a :
   Person ;
2   :knows <https://pod.example/bob/profile.ttl#me>
   ;
3   :hasInbox <https://pod.example/alice/inbox> .
```

Listing 1: (b) Bob’s profile document
(<https://pod.example/bob/profile.ttl>).

```
1 <https://pod.example/bob/profile.ttl#me> a :Person
   ;
2   :posts <https://pod.example/bob/posts/1> .
```

Listing 1: (c) Bob’s post
(<https://pod.example/bob/posts/1>).

```
1 <https://pod.example/bob/posts/1> a :Post ;
2   :content "Hello Solid world!" .
```

Listing 1: (d) Alice’s interests document
(<https://pod.example/alice/interests.ttl>).

```
1 <https://pod.example/alice/profile.ttl#me> :
   interestedIn "Wildlife" .
```

Listing 1: (e) Wildlife forum document
(<https://pod.example/forum/wildlife.ttl>).

```
1 <https://pod.example/forum/wildlife.ttl> a :Forum ;
2   :hasPost <https://pod.example/ruben/posts/9> ;
3   :hasComment <https://pod.example/bob/comment/1>
   ;
4   :hasTopic "Wildlife" .
5 <https://pod.example/bob/comment/1> :responseTo <
   https://pod.example/ruben/posts/9> .
```

The generator randomly selects a user and simulates a realistic sequence of queries that reflects real-world user behavior. Given this dataset, and two query templates: one to fetch a person’s posts and another to retrieve the

content of a specific post, the generator can create a query sequence, which can contain multiple logical sessions. For user “alice”, we can start the sequence (and first logical session) by executing the first query template (Q1) to discover Bob’s posts, as shown in Listing 2.

Listing 2: Initial query (Q1) fetching Bob’s posts.

```
SELECT ?post WHERE {
  <https://pod.example/bob/profile.ttl#me> :posts ?
    post .
}
```

The client-side query engine executes this query by traversing to Bob’s profile document, returning the result binding: ‘?post = <https://pod.example/bob/posts/1>’.

To simulate a user clicking on this discovered post, the sequence generator instantiates the next query template dynamically. It extracts the value bound to “?post” from the results of Q1 and injects it as the subject of Q2, as shown in Listing 3.

Listing 3: Dynamic sequence query (Q2) instantiating a variable from Q1.

```
SELECT ?content WHERE {
  <https://pod.example/bob/posts/1> :content ?
    content .
}
```

This example demonstrates that the instantiation of Q2 strictly depends on the execution results of Q1. Because Q2 requires an instantiated post URI from Q1, these queries are directionally dependent; reversing their order leaves the generator with no method to instantiate the initial query parameters. Consequently, structured logical query sequences naturally emerge from these interdependencies, accurately reflecting realistic exploratory user behavior.

Finally, we simulate logical session switching. Drawing from web browsing behavior, we assign each sequence a session-switching probability sampled from a log-normal distribution with a mean of 15% [38, 53]. During sequence generation, a session switch triggers a random choice with equal probability: the engine either starts a new session (using interest-based instantiation) or resumes a previous one (deriving instantiation values from that session’s last executed query). To prevent repetitive queries and maintain a uniform distribution of template instantiations, we explicitly prohibit backtracking within our model. Additionally, we maintain a balanced template distribution by dynamically scaling down each template’s selection probability proportionally to its overall frequency.

Continuing our running example, a session switch occurs after executing Q2. Instead of continuing sequence generation from the content of Bob’s post, the generator terminates the current path and selects a new template to instantiate: a query for posts within a forum.

As shown in Listing 4, the generator selects a wildlife forum as the initial instantiation value. This query requires an entirely separate data path to execute, breaking the dependency chain of the previous queries and representing a clear

change in user intent. We are still generating the same *query sequence*, but the session switch introduces a new *logical session* within that sequence.

Listing 4: Independent query (Q3) initiating a session switch to explore a wildlife forum.

```
1 SELECT ?post WHERE {
2   <https://pod.example/forum/wildlife.ttl> :hasPost
      ?post .
3 }
```

3.2.2. User Interest Modeling

Individuals interact more frequently with users sharing similar interests [40]. To simulate this behavior, we use the underlying LDBC dataset utilized by SolidBench [19], which inherently models realistic user preferences. The LDBC generator, Datagen, produces person profiles containing specific interests, educational backgrounds, and workplaces. It links users based on these demographic and interest overlaps, yielding a non-random network topology with a realistic degree distribution.

We use this interest-driven topology to generate template instantiation values for the first query of each logical session. Specifically, we construct a binary feature vector v_k for each user k :

$$v_k = (x_{k,1}, \dots, x_{k,n}, y_{k,1}, \dots, y_{k,m}), \quad (1)$$

where $x_{k,j} = 1$ if user k holds stated interest j , and $y_{k,m} = 1$ if user k completed study m .

For each sequence, we randomly select a base person k and compute the cosine similarity between v_k and the feature vectors of all other users. Let N be the total number of users. To maintain efficiency at large scale factors, we restrict our candidate pool to $C_{k,M}$, defined as the set of the top $M < N$ users ranked by similarity to k . Template instantiation values are then selected probabilistically using a softmax function with temperature T :

$$P(i | k) = \frac{e^{s_{k,i}/T}}{\sum_{u \in C_{k,M}} e^{s_{k,u}/T}}, \quad (2)$$

where $s_{k,i}$ is the similarity score between base person k and candidate $i \in C_{k,M}$. For templates requiring non-person values (e.g., posts or activities), selection probabilities are derived from the similarity scores of the content’s creators.

Continuing our running example, consider an expanded decentralized environment containing a second forum dedicated to pottery, as shown in Listing 5 as well as all documents in Listing 1.

Listing 5: The additional pottery forum document (<https://pod.example/forum/pottery.ttl>).

```
1 <https://pod.example/forum/pottery.ttl> a :Forum ;
2   :hasTopic "Pottery" .
```

To determine what instantiation value to use for the forum query for user Alice, we construct binary feature vectors over a small global feature space: (Wildlife, Pottery).

Alice's profile states an explicit interest in 'Wildlife', yielding vector $v_{\text{Alice}} = (1, 0)$. While the forums in the data have topic statements, thus the vectors for the forums are $v_{\text{Wildlife}} = (1, 0)$ and $v_{\text{Pottery}} = (0, 1)$.

This gives us a cosine similarity of $s_{\text{Alice, Wildlife}} = 1$ and $s_{\text{Alice, Pottery}} = 0$. Then using softmax with a temperature of $T = 0.5$, we compute the selection probabilities for the two forums:

$$P(\text{Wildlife} \mid \text{Alice}) = \frac{e^{1/0.5}}{e^{1/0.5} + e^{0/0.5}} \approx 0.88,$$

$$P(\text{Pottery} \mid \text{Alice}) = \frac{e^{0/0.5}}{e^{1/0.5} + e^{0/0.5}} \approx 0.12.$$

Consequently, when initiating or switching a session, the generator is more likely to select the 'Wildlife' forum for Alice, reflecting her interests.

3.2.3. Refinement Patterns

The benchmark simulates query refinement by applying composable transformations to an instantiated query template. Following our literature review, we focus on transformations (and their reciprocal counterparts) that add or modify BGPs, OPTIONAL clauses, UNION blocks, and query instantiation values.

To ensure these transformations meaningfully alter query execution rather than superficially appending triples, we apply a choke point-based design methodology [4]. The generator sequentially applies refinements to a base SolidSessionBench template. By mapping empirical exploratory usage patterns [5] to concrete planning (P) and traversal (T) choke points, we translate real-world user behaviors into rigorous execution bottlenecks for query engines.

The planning choke points, derived from empirical usage patterns [5] and relevant LDBC choke points [3], are defined as follows:

- P.1** Involves adding or removing a FILTER, requiring prior knowledge to adjust query plans and estimate selectivity.
- P.2** Addresses adding or removing UNION or OPTIONAL clauses to alter filter push-down capabilities and complicate query planning.
- P.3** Covers adding or removing selective triple patterns, forcing the engine to identify changes and re-optimize the plan.
- P.4** Focuses on adding or removing non-selective triple patterns.

Beyond planning, these refinements introduce traversal choke points that expand upon those established in SolidBench [59, 58]:

- T.1** Expands or contracts the reachable sub-web through predicate additions.

- T.2** Shifts the sub-web by substituting the traversal starting point.

- T.3** Changes the number of hops required to obtain relevant data, corresponding to SolidBench choke points L.1–L.6 [58].

- T.4** Alters the usability of structural indexes, such as type indexes, corresponding to SolidBench choke point L.8 [58].

These choke points directly map to the exploratory query behaviors identified in Section 2.2:

- **Result refinement** corresponds to P.1 and P.3, as it narrows results via FILTER constraints and selective triple patterns.
- **Result generalization** corresponds to P.3 and P.4, expanding existing BGPs with selective or non-selective triple patterns.
- **Result extension** maps to P.2, P.3, and P.4 by appending triple patterns to BGPs or introducing OPTIONAL and UNION blocks that alter filter push-down capabilities.
- **Shifting query intent** corresponds to T.1 and T.2, substituting instantiation values to initiate traversal from different seed documents, thereby shifting or expanding the reachable sub-web.
- **Query refinement** maps to P.2, modifying the structural complexity of the query by adding or removing OPTIONAL and UNION blocks.

Finally, the generator supports variable instantiation within refinements, allowing users to bind pattern variables to specific values randomly selected from configuration candidates. Users can define custom refinement patterns via JSON files to augment the default configurations.

An example of a slimmed-down default configuration is provided in Listing 6. This entry specifies an OPTIONAL refinement pattern that appends a triple pattern to retrieve the messages liked by a person.

The location parameter is set to 0, indicating that the triple pattern is added to the first existing OPTIONAL block, or to a new block if none is present. The default benchmark suite also includes a reciprocal configuration where operation is set to "removal", which instead deletes the triple pattern from the first OPTIONAL block.

Listing 6: Example configuration for an OPTIONAL refinement pattern.

```

1 {
2   "type": "OPTIONAL",
3   "id": 0,
4   "operation": "addition",
5   "description": "Add triple for likes (P.1, T.2)",
6   "location": 0,
7   "target": [
8     {
9       "subject": {

```

Table 1

LogT-normal distribution parameters (μ, σ) control the queries per sequence, queries per logical session, and the probability of switching logical sessions. Refinement parameters define the likelihood (patternProbability) and bounds (min/maxRefinementLength) of generating a refinement sequence for a given query. Instantiation relies on a softmax temperature and a maxLogits cutoff for similarity-based entity selection.

Category	Parameter	Value
Distributions (μ, σ)	Sequence Length	3.0, 0.2
	Session Length	1.7, 0.5
	Transition Probability	-2.0, 0.25
Refinements	patternProbability	0.1
	min/maxRefinementLength	2, [3–5]
Instantiation	temperature	0.1
	maxLogits	5–10

```

10     "value": "person",
11     "termType": "variable"
12 },
13 "predicate": {
14     "value": ".../vocabulary/likes",
15     "termType": "namedNode"
16 },
17 "object": {
18     "value": "likedMessage",
19     "termType": "variable"
20 }
21 }
22 ]
23 }
```

All defaults, along with complete documentation, are available on GitHub.¹

3.3. Hyperparameters

The sequence generation process introduces several new hyperparameters, which are detailed in Table 1 together with their default values. To guarantee reproducibility despite extensive random sampling, a single seeded pseudo-random number generator (PRNG) is used throughout the entire pipeline.

4. Caching in Link Traversal-based Query Processing

Unlike traditional query engines that evaluate queries against a centralized, pre-built index, LTQP evaluates queries directly over the live Web [58, 29] using the “follow-your-nose” principle.

Starting from a seed URI (often extracted from the query), the engine fetches data via a *link queue* (governed by *reachability criteria* [30]) and deposits the retrieved triples into an *active local store*. This local store is an in-memory

dataset over which the query executes, typically utilizing dictionary encoding [57].

Previous work [27] established the fundamental concept of caching within this paradigm, demonstrating that a local repository of recently accessed Web documents mitigates the high network latency inherent to LTQP.

For our experiments, we use the Comunica LTQP engine [57, 59]. As a JavaScript-based engine, it relies on the event loop to asynchronously interleave HTTP requests during traversal and local query execution.

We use caching-based algorithms to validate SolidSessionBench query sequences and compare them against alternative benchmarking methods in the literature. Implementing these strategies establishes strong baselines for evaluating caching in traversal engines. This section introduces four cache implementations, each storing dereferenced triples differently. We also evaluate two cardinality estimation approaches that use cached triples to improve query planning and execution. Because these estimates require an indexed cache, we omit them for the unindexed baseline.

4.1. Cache Implementations

Unindexed LRU Cache This baseline caches raw triple arrays alongside source metadata. On a cache hit, the engine retrieves and indexes these triples into the active local store.

Indexed LRU Cache This approach pre-indexes triples and stores them in an in-memory LRU cache. On a hit, the engine extracts only the triples matching the query patterns. Combined with dictionary encoding, this pre-filtering reduces local store memory and indexing overhead, potentially offsetting the higher initial ingestion costs.

Memory-based Quad Store Cache This approach uses a quad store to unify cache indexes, saving memory and improving search efficiency. The quad graph stores the source of the triples, allowing cache hits to retrieve data using an “?subject ?predicate ?object” query where the graph term matches the cached document’s URL.

Disk-based Quad Store Cache This approach stores the quad store on disk, providing the same advantages while supporting datasets larger than main memory. We add a small in-memory cache for a ‘hot’ subset of frequently accessed triples. To make this memory cache scan-resistant, documents are only added if accessed multiple times. This prevents long-running queries from evicting the entire cache.

4.2. Cardinality Estimation Approaches

Link traversal lacks prior knowledge regarding data distribution and availability, complicating query planning. To address this, we hypothesize that cached data provides sufficiently accurate cardinalities for query planning, and we evaluate two estimation approaches based on this cache. We integrate these estimates into the default Comunica cost-based optimizer [57] to generate more accurate query plans, replacing the zero-knowledge heuristics [28] traditionally used in link traversal.

¹<https://github.com/SolidBench/SolidBench.js/tree/master/templates/refinements>

Reachability-agnostic Cache-based Cardinality Estimation This approach estimates cardinalities across the entire cache. For each cache entry, it performs a query to count the number of matching triples and sums these counts to produce a final estimate.

Reachability-aware Cache-based Cardinality Estimation Here, we store the outgoing links of each cached document. For each query, we traverse the cache to find all documents reachable under the active reachability criterion, to produce more accurate estimates by ignoring irrelevant data. If the seed document is missing from the cache, we fall back to the Reachability-agnostic Cache-based Cardinality Estimation.

4.3. Experimental Configurations

For our experiments we evaluate three cache capacities: small (350k triples, ~10% of the dataset), medium (700k, ~20%), and large (1.4M, ~40%). While the disk-based cache stores 1.4M triples on disk, and a small in-memory cache of 25k, 50k, and 100k triples for the small, medium, and large configurations respectively.

Our implementations adhere to the RFC-9111 specification [22], meaning the cache correctly interprets standard HTTP headers (e.g., Cache-Control) just like a web browser would. However, because the benchmark dataset is static, cache entries require no revalidation and never become stale. Consequently, observed hit rates are likely higher than in a live environment.

Ultimately, comparing these strategies establishes 10 baselines: three algorithms per indexed cache (LRU, In-memory Quad Store and Disk-based Quad Store) and one algorithm for the unindexed cache, for caching performance in realistic user-centric environments, upon which future research into advanced caching approaches can build.

5. Evaluation

{TODO: Once figures are complete, rename the algorithms in the figures to accurately reflect current names}

As established in Section 3, the lack of real-world query logs prevents a direct comparison of the generated sequences to existing query logs. Instead, we validate the data access patterns and temporal locality of the generator using client-side caching as a proxy. Because caching relies on data locality, it serves to measure the impact of our simulation choices.

We structure the evaluation in four parts. First, we establish a performance baseline for the generated workloads. Next, we isolate logical sessions to quantify how session switching affects data locality and cache performance. We then analyze how query refinement patterns influence cache performance, examining both refinement depth and specific execution chokepoints. Finally, we contrast our outcomes with traditional evaluation methods, such as microbenchmarks and random sequences, to demonstrate that they fail to capture these performance dynamics accurately.

While we use caching to validate the benchmark, the generated workloads support the evaluation of other client-side optimization techniques. We selected caching as our primary proxy due to the extensive literature on its application and benchmarking in client-side environments.

5.1. Experiment Setup

We evaluate our benchmark using a scale 0.1 SolidBench dataset (158,233 RDF files, 1,531 vaults, 3,556,159 triples). Using the default hyperparameters in Table 1, we generate 8 sequences totaling 192 queries. These queries are from the interactive workload, are split into discover and short queries, with multiple templates belonging to either of these groups. Experiments run on an Ubuntu 20.04 machine (Intel Core i5-9400) with 16 GB RAM allocated to the engine and a 180-second query timeout. We repeat each sequence 10 times to minimize variance and inject a uniform 70–90 ms latency to simulate a realistic network environment. The cache is scoped for a sequence, meaning no cache-state is shared between different executions or repetitions of sequences.

5.2. Holistic Evaluation of Benchmark Characteristics

First, we present the overall performance characteristics of the tested caching algorithms on the default configuration of our introduced benchmark.

Unindexed LRU Cache In Figure 2, we find that the unindexed LRU cache reliably improves performance across all cache sizes, with larger caches yielding better results. For total execution time of queries, the large cache is significantly better than the smaller cache sizes, while for throughput the difference is less pronounced.

Indexed LRU Cache As shown in Figure 2, pre-indexing triples in the LRU cache accelerates successful query execution but introduces higher initial overhead. When high cache eviction rates outweigh the efficiency gains of indexing, this ingestion cost slows down execution or causes timeouts. The figure illustrates this overhead, as the no-cache baseline ultimately solves a higher percentage of queries than the standard indexed cache as the line reaches a higher y-value.

However, integrating cardinality estimation overcomes this limitation by enabling the query engine to generate more accurate query plans, increasing the percentage of solved queries and lowering execution times. Comparing the two estimation approaches, reachability-aware estimation outperforms reachability-agnostic estimation by ignoring irrelevant data. This effect is most pronounced in larger caches, where reachability-agnostic estimation yields only minor performance benefits, while reachability-aware estimation shows substantial improvements. This aligns with expectations: larger caches accumulate more irrelevant, out-of-context data, which the reachability-aware estimator successfully filters out.

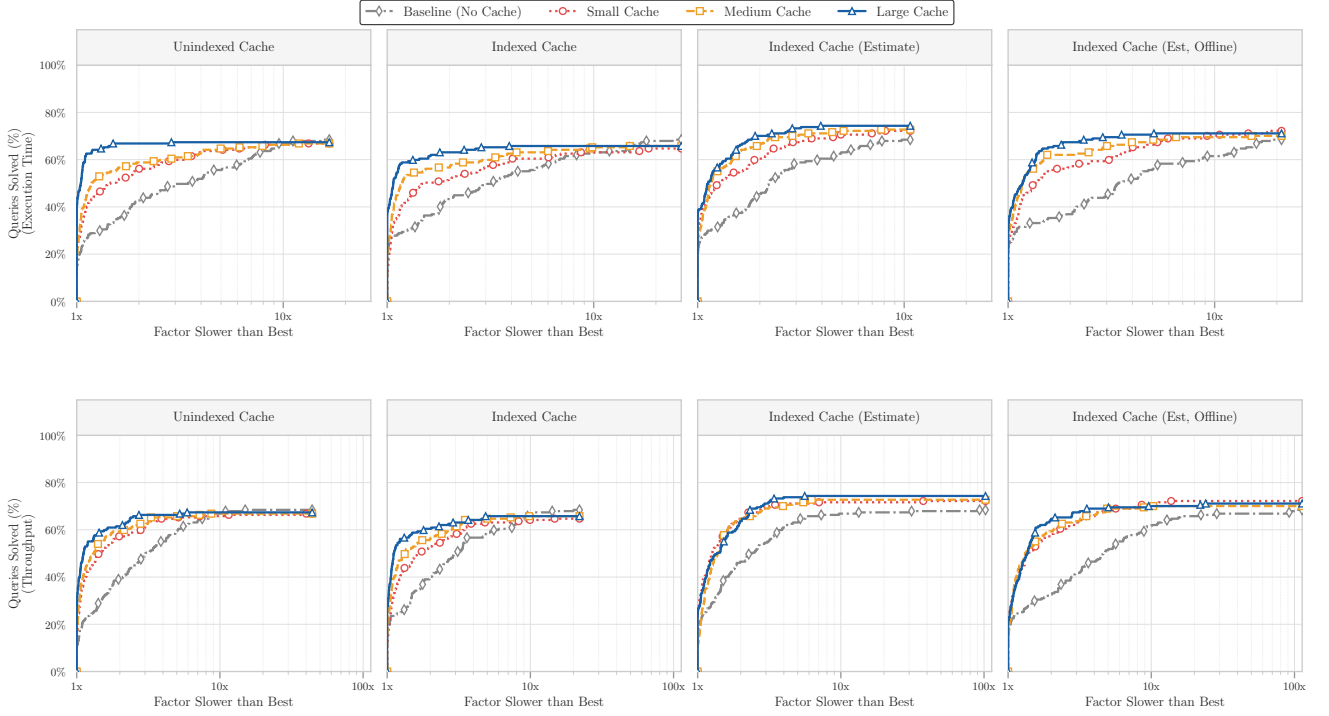


Figure 2: Performance profiles of the LRU-based unindexed and indexed triples cache. The y-axis shows the percentage of queries executing within a factor (x-axis) of the fastest algorithm. Curves closer to the top-left indicate better overall performance. The y-intercept ($x = 1$) shows how often an algorithm is the outright fastest, while the rightward trajectory demonstrates robustness (e.g., $x = 2, y = 80\%$ means 80% of queries execute within twice the fastest time). From the figure, we observe that all caching-based approaches outperform the no-cache baseline.

Memory-based Quad store Cache As shown in Figure 3, the memory-based quad store cache exhibits high performance variance depending on the estimation strategy. Without estimation (*Indexed Store*), performance scales normally with capacity: the large cache achieves the best performance, while the medium and small caches sit lower but still reliably outperform the baseline. Similar to the LRU-based indexed cache, the baseline solves slightly more queries, indicating that the performance overhead can cause query failures. However, introducing online cardinality estimation (*Indexed Store (Estimate)*) completely inverts the performance scaling observed without estimation, with the small and medium caches outperforming the large cache.

The scaling nature of the performance penalty of cache size in estimation indicates that executing count queries scales unfavorably as the cached quad store size increases. Compared to the LRU-cache, which executes count triple pattern queries over small sources, the quad store-based approach uses triple pattern queries over the entire quad store, but with the graph term filled in to represent the current document. For reachability-aware estimation the performance hit is not as big, especially in the total execution time case.

Disk-based Quad store Cache In Figure 3, we see that the disk-based quad store cache performs.... **{TODO: PLACEHOLDER FIGURE}**

Comparison Between Caching Algorithms **{TODO: Small section comparing the different caching algorithms and their performance characteristics. for example how unindex cache mainly improves total execution time, how quad store seems best when using small caches and LRU-cache scales better for bigger caches.}**

5.2.1. Cache Hit Rates

{TODO: Optional section with hit rates and eviction percentages per cache size and algorithm. Should we include this?}

5.3. Logical Session & Interest Modeling Cache Performance

To evaluate the impact of logical sessions on caching performance, we analyze the cache hit rate deviation (Δ) from the template baseline for queries initiating a new session, switching to an existing session, or remaining within the current session. We calculate this deviation on a per-template basis to control for inherent differences in query complexity.

Table 2 shows that new sessions severely degrade hit rates and existing session switches cause moderate degradation, whereas intra-session queries improve performance. These negative effects are most pronounced in small and medium caches. Large caches retain performance better, though primarily when switching to an existing session.

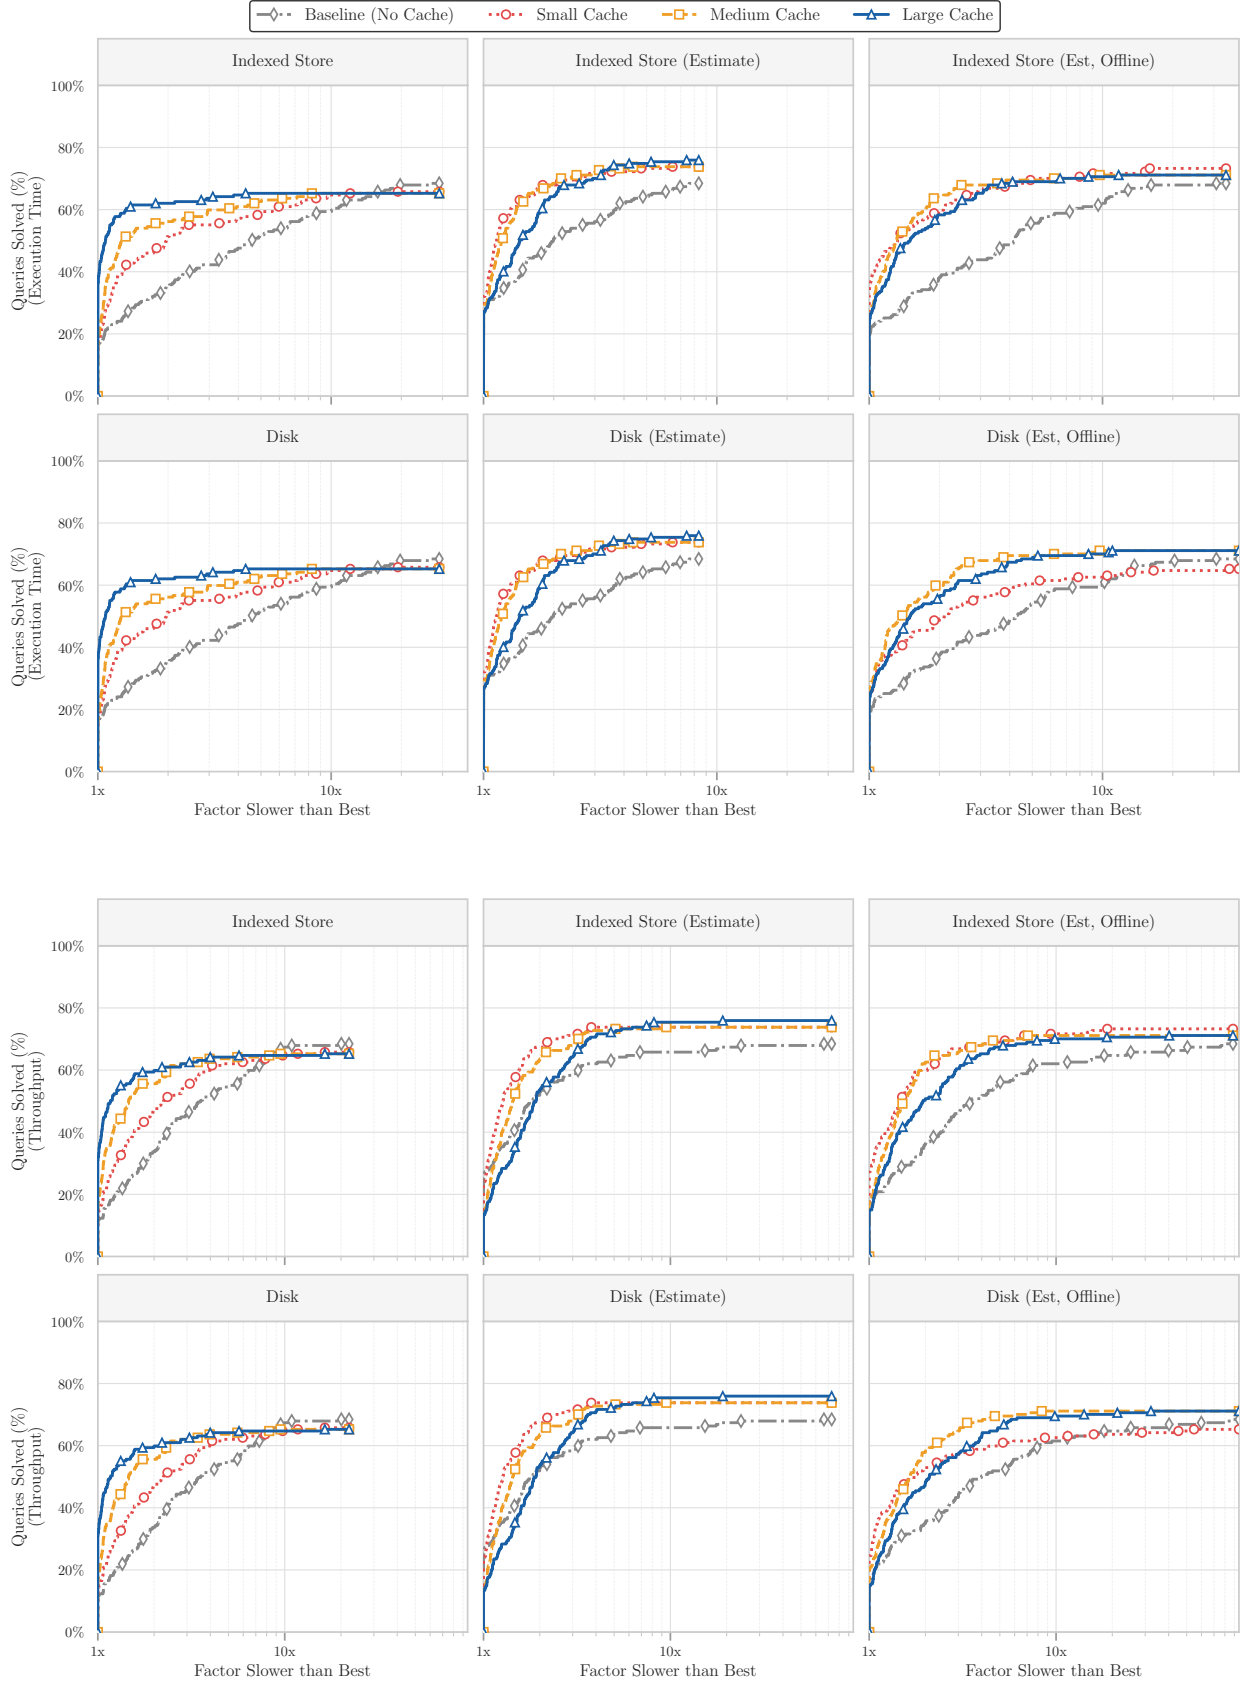


Figure 3: Performance profiles of the in-memory and disk-based quad store caches families of algorithms. The y-axis shows the percentage of queries executing within a factor (x-axis) of the fastest algorithm.

Table 2

Impact of logical session status on algorithm performance. Values represent absolute and percentage cache hit rate deviations from the global template average across new, existing, and within-session queries. Absolute values represent the mean deviation across queries, and percentages are calculated using the ratio of averages (mean absolute deviation divided by the mean baseline). Negative values indicate worse cache performance for these query types.

Cache Algorithm	New Session		Existing Session		Within Session	
	Abs.	%	Abs.	%	Abs.	%
unindexed-l	-0.092	-15.557	-0.059	-9.824	0.035	6.013
unindexed-m	-0.109	-24.034	-0.045	-9.720	0.029	6.555
unindexed-s	-0.091	-24.120	-0.066	-17.139	0.039	10.460
index-l	-0.080	-13.715	-0.044	-7.404	0.027	4.586
index-m	-0.080	-17.202	-0.057	-11.917	0.034	7.101
index-s	-0.085	-21.823	-0.066	-16.458	0.039	9.869
store-l	-0.193	-29.819	-0.017	-2.644	0.019	3.060
store-m	-0.137	-28.394	-0.020	-4.103	0.018	3.810
store-s	-0.108	-29.691	-0.056	-15.100	0.035	9.697
disk-l	—	—	—	—	—	—
disk-m	—	—	—	—	—	—
disk-s	—	—	—	—	—	—

Consequently, optimal client-side cache sizing depends heavily on session-switching behavior. These findings validate our sequence-based simulation design; ignoring session dynamics obscures critical performance shifts. They also highlight the need for eviction policies that retain cross-session entries.

Future work should investigate identifying and protecting a frequently accessed core of cache entries to mitigate session-switching penalties. Alternatively, query engines could identify logical sessions dynamically and maintain a separate cache for each.

5.4. Refinement Patterns

We evaluate how our refinement patterns impact benchmark characteristics and challenge caching algorithms by analyzing the effect of individual chokepoints on query sequences and refinement depth on cache performance. Grounding these patterns in empirical data [5] already ensures they accurately reflect real-world user behavior. Consequently, this evaluation strategy primarily evaluates how these empirically found user behaviors affect caching performance and data locality.

5.4.1. Effect of chokepoints on query sequences

{TODO: Add appendix or supplemental material and refer to it}

We isolate the structural impact of individual query chokepoints through a controlled experiment comprising 80 single-query sequences. Each sequence begins with a base query and sequentially applies a chain of two to five refinement patterns from the default set. We execute each sequence 10 times across three cache capacities (Small, Medium, Large). To analyze the chokepoints in the simplest configuration, we restrict this experiment to the LRU-based

indexed cache. We measure cache hit rate, unique data sources accessed, and total execution time.

To quantify the performance impact of each chokepoint, we map the refinement patterns to their underlying chokepoints and evaluate them using a linear mixed-effects regression model. The model predicts the performance delta (ΔY) between the current and previous query step. We categorize chokepoint operations into additions (suffix ‘a’) and removals (suffix ‘r’). A removal operation occurs only when the sequence reverts a previously applied pattern. We represent the chokepoints applied in a given refinement step as a binary vector $\mathbf{T}_{i,t}$. We use these vectors as predictors, alongside the previous query’s performance metrics ($Y_{i,t-1}$), to account for the system’s baseline state. The regression model is:

$$\Delta Y_{i,t} = \gamma Y_{i,t-1} + \mathbf{T}_{i,t}^T \boldsymbol{\beta} + u_i + \epsilon_{i,t} \quad (3)$$

where $\Delta Y_{i,t}$ is the performance delta for sequence i at refinement step t , $Y_{i,t-1}$ is the previous step’s independent variable value, $\mathbf{T}_{i,t}$ is a binary indicator vector of applied chokepoints, $\boldsymbol{\beta}$ is the vector of fixed effects estimating the isolated impact of each pattern, u_i is a sequence-specific random intercept absorbing unobserved heterogeneity, and $\epsilon_{i,t}$ is the residual error.

Figure 4 plots the estimated effect of each chokepoint on performance. Full regression tables are available in Appendix ???. We observe three primary behaviors:

First, modifying specific patterns degrades performance in both directions. For example, adding or removing $\tau.3$ (increasing required traversal hops) reduces the cache hit rate and increases execution time. This indicates an invalidation penalty: the chokepoint forces the cache to evict useful data, preventing recovery when the chokepoint is removed.

Consequently, caching in these environments requires scan-resistant algorithms.

Second, patterns such as $\tau.2$ (new instantiation values) and $P.4$ (non-selective triple patterns) exhibit reversible effects. Adding these chokepoints reduces performance, but removing them improves the hit rate and accelerates execution. In these instances, the cache successfully maintains temporal locality across the refinement, isolating the performance degradation to the chokepoint itself.

Third, the large cache counterintuitively yields a smaller positive effect on the hit rate for chokepoints like $P.3.r$ (selective triple patterns), $P.2.r$ (unions or optionals), and $P.1.a$ (filters) compared to smaller caches. Because the hit rate has an upper bound of 1.0, the large cache has less margin for improvement. The average hit rates across all queries support this ceiling effect: 0.51, 0.61, and 0.66 for the Small, Medium, and Large caches, respectively. The significant negative coefficient of the lagged hit rate in our model further confirms that a higher previous hit rate limits the expected delta.

Finally, across all patterns, chokepoints that increase the number of accessed data sources consistently reduce the cache hit rate.

Implications for Refinement Pattern Design This analysis exposes structural weaknesses in standard caching algorithms. We demonstrate that structural mutations like $\tau.3$ trigger severe invalidation penalties. Conversely, the reversibility of patterns like $\tau.2$ proves that caches can maintain temporal locality despite changes to the traversal seed.

Mapping refinement patterns to specific chokepoints allows researchers to isolate these structural impacts and directly evaluate caching algorithms. Because our sequence generation is dynamically configurable, it acts as a diagnostic tool. Developers can extend our default configurations to isolate targeted chokepoints, enabling custom stress tests for distinct caching architectures.

5.4.2. Effect of Refinement Depth on Performance

To demonstrate our benchmark’s ability to model realistic refinements of a single query, we evaluate how caching strategies perform across increasing refinement depths. We define depth as the number of consecutive refinement patterns applied to a base query. By analyzing average execution times and cache hit rates at varying depths using the default benchmark configuration, we reveal how caches handle highly correlated, sequential workloads.

Figure 5 shows that cache hit rates predictably rise as refinement depth increases, proving that caching algorithms successfully exploit the structural similarities inherent to exploratory refinement. However, at a refinement depth of 5, hit rates drop sharply alongside a spike in evictions. This indicates that deeper exploratory refinements sufficiently differ from the starting query so that either new subwebs must be fetched or previously relevant data has been evicted. Furthermore, while the reachability-agnostic and no-estimation

algorithms report high hit rates, the reachability-aware approach reports significantly lower rates. This is an artifact of the estimation strategy: the aware estimator performs an offline traversal of the cache to build its plan, logging internal cache misses when it probes links at the edge of the cached graph that have not yet been dereferenced. Consequently, its reported hit rate is artificially deflated by these planning-phase checks, suggesting the actual HTTP-request driven hit rate is likely comparable to the other approaches.

Figure ?? demonstrates that an increase in hit rate does not reliably translate to faster execution or improved throughput. While caching generally improves these metrics, speedup variance is high across the sequence, dipping considerably at depth 3 and spiking dramatically at depth 5 (coinciding with the drop in hit rates). Most notably, the small and medium caches using reachability-aware cardinality estimation achieve massive performance gains at depth 5, reaching up to 100 $\times$ speedups compared to the baseline. Interestingly, this effect disappears for large caches. We attribute this to two factors: first, higher variance at larger depths, as fewer refinement sequences reach depth 5; second, the inherent unpredictability of the cost model. Because smaller caches contain less data, they generate less accurate cardinality estimates. Counterintuitively, these inaccurate cardinality and cost estimates can occasionally cause the optimizer to discover a vastly superior join plan that drastically improves execution.

Ultimately, this analysis validates our benchmark design. By testing across refinement sequences, we expose that deeper user traversals present significant cache invalidation challenges, and that cardinality estimation variance plays a profound—and sometimes highly unpredictable—role in query performance that isolated query evaluations would miss. **{TODO: Include disk-based caching!}**

5.5. Comparison to Alternative Evaluation Methods

{TODO: Write introduction paragraph}

The final step in our evaluation compares the performance outcomes obtained from SolidSessionBench against alternative evaluation methods commonly found in literature, specifically synthetic microbenchmarks and random query sequences. By demonstrating that these conventional methods yield divergent and often misleading conclusions regarding cache performance, we validate the necessity of our empirical data-based query sequence simulation.

Microbenchmarks-Theoretical Hit Rate Analysis Cache literature extensively uses microbenchmarks of various forms to analyze caching performance [41, 27]. To compare the conclusions of such a benchmark to the conclusions of the benchmark introduced in this paper we investigate theoretical caching speedup without management costs, by executing each query template twice with simulated cache miss probabilities. We excluded the estimation-based approaches, as using the full cache for estimation would skew the results for miss rates above zero.

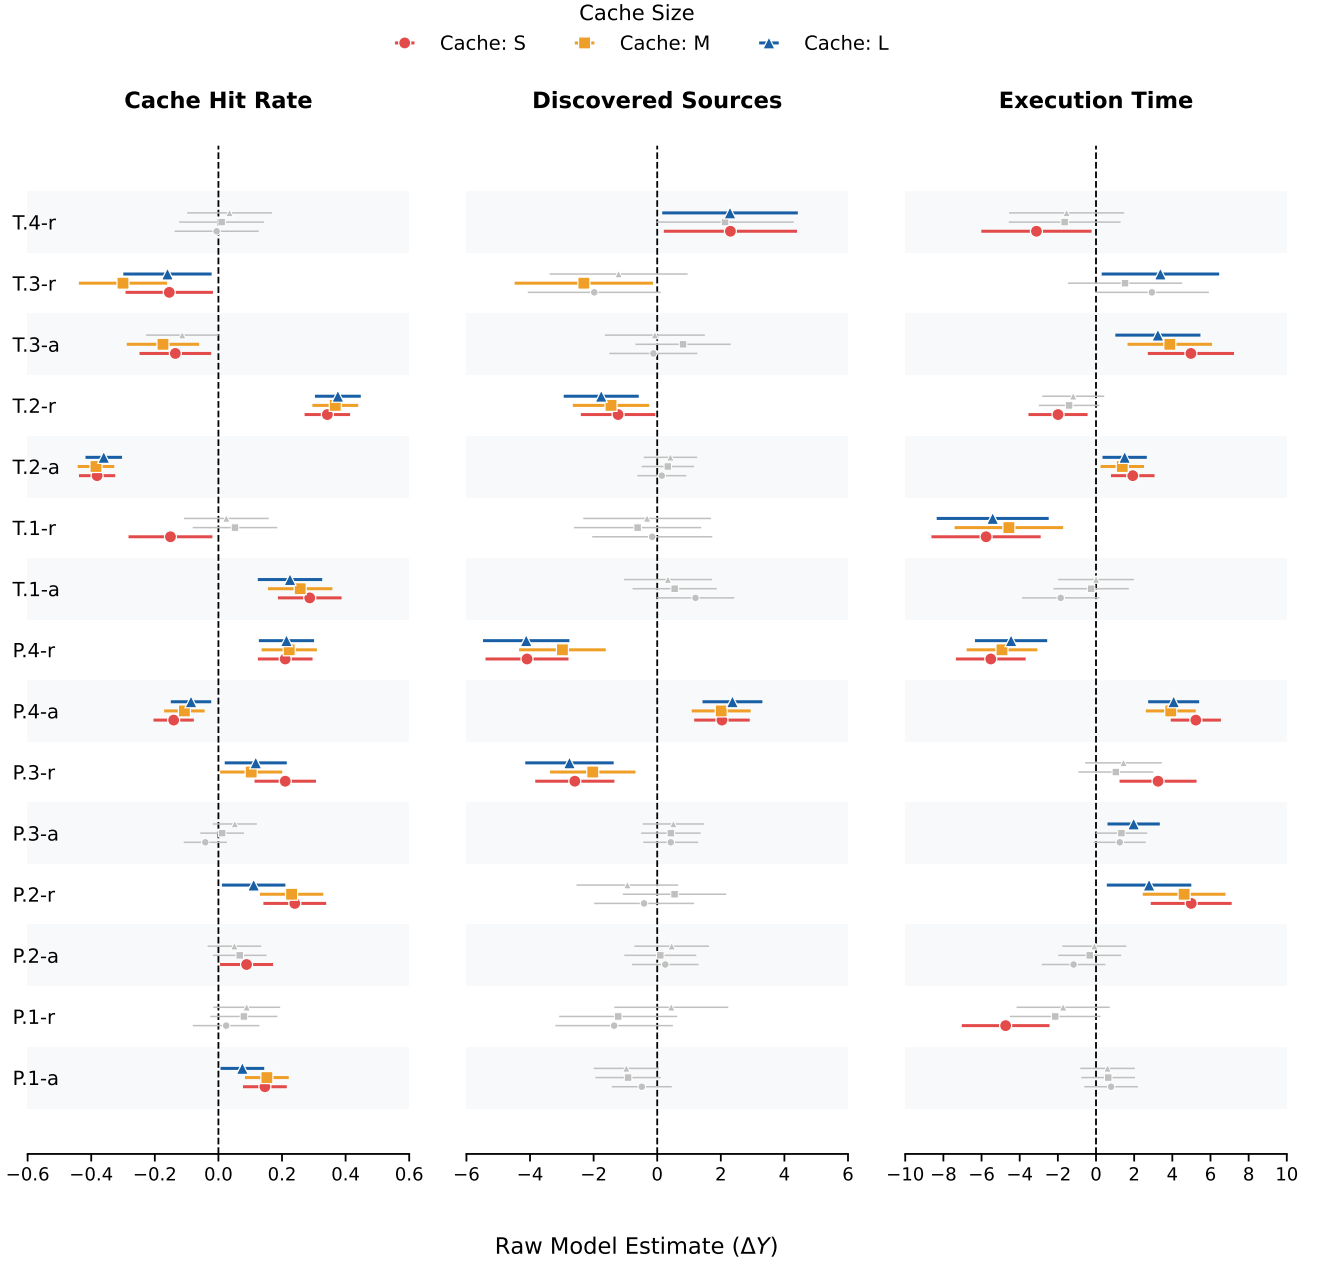


Figure 4: Marginal fixed effects of refinement pattern additions (-a) and removals (-r) on query performance across Small (S), Medium (M), and Large (L) cache capacities. The plot reports the unstandardized absolute expected change (ΔY) for Cache Hit Rate, Discovered Sources, and Execution Time. For both discovered sources and execution time, the plot uses signed log-counts and signed log-milliseconds, respectively. Error bars represent 95% confidence intervals and statistically insignificant estimates ($p \geq 0.05$) are rendered in gray and any chokepoints without any significant coefficients are omitted. Undoing the traversal chokepoint changing the instantiation value of the query significantly improves cache hit rate (+.35) and reduces the number of unique data sources accessed. However, its effect on execution time is on the edge of significance.

Figure 7 shows representative performance profiles for the workload. Most templates (8 out of 12) show reliable improvement that scales with the hit rate for both algorithms. However, certain long-running queries (e.g., interactive-discover-6, 7, and short-3) show no speedup, and some even experience slowdowns. These templates traverse many solid pods but do not require all traversed data. We hypothesize that rapidly serving documents from an in-memory cache

overwhelms the system with data, slowing result production. Conversely, HTTP network latency gives the JavaScript event loop time to process the join execution pipeline, yielding initial results faster since only the first few requests are needed.

In general, using an indexed cache (store-based or LRU) improves performance more than an unindexed cache, however, this also comes with higher cache management costs,

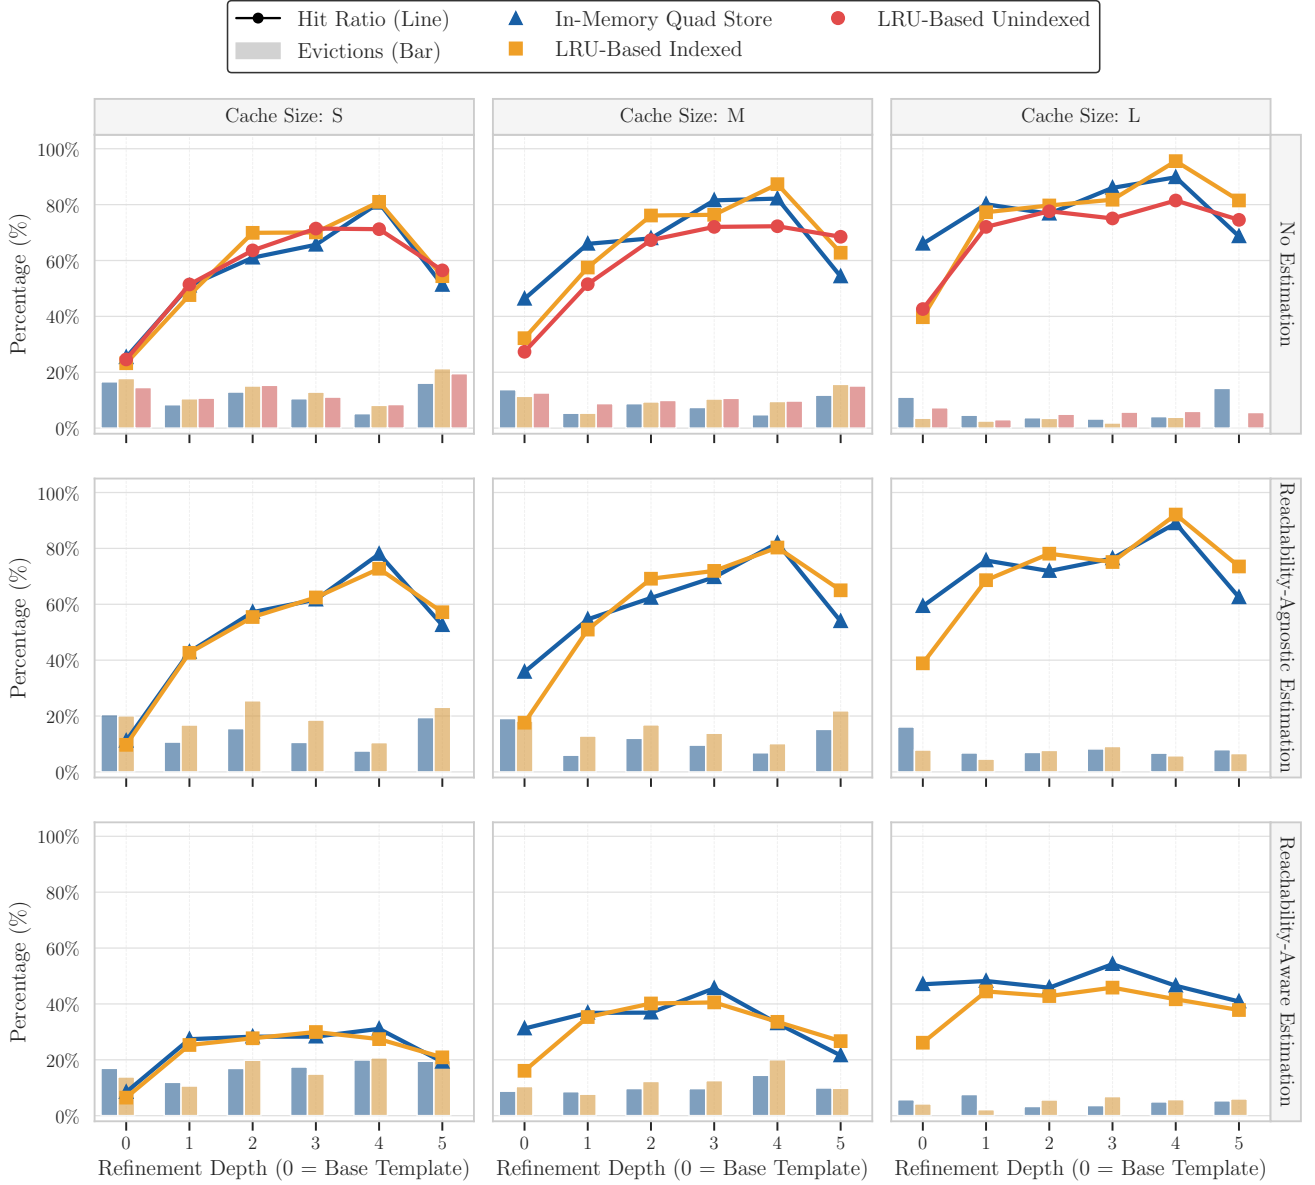


Figure 5: Cache hit ratio and eviction percentage across refinement depths (0 to 5). The grid separates configurations by cardinality estimation strategy (rows) and cache capacity (columns). Line plots denote the cache hit ratio, while the shaded background bars represent the percentage of cache capacity evicted during the sequence.

which are not accounted for when using theoretical hit rates.

{TODO: See about disk-base caching}

{TODO: Circle back to our general evaluation to see how the conclusions differ}

Random Query Sequences Another common benchmarking approach is to randomly order queries from an existing benchmark into a sequence [42, 11, 27, 41, 23]. Figures 9 and 8 show execution times and throughput for sequences created by randomly grouping default SolidBench.js queries. Without cardinality estimation, only the large cache improves over the baseline, while medium and small caches perform similarly or worse. With cardinality estimation (both reachability-agnostic and -aware), no cache reliably

outperforms the baseline, though the reachability-aware approach yields minor improvements when using the large cache. These results differ significantly from our benchmark, leading to different conclusions about the utility of caching. Because random query sequences ignore the literature on established application user behavior, they produce overly pessimistic estimates of caching performance in real-world scenarios.

{TODO: Disk-based is placeholder data which should be filled in when done}

Scope and Limitations We evaluate SolidSessionBench against microbenchmarks and random sequences, but explicitly exclude hand-crafted scenarios and simple distributions.

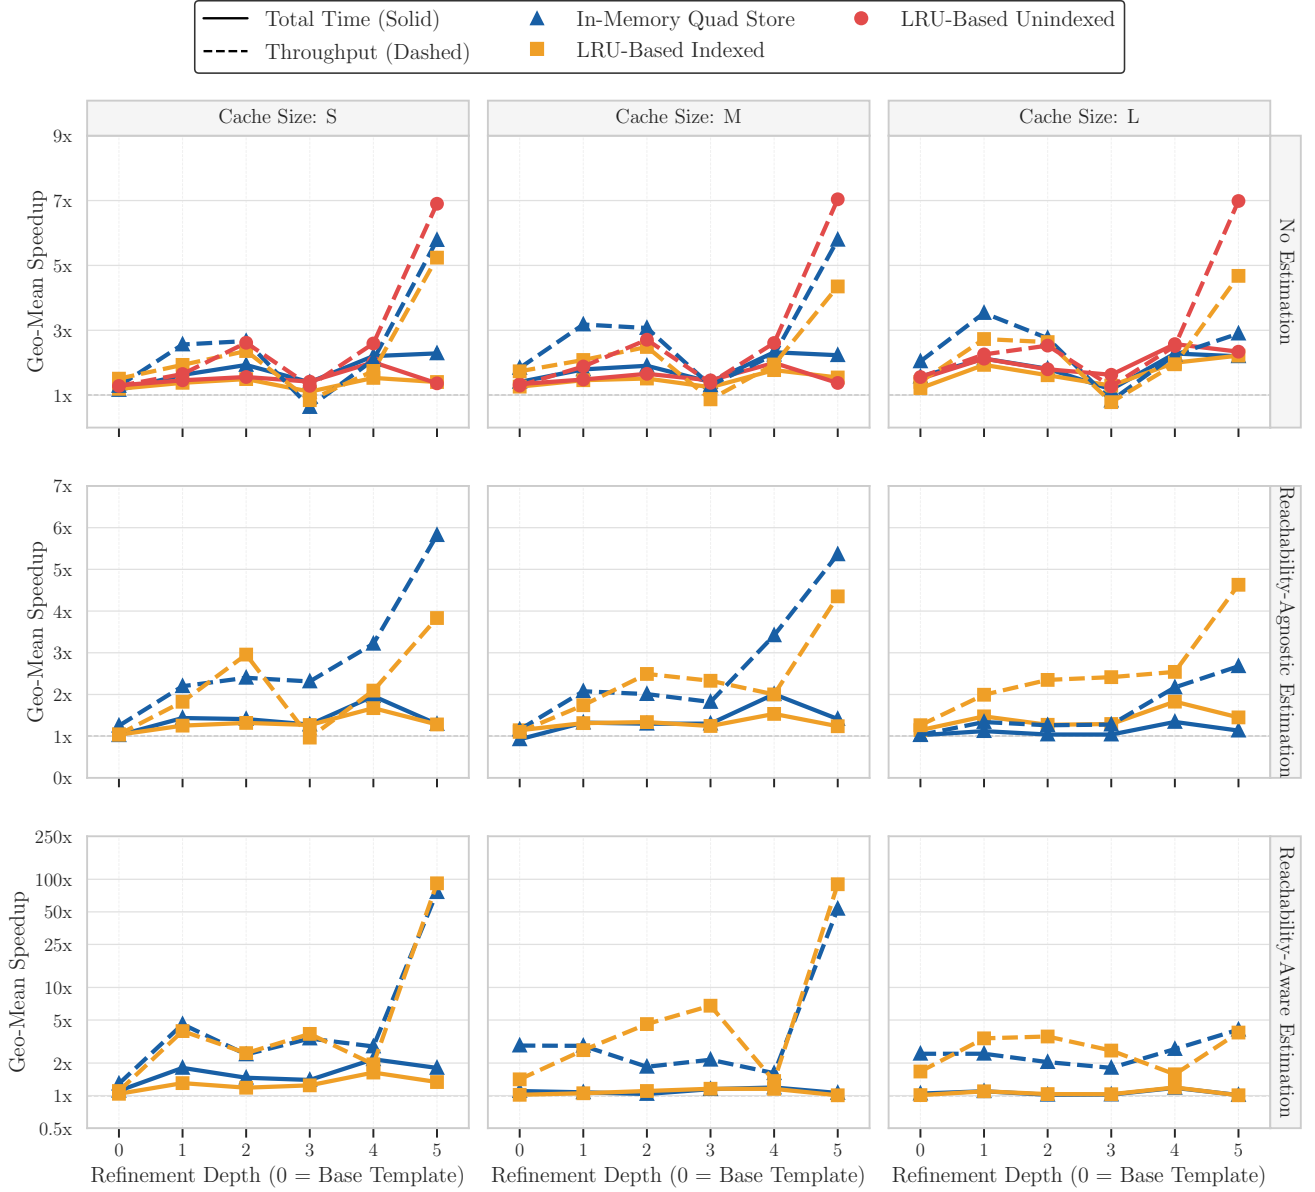


Figure 6: Geometric mean speedup of total execution time (solid lines) and query throughput (dashed lines) relative to the no-cache baseline. Results are faceted by cardinality estimation strategy (rows) and cache capacity (columns). The Reachability-Aware Estimation row utilizes a logarithmic y-axis to accommodate significant performance gains at higher refinement depths.

Hand-crafted methods lack scalability, while simple distributions fail to capture complex user habits. By automating logical sessions and user interests, our benchmark functions as a scalable superset of both approaches, making direct comparison redundant. By contrast, the compared methods do not incorporate these sequence attributes, and our results show this omission risks drawing inaccurate conclusions.

6. Conclusion

We introduced SolidSessionBench, an evidence-based benchmark for generating realistic query sequences in decentralized environments. By modeling logical sessions, user interests, and iterative refinement, it captures client-side

performance characteristics that traditional evaluation methods fail to find. While using Solid as the primary use case, the underlying concepts apply to approaches such as Linked Web Storage (LWS), and we will provide an LWS-specific representation once the W3C Working Group finalizes the specifications.

To ensure longevity, SolidSessionBench has been integrated into the core SolidBench ecosystem, inheriting its established track record of community support and maintenance. We formalize this in our sustainability plan <https://github.com/SolidBench/SolidBench.js/wiki/Sustainability-Plan>. Due to the seamless integration into SolidBench, its status as the standard community resource for evaluating decentralized query

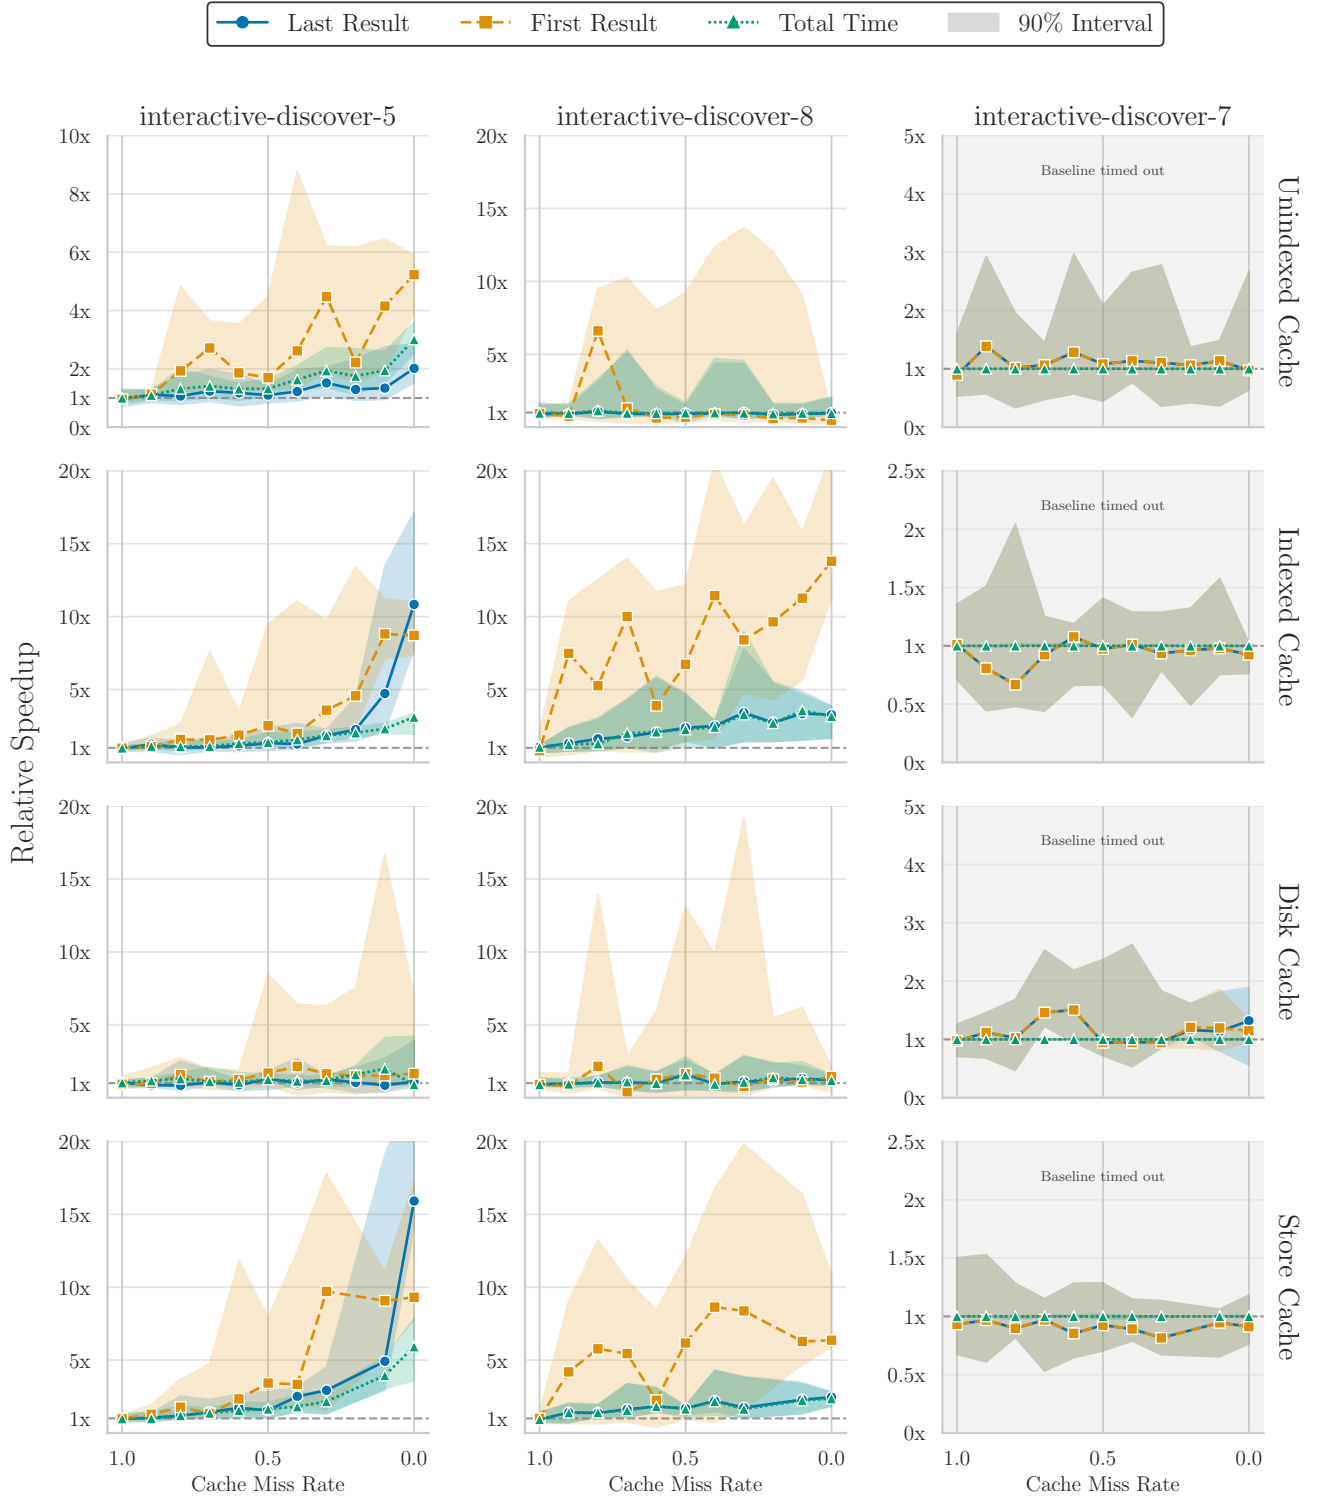


Figure 7: Performance of unindexed, LRU indexed, In-memory store, and Disk-based store caches across representative query templates. The y-axis shows the mean speedup relative to a baseline with a 0% hit rate. Shaded regions denote the 90th percentile {TODO: Placeholder disk figure}

execution [20, 62, 26, 60] serves as a proxy for the future adoption of this new benchmark when trying to evaluate any client-specific optimization approaches.

The framework is modular, MIT-licensed, and fully documented, with links to all code, data, and experiment setups available at this paper-specific hub: <https://github.com/RubenEschauzier/simulated-query-sequence-paper>. This

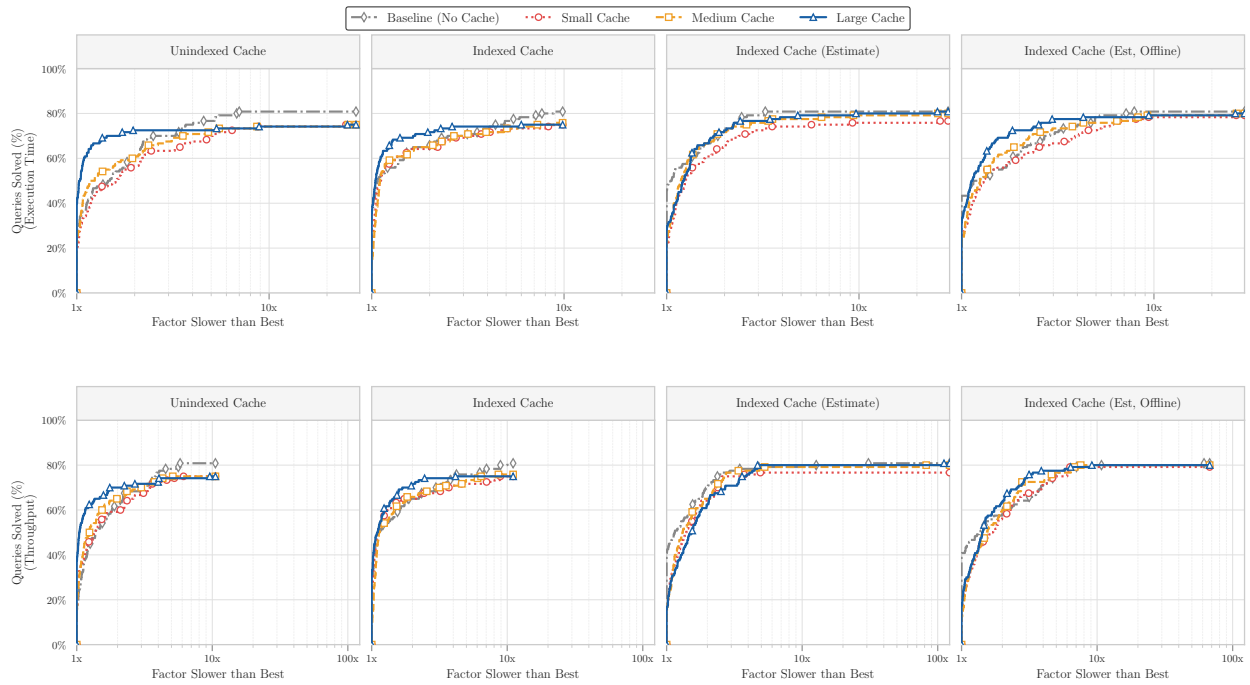


Figure 8: Performance profiles of the lru-based unindexed and indexed caches families of algorithms on random query sequences. The y-axis shows the percentage of queries executing within a factor (x-axis) of the fastest algorithm.

extension-friendly approach to development allows researchers to easily modify or extend specific components to meet future requirements without disrupting the broader evaluation pipeline.

CRedit authorship contribution statement

Ruben Eschauzier: TODO:. **Ruben Taelman:** TODO:.

References

- [1] Aluç, G., Hartig, O., Özsu, M.T., Daudjee, K., 2014. Diversified stress testing of rdf data management systems, in: International Semantic Web Conference, Springer. pp. 197–212.
- [2] Amblard, F., Bouadjo-Boulic, A., Gutiérrez, C.S., Gaudou, B., 2015. Which models are used in social simulation to generate social networks? a review of 17 years of publications in jasss, in: 2015 Winter Simulation Conference (WSC), IEEE. pp. 4021–4032.
- [3] Angles, R., Antal, J.B., Averbuch, A., Birler, A., Boncz, P., Búr, M., Erling, O., Gubichev, A., Haprian, V., Kaufmann, M., et al., 2020. The ldbc social network benchmark.
- [4] Angles, R., Boncz, P., Larriba-Pey, J., Fundulaki, I., Neumann, T., Erling, O., Neubauer, P., Martinez-Bazan, N., Kotsev, V., Toma, I., 2014. The linked data benchmark council: a graph and rdf industry benchmarking effort, ACM New York, NY, USA. pp. 27–31.
- [5] Arenas, M., Franconi, E., Hammerer, J., Hartig, O., Hose, K., Koesten, L., Konstantinidis, G., Libkin, L., Martens, W., Sasaki, Y., et al., 2025. Exploring exploratory querying. Proceedings of the VLDB Endowment 18, 5731–5739.
- [6] Arnold, B.C., 2014. Pareto distribution. Wiley StatsRef: Statistics Reference Online , 1–10.
- [7] Backstrom, L., Huttenlocher, D., Kleinberg, J., Lan, X., 2006. Group formation in large social networks: membership, growth, and evolution, in: Proceedings of the 12th ACM SIGKDD international conference on Knowledge discovery and data mining, pp. 44–54.
- [8] Bast, H., Buchhold, B., 2017. Qlever: A query engine for efficient sparql+ text search, in: Proceedings of the 2017 ACM on Conference on Information and Knowledge Management, pp. 647–656.
- [9] Berendt, B., Hollink, L., Luczak-Rösch, M., Möller, K., Vallet, D., 2013. Usewod2013 3rd international workshop on usage analysis and the web of data. 10th ESWC-Semantics and Big Data, Montpellier, France .
- [10] Berners-Lee, T., 2017. Charlie: An AI that works for you. W3C Design Issues. URL: <https://www.w3.org/DesignIssues/Charlie.html>. updated 2023.
- [11] Bizer, C., Schultz, A., 2011. The berlin sparql benchmark, in: Semantic Services, Interoperability and Web Applications: Emerging Concepts. IGI Global Scientific Publishing, pp. 81–103.
- [12] Boncz, P., Neumann, T., Erling, O., 2013. Tpc-h analyzed: Hidden messages and lessons learned from an influential benchmark, in: Technology Conference on Performance Evaluation and Benchmarking, Springer. pp. 61–76.
- [13] Bonifati, A., Martens, W., Timm, T., 2018. DARQL: Deep Analysis of SPARQL Queries, in: Companion Proceedings of the The Web Conference 2018, International World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE. pp. 187–190. URL: <https://dl.acm.org/doi/10.1145/3184558.3186975>, doi:10.1145/3184558.3186975.
- [14] Bonifati, A., Martens, W., Timm, T., 2020. An analytical study of large sparql query logs. The VLDB Journal 29, 655–679.
- [15] Bronson, N., Amsden, Z., Cabrera, G., Chakka, P., Dimov, P., Ding, H., Ferris, J., Giardullo, A., Kulkarni, S., Li, H., et al., 2013. {TAO}:{Facebook’s} distributed data store for the social graph, in: 2013 USENIX annual technical conference (USENIX ATC 13), pp. 49–60.
- [16] Chatzopoulos, S., Vergoulis, T., Skoutas, D., Dalamagas, T., Tryfonopoulos, C., Karras, P., 2022. Atrapos: Evaluating metapath query workloads in real time. CoRR .
- [17] Clark, A., 2007. Understanding community: A review of networks, ties and contacts .
- [18] Dang, M.H., Aimonier-Davat, J., Molli, P., Hartig, O., Skaf-Molli, H., Le Crom, Y., 2023. Fedshop: A benchmark for testing the

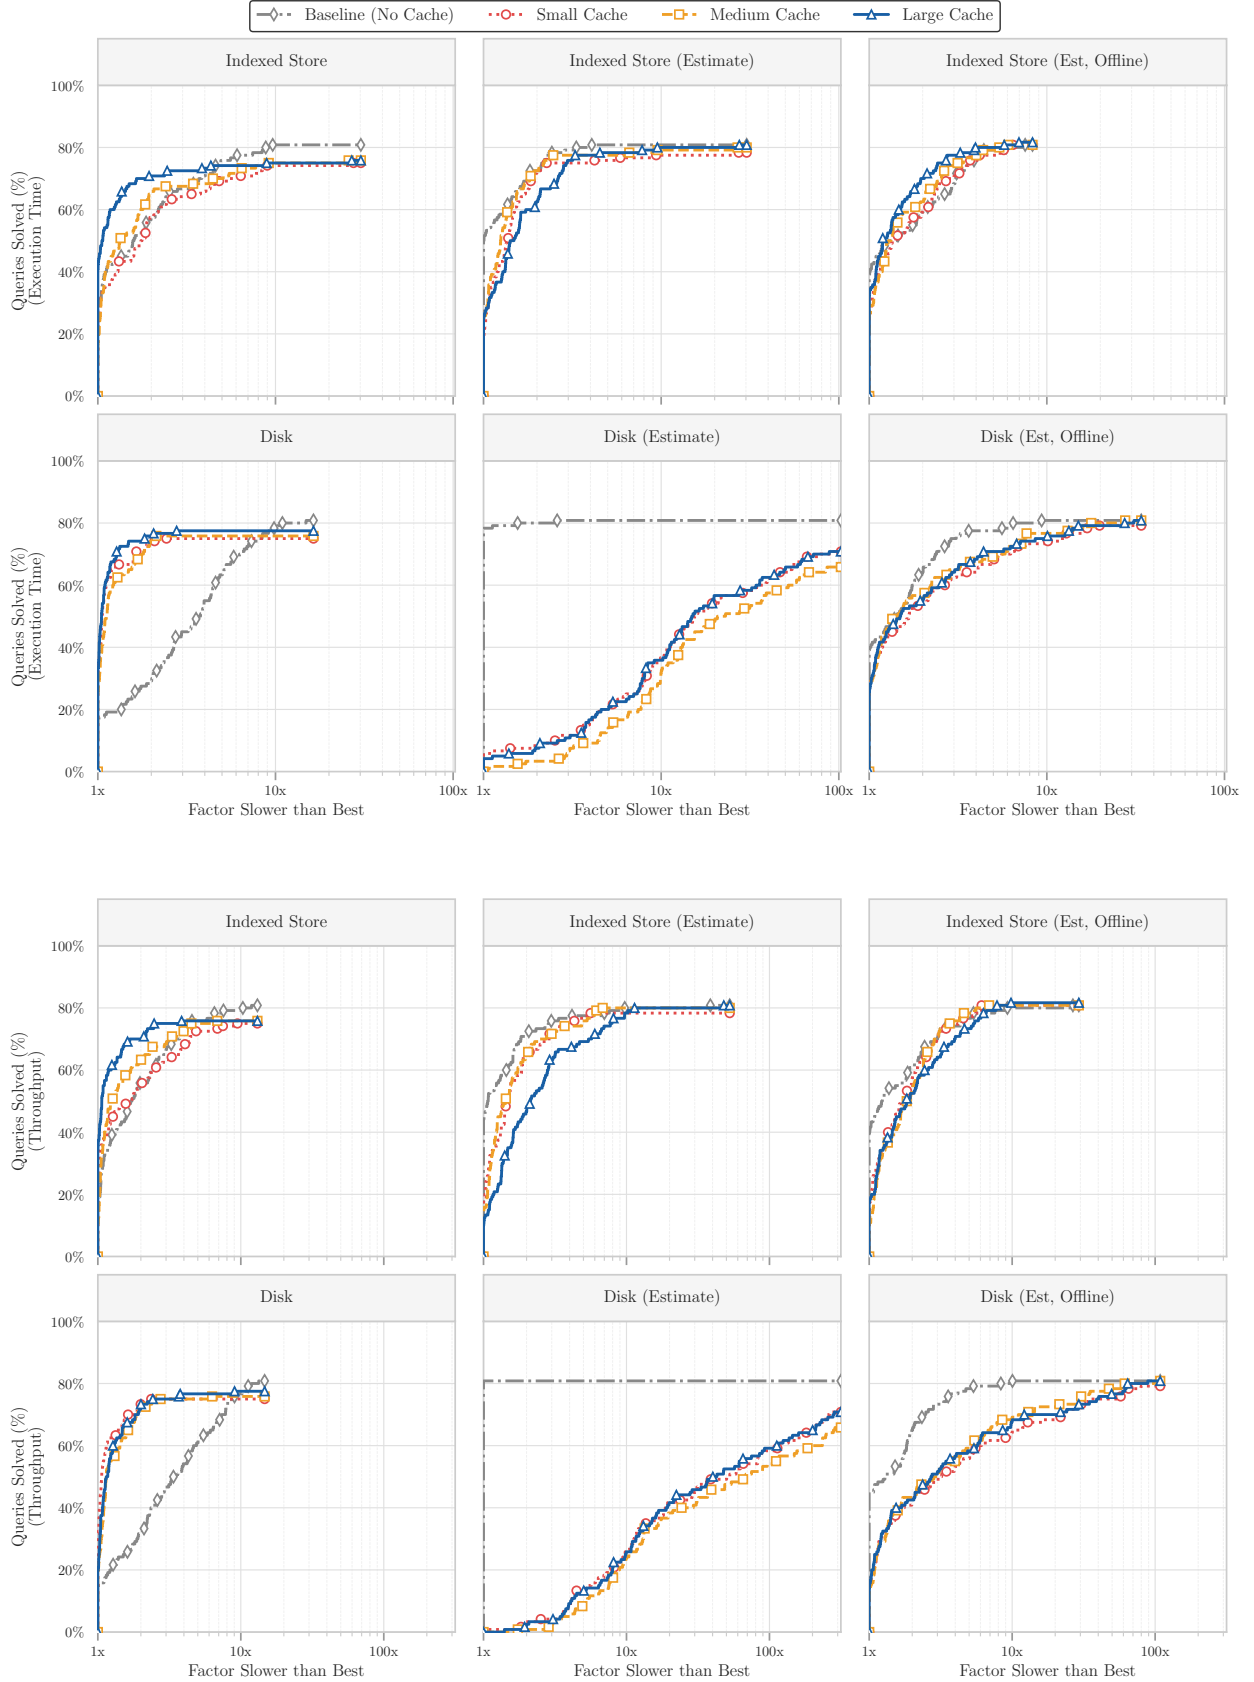


Figure 9: Performance profiles of the in-memory and disk-based quad store caches families of algorithms on random query sequences. The y-axis shows the percentage of queries executing within a factor (x-axis) of the fastest algorithm.

- scalability of sparql federation engines, in: International Semantic Web Conference, Springer. pp. 285–301.
- [19] Erling, O., Averbuch, A., Larriba-Pey, J., Chafi, H., Gubichev, A., Prat, A., Pham, M.D., Boncz, P., 2015. The ldbs social network benchmark: Interactive workload, in: Proceedings of the 2015 ACM SIGMOD International Conference on Management of Data, pp. 619–630.
 - [20] Eschauzier, R., Taelman, R., Verborgh, R., 2025. Revisiting link prioritization for efficient traversal in structured decentralized environments, in: International Semantic Web Conference, Springer. pp. 575–593.
 - [21] Esteves, B., Pandit, H.J., Rodríguez-Doncel, V., 2021. Odr profile for expressing consent through granular access control policies in solid, in: 2021 IEEE European Symposium on Security and Privacy Workshops (EuroS&PW), IEEE. pp. 298–306.
 - [22] Fielding, R., Nottingham, M., Reschke, J., 2022. Rfc 9111: Http caching.
 - [23] Folz, P., Skaf-Molli, H., Molli, P., 2016. Cyclades: a decentralized cache for triple pattern fragments, in: European semantic web conference, Springer. pp. 455–469.
 - [24] Hamill, L., Gilbert, G., 2009. Social circles: A simple structure for agent-based social network models. *Journal of Artificial Societies and Social Simulation* 12.
 - [25] Hanski, J., Taelman, R., Verborgh, R., 2024. Observations on bloom filters for traversal-based query execution over solid pods, in: European Semantic Web Conference, Springer. pp. 228–233.
 - [26] Hanski, J., Van Braeckel, S., Taelman, R., Verborgh, R., 2025. Link traversal over decentralised environments using restart-based query planning, in: International Conference on Web Engineering.
 - [27] Hartig, O., 2011a. How caching improves efficiency and result completeness for querying linked data., in: LDOW.
 - [28] Hartig, O., 2011b. Zero-knowledge query planning for an iterator implementation of link traversal based query execution, in: Extended Semantic Web Conference, Springer. pp. 154–169.
 - [29] Hartig, O., 2012. Sparql for a web of linked data: Semantics and computability, in: Extended Semantic Web Conference, Springer. pp. 8–23.
 - [30] Hartig, O., Bizer, C., Freytag, J.C., 2009. Executing sparql queries over the web of linked data, in: International semantic web conference, Springer. pp. 293–309.
 - [31] Hartig, O., Özsu, M.T., 2016. Walking without a map: Ranking-based traversal for querying linked data, in: International Semantic Web Conference, Springer. pp. 305–324.
 - [32] Heling, L., Acosta, M., 2022. Federated sparql query processing over heterogeneous linked data fragments, in: Proceedings of the ACM Web Conference 2022, pp. 1047–1057.
 - [33] Kalaitzakis, A., Papadakis, H., Fragopoulou, P., 2012. Evolution of user activity and community formation in an online social network, in: Proceedings of the 2012 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining, IEEE. pp. 1315–1320.
 - [34] Karki, N., Pandey, M., Tiwari, S., Mihindukulasooriya, N., Groppe, S., Dobriy, D., 2026. Agentic ai, context engineering and knowledge graphs: Current approaches, challenges and opportunities., in: EDBT/ICDT Workshops.
 - [35] Lorey, J., Naumann, F., 2013. Caching and prefetching strategies for sparql queries, in: Extended Semantic Web Conference, Springer. pp. 46–65.
 - [36] Malyshev, S., Krötzsch, M., González, L., Gonsior, J., Bielefeldt, A., 2018. Getting the most out of wikidata: Semantic technology usage in wikipedia's knowledge graph, in: The Semantic Web–ISWC 2018: 17th International Semantic Web Conference, Monterey, CA, USA, October 8–12, 2018, Proceedings, Part II 17, Springer. pp. 376–394.
 - [37] Martin, M., Unbehauen, J., Auer, S., 2010. Improving the performance of semantic web applications with sparql query caching, in: Extended Semantic Web Conference, Springer. pp. 304–318.
 - [38] Meiss, M., Duncan, J., Gonçalves, B., Ramasco, J.J., Menczer, F., 2009. What's in a session: tracking individual behavior on the web, in: Proceedings of the 20th ACM conference on Hypertext and hypermedia, ACM, Torino Italy. pp. 173–182. URL: <https://dl.acm.org/doi/10.1145/1557914.1557946>.
 - [39] Mislove, A., Marcon, M., Gummadi, K.P., Druschel, P., Bhattacharjee, B., 2007. Measurement and analysis of online social networks, in: Proceedings of the 7th ACM SIGCOMM conference on Internet measurement, pp. 29–42.
 - [40] Mitzlaff, F., Atzmueller, M., Benz, D., Hotho, A., Stumme, G., 2013. User-relatedness and community structure in social interaction networks. *arXiv preprint arXiv:1309.3888*.
 - [41] Nicholson, H., Chrysogelos, P., Ailamaki, A., 2024. Hpcache: memory-efficient olap through proportional caching revisited. *The VLDB Journal* 33, 1775–1791.
 - [42] O'Neil, P., O'Neil, E., Chen, X., Revilak, S., 2009. The star schema benchmark and augmented fact table indexing, in: Technology Conference on Performance Evaluation and Benchmarking, Springer. pp. 237–252.
 - [43] Padia, A., Finin, T., Joshi, A., et al., 2015. Attribute-based fine grained access control for triple stores, in: 3rd Society, Privacy and the Semantic Web-Policy and Technology workshop, 14th International Semantic Web Conference.
 - [44] Papailiou, N., Tsoumakos, D., Karras, P., Koziris, N., 2015. Graph-aware, workload-adaptive sparql query caching, in: Proceedings of the 2015 ACM SIGMOD International Conference on Management of Data, pp. 1777–1792.
 - [45] Picalausa, F., Vansummeren, S., 2011. What are real SPARQL queries like?, in: Proceedings of the International Workshop on Semantic Web Information Management, Association for Computing Machinery, New York, NY, USA. pp. 1–6. URL: <https://dl.acm.org/doi/10.1145/1999299.1999306>, doi:10.1145/1999299.1999306.
 - [46] Prat-Pérez, A., Dominguez-Sal, D., 2014. How community-like is the structure of synthetically generated graphs?, in: Proceedings of Workshop on GRAPh Data management Experiences and Systems, pp. 1–9.
 - [47] Raman, A., Joglekar, S., Cristofaro, E.D., Sastry, N., Tyson, G., 2019. Challenges in the decentralised web: The mastodon case, in: Proceedings of the internet measurement conference, pp. 217–229.
 - [48] Sadagopan, N., Li, J., 2008. Characterizing typical and atypical user sessions in clickstreams, in: Proceedings of the 17th international conference on World Wide Web, pp. 885–894.
 - [49] Saleem, M., Ali, M.I., Hogan, A., Mehmood, Q., Ngomo, A.C.N., 2015. Lsq: the linked sparql queries dataset, in: International semantic web conference, Springer. pp. 261–269.
 - [50] Saleem, M., Hasnain, A., Ngomo, A.C.N., 2018. Largerdfbench: A billion triples benchmark for sparql endpoint federation. *Journal of Web Semantics* 48, 85–125.
 - [51] Samba, A.V., Mansour, E., Hawke, S., Zereba, M., Greco, N., Ghanem, A., Zagidulin, D., Aboulhaga, A., Berners-Lee, T., 2016. Solid: a platform for decentralized social applications based on linked data. MIT CSAIL & Qatar Computing Research Institute, Tech. Rep. 2016.
 - [52] Schmidt, M., Görlitz, O., Haase, P., Ladwig, G., Schwarte, A., Tran, T., 2011. Fedbench: A benchmark suite for federated semantic data query processing, in: The Semantic Web–ISWC 2011: 10th International Semantic Web Conference, Bonn, Germany, October 23–27, 2011, Proceedings, Part I 10, Springer. pp. 585–600.
 - [53] Schneider, F., Feldmann, A., Krishnamurthy, B., Willinger, W., 2009. Understanding online social network usage from a network perspective, in: Proceedings of the 9th ACM SIGCOMM Conference on Internet Measurement, pp. 35–48.
 - [54] Schwarte, A., Haase, P., Hose, K., Schenkel, R., Schmidt, M., 2011. Fedx: Optimization techniques for federated query processing on linked data, in: The Semantic Web–ISWC 2011: 10th International Semantic Web Conference, Bonn, Germany, October 23–27, 2011, Proceedings, Part I 10, Springer. pp. 601–616.
 - [55] Stadler, C., Saleem, M., Mehmood, Q., Buil-Aranda, C., Dumontier, M., Hogan, A., Ngonga Ngomo, A.C., 2024. Lsq 2.0: A linked dataset of sparql query logs. *Semantic Web* 15, 167–189.

- [56] Taelman, R., 2024. Towards applications on the decentralized web using hypermedia-driven query engines. ACM SIGWEB Newsletter URL: https://www.rubensworks.net/raw/publications/2024/towards_query_engines_decentralized_hypermedia.pdf.
- [57] Taelman, R., Van Herwegen, J., Vander Sande, M., Verborgh, R., 2018. Comunica: a modular sparql query engine for the web, in: International Semantic Web Conference, Springer. pp. 239–255.
- [58] Taelman, R., Verborgh, R., 2023a. Evaluation of link traversal query execution over decentralized environments with structural assumptions.
- [59] Taelman, R., Verborgh, R., 2023b. Link traversal query processing over decentralized environments with structural assumptions, in: International Semantic Web Conference, Springer. pp. 3–22.
- [60] Tam, B.E., Taelman, R., Colpaert, P., Verborgh, R., 2024. Opportunities for shape-based optimization of link traversal queries. arXiv preprint arXiv:2407.00998 .
- [61] Umbrich, J., Hose, K., Karnstedt, M., Harth, A., Polleres, A., 2011. Comparing data summaries for processing live queries over linked data. World Wide Web 14, 495–544.
- [62] Vandenbrande, M., Taelman, R., Bonte, P., Ongenaes, F., 2025. Incremental: Web-based incremental view maintenance for sparql, in: European Semantic Web Conference, Springer. pp. 297–315.
- [63] Vögele, C., van Hoorn, A., Schulz, E., Hasselbring, W., Krcmar, H., 2018. Wessbas: extraction of probabilistic workload specifications for load testing and performance prediction—a model-driven approach for session-based application systems. Software & Systems Modeling 17, 443–477.
- [64] Walter, S., Bast, H., 2025. Grasp: Generic reasoning and sparql generation across knowledge graphs, in: International Semantic Web Conference, Springer. pp. 271–289.
- [65] Williams, G.T., Weaver, J., 2011. Enabling fine-grained http caching of sparql query results, in: International Semantic Web Conference, Springer. pp. 762–777.
- [66] Zhang, W.E., Sheng, Q.Z., Qin, Y., Yao, L., Shemshadi, A., Taylor, K., 2016. Secf: improving sparql querying performance with proactive fetching and caching, in: Proceedings of the 31st Annual ACM Symposium on Applied Computing, pp. 362–367.
- [67] Zhang, X., Wang, M., Zhao, B., Liu, R., Zhang, J., Yang, H., 2020. Characterizing robotic and organic query in sparql search sessions, in: Web and Big Data: 4th International Joint Conference, APWeb-WAIM 2020, Tianjin, China, September 18-20, 2020, Proceedings, Part I 4, Springer. pp. 270–285.