

# MOSAIC: Data-Certified Stochastic Release under Structured Deployment Shift

Rudra Chopra

Independent Researcher

Contra Costa County, California, USA

Code and artifacts: <https://github.com/RudraChopra/mosaic-certified-release/tree/mosaic-aaai2027-v4>

## Abstract

Concept-erasure evaluations rarely certify the public interface that remains after an edit. We present MOSAIC, a software-only release method that either selects a task-specific stochastic channel and decoder or abstains. One simultaneous confidence region over pre-release token laws covers every channel optimized from that table. Labeled target bridge data then certify the portion of population shift explained by one common Markov transform, while the unexplained portion is charged to channel capacity. We prove finite-sample envelopes for the Bayes source attacker within each task label and for worst-stratum task error, global solvability for finite alphabets, and sharp abstention boundaries for unrestricted shift and missing target support. In 1,000 hash-locked safety trials, naive continuum selection deploys contract-violating releases on 42.1% of tables; MOSAIC records none. Across 100 registered jobs on five real benchmarks, unconditional deployment violates 38/80 estimable external diagnostics, validation-only selection violates 18/60, and a bridge plug-in violates 7/47. Under the primary contract, MOSAIC releases 20 interfaces with 0/20 observed diagnostic violations. Every certificate, decision, and population-risk check is retained for independent replay.

## 1 Introduction

Representation editing is commonly evaluated by fitting a probe to a frozen embedding (Ravfogel et al. 2020, 2022; Belrose et al. 2023; Jourdan et al. 2023; Avitan, Goldberg, and Elazar 2026), although probe design can change the apparent conclusion (Pimentel et al. 2020). This leaves two deployment gaps: a different downstream rule may recover the attribute, and an edit selected on a noisy validation table may fail after population shift. Both matter when the released token is a public interface.

We study a task-specific finite-token interface. A tokenizer fixed without the certification fold maps an internal representation to  $C \in [K]$ ; a source-blind stochastic channel  $M \in \text{Stoch}(K, L)$  releases the only public token  $Z$ . Within each task label, the contract bounds the balanced accuracy of the Bayes-optimal source attacker rather than a chosen probe. This isolates conditional source signal from label prevalence. Pre-release shift is a common Markov trans-

form plus bounded source-specific contamination, permitting large source-blind drift while charging the part that can create new source differences.

MOSAIC, Minimax-Optimized Source-Agnostic Invariant Channels, builds an exact attacker envelope from simultaneous multinomial confidence regions. Because the event precedes  $M$ , it covers every stochastic channel, including one optimized on the same table. A bridge LP uses labeled target data to learn a common transform and the largest certifiable retained mass; exact transform-and-contamination envelopes then certify source distinguishability and a jointly selected decoder. Finite-alphabet optimization is global, and MOSAIC returns `ABSTAIN` when no feasible release exists.

MOSAIC turns these pieces into one deployment procedure: it certifies the whole post-channel family from a pre-channel table, tests the registered shift class with target bridge data, and jointly optimizes privacy and utility. This differs from finite-candidate risk control because its confidence event lies upstream of the channel search. Hash-locked experiments compare plug-in and held-out selection, LTT, deterministic release, shift-unaware certification, official erasers, and an exact population oracle.

## 2 Related Work

**Erasure and universal representations.** Concept-erasure methods remove source-associated directions, covariance, or components (Ravfogel et al. 2020, 2022; Belrose et al. 2023; Jourdan et al. 2023; Avitan, Goldberg, and Elazar 2026); interventions and leakage audits explain why a weak probe is not a universal certificate (Elazar et al. 2021; Chowdhury et al. 2025). FARE certifies every downstream classifier for restricted finite encoders, while Fair Normalizing Flows bounds strong adversaries through tractable densities (Jovanovic et al. 2023; Balunović, Ruoss, and Vechev 2022). MOSAIC instead places its confidence event on pre-release token laws, uniformly covering a stochastic post-channel optimized on that table and transferred through an explicit shift class.

**Randomized mappings and risk control.** Probabilistic preprocessing and fair representation already show the value of stochastic channels (Calmon et al. 2017; Makhdoumi et al. 2014; Agarwal and Deshpande 2024). Risk-controlling prediction, Learn-Then-Test (LTT), conformal risk control, and

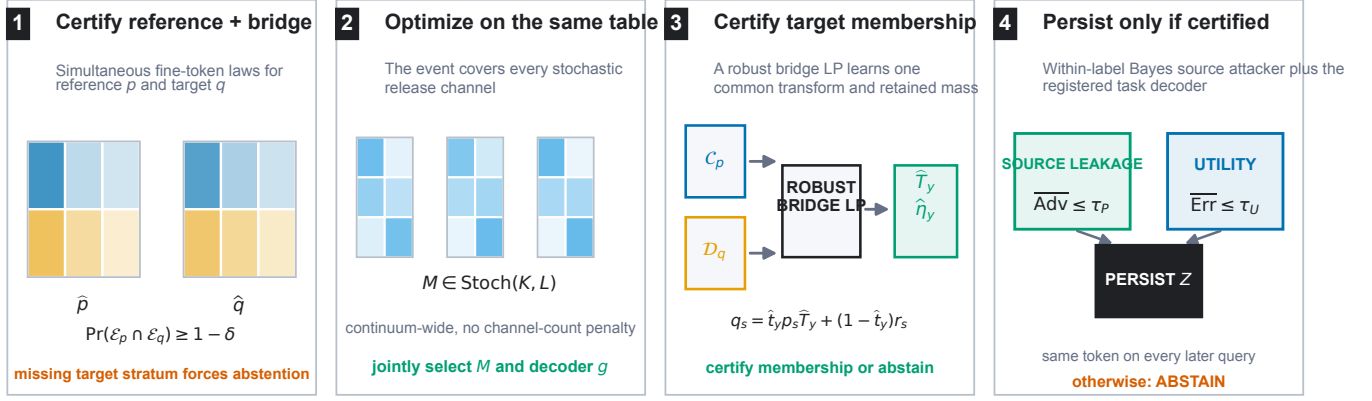


Figure 1: MOSAIC jointly certifies reference and labeled target-bridge token laws, optimizes a continuum of source-blind stochastic channels on that event, and uses a robust bridge LP to certify target membership. The runtime samples one persistent token only when within-label source distinguishability and registered task utility pass; otherwise it abstains. The primary contract is within-label source distinguishability.

Pareto testing certify registered decisions and may abstain (Bates et al. 2021; Angelopoulos et al. 2025, 2024; Laufer-Goldshtein et al. 2023). Robust variants address specified covariate or uncertainty shifts (Tibshirani et al. 2019; Cauchois et al. 2024). These are the closest decision-layer precedents. MOSAIC instead covers an uncountable channel family through one confidence region for its sufficient table, without testing channels separately.

**Shift, comparison of experiments, and abstention.** Dobrushin coefficients quantify channel contraction (Diaz, Sankar, and Kairouz 2018); fairness and domain-adaptation impossibility results show why unrestricted shift precludes universal guarantees (Lechner et al. 2021; Agarwal et al. 2025; Ben-David et al. 2010). WILDS and subgroup-robustness benchmarks document the practical problem (Koh et al. 2021; Sagawa et al. 2020; Zhou et al. 2021; Sohoni et al. 2020). Bounded-shift fairness transfer and distributional fairness certification give complementary predictor-level robust bounds (Chen et al. 2022; Kang et al. 2022). Common source-blind transformation is Blackwell garbling, while Le Cam deficiency handles approximate experiment comparison (Blackwell 1953; Le Cam 1964; Torgersen 1991); arbitrary residuals follow contamination neighborhoods (Huber 1964). Testable learning asks when target data can validate a shift assumption; recent work studies rejection granularity and tests registered noise models (Klivans, Stavropoulos, and Vasilyan 2024; Chandrasekaran et al. 2025; Patel et al. 2026; Goel et al. 2026). MOSAIC contributes a finite-confidence garbling-and-contamination bridge that composes with the same-table optimizer. Its contract-driven abstention is distinct from predictive-confidence rejection (El-Yaniv and Wiener 2010; Geifman and El-Yaniv 2017).

### 3 Problem Setup

Let  $S \in [G]$  denote source,  $Y \in [J]$  task label, and  $C \in [K]$  the fine token. For a fixed label, write  $p_{s,y}(c) = \Pr(C = c \mid S = s, Y = y)$ . The source-blind release channel  $M$

produces  $Z \in [L]$ . The balanced accuracy of the strongest downstream source attacker within label  $y$  is

$$A_y(P, M) = \frac{1}{G} \sum_{z=1}^L \max_{s \in [G]} (p_{s,y} M)(z), \quad (1)$$

with normalized advantage  $\text{Adv}_G(A) = (GA - 1)/(G - 1)$ . This is chance-normalized and ranges from zero to one. The registered source contract is  $\max_y \text{Adv}_G(A_y) \leq \tau_P$ .

The main contract concerns source inference within a task label. A joint-law extension covers natural-mixture source inference: define  $X = (Y, C)$ , estimate  $P(X \mid S)$  without balancing labels, and lift the channel as  $\tilde{M}((y, c), z) = M(c, z)$ . The same envelope then certifies inference from  $Z$ ; using output  $(Y, Z)$  covers an attacker given the true label as well.

For each supported source-label stratum, the certification table supplies an empirical law  $\hat{p}_{s,y}$  and radius  $\epsilon_{s,y}$ . The simultaneous confidence set is  $\mathcal{C}_{s,y} = \{p \in \Delta_K : \|p - \hat{p}_{s,y}\|_1 \leq \epsilon_{s,y}\}$ . Under conditionally i.i.d. categorical sampling within each registered source-label stratum, the simultaneous event

$$\mathcal{E} = \bigcap_{s,y} \{\|\hat{p}_{s,y} - p_{s,y}\|_1 \leq \epsilon_{s,y}\} \quad (2)$$

has probability at least  $1 - \delta$  after a fixed allocation across strata. We use the Weissman multinomial radius (Weissman et al. 2003) in the confirmation, although any valid simultaneous region can replace it. The tokenizer and fine alphabet must be fixed without these observations.

The external law for label  $y$  belongs to the structured class

$$q_s = t_y p_s T_y + (1 - t_y) r_s, \quad t_y \geq 1 - \eta_y, \quad (3)$$

where  $T_y$  is a source-independent fine-token channel from a registered convex uncertainty set and each residual  $r_s$  is arbitrary. Both components pass through the same release channel  $M$ . This placement matters: a constant-row software channel cannot leak information that appears before it.

| Method                                                           | Finite $Z$ | Bayes attacker | Same-table $M$ | Target shift  | Shift evidence |
|------------------------------------------------------------------|------------|----------------|----------------|---------------|----------------|
| FARE (Jovanovic et al. 2023)                                     | yes        | yes            | no             | no            | no             |
| Randomized fair reps. (Agarwal and Deshpande 2024)               | yes        | yes            | population     | no            | no             |
| LTT / risk control (Angelopoulos et al. 2025; Bates et al. 2021) | general    | candidate      | finite family  | optional      | model-specific |
| Blackwell / deficiency (Blackwell 1953; Le Cam 1964)             | experiment | all decisions  | no             | population    | assumed        |
| Robust validation (Cauchois et al. 2024)                         | no         | no             | no             | declared ball | estimated      |
| Testable shift (Klivans, Stavropoulos, and Vasilyan 2024)        | no         | no             | hypothesis     | yes           | tested         |
| MOSAIC                                                           | yes        | exact          | yes            | pre-release   | finite-sample  |

Table 1: Component-level scope of the closest frameworks. “Same-table continuum” means that one confidence event remains valid after optimizing an uncountable stochastic-channel family on that table. The MOSAIC row combines upstream same-table coverage, an exact attacker envelope, and target-shift evidence in one release rule.

## 4 Adaptive Within-Label Attacker Certificate

For a bounded vector  $v$ , define the exact confidence-set support function

$$\Phi(\hat{p}, \epsilon; v) = \max_{p \in \Delta_K : \|p - \hat{p}\|_1 \leq \epsilon} p^\top v. \quad (4)$$

It is obtained by moving at most  $\epsilon/2$  mass from low to high coordinates of  $v$ , or from an equivalent linear-program dual. For attacker assignment  $a \in [G]^L$ , let  $v_{M,a,s}(c) = \sum_z M(c, z) \mathbf{1}\{a(z) = s\}$ . We then define

$$\bar{A}(\hat{P}, M) = \frac{1}{G} \max_{a \in [G]^L} \sum_s \Phi(\hat{p}_s, \epsilon_s; v_{M,a,s}). \quad (5)$$

**Theorem 1** (Adaptive exact envelope). *On  $\mathcal{E}$ , simultaneously for every row-stochastic  $M$ , including a channel selected as an arbitrary function of the same table,  $A(P, M) \leq \bar{A}(\hat{P}, M)$ . For fixed  $M$ , the right-hand side is the exact supremum over the product of the stated  $\ell_1$  confidence sets.*

The proof writes the Bayes attacker as a maximum over deterministic assignments. For a fixed assignment the source confidence sets separate, giving one support function per source; all maxima are finite and commute. The implication is pointwise over the complete stochastic-channel space, which is why adaptive selection needs no channel-count correction.

## 5 Data-Certified Shift Membership

MOSAIC certifies structured-shift membership from labeled target bridge data. Let a labeled bridge sample from the target population define simultaneous confidence sets  $\mathcal{D}_{s,y}$  for its fine-token laws  $q_{s,y}$ . Write

$$h_{s,y}(w) = \max_{p \in \mathcal{C}_{s,y}} p^\top w, \quad \underline{q}_{s,y}(z) = \min_{q \in \mathcal{D}_{s,y}} q(z). \quad (6)$$

For each label, the bridge program chooses retained mass  $t$  and  $W = tT$  by solving

$$\begin{aligned} \max_{t, W} \quad & t \\ \text{s.t.} \quad & W \geq 0, \quad W\mathbf{1} = t\mathbf{1}, \quad 0 \leq t \leq 1, \\ & h_{s,y}(W{:}z) \leq \underline{q}_{s,y}(z) \quad \forall s, z. \end{aligned} \quad (7)$$

The support functions and coordinate lower bounds have exact LP duals, so Eq. (7) is one linear program rather than a transform search.

**Theorem 2** (Adaptive finite-sample bridge). *Suppose the reference and bridge confidence sets jointly cover every  $p_{s,y}$  and  $q_{s,y}$ . Any feasible  $(\hat{t}, \hat{W})$  with  $\hat{t} > 0$ , including the same-table maximizer, defines  $\hat{T} = \hat{W}/\hat{t}$  and residual laws satisfying*

$$q_{s,y} = \hat{t} p_{s,y} \hat{T} + (1 - \hat{t}) r_{s,y} \quad \forall s. \quad (8)$$

*Moreover, Eq. (7) returns the largest retained mass certified uniformly over the product confidence region.*

Indeed, feasibility and coverage imply  $q_{s,y}(z) \geq p_{s,y}^\top \hat{W}{:}z$  coordinatewise. The difference is nonnegative and sums to  $1 - \hat{t}$ , so normalization constructs  $r_{s,y}$ . Conversely, robust membership requires exactly these coordinatewise inequalities; maximizing the reference support and minimizing the bridge coordinate yields Eq. (7). Thus the learned singleton transform  $\{\hat{T}_y\}$  and contamination  $\hat{\eta}_y = 1 - \hat{t}_y$  can be inserted into the certificates below on the same event. If a required bridge source–label stratum is absent, its confidence set is the full simplex, every coordinate lower bound is zero, and Eq. (7) forces  $\hat{t} = 0$ .

## 6 Certification under Pre-Release Shift

We use three names consistently: the *data-certified bridge* tests shift membership, the *transform-exact certificate* enumerates the learned shift geometry, and the *capacity fallback* upper-bounds it when that geometry cannot be enumerated.

Define the arbitrary differential-shift capacity

$$\text{Cap}_G(M) = \frac{1}{G} \max_{a \in [G]^L} \sum_s \max_c v_{M,a,s}(c). \quad (9)$$

This equals  $\sup_{r_1, \dots, r_G} A(R, M)$ . For  $G = 2$ , its normalized value is the Dobrushin coefficient, the largest total variation distance between two rows of  $M$ .

For a transform polytope with registered extremes  $\mathcal{V}_y = \text{ext}(\mathcal{T}_y)$ , define the shifted envelope

$$\begin{aligned} \bar{A}_y^X(M) = \frac{1}{G} \max_{T \in \mathcal{V}_y, a \in [G]^L} \sum_s \Big[ & \\ (1 - \eta_y) \Phi(\hat{p}_{s,y}, \epsilon_{s,y}; T v_{M,a,s}) & \\ + \eta_y \max_c v_{M,a,s}(c) \Big]. \end{aligned} \quad (10)$$

**Theorem 3** (Transform-exact structured-shift certificate). *On  $\mathcal{E}$ , every same-table selected  $M$  and every external law*

in Eq. (3) satisfy  $A_y(Q, M) \leq \bar{A}_y^X(M)$ . For fixed  $M$ , the right-hand side is the exact supremum over the stated confidence sets, transform polytope, retained masses, and arbitrary residual laws.

For fixed  $T$ , retained mass, and attacker assignment, the source confidence sets and residual simplexes separate. Their support values are respectively  $\Phi(\hat{p}, \epsilon; Tv)$  and  $\max_c v(c)$ . The latter is no smaller, so the worst retained mass is  $1 - \eta_y$ . The support objective is convex in  $T$ ; its maximum over a polytope occurs at an extreme. These finite maxima commute, proving exactness. Since the statement holds pointwise for every  $M$ , it survives adaptive channel selection.

When transform extremes cannot be enumerated, a capacity-fallback corollary is available. Define  $\rho_T(M) = \max_c \text{TV}((TM)(c, \cdot), M(c, \cdot))$  and  $B_y(M) = \min\{\text{Cap}_G(M), \bar{A}_y(\hat{P}, M) + \rho_{T_y}(M)\}$ . Then

$$A(Q, M) \leq (1 - \eta_y)B_y(M) + \eta_y \text{Cap}_G(M). \quad (11)$$

The exact envelope in Eq. (10) is never larger. When  $\eta_y = 0$  and  $TM = M$ , both reduce to the reference certificate; when  $\eta_y = 1$ , both reduce to exact distribution-free capacity.

Because the fallback separately upper-bounds every law in the same structured class, both transform-exact source and utility values are pointwise no larger than their fallback values. “Never worse” is therefore an implementation check implied by the theorem; experiments measure how often tightness changes the release decision. Proofs are in the supplement.

For decoder  $g : [L] \rightarrow [J]$ , let  $u_y(c) = \sum_z M(c, z) \mathbf{1}\{g(z) \neq y\}$ . The matching exact conditional error certificate is

$$\bar{E}_{s,y}^X(M, g) = \max_{T \in \mathcal{V}_y} \left[ (1 - \eta_y) \Phi(\hat{p}_{s,y}, \epsilon_{s,y}; Tu_y) + \eta_y \max_c u_y(c) \right]. \quad (12)$$

It is the exact supremum over the same confidence and shift sets. Thus  $M$ ,  $g$ , within-label source distinguishability, and worst-stratum utility can all be selected on one event.

**Theorem 4** (No free lunch).  $\text{Cap}_G(M) = 1/G$  if and only if all rows of  $M$  are identical. For two sources, if two fine tokens carry different task labels and incur row-wise decoder errors at most  $e_0$  and  $e_1$ , then the normalized capacity is at least  $1 - e_0 - e_1$ .

Consequently, unrestricted source-specific shift permits exact erasure only by making the public token independent of the fine token. A bounded  $\eta_y$  is therefore an identifiable assumption of the deployment contract, not a hidden technical convenience.

There is a separate identifiability boundary for external auditing. Suppose a required source is absent and let  $A_{\text{miss}}(q_0, M) = \sup_{q_1 \in \Delta_K} A((q_0, q_1), M)$ .

**Theorem 5** (Missing-source audit). For a release channel  $M$  fixed independently of the missing-source law and audit randomness, any protocol with false-certification probability at most  $\delta$  uniformly over the unobserved law  $q_1$  can claim  $A((q_0, q_1), M) \leq \tau < A_{\text{miss}}(q_0, M)$  with probability at most  $\delta$ .

The observed audit distribution is identical for every missing law; choosing a simplex maximizer makes every stronger claim a false certification. The same argument makes the utility bound for a missing source-label stratum at least  $\max_c (M\ell_y)(c)$ . Missing required strata are therefore unestimable, not evidence of safety; the supplement gives the full proof.

## 7 Global Optimization and Abstention

For fixed decoder, support functions, transformed scores, and residual maxima have linear epigraphs. Enforcing all transform extremes and  $G^L$  attacker assignments gives one LP in the  $KL$  channel entries; enumerating  $J^L$  decoders yields the global finite-alphabet optimum. The capacity fallback uses one mixed-integer LP per decoder. Acceptance requires solver optimality, valid primal residuals, and agreement with separately recomputed certificates.

**Release protocol.** Fix tokenizers, alphabets, thresholds, split roles, and confidence allocation before viewing certification or bridge folds. Construct simultaneous regions, solve Eq. (7), and enumerate decoder LPs subject to every source constraint. Replay each returned certificate, then select the feasible registered tokenizer with minimum certified error under a fixed tie break. Zero retained mass, missing support, no feasible row, or a failed numerical check returns ABSTAIN; otherwise only  $(M, g)$  and  $Z$  are released.

With  $R = \max_y |\mathcal{V}_y|$ , the direct formulation is polynomial in  $K$  for fixed  $(G, J, L, R)$  but exponential in the deliberately small  $L$  through attacker and decoder enumeration. Larger public alphabets require separation or column generation. Endpoint enumeration, population identities, dense channel grids, and randomized exact-versus-fallback comparisons check the encoding; the supplement gives complexity and power-curve details.

## 8 Hash-Locked Evaluation

**Synthetic confirmation.** Before outcomes, we SHA-256 locked the protocol, code, evaluators, seed exclusions, gates, and theory curve. Two source-label populations, two shift regimes, eight rules, and up to five sample sizes use 1,000 independent tables per cell and familywise  $\delta = .05$ . A separate population evaluator grades every selected channel, and replay scripts reconstruct every decision, risk, interval, and optimizer check. The primary contrasts test unsafe plug-in selection and safe retention against held-out certification, LTT, and deterministic release; every registered cell remains reportable.

**Real bridge confirmation.** We registered 100 fresh jobs: 20 untouched seeds on each of Waterbirds, Camelyon17-WILDS, CivilComments-WILDS, BiasBios-Clinical, and GaitPDB, spanning vision, medical vision, text, and time series. Each job evaluates 13 frozen feature edits from the official INLP, LEACE, R-LACE, TaCo, and MANCE++ implementations; proxies are forbidden. Construction data alone fit a balanced task score and its four-bin tokenizer. Separate reference observations certify the pre-shift table, while the natural external split is divided within each supported

source–label stratum into two-thirds labeled bridge data and an untouched one-third diagnostic fold. Neither diagnostics nor their outcomes enter channel or candidate selection.

Target  $S$  and  $Y$  labels supply the conditional token laws  $q_{s,y}$  used by the bridge and the within-label contract. Task-only retraining serves a different objective: it improves a target predictor without constructing these source-conditional laws. Where  $S$  is sensitive, collection, consent, and permitted audit use are part of the deployment protocol; unsupported strata trigger abstention.

The familywise level is .05 over 13 candidate tables and both reference and bridge regions. The source-advantage contract is .35; worst-stratum utility thresholds are .30, .35, .40, .45, and .49, with .40 primary. We globally optimize  $L = 2$ , then reoptimize  $L = 4$  only for the best covered  $L = 2$  candidate. A strict replay accepts no decision tolerance and an exact-rational audit checks every serialized bridge slack and outward risk bound. The reported strict-v2 outputs use a disclosed structural-zero repair, and the archive retains the original and first-replay artifacts. Locked comparators use the same candidates and folds: capacity transfer, a bridge plug-in without intervals, a validation plug-in that ignores the bridge, and unconditional deployment of the best validation plug-in. All datasets, thresholds, abstentions, and missing-support outcomes remain reportable.

**Fresh geographic-shift confirmation.** We separately lock five fresh ACSIncome California-to-Texas jobs from Folktables (Ding et al. 2021). Income above \$50,000 is the task; binary sex is the audit source and is excluded from the released feature matrix. California supplies the eraser-train and reference folds, while Texas supplies balanced bridge and untouched diagnostic folds with 2,000 observations per source–label stratum. The full 13-candidate official frontier, strict-v2 replay, and independent replay audit are all locked before the five seeds run.

**Bridge validity stress.** A separate 12,000-table confirmation varies the bridge sample size from 500 to 5,000 per source–label stratum. One population obeys a common transform; two violate the registered model through either source-specific transforms or contamination above the declared budget. Acceptance requires a finite-sample retained-mass lower bound of at least .80. This study tests whether valid membership gains power with data while the two registered violations remain rejected.

## 9 Audited Results

The preregistered synthetic gates pass. Figure 2 reports every implementable rule in the primary cells; “capacity fallback” is MOSAIC’s generic capacity certificate. Independent replay recomputes all 64,000 method receipts, 128,000 population risks, decisions, and aggregate intervals with zero mismatch.

The paired safety difference is 42.1 points (95% bootstrap interval [39.0, 45.2]), with 421 plug-in-only violations and no reverse discordance. Across 8,000 capacity-fallback certification tables, no accepted release violates the exact population contract. In the retention cell, capacity-fallback

safe deployment exceeds held-out, finite-LTT, and deterministic rates by 53.8, 53.0, and 56.3 points. No deterministic channel is feasible. These finite-run facts align with the  $1 - \delta$  guarantee.

A separately locked 5,000-table refinement evaluates exact shift geometry on the same tables. At  $n = 125$ , transform-exact certification safely deploys on 53.0% versus 0.3% for fallback; at  $n = 250$ , the rates are 99.9% and 57.8%. The exact objective is no larger on all 5,000 pairs, as theory requires, and all 10,000 method-cell decisions have zero false acceptances. Full cell tables, threshold sensitivity, amendment history, and audits are in the supplement.

**Matched finite-family baselines.** A separately locked replay places four rules on the same 1,000 tables in each primary scenario. In the retention cell, continuum MOSAIC certifies 579/1,000 deployments (57.9%, exact 95% interval [54.77, 60.98]), versus 283/1,000 (28.3%, [25.53, 31.20]) for Holm LTT over all 500 fixed channel–decoder pairs. MOSAIC alone deploys on 312 paired tables, LTT alone on 16, and both on 267, a 29.6-point paired difference. The exact McNemar value is  $2.28 \times 10^{-72}$ ; it is reported as a descriptive paired statistic. The confidence-region grid and matched deterministic restricted-encoder adaptation both abstain throughout this cell. All four rules have zero observed false acceptance. The deterministic row tests FARE’s finite-encoder principle under MOSAIC’s shift contract, not FARE’s official end-to-end training objective.

**Bridge validity and power.** Across a separate 12,000-table locked stress study, a correctly specified common transform is accepted on 0%, 31%, 100%, and 100% of tables as the bridge stratum size rises through 500, 1,000, 2,000, and 5,000. Underdeclared contamination has population retained mass  $.775 < .80$ ; a source-specific transform has minimum retained mass .50. Both violating populations are rejected on every table at every sample size. Independent replay finds no failure on the joint confidence event and no invalid false acceptance. The study establishes power against both registered bridge violations and shows the acceptance transition as bridge support grows.

**Real data-certified bridge.** At the primary error contract .40, strict MOSAIC deploys on 20/100 jobs (20.0%, exact 95% interval [12.67, 29.18]), all externally estimable, with 0/20 observed violations (one-sided 95% upper bound 13.91%). The selected official edits comprise six INLP, five LEACE, and nine MANCE++ candidates. Capacity transfer deploys none. The bridge plug-in deploys 47 and violates 7/47 estimable diagnostics (14.9%); validation-only selection deploys 80, including 20 unestimable Camelyon jobs, and violates 18/60 estimable diagnostics (30.0%). Unconditional deployment violates 38/80 estimable jobs (47.5%) and also releases all 20 unestimable jobs. MOSAIC retains 20 safe deployments at every stronger threshold .30–.45 and adds three safe Waterbirds deployments at .49; the supplement enumerates every threshold. These untouched diagnostics show the practical effect of each selection rule alongside the finite-sample bridge guarantee.

The primary releases concentrate on BiasBios-Clinical,

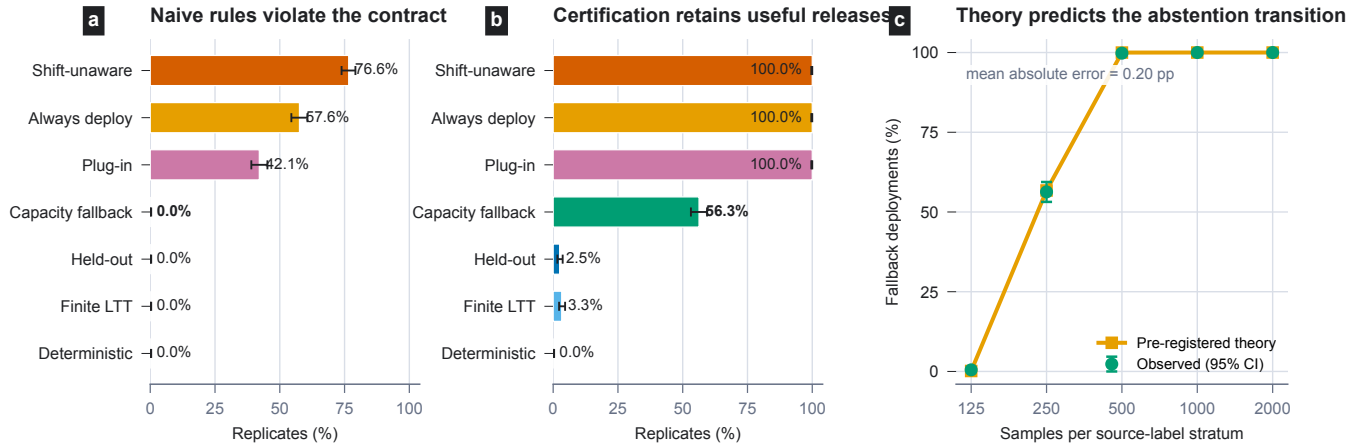


Figure 2: Hash-locked confirmation with 1,000 independent certification tables per cell. Error bars are exact 95% Clopper–Pearson intervals. (a) At the safety boundary, plug-in continuum selection falsely accepts 42.1% of tables; MOSAIC abstains with no false acceptance. Ignoring shift is worse. (b) In the retention cell, the capacity fallback safely deploys on 56.3%, versus 2.5% for held-out certification, 3.3% for finite LTT, and 0% for deterministic MOSAIC. (c) Deployment follows the preregistered theory curve with 0.20 percentage-point mean absolute error. Exact 95% Clopper–Pearson intervals are shown.

| Dataset             | Strict | Bridge | Validation | Unconditional | Strict diagnostic | Bridge status        |
|---------------------|--------|--------|------------|---------------|-------------------|----------------------|
| BiasBios-Clinical   | 20/0   | 20/0   | 20/0       | 20/0          | 20 estimable      | median $t = .797$    |
| Camelyon17-WILDS    | 0/0    | 0/0    | 20/–       | 20/–          | none              | missing support      |
| CivilComments-WILDS | 0/0    | 0/0    | 0/0        | 20/20         | none              | no joint feasibility |
| GaitPDB             | 0/0    | 7/7    | 20/18      | 20/18         | none              | missing support      |
| Waterbirds          | 0/0    | 20/0   | 20/0       | 20/0          | none              | no joint feasibility |

Table 2: Dataset-grouped primary results, 20 seeds per benchmark. Entries are deployments/diagnostic violations among estimable deployments; “–” marks a diagnostic with missing source support. The 20 strict MOSAIC deployments occur on BiasBios-Clinical.

where the bridge has strong support and certified median retained mass is .797. The other four benchmarks map the operational boundary of the method: missing source support produces a required abstention, while insufficient joint privacy–utility feasibility produces a contract-based abstention. Waterbirds illustrates the difference between an observed diagnostic and a certificate: its bridge plug-in releases all 20 jobs, whereas the strict procedure declines to release because the joint contract is not certified. The 100 jobs are repeated partitions of five benchmark populations, so results are reported by dataset as well as in aggregate.

**What the real ablations remove.** The primary rows form a diagnostic ladder rather than unrelated baselines. Capacity transfer keeps simultaneous regions but replaces the learned shift geometry by a worst-case channel-capacity charge; its 0/100 deployments versus MOSAIC’s 20/100 show that the exact bridge is decision-relevant. The bridge plug-in retains target data and the fitted transform but removes confidence regions, gaining 27 deployments at the cost of seven observed violations. Validation-only selection removes the target-membership gate, adding 60 deployments but producing 18 estimable violations and 20 unsupported releases. Unconditional deployment additionally removes contract-based abstention and produces 38 violations. Thus intervals, bridge membership, exact geometry, and abstention each change a

measured deployment outcome.

**Direct target-table comparator.** An audited comparator applies the same simultaneous envelope directly to the labeled target bridge table, without making a bridge transport claim. It deploys 36/100 jobs and records 0/36 diagnostic violations. Strict MOSAIC deploys 20/100, with the same 0/20 observed diagnostic violations, while certifying the larger bridge-admitted shift class. The supplement places these rules alongside target-stratum support, diagnostic interface utility, and the registered contract frontier.

**Numerical verification and fresh confirmations.** The main table uses the strict-v2 arithmetic: deterministic replay matches all 100 receipts, and exact-rational checks verify 1,300 bridge certificates and 1,400 outward release bounds. The archive also preserves the earlier raw and strict-v1 outputs, together with the scoped structural-zero repair that produced v2. A new pre-outcome confirmation on seeds 1220–1224 repeats the corrected pipeline, with 325 candidate and 350 global-optimization replays. It releases all five BiasBios jobs with no diagnostic violation and abstains on the other benchmark jobs at the primary contract. A second pre-outcome confirmation uses the Folktables ACSIncome task (Ding et al. 2021) to transfer from California to Texas. Its strict replay covers 65 official-candidate rows and 70 global

optimizations. At the registered .45 sensitivity contract, it releases all five jobs (three R-LACE and two identity interfaces), and all five untouched Texas diagnostics meet the contract; the stricter .40 primary contract abstains on the same five jobs.

**Alphabet sensitivity.** Reoptimizing the best covered candidate with four release tokens is no worse than its two-token solution on all 100 jobs within the registered  $10^{-7}$  solver criterion (largest serialized difference  $1.07 \times 10^{-8}$ ), but is strictly better on only five. The real result therefore comes mainly from certifying shift geometry, not from hiding utility in a larger alphabet. It also reinforces the intended scope: MOSAIC is a compact task-specific release interface, not a generally reusable edited embedding.

## 10 Discussion

**Beyond finite candidate testing.** LTT and Pareto testing control risk after registering a finite family. MOSAIC certifies the categorical experiment before release: on one covered table, every  $M$  and  $g$  inherit the same pointwise envelope. The optimizer can then search a continuum without turning internal search points into hypotheses. Tokenizers and erasers are registered statistical objects with their own familywise allocation. The matched 500-pair replay shows the practical result: a structure-aware Holm implementation leaves power on the table when the full channel space is downstream of one confidence event.

**Bridge and deployment rule.** The bridge measures how much of each target source law is explained by one common transformation of its reference law. Equation (7) ranges over every source-blind  $K \times K$  Markov transform and returns the largest jointly supported retained mass  $t_y$ ; the residual  $1 - t_y$  receives the adversarial capacity charge. More bridge data tightens this fit. The protocol registers source and task strata, tokenizer, target population, confidence allocation, and decision thresholds before optimization. A different target population, source definition, or tokenizer defines a new bridge. This gives a clear distinction from target retraining: retraining can improve a target predictor, while MOSAIC certifies a persistent source-blind token interface.

**Operational use.** MOSAIC is designed for stable software decision interfaces where a channel, a decoder, and a persistence rule can be versioned together. The runtime emits the token when the contract passes and otherwise returns ABSTAIN. The released interface is compact and task-specific, which makes its complete source-inference experiment enumerable and auditable.

## 11 Guarantee Semantics

The probability  $1 - \delta$  is over simultaneous reference and bridge regions. On that event, the conclusion is uniform over optimized channels and every law in the certified shift class. The frozen tokenizer table covers the channel continuum and every decoder without a channel-count correction. Separately learned tokenizers or erasers receive their own registered familywise allocation: MOSAIC pays for statistical objects, not every point searched inside one covered object.

**Threat surface.** The attacker knows  $M$  and may apply any rule to  $Z$ . The source-blind software channel is the only public token interface and samples once per immutable item; persistent repeats reveal no more than one  $Z$ . If  $r$  fresh draws are permitted, certification must use product channel  $M^{\otimes r}$ ; unbounded draws can reveal its row. Transcripts over distinct items require a joint-law certificate. Releasing  $C$ , original features, source-dependent metadata, mutable identifiers, or another side channel is outside scope.

## 12 Deployment Envelope

MOSAIC operates with conditionally i.i.d. reference and target bridge samples that include source and task labels for every required stratum. Source labels are audit data and belong in the associated governance plan. The method releases a compact, task-specific interface; larger alphabets can use structured confidence regions or column generation. The certificate covers within-label source inference from one persistent released token. Multi-item transcripts, prevalence-sensitive analyses, and additional public interfaces use the corresponding joint construction.

## 13 Conclusion

MOSAIC treats editing as release design. A pre-channel confidence event permits continuum optimization; a target bridge separates common drift from differential contamination. Impossibility results identify required abstention, while locked experiments show unsafe refusals and safe retention under certified shift geometry.

## References

- Agarwal, S.; and Deshpande, A. 2024. On the Power of Randomization in Fair Classification and Representation. arXiv:2406.03142.
- Agarwal, S.; Deshpande, A.; Rajaraman, R.; and Sundaram, R. 2025. Optimal Fair Learning Robust to Adversarial Distribution Shift. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, 513–530.
- Angelopoulos, A. N.; Bates, S.; Candes, E. J.; Jordan, M. I.; and Lei, L. 2025. Learn then Test: Calibrating Predictive Algorithms to Achieve Risk Control. *The Annals of Applied Statistics*.
- Angelopoulos, A. N.; Bates, S.; Fisch, A.; Lei, L.; and Schuster, T. 2024. Conformal Risk Control. In *International Conference on Learning Representations*.
- Avitan, M.; Goldberg, Y.; and Elazar, Y. 2026. MANCE: Manifold Aware Concept Erasure. arXiv:2607.03973.
- Balunović, M.; Ruoss, A.; and Vechev, M. 2022. Fair Normalizing Flows. In *International Conference on Learning Representations*.
- Bates, S.; Angelopoulos, A.; Lei, L.; Malik, J.; and Jordan, M. 2021. Distribution-Free, Risk-Controlling Prediction Sets. *Journal of the ACM*.



- Belrose, N.; Schneider-Joseph, D.; Ravfogel, S.; Cotterell, R.; Raff, E.; and Biderman, S. 2023. LEACE: Perfect Linear Concept Erasure in Closed Form. *Advances in Neural Information Processing Systems*.
- Ben-David, S.; Lu, T.; Luu, T.; and Pal, D. 2010. Impossibility Theorems for Domain Adaptation. In *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*.
- Blackwell, D. 1953. Equivalent Comparisons of Experiments. *The Annals of Mathematical Statistics*, 24(2): 265–272.
- Calmon, F. P.; Wei, D.; Vinzamuri, B.; Ramamurthy, K. N.; and Varshney, K. R. 2017. Optimized Pre-Processing for Discrimination Prevention. In *Advances in Neural Information Processing Systems*, volume 30.
- Cauchois, M.; Gupta, S.; Ali, A.; and Duchi, J. C. 2024. Robust Validation: Confident Predictions Even When Distributions Shift. *Journal of the American Statistical Association*.
- Chandrasekaran, G.; Klivans, A. R.; Lee, L. L.; and Stavropoulos, K. 2025. Learning Neural Networks with Distribution Shift: Efficiently Certifiable Guarantees. In *International Conference on Learning Representations*.
- Chen, Y.; Raab, R.; Wang, J.; and Liu, Y. 2022. Fairness Transferability Subject to Bounded Distribution Shift. In *Advances in Neural Information Processing Systems*, volume 35.
- Chowdhury, S. B. R.; Dubey, K. A.; Beirami, A.; Kidambi, R.; Monath, N.; Ahmed, A.; and Chaturvedi, S. 2025. Fundamental Limits of Perfect Concept Erasure. In *International Conference on Artificial Intelligence and Statistics*.
- Diaz, M.; Sankar, L.; and Kairouz, P. 2018. On the Contractivity of Privacy Mechanisms. arXiv:1801.06255.
- Ding, F.; Hardt, M.; Miller, J.; and Schmidt, L. 2021. Retiring Adult: New Datasets for Fair Machine Learning. In *Advances in Neural Information Processing Systems Datasets and Benchmarks Track*.
- El-Yaniv, R.; and Wiener, Y. 2010. On the Foundations of Noise-free Selective Classification. *Journal of Machine Learning Research*.
- Elazar, Y.; Ravfogel, S.; Jacovi, A.; and Goldberg, Y. 2021. Amnesic Probing: Behavioral Explanation with Amnesic Counterfactuals. *Transactions of the Association for Computational Linguistics*.
- Geifman, Y.; and El-Yaniv, R. 2017. Selective Classification for Deep Neural Networks. *Advances in Neural Information Processing Systems*.
- Goel, S.; Klivans, A.; Stavropoulos, K.; and Vasilyan, A. 2026. Testing Noise Assumptions of Learning Algorithms. In *Proceedings of the 39th Conference on Learning Theory*, volume 336 of *Proceedings of Machine Learning Research*, 2804–2853.
- Huber, P. J. 1964. Robust Estimation of a Location Parameter. *The Annals of Mathematical Statistics*, 35(1): 73–101.
- Jourdan, F.; Bethune, L.; Picard, A.; Risser, L.; and Asher, N. 2023. TaCo: Targeted Concept Erasure Prevents Non-Linear Classifiers From Detecting Protected Attributes. arXiv:2312.06499.
- Jovanovic, N.; Balunovic, M.; Dimitrov, D. I.; and Vechev, M. 2023. FARE: Provably Fair Representation Learning with Practical Certificates. In *International Conference on Machine Learning*.
- Kang, M.; Li, L.; Weber, M.; Liu, Y.; Zhang, C.; and Li, B. 2022. Certifying Some Distributional Fairness with Subpopulation Decomposition. *Advances in Neural Information Processing Systems*.
- Klivans, A.; Stavropoulos, K.; and Vasilyan, A. 2024. Testable Learning with Distribution Shift. In *Proceedings of the 37th Conference on Learning Theory*, volume 247 of *Proceedings of Machine Learning Research*, 2887–2943.
- Koh, P. W.; Sagawa, S.; Marklund, H.; Xie, S. M.; Zhang, M.; Balsubramani, A.; Hu, W.; Yasunaga, M.; Phillips, R. L.; Gao, I.; Lee, T.; David, E.; Stavness, I.; Guo, W.; Earnshaw, B.; Haque, I.; Beery, S.; Leskovec, J.; Kundaje, A.; Pierson, E.; Levine, S.; Finn, C.; and Liang, P. 2021. WILDS: A Benchmark of in-the-Wild Distribution Shifts. In *International Conference on Machine Learning*.
- Laufer-Goldshtein, B.; Fisch, A.; Barzilay, R.; and Jaakkola, T. 2023. Efficiently Controlling Multiple Risks with Pareto Testing. In *International Conference on Learning Representations*.
- Le Cam, L. 1964. Sufficiency and Approximate Sufficiency. *The Annals of Mathematical Statistics*, 35(4): 1419–1455.
- Lechner, T.; Ben-David, S.; Agarwal, S.; and Ananthakrishnan, N. 2021. Impossibility Results for Fair Representations. arXiv:2107.03483.
- Makhdoumi, A.; Salamatian, S.; Fawaz, N.; and Medard, M. 2014. From the Information Bottleneck to the Privacy Funnel. arXiv:1402.1774.
- Patel, S.; Klivans, A.; Stavropoulos, K.; and Vasilyan, A. 2026. Equivalence of Coarse and Fine-Grained Models for Learning with Distribution Shift. In *Proceedings of the 39th Conference on Learning Theory*, volume 336 of *Proceedings of Machine Learning Research*, 4022–4049.
- Pimentel, T.; Valvoda, J.; Maudslay, R. H.; Zmigrod, R.; Williams, A.; and Cotterell, R. 2020. Information-Theoretic Probing for Linguistic Structure. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*.
- Ravfogel, S.; Elazar, Y.; Gonen, H.; Twiton, M.; and Goldberg, Y. 2020. Null It Out: Guarding Protected Attributes by Iterative Nullspace Projection. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*.
- Ravfogel, S.; Twiton, M.; Goldberg, Y.; and Cotterell, R. D. 2022. Linear Adversarial Concept Erasure. In *International Conference on Machine Learning*.
- Sagawa, S.; Koh, P. W.; Hashimoto, T. B.; and Liang, P. 2020. Distributionally Robust Neural Networks for Group Shifts: On the Importance of Regularization for Worst-Case Generalization. In *International Conference on Learning Representations*.
- Sohoni, N.; Dunnmon, J.; Angus, G.; Gu, A.; and Re, C. 2020. No Subclass Left Behind: Fine-Grained Robustness in



Coarse-Grained Classification Problems. *Advances in Neural Information Processing Systems*.

Tibshirani, R. J.; Foygel Barber, R.; Candes, E.; and Ramdas, A. 2019. Conformal Prediction Under Covariate Shift. *Advances in Neural Information Processing Systems*.

Torgersen, E. 1991. *Comparison of Statistical Experiments*, volume 36 of *Encyclopedia of Mathematics and its Applications*. Cambridge University Press.

Weissman, T.; Ordentlich, E.; Seroussi, G.; Verdu, S.; and Weinberger, M. J. 2003. Inequalities for the L1 Deviation of the Empirical Distribution. Technical Report HPL-2003-97R1, Hewlett-Packard Laboratories.

Zhou, C.; Ma, X.; Michel, P.; and Neubig, G. 2021. Examining and Combating Spurious Features under Distribution Shift. In *International Conference on Machine Learning*.