


Practical-2

AIM: Study about OSI model network Layers.

The **OSI (Open Systems Interconnection)** Model is a set of rules that explains how different computer systems communicate over a network. OSI Model was developed by the **International Organization for Standardization (ISO)**. The OSI Model consists of 7 layers and each layer has specific functions and responsibilities.

This layered approach makes it easier for different devices and technologies to work together. OSI Model provides a clear structure for data transmission and managing network issues. The OSI Model is widely used as a reference to understand how network systems function.

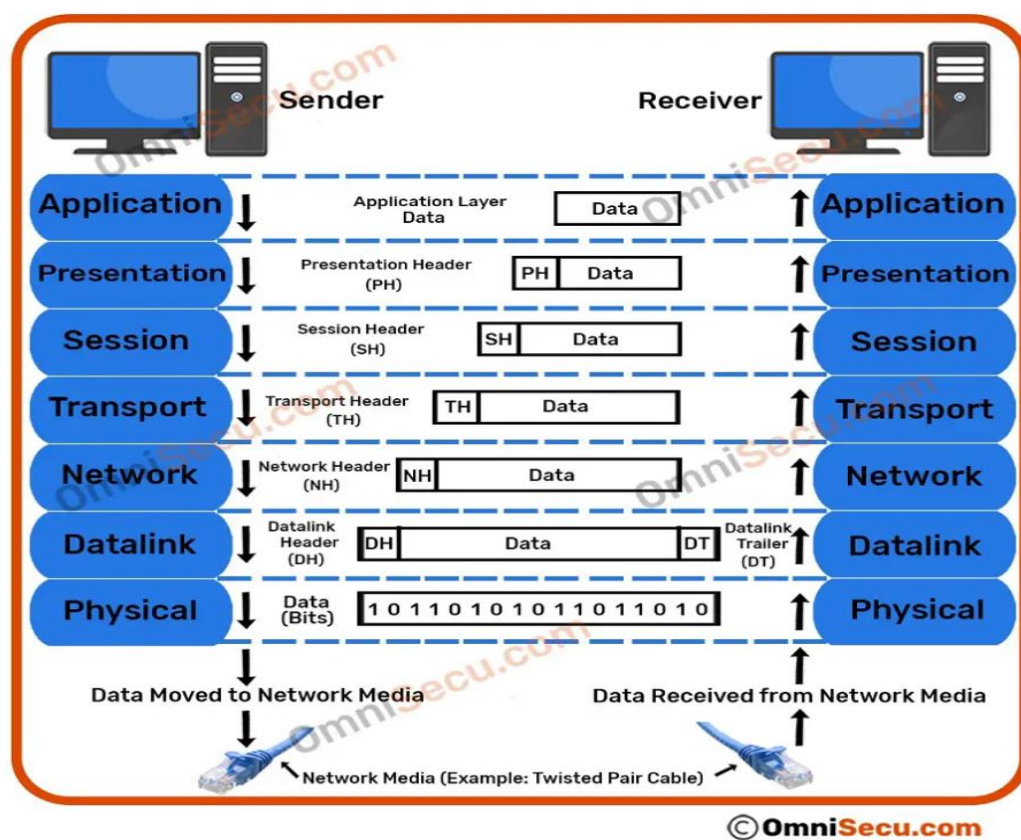

Layer 1 – Physical Layer

The lowest layer of the OSI reference model is the **Physical Layer**. It is responsible for the actual physical connection between the devices. The physical layer contains information in the form of **bits**. Physical Layer is responsible for transmitting individual bits from one node to the next. When receiving data, this layer will get the signal received and convert it into 0s and 1s.

and send them to the Data Link layer, which will put the frame back together. Common physical layer devices are [Hub](#), [Repeater](#), [Modem](#), and [Cables](#).



Physical Layer

Functions of the Physical Layer

- **Bit Synchronization:** The physical layer provides the synchronization of the bits by providing a clock. This clock controls both sender and receiver thus providing synchronization at the bit level.
- **Bit Rate Control:** The Physical layer also defines the transmission rate i.e. the number of bits sent per second.
- **Physical Topologies:** Physical layer specifies how the different, devices/nodes are arranged in a network i.e. bus topology , star topology , or mesh topology .
- **Transmission Mode:** Physical layer also defines how the data flows between the two connected devices. The various transmission modes possible are Simplex, half-duplex and full-duplex .

Layer 2 – Data Link Layer (DLL)

The data link layer is responsible for the node-to-node delivery of the message. The main function of this layer is to make sure data transfer is error-free from one node to another, over the physical layer. When a packet arrives in a network, it is the responsibility of the DLL to transmit it to the Host using its [MAC address](#). Packet in the Data Link layer is referred to as **Frame**. [Switches and Bridges](#) are common Data Link Layer devices.

The Data Link Layer is divided into two sublayers:

- [Logical Link Control \(LLC\)](#)
- [Media Access Control \(MAC\)](#)

Functions of the Data Link Layer

- **Framing:** Framing is a function of the data link layer. It provides a way for a sender to transmit a set of bits that are meaningful to the receiver. This can be accomplished by attaching special bit patterns to the beginning and end of the frame.
- **Physical Addressing:** After creating frames, the Data link layer adds physical addresses (**MAC addresses**) of the sender and/or receiver in the header of each frame.

- **Error Control:** The data link layer provides the mechanism of error control in which it detects and retransmits damaged or lost frames.
- **Flow Control:** The data rate must be constant on both sides else the data may get corrupted thus, flow control coordinates the amount of data that can be sent before receiving an acknowledgment.
- **Access Control:** When a single communication channel is shared by multiple devices, the MAC sub-layer of the data link layer helps to determine which device has control over the channel at a given time.

Layer 3 – Network Layer

The network layer works for the transmission of data from one host to the other located in different networks. It also takes care of packet routing i.e. selection of the shortest path to transmit the packet, from the number of routes available. The sender and receiver's [IP address](#) are placed in the header by the network layer. Segment in the Network layer is referred to as **Packet**. Network layer is implemented by networking devices such as [routers and switches](#).

Functions of the Network Layer

- **Routing:** The network layer protocols determine which route is suitable from source to destination. This function of the network layer is known as routing.
- **Logical Addressing:** To identify each device inter-network uniquely, the network layer defines an addressing scheme. The sender and receiver's IP addresses are placed in the header by the network layer. Such an address distinguishes each device uniquely and universally.

Layer 4 – Transport Layer

The transport layer provides services to the application layer and takes services from the network layer. The data in the transport layer is referred to as **Segments**. It is responsible for the end-to-end delivery of the complete message. The transport layer also provides the acknowledgment of the successful data transmission and re-transmits the data if an error is found. Protocols used in Transport Layer are [TCP](#), [UDP](#), [NetBIOS](#), [PPTP](#).

Functions of the Transport Layer


- **Segmentation and Reassembly:** This layer accepts the message from the (session) layer, and breaks the message into smaller units. Each of the segments produced has a header associated with it. The transport layer at the destination station reassembles the message.
- **Service Point Addressing:** To deliver the message to the correct process, the transport layer header includes a type of address called service point address or port address. Thus by specifying this address, the transport layer makes sure that the message is delivered to the correct process.

Layer 5 – Session Layer

Session Layer in the OSI Model is responsible for the establishment of connections, management of connections, terminations of sessions between two devices. It also provides authentication and security. Protocols used in the Session Layer are NetBIOS, PPTP.

Functions of the Session Layer

- **Session Establishment, Maintenance, and Termination:** The layer allows the two processes to establish, use, and terminate a connection.
- **Synchronization:** This layer allows a process to add checkpoints that are considered synchronization points in the data. These synchronization points help to identify the error so that the data is re-synchronized properly, and ends of the messages are not cut prematurely and data loss is avoided.
- **Dialog Controller:** The session layer allows two systems to start communication with each other in half-duplex or full-duplex.

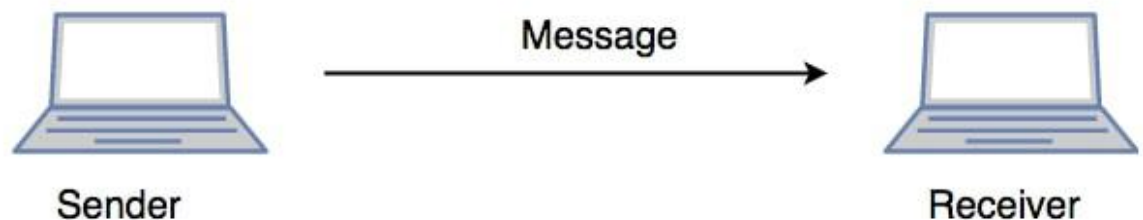

- *Communication in Session Layer*

Layer 6 – Presentation Layer


The presentation layer is also called the **Translation layer**. The data from the application layer is extracted here and manipulated as per the required format to transmit over the network. Protocols used in the Presentation Layer are [JPEG](#), [MPEG](#), [GIF](#), [TLS/SSL](#), etc.

Functions of the Presentation Layer

- **Translation:** For example, [ASCII to EBCDIC](#) .
- **Encryption/ Decryption:** Data encryption translates the data into another form or code. The encrypted data is known as the ciphertext and the decrypted data is known as plain text. A key value is used for encrypting as well as decrypting data.
- **Compression:** Reduces the number of bits that need to be transmitted on the network.

Layer 7 – Application Layer

At the very top of the OSI Reference Model stack of layers, we find the Application layer which is implemented by the network applications. These applications produce the data to be transferred over the network. This layer also serves as a window for the application services to access the network and for displaying the received information to the user. Protocols used in the Application layer are [SMTP](#), [FTP](#), [DNS](#), etc.

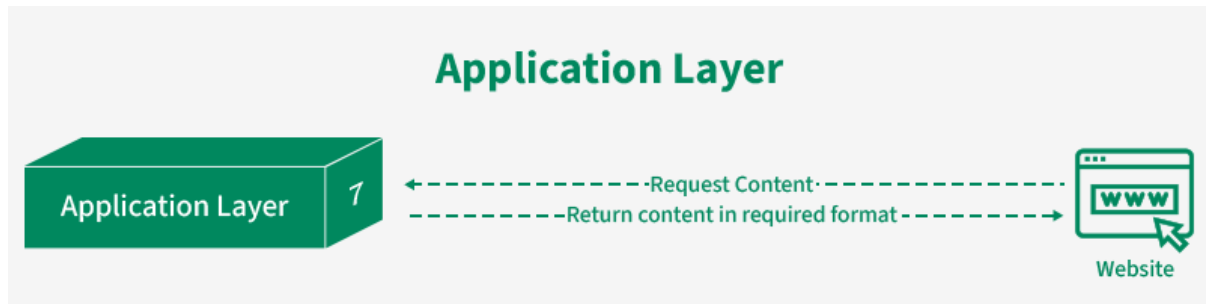

Application Layer

Functions of the Application Layer

The main functions of the application layer are given below.

- **Network Virtual Terminal(NVT):** It allows a user to log on to a remote host.
- **File Transfer Access and Management(FTAM):** This application allows a user to access files in a remote host, retrieve files in a remote host, and manage or control files from a remote computer.
- **Mail Services:** Provide email service.
- **Directory Services:** This application provides distributed database sources and access for global information about various objects and services.