




The image shows two horizontal bars. The top bar has a dark blue segment on the left and the text 'HTTP' on the right. The bottom bar has a light blue segment on the left and is empty on the right. Both bars are outlined in a thin blue line.

HTTP


Overview

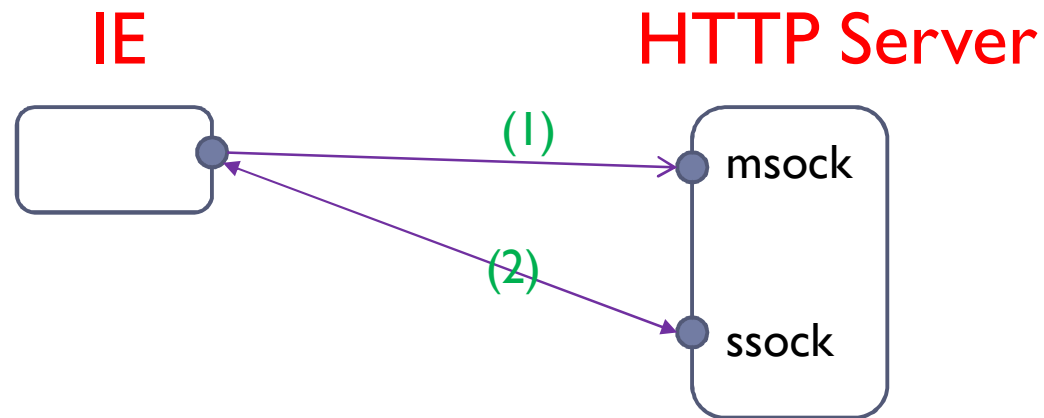


- (1) : Connection Request (default : port 80)
- (2) : Connection Establish




Overview

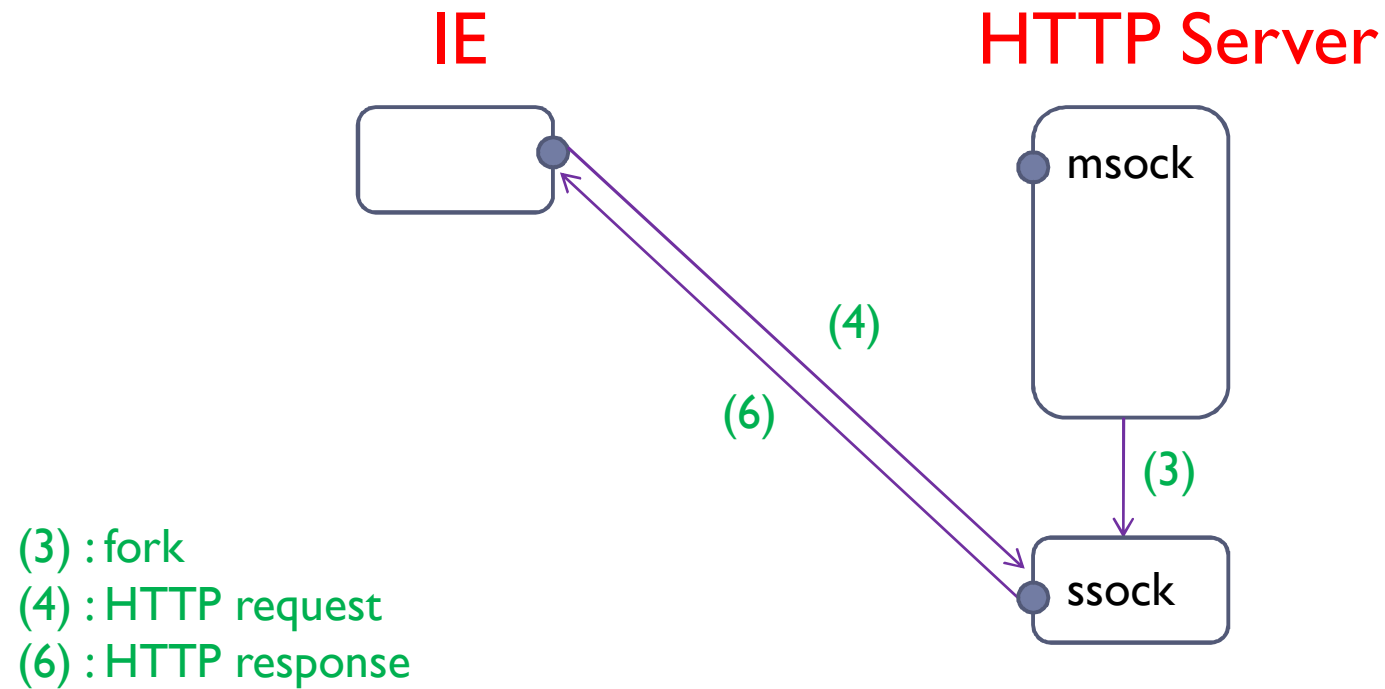

HTTP request (4)

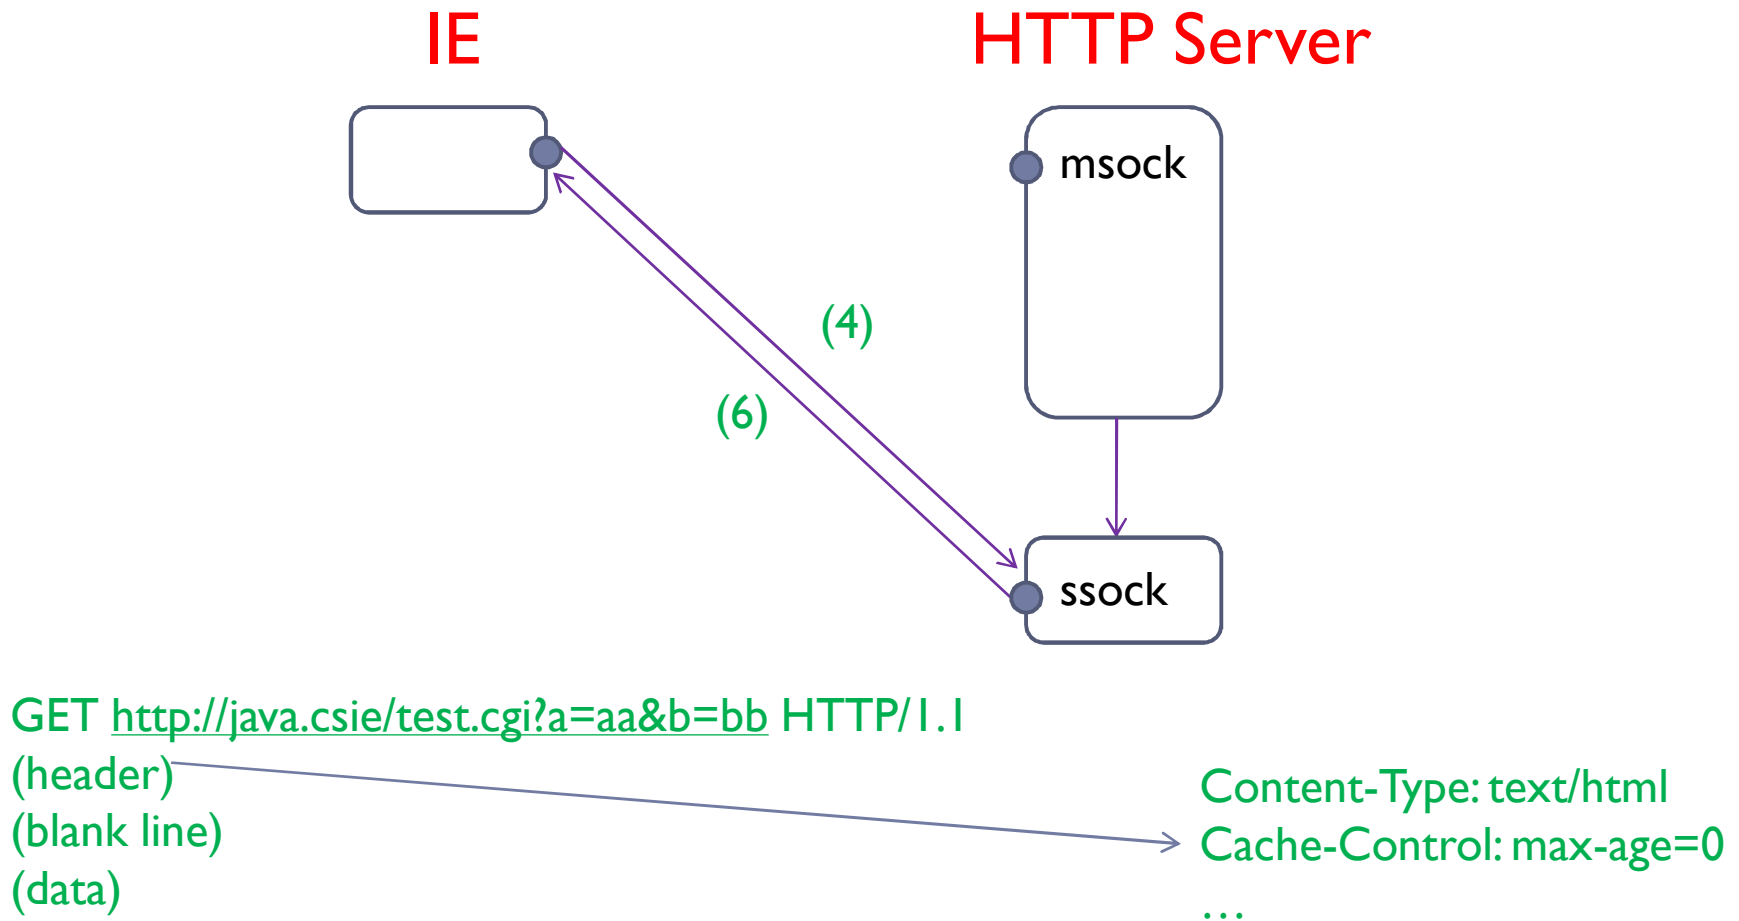

Process request

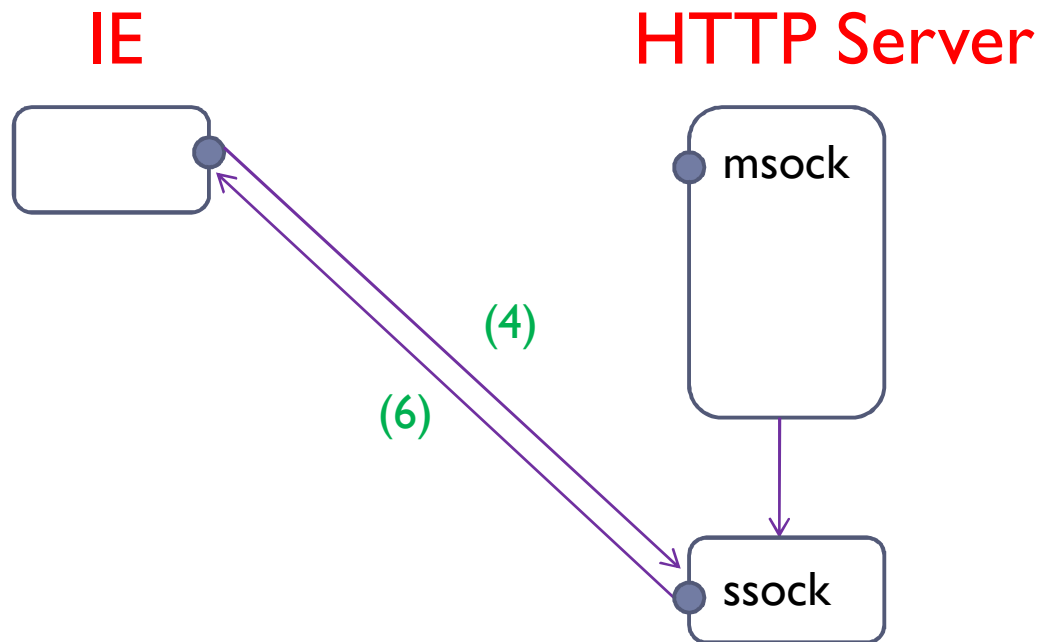


GET <http://java.csie/test.cgi?a=aa&b=bb> HTTP/1.1


HTTP Server 須 parse request ,
然後將 `a=aa&b=bb` 放入環境變數 `QUERY_STRING` 中 (GET method)



HTTP response (6)

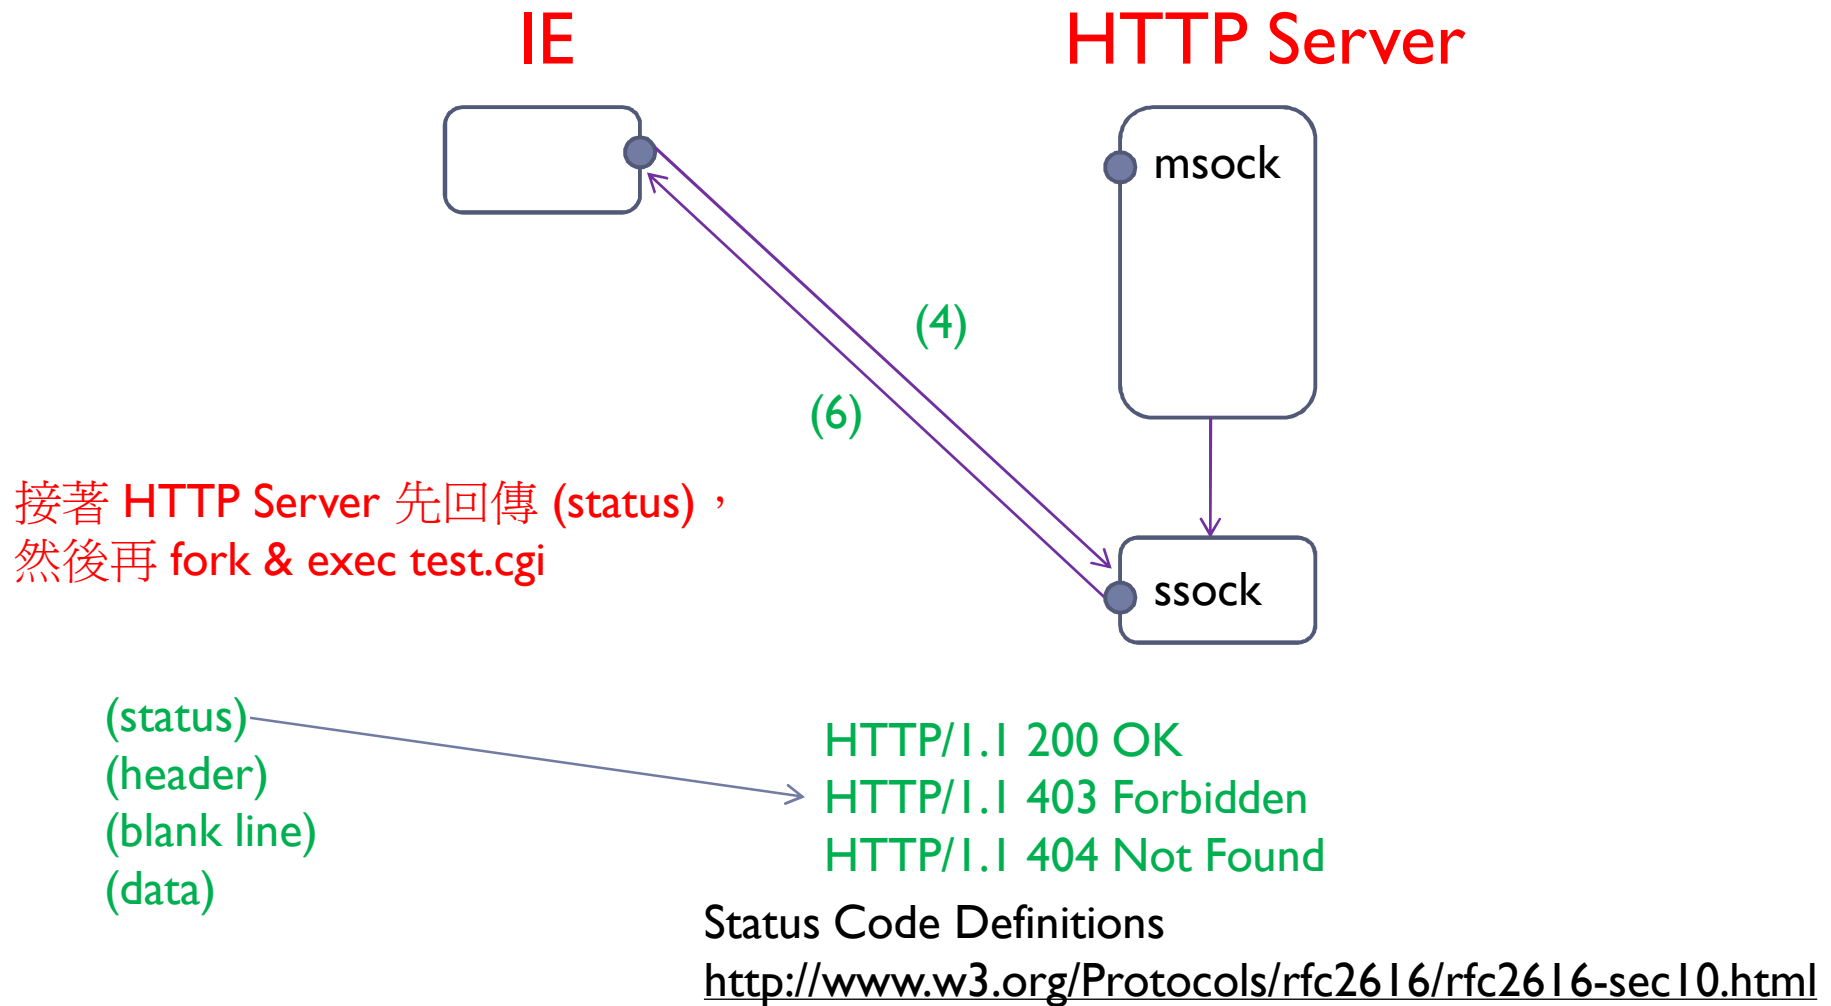


HTTP response (5)

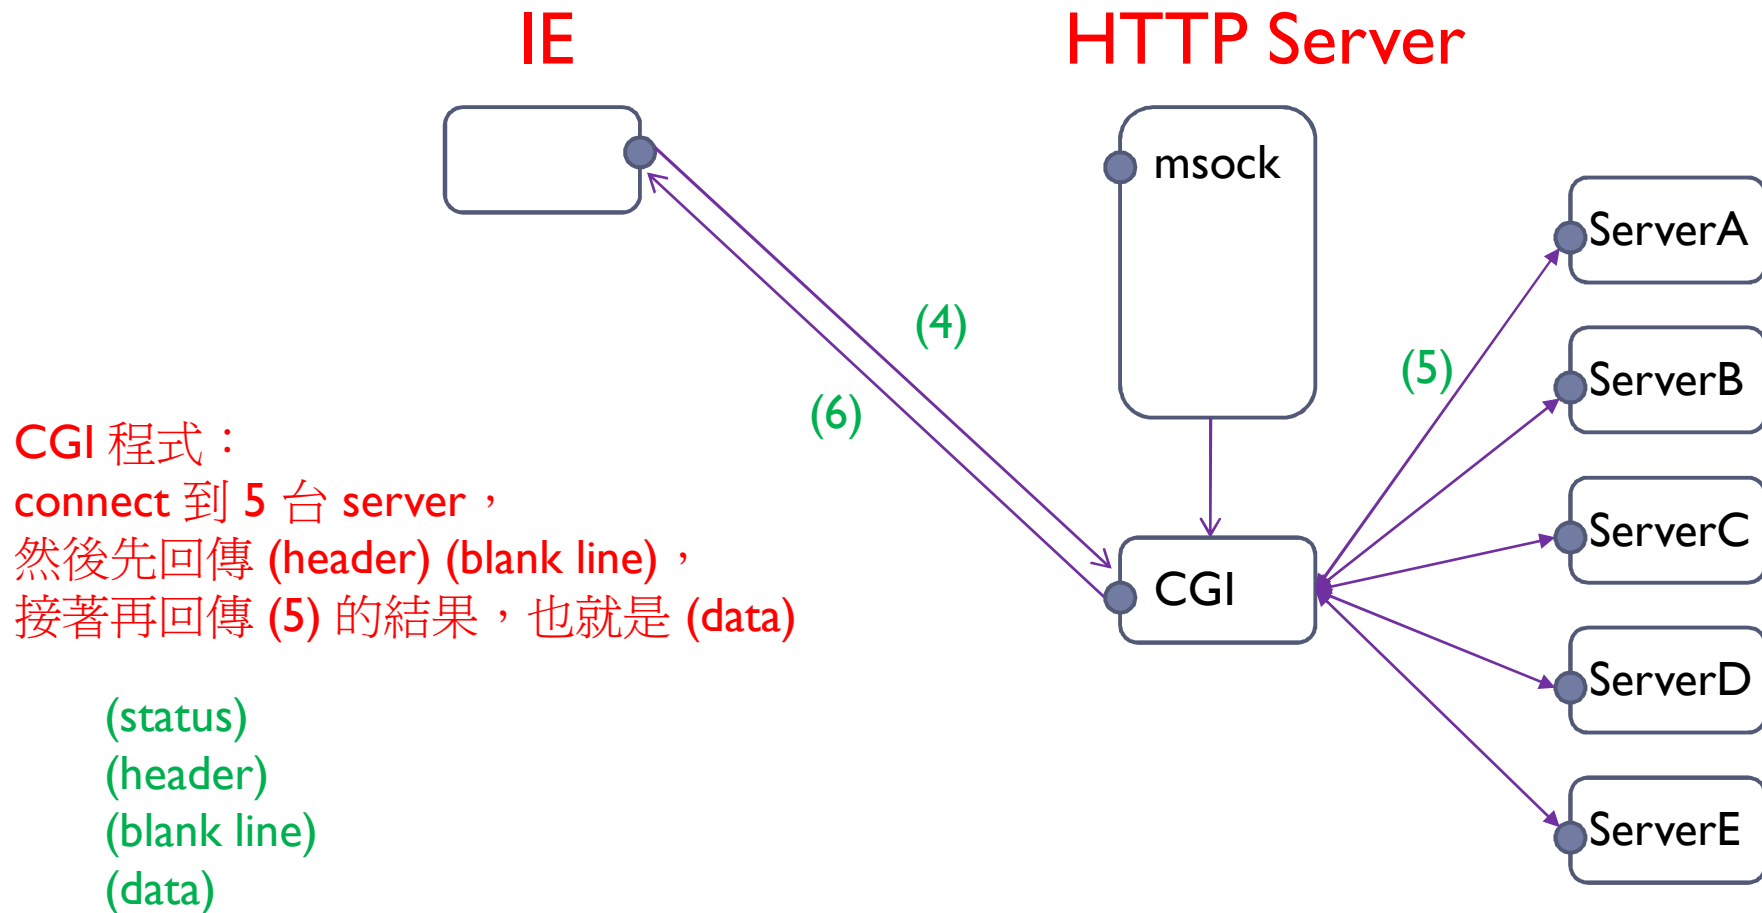


Single Process Model - Concurrent Client

Connect to One Server

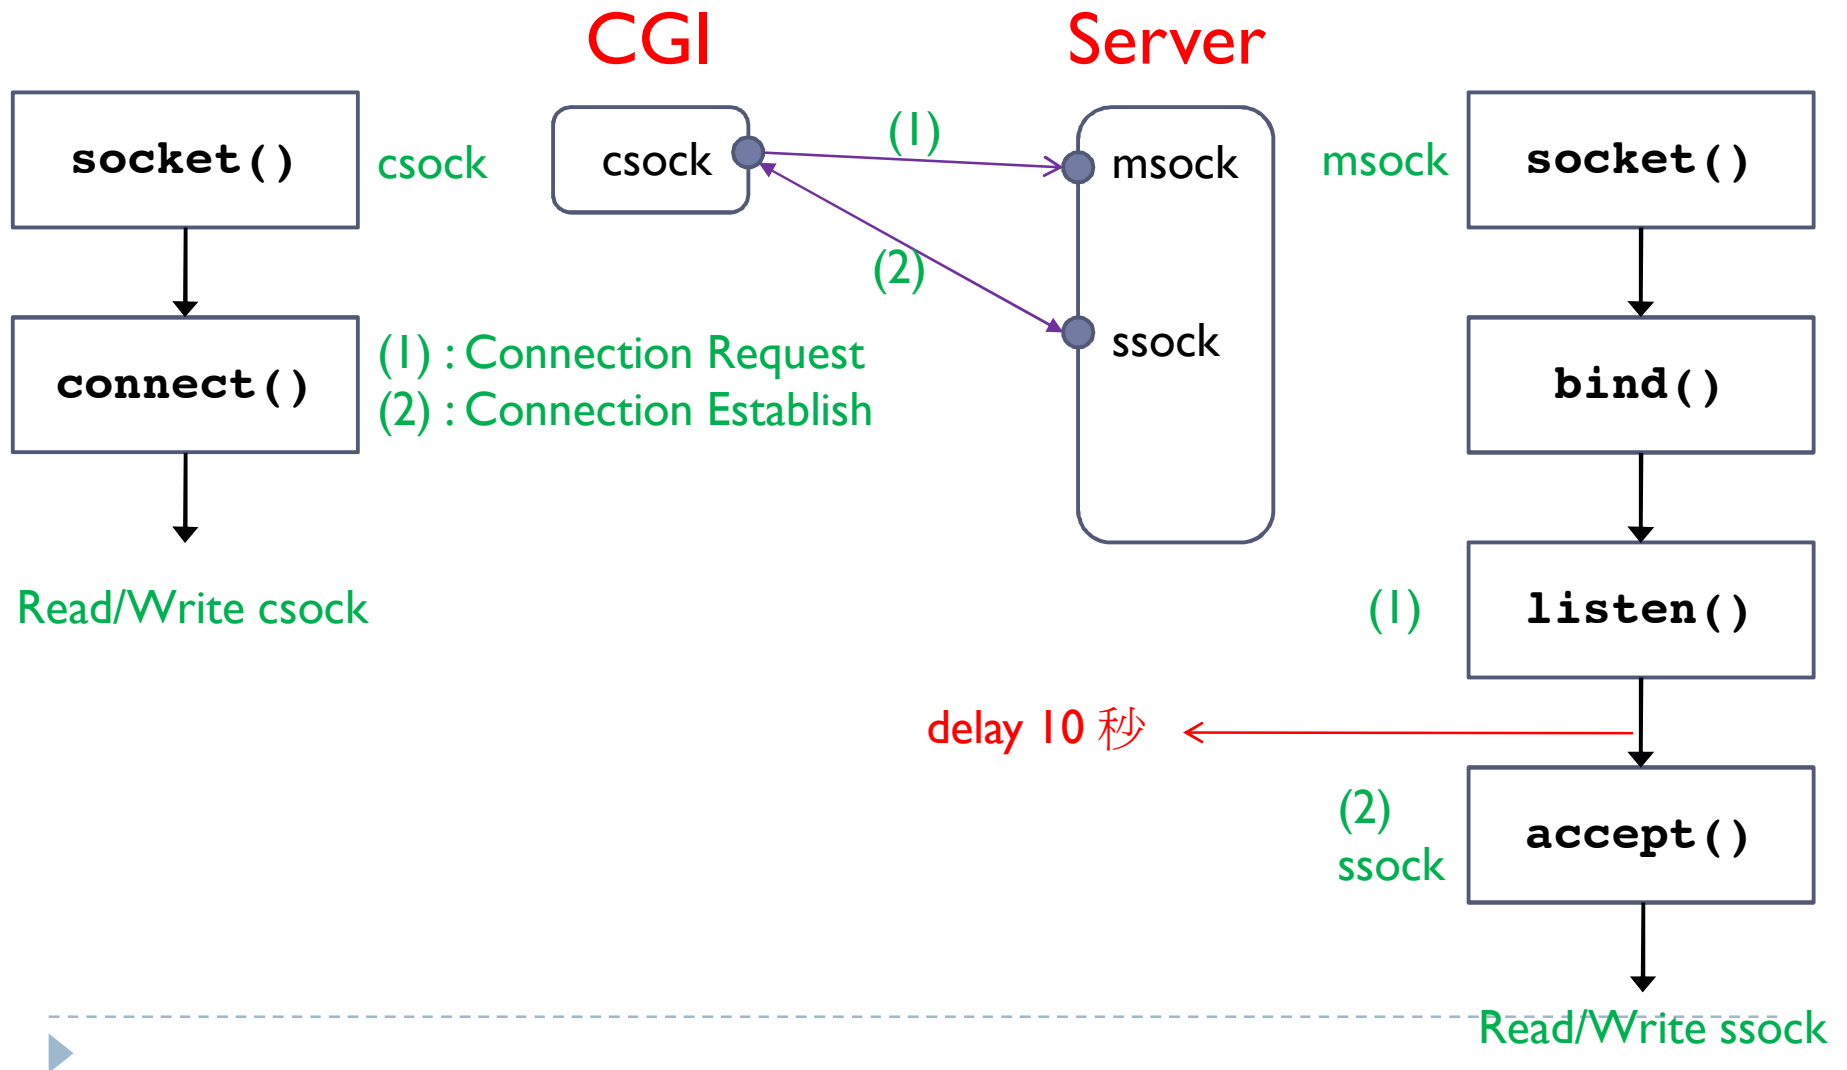

Connect to Many Server

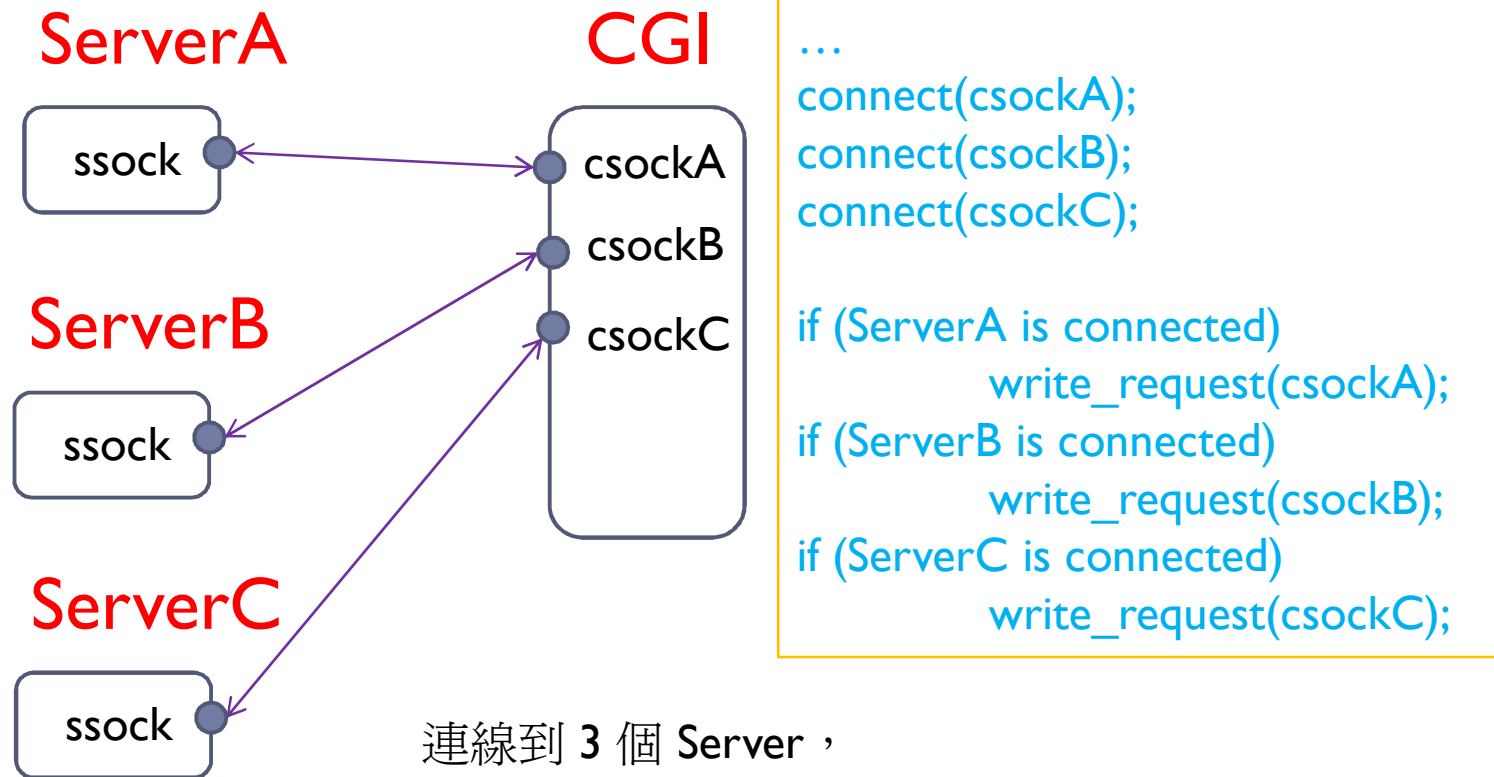

連線到 3 個 Server ,
問題：如果連線到很慢的 ServerB (or **delay 10 秒**)
ServerB 的 connect 會等很久
結果造成其它正常 ServerA 的 request 和 ServerC 的
connect/request 也一起等很久

Concurrent Client

解決 **connect** 和 **Read/Write** 會 **block** 的問題

解決方法

- non-blocking I/O

 - fcntl

 - select



select

```
int select(int nfd, fd_set *readfds, fd_set *writefds, fd_set *exceptfds, struct timeval *timeout);
```

nfd

select 監聽的 fd 最大值

一般為三組 fd_set 中最大值加一 或 FD_SET 的 size

readfds

select 監聽的可讀 fd 集合

writefds

select 監聽的可寫 fd 集合

exceptfds

select 監聽的異常 fd 集合

timeout

select() 的 timeout 時間

NULL : 不設定 timeout



NON-Blocking I/O

```
int fcntl(int fd, int cmd, ...);
```

E.g.

```
int flag = fcntl(sockfd, F_GETFL, 0);
```

```
fcntl(sockfd, F_SETFL, flag | O_NONBLOCK);
```



Concurrent Client Overview

```
int flag = fcntl(csockA, F_GETFL, 0);
fcntl(csockA, F_SETFL, flags | O_NONBLOCK);

if ( (n = connect (csockA, ...)) < 0) {
    if (errno != EINPROGRESS) return (-1);
}

fd_set rfd; /* readable file descriptors */
fd_set wfd; /* writable file descriptors */
fd_set rs; /* active file descriptors */
fd_set ws; /* active file descriptors */

int conn = 1; /* 連線數量 */
nfd = FD_SETSIZE;
FD_ZERO(&rfd); FD_ZERO(&wfd); FD_ZERO(&rs); FD_ZERO(&ws);
FD_SET(csockA, &rs);
FD_SET(csockA, &ws);
rfd = rs; wfd = ws;
```

Concurrent Client Overview

```
#define F_CONNECTING 0
#define F_READING 1
#define F_WRITING 2
#define F_DONE 3
```

```
int statusA = F_CONNECTING;

while (conn > 0) {
    memcpy(&rfd, &rs, sizeof(rfd)); memcpy(&wfd, &ws, sizeof(wfd));

    if ( select(nfds, &rfd, &wfd, (fd_set*)0, (struct timeval*)0) < 0 ) errexit();

    if (statusA == F_CONNECTING &&
        (FD_ISSET(csockA, &rfd) || FD_ISSET(csockA, &wfd)))
    {
        if (getsockopt(csockA, SOL_SOCKET, SO_ERROR, &error, &n) < 0 ||
            error != 0) {
            // non-blocking connect failed
            return (-1);
        }
        statusA = F_WRITING;
        FD_CLR(csockA, &rs);
    }
}
```

Concurrent Client Overview

```
#define F_CONNECTING 0
#define F_READING 1
#define F_WRITING 2
#define F_DONE 3
```

```
else if (statusA == F_WRITING && FD_ISSET(csockA, &wfds) ) {
    n = write(...); NeedWrite -= n;
    if (n <= 0 || NeedWrite <= 0) {
        // write finished
        FD_CLR(csockA, &ws);
        statusA = F_READING;
        FD_SET(csockA, &rs);
    }
}
else if (statusA == F_READING && FD_ISSET(csockA, &rfd) ) {
    n = read(...);
    if (n <= 0) {
        // read finished
        FD_CLR(csockA, &rs);
        statusA = F_DONE ;
        conn--;
    }
}
}
```