

Practical 17

Aim: Use all tags of XML.

```
<?xml version="1.0" encoding="UTF-8"?>
<breakfast_menu>
```

```
<food>
<name>Belgian Waffles</name>
<price>$5.95</price>
<description>Two of our famous Belgian Waffles with plenty of real maple syrup</description>
<calories>650</calories>
</food>
```

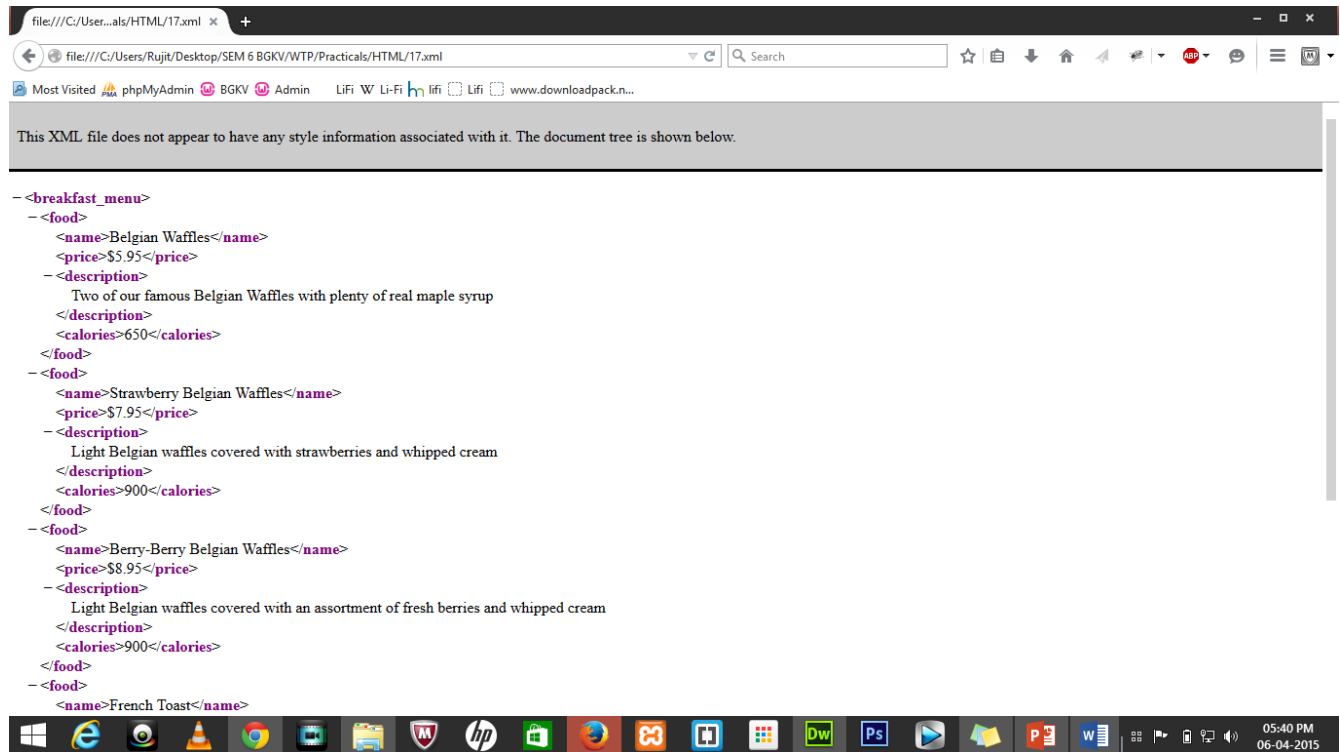
```
<food>
<name>Strawberry Belgian Waffles</name>
<price>$7.95</price>
<description>Light Belgian waffles covered with strawberries and whipped
cream</description>
<calories>900</calories>
</food>
```

```
<food>
<name>Berry-Berry Belgian Waffles</name>
<price>$8.95</price>
<description>Light Belgian waffles covered with an assortment of fresh berries and whipped
cream</description>
<calories>900</calories>
</food>
```

```
<food>
<name>French Toast</name>
<price>$4.50</price>
<description>Thick slices made from our homemade sourdough bread</description>
<calories>600</calories>
</food>
```

```
<food>
<name>Homestyle Breakfast</name>
<price>$6.95</price>
<description>Two eggs, bacon or sausage, toast, and our ever-popular hash
```

```
browns</description>  
<calories>950</calories>  
</food>  
  
</breakfast_menu>
```

OUTPUT:

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
- <breakfast_menu>
- <food>
  <name>Belgian Waffles</name>
  <price>$5.95</price>
  <description>
    Two of our famous Belgian Waffles with plenty of real maple syrup
  </description>
  <calories>650</calories>
</food>
- <food>
  <name>Strawberry Belgian Waffles</name>
  <price>$7.95</price>
  <description>
    Light Belgian waffles covered with strawberries and whipped cream
  </description>
  <calories>900</calories>
</food>
- <food>
  <name>Berry-Berry Belgian Waffles</name>
  <price>$8.95</price>
  <description>
    Light Belgian waffles covered with an assortment of fresh berries and whipped cream
  </description>
  <calories>900</calories>
</food>
- <food>
  <name>French Toast</name>
```