Weekly Internship Assignment 6

Component System

The component system includes reusable UI elements with configurable variants and states.

Button Components

Four button variants were implemented:

- Primary
- Secondary
- Outline
- Ghost

Each variant supports multiple sizes:

- Small
- Medium
- Large

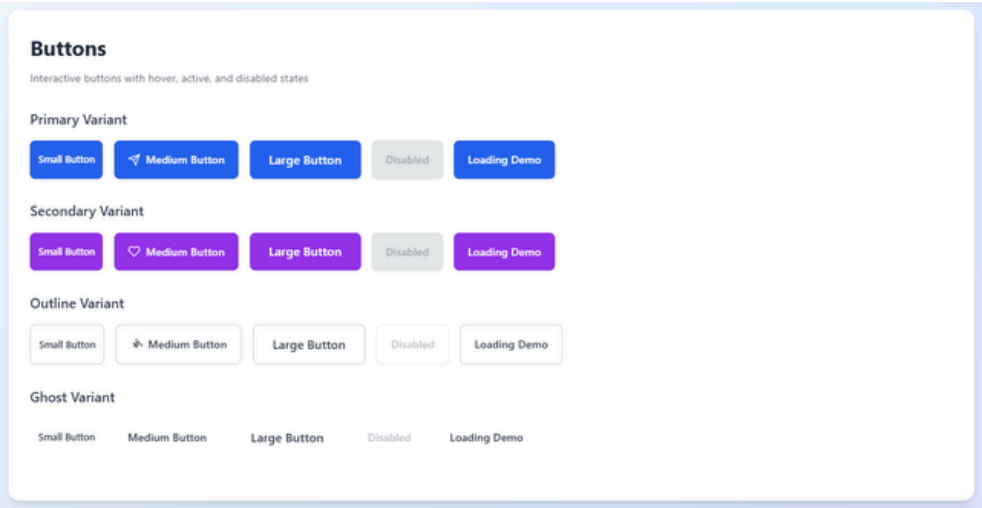

Click to view the webpage:

[Github Pages > Runarok > GenAI-plus > Coursework > UI Components]

Each button also supports interaction states:

- Hover
- Active
- Disabled
- Loading

Micro-interactions include:

- Hover scaling effects
- Click feedback animation
- Loading spinner animation

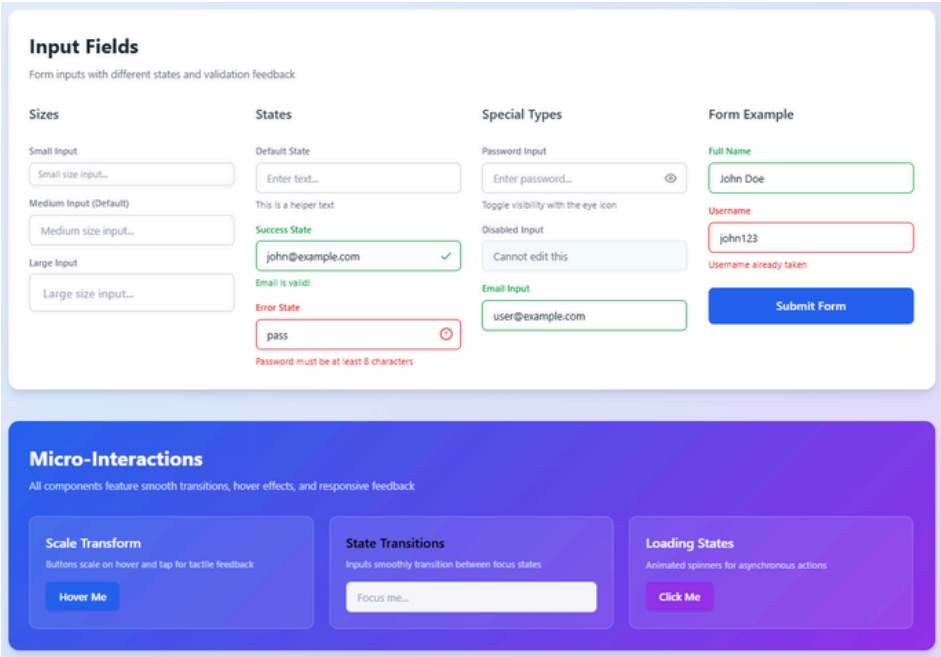

Input Components

Input fields were designed with multiple validation states.
Supported Input States:

- Default
- Focus
- Success
- Error
- Disabled

Additional components include:

- Password input with visibility toggle
- Email input validation
- Form validation feedback

These states provide clear visual feedback to the user and improve usability.

Micro-Interactions

Micro-interactions were implemented to improve user experience.
Examples include:

- **Hover Interaction:** Buttons slightly scale when hovered, providing tactile feedback.
- **Focus Transitions:** Input fields smoothly transition between states when focused.
- **Loading Animation:** Buttons display animated spinners during asynchronous operations.

These micro-interactions improve clarity, responsiveness, and perceived system performance.

Technologies Used

- HTML5
- CSS3 (Flexbox, transitions, animations)
- JavaScript (interaction logic)

Live Demo

The component system can be viewed here:
Github Pages > Runarok > GenAI-plus > Coursework > UI Components

Conclusion

The reusable component system demonstrates how UI design principles can be implemented directly in code. By building variants, states, and micro-interactions, the system supports scalability and consistency in interface design.