

Literature Lookup

User Guide

Find, verify, enrich, review and convert bibliographic records

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Title (required)

1

Work orientations in Scandinavia: employment commitment and organizational commitment

Author surname

2

SvallforsYear

2001

Search

3

Found 5 candidates, sorted by match score. Click one to see details. Note: OpenAlex (HTTP 503), Semantic Scholar (HTTP 429) didn't respond, so results may be incomplete.

Score	Source	Candidate title	Year
89	crossref	Work Orientations in Sc.	2001
82	crossref	Work Orientations in Sc.	2001
43	crossref	Class and Attitudes to I	2007
35	crossref	CHAPTER ONE. Introdu	2007
28	crossref	Conclusion	2007

DC

5

10.1177/000169930104400203

Copy DOIVerify result

6

Linkhttps://doi.org/10.1177/000169930104400203

Copy linkOpen in browser

Verified: The DOI is registered and its main-title metadata matches this paper. Metadata: Work Orientations in Scandinavia: Employment Commitment and Organizational Commitment in Denmark, Norway and Sweden (2001), score 90.

Contents

1. Introduction	3
What each page is for	3
A typical workflow	3
2. Getting started	4
Requirements	4
Starting the app for the first time	4
Where your settings are stored	4
Things that work the same on every page	4
Zotero round trip	5
3. The main window	5
4. Single Lookup	6
5. Batch Import	7
5.1 Sources settings	7
5.2 Running a batch lookup	9
6. Verification	11
6.1 Verification settings	12
6.2 Verifying a file	13
6.3 Choosing which columns to export	14
7. Abstract Finder	15
8. ISSP Module Tags	16
9. Note Link Recovery	18
10. Keyword Cleanup	19
11. Review & Convert	20
11.1 Adding one column's values to another	21
11.2 The review queue	23
12. Statistics	25
13. Compare Documents	26
13.1 Setting up the comparison	26
13.2 Reading the results	27
14. Translate	28
15. Troubleshooting and FAQ	30
Privacy	30

1. Introduction

Literature Lookup is a desktop application for people who maintain a bibliography, typically a Zotero library, and need to fill in and check its links and metadata at scale. It finds missing DOIs and URLs, verifies that every link really points to the paper it claims to, fetches missing abstracts, tags records, cleans notes and keywords, and lets you review, compare and convert the results before you import them back into Zotero.

Everything runs on your own computer. The app only goes online to query the public scholarly databases and translation services you enable. Your files are never uploaded anywhere, and the file you open is never overwritten: every page saves a **new copy**.

What each page is for

Page	Use it to...
Single Lookup	Look up one title and copy its DOI or link; verify the match.
Batch Import	Find DOIs/URLs for a whole file of records. Its <i>Sources settings</i> sub-tab chooses which databases every page searches.
Verification	Check that each record's DOI/URL exists and describes that paper. Its <i>Verification settings</i> sub-tab chooses which fields are compared.
Abstract Finder	Fill in missing abstracts from scholarly sources or the record's own web page.
ISSP Module Tags	Tag records with the ISSP survey module(s) they use, with evidence.
Note Link Recovery	Move links typed into Notes into the URL field, and tidy the Notes.
Keyword Cleanup	Keep your own uppercase keywords / country tags and drop imported ones.
Review & Convert	Inspect, filter and manually review any result file; save it as CSV, Excel, RIS or BibTeX (this page is also the file converter).
Statistics	Summarise columns with counts, percentages and charts.
Compare Documents	Match the records of two files and show exactly which values differ.
Translate	Add English (or another language) translations of titles and abstracts.

A typical workflow

For a Zotero library that is missing links, the pages are usually used in this order. Each step reads the file saved by the previous one.

1. **Export** your library from Zotero as RIS (or CSV).
2. **Note Link Recovery**: recover links already written in Notes.
3. **Batch Import**: find DOIs/URLs for the records that still have none.
4. **Verification**: check every DOI/URL against the paper's metadata.
5. **Review & Convert**: review the doubtful records by hand, then save.
6. **Abstract Finder, ISSP Module Tags, Keyword Cleanup, Translate**: optional enrichment and clean-up steps.
7. **Import** the final file back into Zotero.

2. Getting started

Requirements

- Windows 10 or Windows 11 (64-bit).
- An internet connection for the pages that search databases, verify links, fetch abstracts or translate. Review & Convert, Statistics, Compare Documents, Keyword Cleanup and Note Link Recovery work completely offline.
- No installation, no Python and no administrator rights are needed.

Starting the app for the first time

1. Save **Literature Lookup.exe** anywhere, for example your Desktop or Documents folder.
2. Double-click it. The first start takes about 5–10 seconds while the app unpacks itself; this happens on every start and is normal.
3. Because the program is not digitally signed, Windows may show “*Windows protected your PC*”. Click **More info**, then **Run anyway**. You only need to do this once.

Note. If your antivirus quarantines the file, add an exception for Literature Lookup.exe. Single-file applications built with Python are sometimes flagged by mistake.

Where your settings are stored

Your settings (the sources you enabled, your contact email and any API keys) and the app's caches are saved automatically in **%APPDATA%\Literature Lookup** (type that into the File Explorer address bar to open it). They are restored every time you start the app. To reset the app completely, close it and delete that folder.

Things that work the same on every page

- **Choose file...** opens CSV, Excel (.xlsx/.xls), RIS, BibTeX (.bib) and CSL JSON files, including Zotero exports. Non-UTF-8 CSV files are detected automatically; the detected encoding is shown next to the file name.
- **Column mapping** menus are filled in automatically from the column names (Title, Author, Publication Year, DOI, Url, ...). Check them and change any that were guessed wrongly.
- **Export format** defaults to *Same as source*; you can choose CSV, Excel, CSL JSON, RIS or BibTeX instead. Exports never overwrite the file you opened.
- **Stop** finishes the records currently in progress and keeps everything done so far.
- Results are **cached**: running the same file again skips records that were already processed and only queries the databases for new or changed ones.
- Every results table can be copied: right-click a cell for *Copy cell* / *Copy row*, or press Ctrl+C. Blue link cells open in your browser when clicked.

Zotero round trip

Export from Zotero with *File* → *Export Library...* (or right-click a collection → *Export Collection...*) and choose **RIS** or **CSV**. After processing, import the saved file with *File* → *Import...*. Standard fields (DOI, URL, abstract, tags, notes) map to Zotero's own fields. Extra columns the RIS/BibTeX formats have no field for, such as verification details, are stored in each record's Note and are restored as columns when this app opens the file again. Before saving such columns to RIS or BibTeX, the app lists them and asks: **Yes** keeps them in the Note, **No** leaves them out of the file, **Cancel** does not save. CSV and Excel keep every column as an ordinary column.

Tip. When a cleanup page (Note Link Recovery or Keyword Cleanup) saves a RIS file as RIS, only the lines it changed are rewritten. Every other field of your original file, including volume, issue, pages, ISSN, dates and language, is kept exactly as it was.

3. The main window

The main window, opened on the Single Lookup page.

1 Page tabs

Click a tab to switch page. Each page keeps its own file and results while you work on another page. The tab labels shrink automatically to fit narrow windows.

Batch Import and Verification have two sub-tabs each, shown as a small switch below the page tabs: one for running the task and one for its settings.

4. Single Lookup

Use Single Lookup to find the DOI or link of one paper, for example while writing, or to check one record by hand.

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Title (required)

1

Work orientations in Scandinavia: employment commitment and organizational commitment

Author surname

2

SvallforsYear

2001

Search

3

Found 5 candidates, sorted by match score. Click one to see details. Note: OpenAlex (HTTP 503), Semantic Scholar (HTTP 429) didn't respond, so results may be incomplete.

Score	Source	Candidate title	Year
89	crossref	Work Orientations in Sc	2001
82	crossref	Work Orientations in Sc	2001
43	crossref	Class and Attitudes to T	2007
35	crossref	CHAPTER ONE. Introdu	2007
28	crossref	Conclusion	2007

DC

5

10.1177/000169930104400203

Copy DOIVerify result

6

Linkhttps://doi.org/10.1177/000169930104400203

Copy linkOpen in browser

Verified: The DOI is registered and its main-title metadata matches this paper. Metadata: Work Orientations in Scandinavia: Employment Commitment and Organizational Commitment in Denmark, Norway and Sweden (2001), score 90.

Searching for one title, with the best match selected and verified.

1	Title (required)	Type or paste the paper's title. Press Enter to search.
2	Author surname, Year	Optional. They make the match score more reliable, especially for short or common titles.
3	Search	Queries every source enabled under Batch Import → Sources settings.
4	Candidates	Matches from all sources, sorted by match score (0–100). The score combines title similarity with author and year agreement. Click a row to select it.
5	DOI and Link	The selected candidate's DOI and link, with Copy and Open in browser buttons.
6	Verify result	Independently checks the DOI/link: the DOI must be registered and its metadata must match your title, author and year. The verdict appears below.

Note. The note above the table tells you when a source did not respond (for example “Semantic Scholar (HTTP 429)”, meaning it is rate-limited). The other sources' results are still shown; search again later for a complete list.

Page 6

5. Batch Import

Batch Import finds DOIs and URLs for every record in a file. It has two sub-tabs: **Batch Lookup**, where you run the search, and **Sources settings**, where you choose which databases are searched. The source selection is shared by Single Lookup, Verification and Abstract Finder.

5.1 Sources settings

The screenshot shows the 'Sources settings' tab in the Batch Import interface. It includes sections for 'Optional settings' and 'Sources to search'.

Optional settings:

- Contact email:** 1 you@example.com. Optional. Used by Crossref and PubMed to identify you as a courtesy, which gets you a more generous rate limit. Leave blank if you'd rather not share one.
- Semantic Scholar API key:** 2 optional. Optional, free at semantic scholar.org/product/api#api-key-form. Without it, Semantic Scholar shares a public pool limited to roughly 100 requests/5min; with it, you get a faster dedicated rate.
- CORE API key:** 3 required to use CORE below. Only needed if you enable CORE below — CORE has no free/keyless search tier at all, so without a key it contributes nothing. Free registration at core.ac.uk/services/api.
- Lens.org API key:** required to use Lens.org below. Only needed if you enable Lens.org below — like CORE, it has no keyless tier. Unlike CORE, even the free academic trial requires signing in at lens.org and requesting a token (an approval step, not instant registration).

Sources to search:

Mainstream (broad, cross-discipline)

- ☒ 4 Crossref: General scholarly literature (journal articles, books, chapters). No key needed; an email is optional and only makes Crossref's rate limit more generous.
- ☒ OpenAlex: Broad coverage including theses and working papers. No key needed.
- ☒ Semantic Scholar: ~200M papers across all fields. No key needed; an optional free API key raises the rate limit from ~100 requests/5min to 1/sec.
- ☒ DataCite: DOIs for theses, datasets, and working papers that Crossref doesn't index. No key needed.
- ☐ OpenAIRE: European research output (funders/institutions). No key needed.
- ☒ Unpaywall: Not a title search - fills in a missing URL for a record that already has a DOI (either supplied or found by another source above), by looking up its open-access location. Free, keyless; an email is used only as a courtesy identifier. Effectively free to leave on.
- ☐ DOAJ: Directory of Open Access Journals - cross-discipline open-access journal articles. No key needed.

Specialized & regional

- ☐ GESIS: German social-science data archive (ISSP, SSOAR). Best for social-science / German survey literature. No key needed.
- ☐ CORE: 300M+ records from institutional repositories worldwide. REQUIRES a free API key (register at core.ac.uk/services/api) - without one, CORE contributes nothing.
- ☐ Lens.org: Scholarly + patent literature. REQUIRES an API token - unlike CORE, even the free academic trial needs a sign-in and approval step at lens.org, not instant self-service registration. Without a key, Lens contributes nothing.
- ☐ DNB (German National Library): Germany's national bibliography. Only queried for titles detected as German. No key needed.

Your source selection and settings are saved automatically and restored next time you open the app.

Batch Import → Sources settings.

1	Contact email	Optional. Crossref, PubMed and Unpaywall use it to identify polite users and give them a more generous rate limit.
2	Semantic Scholar API key	Optional and free. Raises Semantic Scholar's shared limit (about 100 requests per 5 minutes) to a dedicated 1 request per second.
3	CORE / Lens.org keys	Required only if you enable CORE or Lens.org. Without a key those two sources return nothing.
4	Sources to search	Tick the databases to query. Mainstream sources are listed first, then specialised and regional ones.

All settings are saved automatically as you change them. The available sources:

Source	Coverage	Key
Crossref	Journal articles, books, chapters (the main DOI registry).	No (email optional)
OpenAlex	Broad coverage including theses and working papers.	No
Semantic Scholar	About 200 million papers across all fields.	Optional

Source	Coverage	Key
DataCite	DOIs for theses, datasets and working papers.	No
OpenAIRE	European research output.	No
Unpaywall	Not a title search: adds an open-access URL to records that already have a DOI.	No (email optional)
DOAJ	Open-access journal articles.	No
GESIS	German social-science data archive (ISSP, SSOAR).	No
CORE	300M+ records from institutional repositories.	Required
Lens.org	Scholarly and patent literature.	Required
DNB, HAL, CiNii, swisscovery, Libris	National catalogues of Germany, France, Japan, Switzerland and Sweden. Queried only for titles detected in that country's language(s).	No
Europe PMC, PubMed	Biomedical and public-health literature.	No
Google Books	Queried only for records whose Item Type is Book or Book Section.	No
arXiv	Physics, maths, computer science and economics preprints.	No

Tip. More sources find more links but take longer and are more likely to hit rate limits. Crossref, OpenAlex, DataCite and Unpaywall are a good default for most libraries; add GESIS for social-science survey literature and the national catalogues for non-English titles.

5.2 Running a batch lookup

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Batch LookupSources settings

1 Choose file...ISSP_sample.csv (18 records) · utf-8-sig

Title column2 Title

Author columnAuthor

Year columnPublication Year

DOI column3 DOI

URL columnUrl

Item type columnItem Type

DOI/URL columns decide which records already have a link and control the "only missing" scope below. Item type lets type-restricted sources (e.g. Google Books, only for Book/Book Section) fire — without it, they're skipped entirely rather than guessed at, to protect their limited quota.

Which records to look up

4 ☒ Only records missing a DOI or a URL (recommended — fills gaps, saves quota)

☐ Only records missing BOTH a DOI and a URL (most conservative — a record that already has either one is skipped entirely, so a fresh search can never end up replacing an existing, correct value with a different match)

☐ All records (re-searches everything, including rows that already have both)

Whichever you pick, a record's existing DOI/URL is only ever replaced by a newly found value — a row this run doesn't find anything for keeps what it already had, it is never blanked out. "Missing both" is the only option that guarantees an already-filled field is never touched at all, even by a different match. "Missing a DOI or a URL" may still re-search (and, if it finds a different paper, replace) the field you already had, while trying to fill in the one you didn't.

☐ Clear cached results before running

This app caches every lookup result (by title/author/year/sources/item type/existing DOI) so re-running the same file doesn't re-query the APIs for rows it already resolved. Leave this unchecked to reuse that cache (faster, fewer requests). Check it to force every selected record to be looked up fresh — e.g. after changing which sources are enabled, after this app added new sources, or if you suspect a cached result is stale/wrong. This clears the shared lookup cache file, so it also affects Single Lookup.

Concurrent workers5

4

How many records to look up at the same time. Higher = faster, but Semantic Scholar and CORE are rate-limited globally no matter what this is set to, so extra workers won't speed those two up. 4-6 is a good default; drop to 2-3 if you see errors or timeouts; go up to 8-12 if you've disabled Semantic Scholar/CORE and want more speed.

Export formatCSV table (.csv)

6 Run batch lookup

Export results...

Columns auto-detected — fix them above if wrong, then click "Run batch lookup".

Title	Status	Score	Source	DOI	Link
-------	--------	-------	--------	-----	------

A Zotero CSV loaded and ready to run.

1	Choose file...	Open the file containing your records.
2	Title / Author / Year columns	Which columns hold the search terms. Detected automatically.
3	DOI / URL / Item type columns	Tell the app which records already have a link. Item type lets type-restricted sources (such as Google Books) run.
4	Which records to look up	<i>Only records missing a DOI or a URL</i> (recommended); <i>only records missing both</i> (never touches a record that already has either); or <i>all records</i> . A value that is already present is only ever replaced by a newly found one, never blanked.
5	Concurrent workers	How many records are searched at the same time. 4-6 is a good default; lower it if you see many timeouts.
6	Run batch lookup	Starts the search. Tick <i>Clear cached results before running</i> above it to force every record to be searched again (for example after enabling new sources).

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Batch LookupSources settings

Choose file...ISSP_sample.csv (18 records) · utf-8-sig

Title columnTitleAuthor columnAuthorYear columnPublication Year

DOI columnDOIURL columnUriItem type columnItem Type

DOI/URL columns decide which records already have a link and control the "only missing" scope below. Item type lets type-restricted sources (e.g. Google Books, only for Book/Book Section) fire — without it, they're skipped entirely rather than guessed at, to protect their limited quota.

Which records to look up

☒ Only records missing a DOI or a URL (recommended — fills gaps, saves quota)

☐ Only records missing BOTH a DOI and a URL (most conservative — a record that already has either one is skipped entirely, so a fresh search can never end up replacing an existing, correct value with a different match)

☐ All records (re-searches everything, including rows that already have both)

Whichever you pick, a record's existing DOI/URL is only ever replaced by a newly found value — a row this run doesn't find anything for keeps what it already had, it is never blanked out. "Missing both" is the only option that guarantees an already-filled field is never touched at all, even by a different match. "Missing a DOI or a URL" may still re-search (and, if it finds a different paper, replace) the field you already had, while trying to fill in the one you didn't.

☐ Clear cached results before running

This app caches every lookup result (by title/author/year/sources/item type/existing DOI) so re-running the same file doesn't re-query the APIs for rows it already resolved. Leave this unchecked to reuse that cache (faster, fewer requests). Check it to force every selected record to be looked up fresh — e.g. after changing which sources are enabled, after this app added new sources, or if you suspect a cached result is stale/wrong. This clears the shared lookup cache file, so it also affects Single Lookup.

Concurrent workers4

How many records to look up at the same time. Higher = faster, but Semantic Scholar and CORE are rate-limited globally no matter what this is set to, so extra workers won't speed those two up. 4-6 is a good default; drop to 2-3 if you see errors or timeouts; go up to 8-12 if you've disabled Semantic Scholar/CORE and want more speed.

Export form3 CSV table (.csv)Run batch lookupExport results...4

Finished in 3:29.

Done: 12/18 records have a DOI/link. 7 record(s) had at least one source fail to respond — see the Failed Sources column. Click "Export results" to save.

Title	Status	Score	Source	DOI	Link
ISSP2001: Soci	Already had a	0		10.17608/k6.ai	https://doi.org
Determinante	Already had a	0		10.32826/cudk	https://doi.org
Interpersonal	Already had a	0		10.18392/met	https://doi.org
The politics of	Already had a	0		10.1017/S0143	http://dx.doi.c
Comparing th	Already had a	0		10.1027/1614-	https://doi.org
'Don't play if y	Already had a	0		10.1017/S1755	https://doi.org
RÄDSLÄN FÖF	Found	100	openalex		http://um.kb.s
Sosiaaliset käs	Found	100	openalex		http://hdl.han

Finished batch lookup.

1	Progress	Shows progress, elapsed time and the estimated time remaining.
2	Results	Title, status, match score, source, DOI and link of each record (first 200 shown; the export contains all). Scroll right for all columns.
3	Export format	Format of the saved file. <i>Same as source</i> keeps the format you opened.
4	Export results...	Saves a copy with the found DOIs/links filled in, plus the columns Lookup Status, Match Score, Match Source, Matched Title and Failed Sources.

Page 10

Lookup statuses

Status	Meaning
Found	A strong match: DOI/link filled in automatically.
Please verify	A plausible match. Its DOI/link is filled in, but should be checked (use Verification or Review & Convert).
Low confidence	Only a weak match was found; it is not written into the DOI/link fields.
matched_no_link	A matching record was found, but the source has no DOI or link for it.
Not found	No source returned a matching record.
Not found — search incomplete	Nothing found, but at least one source failed to respond. Run again later.
URL added (Unpaywall)	The record had a DOI; Unpaywall supplied an open-access URL.
Already had a DOI/URL — skipped	Excluded by the “which records” setting.
Missing title	The record has no title to search for.

6. Verification

Verification checks, record by record, that each DOI or URL exists **and** belongs to that paper. It needs no previous lookup: any file with titles and DOIs/URLs can be verified. A merely similar title with a different identifier is never accepted as verification.

6.1 Verification settings

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Verify fileVerification settings

Verification method settings

Choose which input metadata is compared with source metadata. DOI and URL are always used to locate and validate the record; they are not optional scoring fields. Unchecked fields are preserved in the exported file but do not affect the score, warnings, or decision.

1

☒

Title (required)

Primary identity field. Main title and title + subtitle are both tested.

2

☒

Authors

Compares original and accent-normalised author names; either form may match.

☒

Publisher

Checks the publisher when both the input file and source provide it.

☒

Item Type

Checks compatible types such as journal article, book, chapter, report, or thesis.

3

☐

Publication Year

Optional. Accepts any online, print, or issued year returned by the source (± 1 year).

☐

Publication Title / Journal

Checks the journal, proceedings, or other container title.

☐

Volume

Checks volume when relevant to the item type.

☐

Issue

Checks issue when relevant to the item type.

☐

Pages

Checks the page or article-number field.

☐

ISBN

Checks ISBN for books, chapters, and proceedings.

☐

ISSN

Checks ISSN for journal articles.

Default method: Title + Authors + Publisher + Item Type. Publication Year is off by default so online-first and later volume-assignment dates cannot reduce a result.

Verification → Verification settings.

1	Title (required)	Always compared; the main title and title + subtitle are both tested.
2	Authors	Compares author names, with and without accents.
3	Publication Year	Off by default so that online-first and print years cannot cause false mismatches. When on, a difference of ±1 year is accepted.

Publisher, Item Type, Publication Title, Volume, Issue, Pages, ISBN and ISSN can also be switched on. Fields that are off are still kept in the exported file; they just do not affect the score or decision.

6.2 Verifying a file

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Verify fileVerification settings

Choose file...ISSP_sample_linked.ris (9 records)

Column mapping

TitleAuthorYearDOIURL

1 TitleAuthorPublication YearDOIUrl

4 Verify fileStopMode3 FastExport formatRIS (.ris)Export verified file...7

Fast — verifies DOI registry or page/PDF metadata first and stops immediately when it matches. Enabled Sources are used only as fallback when primary evidence is missing or insufficient. It is faster and uses fewer API requests, but does not require a second source to confirm the same identifier.

Done: 7/9 verified (4 direct, 2 with warning, 1 via publisher page); 2/9 not verified; 5/9 links valid.
Completed in 0:22 · Average 2.4s/record · Estimated remaining 0:00

Title	Verification	Score	Metadata title	Resolved URL
ISSP2001: Soci	Mismatch	75	ISSP2001: Social Netw	https://auckland.fig
Determinante	Verified	90	Determinantes person	https://doi.org/10.3
Interpersonal	Verified via publish	100	Interpersonal relation	https://ojs.lib.unide
The politics of	Verified	90	The politics of State ai	https://www.cambri
Comparing th	Verified with warnir	90	Comparing the Perfor	https://econtent.hc
'Don't play if y	Verified	90	'Don't play if you can'	https://www.cambri
Stichprobenve	Invalid identifier	0		https://nbn-resolvi
Allgemeine Be	Verified with warnir	83	Allgemeine Bevölkererui	https://search.gesis
Movilidad inte	Verified	99		https://cedlas.econ

Selected result details

Status: verified_with_warning
Score: 90.0
Decision rule: complete_metadata_match_with_secondary_warnings
Warnings: publisher
Message:
The DOI and core paper identity match. Secondary metadata warnings: Publisher.

Copy full message

A verified RIS file with one result selected.


1	Column mapping	Title, Author, Year, DOI and URL columns. Detected automatically.
2	DOI / URL columns	The identifiers to check. Records with neither are reported as invalid.
3	Mode	Fast: checks the DOI registry or the page/PDF metadata and stops at the first match. High confidence: additionally requires a second, independent source to confirm the same identifier. Slower, but stronger evidence.
4	Verify file / Stop	Start or stop. Progress is saved after every record, so a stopped or interrupted run resumes where it left off.
5	Results	Each record's verification status, score, the title found in the metadata, and the resolved URL.
6	Selected result details	The full reasoning for the selected record: status, score, decision rule, conflicts, warnings and message.
7	Export verified file...	Saves a copy with the verification columns added.

Verification statuses

Status	Meaning
Verified	The identifier exists and its metadata matches the record.
Verified with warning	The core identity (title/authors) matches, but a secondary field such as the publisher differs. Worth a quick look.
Verified via publisher page	The registry metadata differed (e.g. a translated title), but the publisher's own page shows a matching title and author.
Verified via container page	A chapter whose DOI belongs to the whole book; the book's page lists the chapter and its authors.
Container match - not verified	The DOI identifies the parent book/journal, not this item.
Mismatch	The identifier exists but describes a different paper.
Invalid identifier	Malformed or unregistered DOI, a dead link, or no DOI/URL at all.
Unverifiable - insufficient metadata	Reachable, but the page/PDF gives no usable metadata.
Temporarily unavailable	The site blocked or rate-limited the request (e.g. HTTP 403/429). Try again later; the check is not a verdict on the link.

6.3 Choosing which columns to export

When you export, you can choose which of the added verification columns to keep:

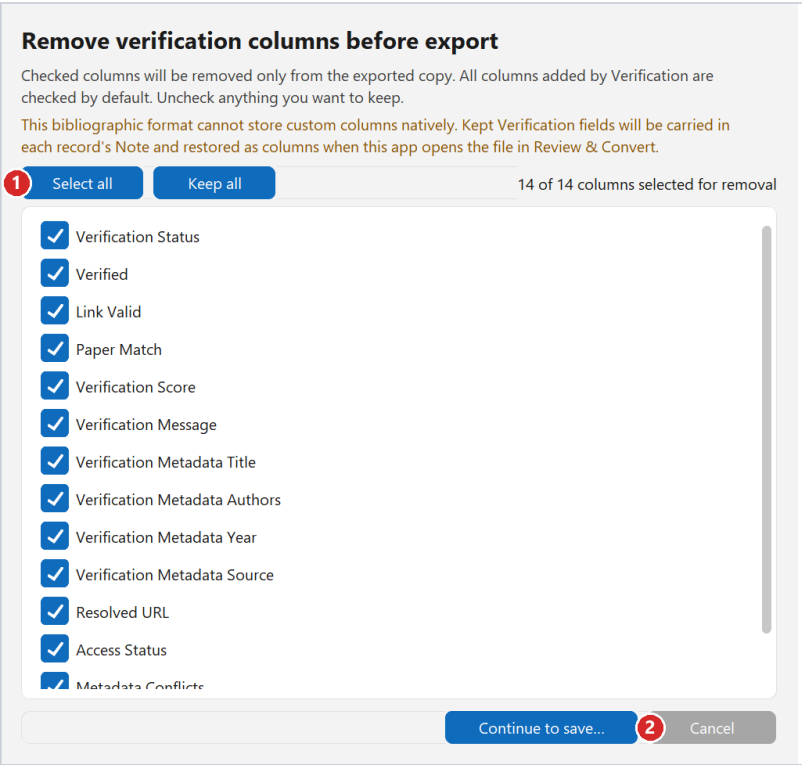

Removing verification columns from the exported copy.

1	Select all / Keep all	Ticked columns are removed from the exported copy. All are ticked by default; untick the ones you want to keep.
2	Continue to save...	Opens the save dialog (the button to the left of the marker). Cancel returns without saving.

7. Abstract Finder

Abstract Finder fills in missing abstracts. It first asks the enabled scholarly sources, using title, author and year to make sure it has the right paper, and otherwise reads the record's own web page or PDF (from its URL or DOI). Existing abstracts are never replaced.

The screenshot shows the 'Abstract Finder' tab in the Literature Lookup interface. At the top, there's a navigation bar with buttons: Single Lookup, Batch Import, Verification, Abstract Finder (selected), ISSP Module Tags, Note Link Recovery, Keyword Cleanup, Review & Convert, Statistics, Compare Documents, and Translate. Below this, a file selection area shows 'Choose file...' and 'ISSP_sample.ris (18 records)'. An 'Export format' dropdown is set to 'Same as source', and an 'Export with abstracts...' button is visible. The main configuration area has three columns for matching: 'Title column (for matching)' with a dropdown set to 'Title' (callout 1), 'Author column (for matching)' with a dropdown set to 'Author', and 'Year column (optional)' with a dropdown set to 'Publication Year'. Below these are 'URL column' (dropdown set to 'Url', callout 2), 'DOI column' (dropdown set to 'DOI'), and 'Abstract column (RIS AB)' (dropdown set to 'Abstract', callout 3). A 'Find missing abstracts' button (callout 4) and a 'Stop' button (callout 6) are to the right. A status bar indicates 'Abstract processing complete. Export to save the enriched file.' Below this, a 'Coverage' section (callout 5) shows statistics: Existing abstracts: 15 (83.3%), Abstracts found from Sources: 2 (11.1%), Abstracts found from links: 0 (0.0%), Abstract matches confirmed: 2 (11.1%), Abstracts found needing review: 0 (0.0%), Abstracts found with possible mismatch: 0 (0.0%), and Abstracts with no abstract found: 0 (0.0%). At the bottom is a table of results (callout 6) with columns: Title, Fetch status, Review tag, Page title, Abstract source, Abstract, and Source URL. The table contains 18 rows of data.

Title	Fetch status	Review tag	Page title	Abstract source	Abstract	Source URL
ISSP2001: Social Networ	existing_abstract				The eleventh of 20 year	
Determinantes personal	existing_abstract				Este artículo tiene tres c	
Interpersonal relationsh	existing_abstract				Our paper aims to dem	
The politics of State aid	existing_abstract				Despite widespread ack	
Comparing the Perform	existing_abstract				Abstract. The use of agr	
'Don't play if you can't v	existing_abstract				In this paper, we invest	
RÅDSLÄN FÖR ATT FÖR	existing_abstract				The purpose of this stuc	
Sosiaalset käsitykset, us	abstract_found_sou	abstract_match_confirm	Sosiaalset käsitykset, us	OpenAlex API	Tässä tutkielmassa tarka	http://hdl.handle.net/10
Commitment at work: h	existing_abstract				French workers are know	
The Discursive Structure	existing_abstract				National pride is widely	
Die Klassenstruktur im s	existing_abstract				Untersucht wird, ob unc	
Worldview construction: existing_abstract	existing_abstract				Early civic education is c	
Shifts in Attitudes and L	existing_abstract				We present longitudinal	
Causes and Remedies fc	abstract_found_sou	abstract_match_confirm	Causes and Remedies fc	Crossref API	In view of the increasing	https://doi.org/10.2202/
Stichprobenverzerrung i	existing_abstract				Die Neigung von Befrag	
Allgemeine Bevölkerung	existing_abstract				Die Allgemeine Bevölker	
Movilidad intergeneraci	existing_abstract				El principal objetivo de	
Frauen Zwischen Beruf	no_link					

Abstract Finder after a run.

1	Title / Author / Year columns	Used to confirm that a found abstract belongs to this record.
2	URL / DOI columns	Used for the web-page fallback.
3	Abstract column	Where abstracts are written (the RIS AB field / Zotero's Abstract).
4	Find missing abstracts	Starts the search; Stop keeps what was found so far.
5	Coverage	How many records have links and abstracts, before and after the run.
6	Results	Fetch status, review tag, page title, abstract source and the abstract itself.

A found abstract is always kept. If the page's title/author/year evidence does not clearly match the record, the record receives a tag you can filter on in Zotero:

- **ABSTRACT_FOUND_POSSIBLE_MISMATCH:** the page appears to describe a different paper.
- **ABSTRACT_FOUND_NEEDS_REVIEW:** not enough evidence either way.

The evidence (page title, authors, year, DOI and match scores) is written to extra columns in CSV/Excel exports and to the record Note in RIS/BibTeX exports.

8. ISSP Module Tags

This page identifies which ISSP (International Social Survey Programme) module or modules a publication uses, with the evidence and a confidence level for every tag. The module tags are written into three columns, one per kind of evidence, so you can check them before any of them reach the keywords.

The screenshot shows the 'ISSP Module Tags' interface. At the top, there's a navigation bar with buttons: Single Lookup, Batch Import, Verification, Abstract Finder, ISSP Module Tags (active), Note Link Recovery, Keyword Cleanup, Review & Convert, Statistics, Compare Documents, and Translate. Below this, a file selection area shows 'Choose file...' and 'ISSP_sample.ris (18 records)'. An 'Export format' dropdown is set to 'Same as source', and an 'Export with module tags...' button is visible. The main configuration area has two rows of dropdowns: 'Title column' (set to 'Title'), 'Abstract column' (set to 'Abstract'), 'Notes/Extra column (optional)' (set to 'Notes'), 'URL column' (set to 'Url'), 'DOI column' (set to 'DOI'), and 'Tags/Keywords column' (set to 'Keywords'). Below these are three checkboxes: 'Also resolve GESIS dataset DOIs online (10.4232/1.xxxxx) — needed when a record cites only a DOI, not a ZA study number' (checked), 'Match by meaning — not included in this version of the app (it needs the sentence-transformers package). All other matching steps still run.' (unchecked), and 'Also download each record's linked page/PDF and search the full text — much slower (one web request per record with a URL or DOI), but reaches Methods/Data sections an abstract alone would miss, and also looks for which module tags into the keywords' (checked). Below the checkboxes are buttons for 'None (review later)', 'ID or name', '+ keywords', and 'All (+ similarity)'. A text block explains that by default, module tags go only into the ISSP Tags (ID or name) / (keywords) / (similarity) columns, which are saved with the file; add them to the keywords later on the Review & Convert page ("Add values"). "DATA - <country>" tags are always added to the keywords. Existing keyword tags are never removed. At the bottom of the configuration area are 'Classify records' and 'Stop' buttons. A status message says 'Classification complete. Module tags are in the ISSP Tags (ID or name) / (keywords) / (similarity) columns; DATA country tags were added to 'Keywords'. Export to save, then open the export in Review & Convert to add the tags you accept to the keywords (Add values).'. Below this is a summary of records: Total records: 18, high confidence: 5 (27.8%), medium confidence: 0 (0.0%), low confidence: 0 (0.0%), not reported: 10 (55.6%). At the bottom is a table with 7 columns: Title, Tag, Confidence, Status, Data countries, Where found, and Quote / reason. The table contains 10 rows of data.

Title	Tag	Confidence	Status	Data countries	Where found	Quote / reason
ISSP2001: Social Network	SOCNET	high	Tagged	New Zealand	SOCNET: Title	SOCNET: "ISSP2001: Soc
Determinantes personal			Not reported			Searched Abstract: no n
Interpersonal relationsh			Not reported			Searched Abstract: no n
The politics of State aid			Not reported			Searched Abstract: no n
Comparing the Perform			Not reported			Searched Abstract: no n
'Don't play if you can't v	SOCINEQ	high	Tagged		SOCINEQ: Abstrac	SOCINEQ: "Taken togetl
RÅDSLÄN FÖR ATT FÖR			Not reported			Searched Abstract: no n
Sosiaaliset käsitykset, us			Unavailable			Only a title/identifier to
Commitment at work: h			Not reported			Searched Abstract: no n
The Discursive Structure	NATID	high	Tagged		NATID: Abstrac	NATID: "National pride i
Die Klassenstruktur im s			Not reported			Searched Abstract: no n

ISSP Module Tags after classifying a file.

1	Title / Abstract / Notes columns	The text that is searched for module evidence.
2	Tags/Keywords column	Where "DATA - <country>" tags (and module tags, if chosen in 5) are added. Existing keywords are never removed.
3	Resolve GESIS DOIs online	Looks up GESIS dataset DOIs (10.4232/1.xxxxx) to find the study they cite. Needed when a record cites only a DOI, not a ZA study number.
4	Search the full text	Also downloads each linked page/PDF and searches it, reaching Methods/Data sections an abstract misses. Much slower. It also tags which countries' data were used, as "DATA - <country>".
5	Module tags into the keywords	<i>None (review later)</i> , the default, keeps module tags only in the three ISSP Tags columns. <i>ID or name</i> , <i>+ keywords</i> or <i>All (+ similarity)</i> also adds those columns' tags to the keywords.
6	Classify records	Starts the classification.
7	Results	Tag, confidence, status, data countries, where the evidence was found and the exact quote or reason.

A record can receive more than one module tag. Each tag goes into one of three columns, by the evidence behind it, from strongest to weakest:

Column	Evidence
ISSP Tags (ID or name)	A ZA study number, a resolved GESIS DOI (10.4232/...), or an exact ISSP module name (e.g. <i>Work Orientations</i> , <i>Citizenship</i>). The single words <i>religion</i> and <i>environment</i> count only in a sentence that also says “ISSP” or “module”.
ISSP Tags (keywords)	<i>Religious</i> , <i>religiosity</i> , <i>environmental</i> and similar word forms in such a sentence; or at least two topic phrases typical of one module.
ISSP Tags (similarity)	Similar in meaning only (one best tag per record). Check these by hand.

Each record also gets a status: *Tagged*, *Not reported* (there was readable text but no ISSP module was found) or *Unavailable* (no abstract or full text to analyse).

When you export to RIS or BibTeX, the three columns are stored in each record's Note (the app asks first; see *Zotero round trip*). Open the exported file in **Review & Convert** to see them as columns again and to add the tags you accept to the keywords with **Add values** (section 11.1).

Note. The option “Match by meaning” is not included in this version of the app. It needs a large machine-learning component, so it is shown greyed out. All other matching steps run normally.

9. Note Link Recovery

Links are often pasted into a record's Notes instead of its URL field. This page finds them and, for records that have neither a URL nor a DOI, copies the first link into the URL field. It works entirely offline.

Single Lookup Batch Import Verification Abstract Finder ISSP Module Tags **Note Link Recovery** Keyword Cleanup Review & Convert Statistics Compare Documents Translate

Choose file... ISSP_sample.ris (18 records)

Export format Same as source Export enriched copy... 7

Notes column URL column DOI column

1 Notes 1 Url 1 DOI Analyze notes & add missing links 2

3 ☒ Remove links from Notes once they are in the URL/DOI field

4 ☐ Clear Notes that contain only "ISSP"

Note and link statistics

Total records: 18
 Records with a Note: 10 (55.6%)
 Records with both a link and a Note: 6 (33.3%)
 Records without a link but whose Note contains a link: 3 (16.7%)
 Links removed from Notes: 7 (in 7 records)

Title	Existing / recovered link	Note URLs found	Added from Note
ISSP2001: Social Networ	https://doi.org/10.17608/k6.auckl		No
Determinantes personal	https://doi.org/10.32826/cude.v4-		No
Interpersonal relationsh	https://doi.org/10.18392/metsz/2	https://doi.org/10.18392/	No
The politics of State aid	http://dx.doi.org/10.1017/S01438		No
Comparing the Perform	https://doi.org/10.1027/1614-224		No
'Don't play if you can't v	https://doi.org/10.1017/S1755773	https://doi.org/10.1017/	No
RÄDSLÄN FÖR ATT FÖR			No
Sosiaaliset käsitykset, us			No
Commitment at work h			No
The Discursive Structure			No
Die Klassenstruktur im s			No
Worldview construction:	http://search.proquest.com/docv	http://search.proquest.c	Yes
Shifts in Attitudes and L	http://www.jstor.org/stable/2000	http://www.jstor.org/sta	Yes
Causes and Remedies fc	http://www.bepress.com/pso_pov	http://www.bepress.com	Yes
Stichprobenverzerrung i	https://nbn-resolving.org/resolve	https://nbn-resolving.or	No
Allgemeine Bevölkerung	https://doi.org/10.4232/1.11138		No
Movilidad intergeneraci	http://cedlas.econo.unlp.edu.ar/a	http://cedlas.econo.unlp	No
Frauen Zwischen Beruf i			No

Analysing notes in a RIS export.

1	Notes / URL / DOI columns	Detected automatically.
2	Analyze notes & add missing links	Runs the analysis and fills the table.
3	Remove links from Notes	Optional: deletes a link from the Note once it is in the URL/DOI field.
4	Clear Notes that contain only "ISSP"	Optional clean-up of placeholder notes.
5	Statistics	Records with notes, with links, and with links only in their notes.
6	Results	Each record's existing or recovered link and the URLs found in its Note.
7	Export enriched copy...	Saves the result.

Tip. A RIS file saved as RIS is patched rather than rewritten: only the Note (N1) and URL (UR) lines that changed are replaced. Every other line of each record stays exactly as it was.

10. Keyword Cleanup

Imported records often carry many automatically assigned keywords. This page keeps only your own curated keywords, recognised by being written in capitals (for example *SOCNET*, *SURVEY DESIGN*) and/or by naming a country (*Germany*, *DATA - Japan*), and removes the rest.

Uppercase keyword cleanup

Keep keywords whose letters are all uppercase (for example: IST, SURVEY DESIGN, COVID-19) and/or keywords that contain a country name (for example: Germany, DATA - Japan). Every other keyword is removed. The source file is never overwritten.

Choose file... ISSP_sample.ris (18 records)

Keywords field **1** Keywords Keyword separator **2** Auto Preview cleanup **3**

Export format Same as source Export cleaned copy... **6**

Keep keywords that are **4** all uppercase (IST, SURVEY DESIGN) or contain a country (Germany, DATA - Japan, USA)

Preview ready: 5 keywords kept; 70 keywords removed from 16 of 18 records.

Record	Original keywords	Kept keywords	Removed keywords
ISSP2001: Soci	Business; Computer scienc	SOCNET	Business; Computer scier
Determinante	Political science; Humaniti		Political science; Human
Interpersonal	2018 FDZ_IUP ISSP ISSP_jr		2018 FDZ_IUP ISSP ISSP_
The politics of	2021 FDZ_IUP ISSP ISSP_jr		2021 FDZ_IUP ISSP ISSP_
Comparing th	Business; Political science;		Business; Political science
'Don't play if y	SOCINEQ	SOCINEQ	
RÄDSLAN FÖF	Economics; Political scienc		Economics; Political scier
Sosiaalset käs	Political science		Political science
Commitment	Economics; Psychology; St		Economics; Psychology; :
The Discursive	NATID; Political science; S	NATID	Political science; Sociolog
Die Klassenstr	Political science		Political science
Worldview cor	NATID	NATID	
Shifts in Attitu	2005 FDZ_IUP ISSP ISSP_jr		2005 FDZ_IUP ISSP ISSP_
Causes and Ri	2009 FDZ_IUP ISSP ISSP_jr		2009 FDZ_IUP ISSP ISSP_
Stichprobenve	2005 FDZ_IUP ISSP ISSP_jr		2005 FDZ_IUP ISSP ISSP_
Allgemeine Be	Philosophy; RELIG	RELIG	Philosophy
Movilidad inte	Political science; Humaniti		Political science; Human
Frauen Zwisch	1991 FDZ_IUP ISSP ISSP_jr		1991 FDZ_IUP ISSP ISSP_

Previewing a keyword cleanup.

- | | | |
|----------|-------------------------------|--|
| 1 | Keywords field | The column holding keywords. For Zotero CSV files <i>Manual Tags</i> is chosen rather than <i>Automatic Tags</i> . |
| 2 | Keyword separator | How keywords are separated. <i>Auto</i> detects semicolons, new lines or commas. |
| 3 | Preview cleanup | Shows what would be kept and removed, without changing anything. |
| 4 | Keep rules | Keep keywords that are all uppercase, and/or keywords that contain a country name. |
| 5 | Preview | Original, kept and removed keywords for each record. |
| 6 | Export cleaned copy... | Saves the cleaned file. RIS saved as RIS only rewrites the keyword (KW) lines. |

11. Review & Convert

Review & Convert opens any result file for inspection and manual review, and saves it in any format. It makes no internet requests. Use it to check the records other pages flagged, to filter a file down to the records you need, or simply to convert between CSV, Excel, RIS and BibTeX.

The screenshot shows the 'Review & Convert' interface. At the top, there's a navigation bar with buttons: Single Lookup, Batch Import, Verification, Abstract Finder, ISSP Module Tags, Note Link Recovery, Keyword Cleanup, Review & Convert (active), Statistics, Compare Documents, and Translate. Below this, a header bar shows 'Choose existing file...' (1) with a file name 'lookup_results_verified.csv (40 records) · utf-8-sig'. A 'Save' (2) button is set to 'RIS (ris)' format. A 'Records' (3) dropdown is set to 'All', and a 'Columns' (4) dropdown is set to 'Ticked only'. A 'Save / convert...' (5) button is visible. On the left, a 'Columns' list shows various fields with checkboxes; 'Author' and 'Title' are checked. The main area shows 'Filter records' (7) with a filter 'Verification Status' set to 'not equals' and 'verified'. A table of records is displayed with columns: Publication Year, Author, Title, doi, url, Verification Status, and Verification Score. The table shows records with various verification statuses and scores. A 'Manual decision' (10) dropdown is at the bottom left. On the right, a 'Selected verification message' (8) is shown, and a 'Copy full message' button is next to it. A 'Manual decision' (10) dropdown is at the bottom left, and an 'Apply to selected row' button is next to it.

A verification result filtered to the records that need attention.

- | | | |
|---|--------------------------------|---|
| 1 | Choose existing file... | Opens CSV, Excel, RIS, BibTeX or CSL JSON. |
| 2 | Save as | Output format: CSV, Excel, RIS or BibTeX. Preset to the source file's format. |
| 3 | Records | All records, or only the <i>Filtered</i> ones (selected automatically after you apply a filter). |
| 4 | Columns | All columns, or <i>Ticked only</i> (the columns ticked on the left). The summary next to the button shows what will be saved. |
| 5 | Save / convert... | Saves the copy. For RIS/BibTeX, the app first lists any columns the format has no field for and asks whether to keep them in the record Note. |
| 6 | Columns | Tick the columns to display (and to keep with <i>Ticked only</i>). All / None tick every column; <i>Add manual field...</i> creates a new column for your own notes. |
| 7 | Filter records | Build conditions (equals, contains, is blank, >, between, ...), combine them with AND or OR, then click Apply. Clear removes all filters. |
| 8 | Open review queue... | Opens the record-by-record review window for the current (filtered) records. |

9	Records	Paged table (50–1,000 rows per page). Click a DOI/URL to open it; double-click a row to review it.
10	Manual decision / Notes	Quick decision for the selected row: Approved, Rejected, Needs review or Unverifiable, plus a note. Click <i>Apply to selected row</i> .

11.1 Adding one column's values to another

Add values copies the items of one column into another column, for example the module tags you accept from *ISSP Tags (similarity)* into *Keywords*. Items are separated by semicolons or new lines; an item already in the target is not added twice, and nothing is removed.

The screenshot displays the 'Review & Convert' interface. At the top, there's a navigation bar with various tool tabs. Below it, a file selection area shows 'ISSP_sample_issp_module_tags.ris (18 records)'. A 'Save as' dropdown is set to 'RIS (.ris)'. A 'Filter records' section allows for filtering by 'Item Type' (set to 'JOUR') and 'Upper value'. The 'Add values' section is active, showing a selection of 'ISSP Tags (ID or name)' as the source and 'Keywords' as the target. A table below this shows the data being processed, with columns for 'Title', 'Keywords', and 'ISSP Tags (ID or name)'. The 'Add' button is highlighted, and a 'Selected verification message' section shows a confirmation message. At the bottom, there's a 'Manual decision' section with a dropdown and an 'Apply to selected row' button.

Adding a record's checked module tags to its keywords.

1	Add values of	The column to copy from. After an ISSP Module Tags run this is preset to <i>ISSP Tags (similarity)</i> .
2	to	The column to add to, normally the keywords column. A new column name creates it.
3	for	<i>Selected record</i> , the <i>Filtered records</i> , or <i>All records</i> .
4	Add	Adds the values and shows how many records changed. Save with Save / convert...
5	Records	Tick the ISSP Tags columns on the left to see them next to the keywords.

Tip. A typical workflow: add *ISSP Tags (ID or name)* to *Keywords* for **All records**, then filter on *ISSP Tags (keywords)* or *ISSP Tags (similarity)* “is not blank”, check each record, and add the tags you agree with for the **Selected record**.

11.2 The review queue

The review window shows one record at a time and compares the record's own values with the values found by lookup and verification.

Record 2 / 37 · source row 2 **1** Show comparison **2** Key fields All fields **3** Edit fields: OFF (view only) Previous Next **4** Keep on top

Lookup status: AI Found | Verification: Verified via publisher page | Score: 100

Field	Input record (view only)		Retrieved metadata (from this file)
Title	ISSP 1997: Work Orientations II ; ZUMA report on the German study 5 Copy	✓ Same after normalization	ISSP 1997: Work Orientations II ; ZUMA report on the German study 7 Copy from column: Verification Metadata Title
Authors	Harkness, Janet Copy	✓ Author surname overlap	Harkness, Janet Copy from column: Verification Metadata Authors
Publication year	2001 Copy	✓ Same year	2001 Copy from column: Verification Metadata Year
Item type	journalArticle Copy	× Different (26)	monograph Copy from column: Verification Metadata Item Type
Publisher	GESIS - Leibniz-Institute for the Social Sciences Copy	× Different (8)	DEU Copy from column: Verification Metadata Publisher
Publication / container	Social Science Open Access Repository (GESIS – Leibniz Institute for the Social Sciences) Copy	— Not available on both sides	(not available) Copy
DOI	Open Copy	— Not available on both sides	1437-4129 Copy from column: Verification Metadata DOI
URL	Open Copy empty in record · showing lookup column: url	× Different (53)	Copy https://www.ssoar.info/ssoar/handle/document/48527 from column: Resolved URL

Verification message **8** The publisher page contains a matching title version and matching author evidence (harkness).

Review state Notes

9 Select a review state... [Save](#) [Save & Next](#) **10** [Close](#)

Reviewing one record: the input record (left) against the retrieved metadata (right).

1	Show comparison	Switch the right-hand comparison on or off.
2	Key fields / All fields	Key fields: Title, Authors, Year, Item type, Publisher, Publication, DOI, URL and Abstract. All fields: every column of the file.
3	Edit fields	Fields open read-only. Switch this on to correct a value; changes are written into the file you save afterwards.
4	Previous / Next	Move through the queue. Keep on top keeps the window above other windows.
5	Input record	The record's own value. When the record's own cell is empty, the value found by the lookup is shown in grey with the note "empty in record · showing lookup column"; it is not saved unless you edit it.
6	Comparison	The outcome for each field, e.g. Same after normalization, Year differs by 2, Different.
7	Retrieved metadata	The value found by verification or lookup, with the column it came from. Blue DOIs and URLs open in the browser.
8	Verification message	Why the record received its verification status.
9	Review state / Notes	Mark the record Accepted or Not accepted and add a note.
10	Save & Next	Saves the decision and moves to the next record. Save stays on this record; Close ends the review.

Colour	Meaning
Green	The two values match (after ignoring case, punctuation and spacing where appropriate).
Yellow	Close but not identical: review recommended.
Red	The values differ.
Grey	One or both sides have no value, or the comparison is switched off.

Important. Decisions are kept in memory while you work. Remember to click **Save / convert...** on the main page to write them to a file.

12. Statistics

Statistics summarises a file: which columns are filled in and how values are distributed. It works offline.

Single Lookup Batch Import Verification Abstract Finder ISSP Module Tags Note Link Recovery Keyword Cleanup Review & Convert **Statistics** Compare Documents Translate

Choose file... ISSP Bibliography_final_restored.ris (12,186 records) Export table... Save chart... 8

Column: 1 Item Type Group by (optional): 2 (none) Chart type: 3 Bar chart Generate: 4

Drag the grey bars to resize the tables and the chart.

5

Column	Kind	Non-empty	Unique values
Item Type	categorical	12,186 (100%)	10
Title	multi_tag	12,186 (100%)	14,592
Publication Year	year	12,184 (100%)	41
Url	text	6,252 (51%)	5,973
Author	multi_tag	12,109 (99%)	15,090
Keywords	multi_tag	10,593 (87%)	168
Abstract	multi_tag	6,370 (52%)	44,251
RIS DA	text	12,184 (100%)	1,261
Publication Title	text	7,432 (61%)	3,400
Volume	numeric	5,256 (43%)	289
DOI	text	5,323 (44%)	5,022
Issue	numeric	4,142 (34%)	292
Pages	text	6,709 (55%)	4,808
Publisher	text	6,039 (50%)	2,134
ISSN	text	2,430 (20%)	1,408

6

Item Type

7

Item	Count	Percentage
JOUR	6174	50.7%
CONF	1479	12.1%
CHAP	1361	11.2%
BOOK	1295	10.6%
THES	809	6.6%
RPRT	808	6.6%
MANSCPT	186	1.5%
DATA	68	0.6%
GEN	5	0.0%
MGZN	1	0.0%

9

Item types of a 12,000-record library.

- | | | |
|---|--|---|
| 1 | Column | The column to summarise. |
| 2 | Group by | Optional second column, for example Item Type by Publication Year. |
| 3 | Chart type | Bar chart, pie chart or histogram, depending on the kind of column; or Table only. |
| 4 | Generate | Builds the table and chart. |
| 5 | Column overview | Every column with its detected kind, how many records fill it, and its number of distinct values. |
| 6 | Chart | The chart for the chosen column. |
| 7 | Counts | Each value with its count and percentage. Keyword-type columns are counted per individual keyword. |
| 8 | Export table... / Save chart... | Save the counts as CSV/Excel, or the chart as an image. |
| 9 | Resize | Drag the grey bar between the upper area and the counts table to make either taller, and the bar between the overview and the chart to change their widths. |

13. Compare Documents

Compare Documents matches the records of two files, which may differ in order, size and even column names, and shows exactly which values changed. Typical uses: before vs after a processing step, or your library vs a colleague's copy.

13.1 Setting up the comparison

The screenshot shows the 'Compare Documents' setup interface. At the top, there are tabs for various functions: Single Lookup, Batch Import, Verification, Abstract Finder, ISSP Module Tags, Note Link Recovery, Keyword Cleanup, Review & Convert, Statistics, Compare Documents (active), and Translate. Below the tabs, there are two file selection buttons: 'Choose file A...' (labeled 1) and 'Choose file B...' (labeled 2). The selected files are 'A: lookup_results.csv (40 records)' and 'B: lookup_results_verified.csv (40 records)'. A 'Hide setup' button (labeled 7) is in the top right. The main setup area is divided into two columns. The left column is titled '1. Match records by' and contains a 'File A column' dropdown (labeled 2) and a 'File B column' dropdown. Below these are two match columns: 'Title' (labeled 2) and 'Publication Year'. A '+ Add match column' button (labeled 3) is below the match columns. A note explains that records are paired when their titles match (case and punctuation ignored) and that extra match columns (e.g., DOI, Year, Author) only have to agree where both records have a value. The right column is titled '2. Columns to compare' (labeled 4) and shows a list of columns from both files. Columns are selected by clicking a checkbox. The selected columns are 'url' (labeled 5) and 'Resolved URL'. A 'Pair differently named column' (labeled 5) section shows 'url' from File A and 'Resolved URL' from File B. A 'Compare' button (labeled 6) is below the columns. Below the 'Compare' button is an 'Export format' dropdown set to 'CSV table (.csv)' and an 'Export shown records...' button. Below the export options is a section 'Choose both files, pick the match columns and the columns to compare, then click Compare.' with a dropdown set to 'All' and a 'Search title...' input. At the bottom is a section 'Select a record to see both files side by side.' with a table showing 'File A' and 'File B' columns.

Choosing how records are matched and which columns are compared.

1	Choose file A / file B	The two files to compare.
2	Match records by: Title	Required. Titles are compared ignoring case and punctuation.
3	+ Add match column	Optional extra keys such as DOI, Year or Author. They only have to agree when both records have a value, so an empty cell never prevents a match. Among several records with the same title, the one agreeing on most keys is used.
4	Columns to compare	Columns with the same name in both files. Click a row to tick it; the filter box, Select shown and Clear help with long lists.
5	Pair differently named columns	Compare two columns with different names, for example <i>url</i> in A with <i>Resolved URL</i> in B.
6	Compare	Runs the comparison. Tick <i>Ignore case & punctuation</i> to treat “SAGE” and “sage.” as equal.
7	Hide / Show setup	The setup collapses after comparing, to give the results more room.

13.2 Reading the results

Single LookupBatch ImportVerificationAbstract FinderISSP Module TagsNote Link RecoveryKeyword CleanupReview & ConvertStatisticsCompare DocumentsTranslate

Choose file A...A: lookup_results.csv (40 records)

Choose file B...B: lookup_results_verified.csv (40 records)

Show setup ▼

Compare

☐ Ignore case & punctuation in compared values

Export format

CSV table (.csv)

Export shown records...6

Matched 40 records (12 with differences, 28 identical in the compared columns) · 0 only in A · 0 only in B · compared 3 column(s).

1 All (40) Different (12) Same (28) Colour2 (any column)

Search title...3

Status	Title	Differing columns	url → Resolved URL (A → B)	url (A → B)	status (A → B)
Different	ISSP 1997: Work Orientations II : ZUMA report	url → Resolved URL	https://nbn-resolving.org/urn:nbn:de:0168-ssoar-		
Different	Brahmin left versus merchant right? An analys	url → Resolved URL	https://journals.openedition.org/regulation/25121		
Different	Work Orientations in Scandinavia: Employmen	url → Resolved URL	https://doi.org/10.1177/000169930104400203 →		
Different	ISSP 1997-Work Orientations II ZUMA Report	url → Resolved URL	https://nbn-resolving.org/urn:nbn:de:0168-ssoar-		
Different	International Social Survey Programme: ISSP 2	url → Resolved URL	https://servat.unil.ch/en/notice/servat:BIB_FA59F6		
Different	ISSP 2001 Germany	url → Resolved URL	https://www.ssoar.info/ssoar/handle/document/5		
Different	High modernity and multiple secularities: Vari	url → Resolved URL	https://dlib.bc.edu/islandora/object/bc-in:101862		
Different	The Relationship Between Employment and Sc	url → Resolved URL	https://doi.org/10.1108/JSE-10-2012-0201 → ht		
Different	Comparative Study of Social Networks and Soc	url → Resolved URL	https://servat.unil.ch/en/notice/servat:BIB_B07AB		
Different	Civic Participation and Engagement in Electro	url → Resolved URL	https://ojs.muni.eu/ojs/public-policy-and-admin		
Different	Class and attitudes to market inequality - A co	url → Resolved URL	http://oxfordindex.oup.com/view/10.11126/stanf		
Different	Attitudes to Social Inequality Changing Irelan	url → Resolved URL	https://theliffeypress.com/changing-ireland-in-in		

Different · row 3 in A → row 3 in B · matched by title + 1 of 1 extra key(s); 2 identical candidates, paired in file order


Column	File A	File B
Title (match key)	ISSP 1997: Work Orientations II : ZUMA report on the German study	ISSP 1997: Work Orientations II : ZUMA report on the German study
Publication Year (match key)	2001	2001
url → Resolved URL	https://nbn-resolving.org/urn:nbn:de:0168-ssoar-48527-2	https://www.ssoar.info/ssoar/handle/document/48527
url	https://nbn-resolving.org/urn:nbn:de:0168-ssoar-48527-2	https://nbn-resolving.org/urn:nbn:de:0168-ssoar-48527-2
status	AI Found	AI Found

Comparison results with one record selected.

1	Status filter	All, Different, Same, Only in A, Only in B, No title, each with its count.
2	Column filter	Show only records where one particular column differs.
3	Search title	Narrow the list by title.
4	Records	One row per record, coloured by status; each compared column shows “A value → B value” where the two differ.
5	Side-by-side detail	Every match key (blue) and compared column (red where different) of the selected record, from both files, with its row number in each file.
6	Export shown records...	Saves the records currently shown, with A and B values and a “differs” flag for each compared column.

14. Translate

Translate adds translations of titles and/or abstracts, written as **original [translation]**, so the original text is always kept. The source language is detected automatically; text already in the target language is skipped and costs no quota.

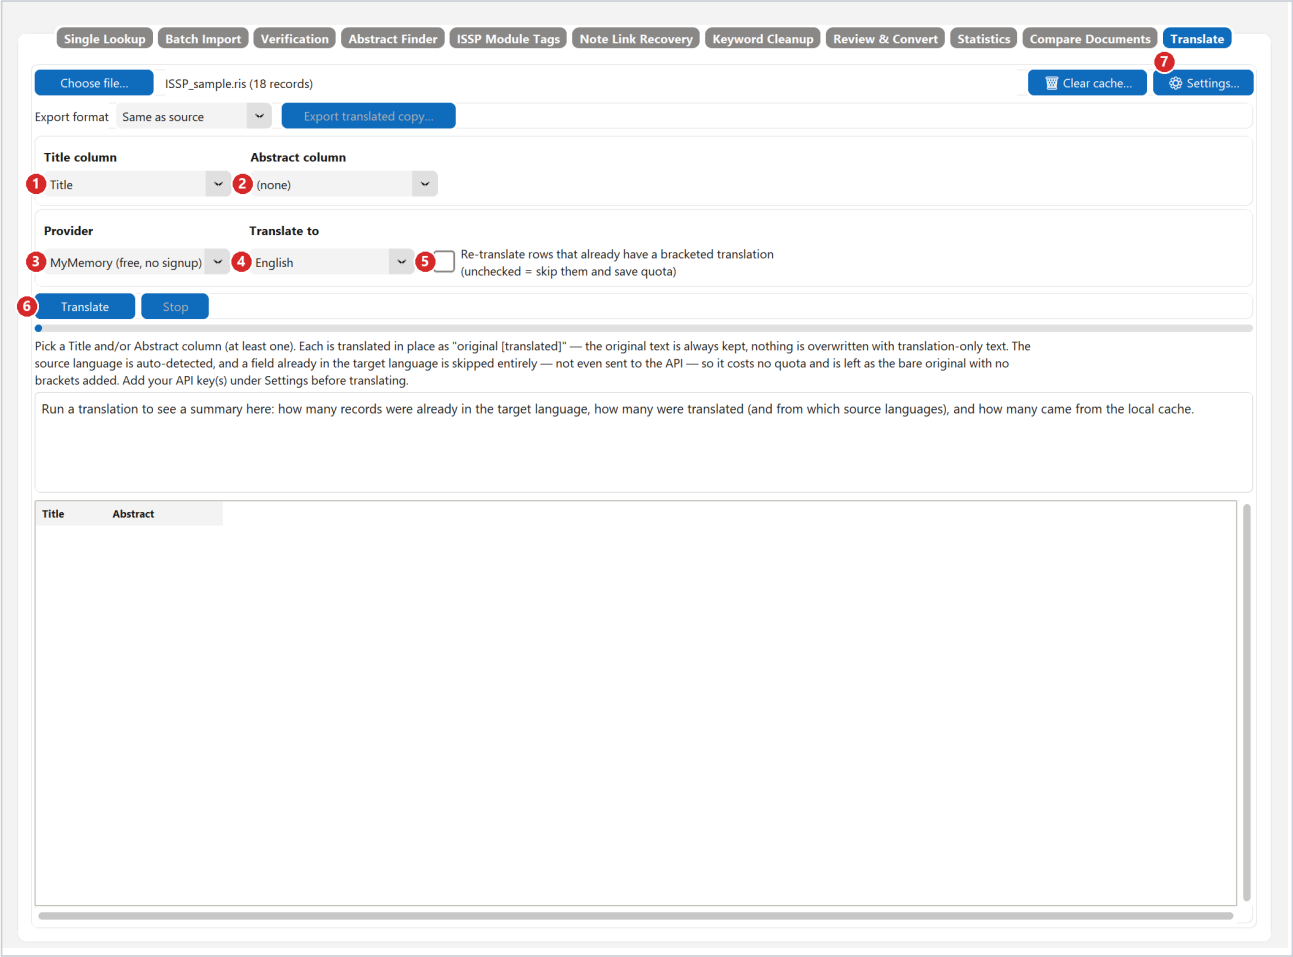

The Translate page with a file loaded.

1	Title column	Titles to translate (choose (none) to skip).
2	Abstract column	Abstracts to translate (choose (none) to skip).
3	Provider	Azure Translator, DeepL or MyMemory (see below).
4	Translate to	The target language.
5	Re-translate rows	When off (recommended), fields that already contain a bracketed translation are skipped to save quota.
6	Translate / Stop	Start or stop. Everything translated before a stop or error is kept and can be exported.
7	Settings... / Clear cache...	Enter API keys; clear the saved translations.

Translation API keys

Saved automatically as you type, and restored next time you open the app. You only need a key for whichever provider you pick on the Translate page.

Azure Translator API key

1

optional

Free F0 tier: 2,000,000 characters/month. Create a "Translator" resource at portal.azure.com to get a key and region.

Azure Translator region

e.g. eastus

The "Location/Region" shown next to the key on the Azure resource's Keys and Endpoint page - required, translation requests fail without it.

DeepL API key

2

optional

Free tier: 500,000 characters/month, generally the higher translation quality. Sign up at deepl.com/pro-api - a free-tier key ends in ".fx".

MyMemory contact email

3

optional, no account needed

No signup and no key at all - MyMemory works with nothing filled in here, at 5,000 characters/day. Adding an email here raises that to 50,000/day (that pool is shared by everyone using the same email, so your own address only helps if you're the only one using it). Translation quality is behind Azure/DeepL, but it's the only option here with no account and no card needed.

Close

Translation API keys (Settings...).

1	Azure Translator key and region	Free tier: 2,000,000 characters per month. Create a "Translator" resource at portal.azure.com .
2	DeepL API key	Free tier: 500,000 characters per month, usually the best quality. Sign up at deepl.com/pro-api (a free key ends in ".fx").
3	MyMemory contact email	No account needed. 5,000 characters per day, or 50,000 per day with a contact email.

Tip. Every translation is cached, so running the same file again, or continuing after a quota or network error, never pays for the same text twice.

15. Troubleshooting and FAQ

Problem	What to do
Windows says “Windows protected your PC”.	Click More info → Run anyway. The app is not digitally signed; this appears once.
The app takes a few seconds to open.	Normal: the single-file app unpacks itself on each start.
A source shows HTTP 429 or “rate limited”.	That database is limiting request speed. The app retries automatically; for large files add a contact email / API key, lower Concurrent workers, or run again later. Cached records are not searched again.
“Not found — search incomplete”.	A source did not respond. Run the same file again later; only the incomplete records are searched.
Verification says “Temporarily unavailable”.	The publisher's site blocked the check (often HTTP 403). The link may be fine; open it in your browser or verify again later.
DeepL: “rejected the API key (403)”.	Check that the whole key was pasted into Settings, that it has not been regenerated, and that the DeepL API subscription is active.
MyMemory: “free daily quota is used up”.	Wait for the reset time shown, add a contact email in Settings (10× the quota), or switch provider. Work done so far is kept.
A cached result looks wrong or outdated.	Batch Import: tick “Clear cached results before running”. Translate: Clear cache...
Scanned PDFs are not read.	Text recognition (OCR) for scanned PDFs is not included in this version; PDFs with a text layer are read normally.
I want to start over with default settings.	Close the app and delete the folder %APPDATA%\Literature Lookup.

Privacy

- Your files stay on your computer; nothing is uploaded.
- Only the title, author, year, DOI or URL needed for a search or check is sent to the databases you enabled. Text to be translated is sent to the translation provider you chose.
- API keys and your contact email are stored only in %APPDATA%\Literature Lookup on your computer.