


# Week8\_gitignore

Commads:-

1. Created a new directory for the experiment.
2. Navigated into that directory.
3. Initialized a Git repository.
4. Created test.log file.
5. Created log directory.
6. Created log/sample.txt file.
7. Created .gitignore file.
8. Edited .gitignore using nano and added:

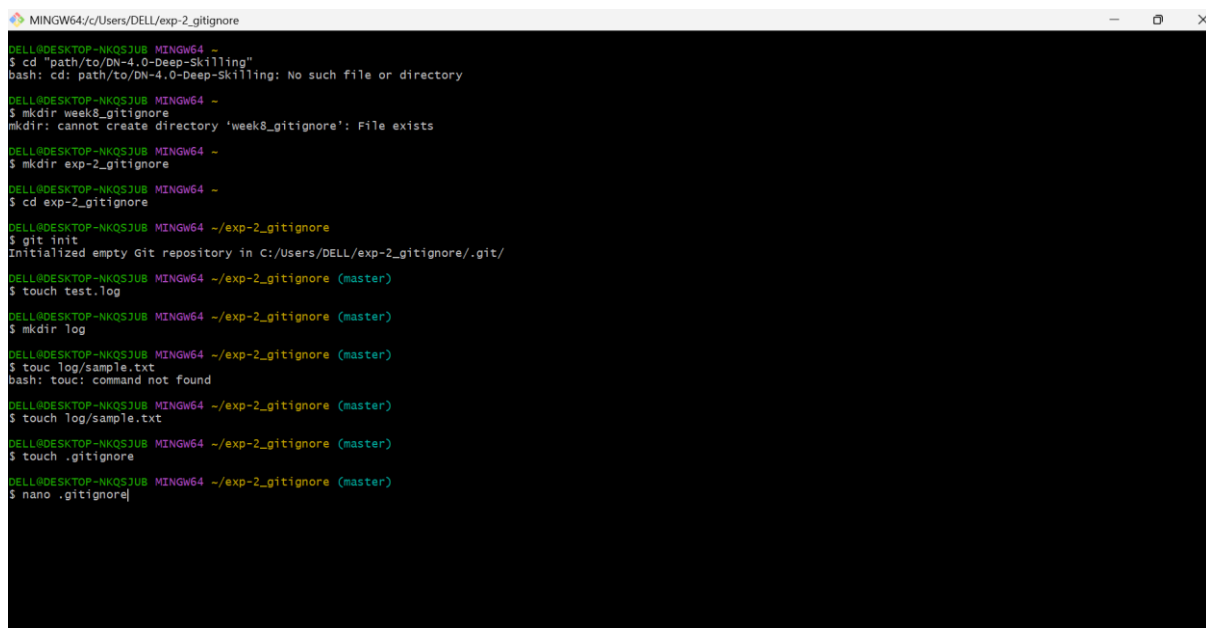

```
MINGW64/c/Users/DELL/exp-2_gitignore
DELL@DESKTOP-NKQ5JUB MINGW64 ~
$ cd "path/to/DN-4.0-Deep-Skilling"
bash: cd: path/to/DN-4.0-Deep-Skilling: No such file or directory

DELL@DESKTOP-NKQ5JUB MINGW64 ~
$ mkdir week8_gitignore
mkdir: cannot create directory 'week8_gitignore': File exists

DELL@DESKTOP-NKQ5JUB MINGW64 ~
$ mkdir exp-2_gitignore

DELL@DESKTOP-NKQ5JUB MINGW64 ~
$ cd exp-2_gitignore

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore
$ git init
Initialized empty Git repository in C:/Users/DELL/exp-2_gitignore/.git/

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore (master)
$ touch test.log

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore (master)
$ mkdir log

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore (master)
$ touc log/sample.txt
bash: touc: command not found

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore (master)
$ touch log/sample.txt

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore (master)
$ touch .gitignore

DELL@DESKTOP-NKQ5JUB MINGW64 ~/exp-2_gitignore (master)
$ nano .gitignore
```

```
MINGW64/c/Users/DELL/exp-2_gitignore
GNU nano 8.4 .gitignore Modified
- .log
log/

Write to File: .gitignore
^G Help      M-D DOS Format  M-A Append      M-B Backup File
^C Cancel    M-M Mac Format  M-P Prepend      ^T Browse
```

```
MINGW64/c/Users/DELL/exp-2_gitignore
GNU nano 8.4 .gitignore git status Modified
- .1

[ Wrote 4 lines ]
^G Help      ^O Write Out  ^F Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File  ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```