



European
Power Platform
Conference

WELCOME
TO

COPEN
HAGEN 2 0
2 6



JOIN THE
CONVERSATION

#EPPC26

Enterprise-Ready Flow Management: Error Handling, Monitoring, and Optimization



NICOLAI SCHJØRMANN

BUSINESS UNIT MANAGER, ABAKION A/S, DENMARK

Enterprise-Ready Flow Management: Error Handling, Monitoring, and Optimization




MICHAEL SVARRER GRUE NIELSEN

SENIOR POWER PLATFORM CONSULTANT, ABAKION A/S,
DENMARK

But first...

Saving time

Interactive questions

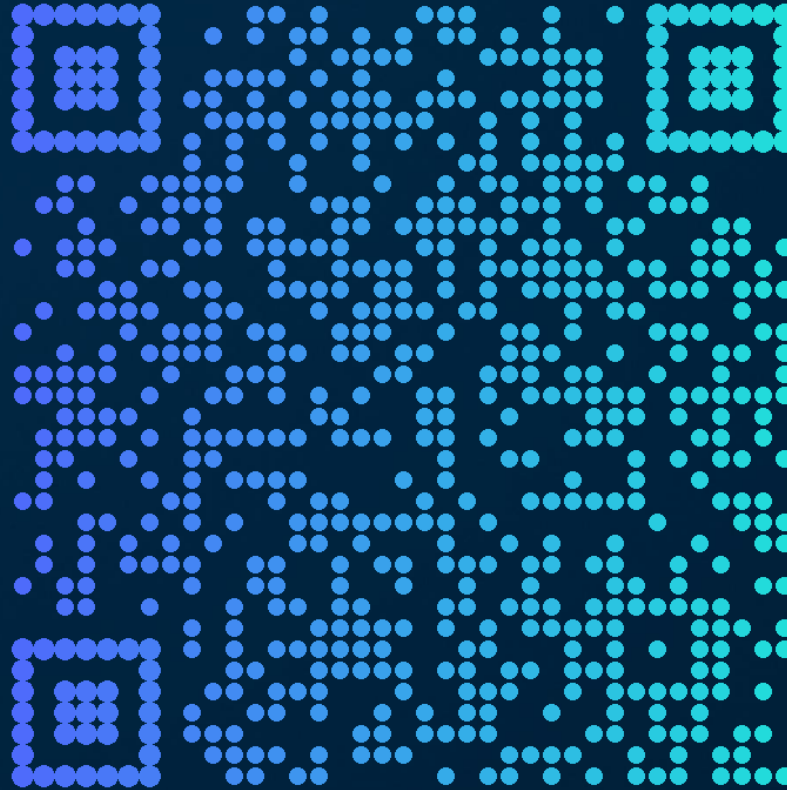

hum.vote/ugct

Let us try to imagine a scenario together...







































Lesson learned



Error management



Notifications




Proactive monitoring



Logging



Scope: We'll explore how to elevate your flows



Design robust error handling to make your flows inform you what went wrong.



Implement real-time monitoring that keeps you ahead of failures instead of reacting after the damage is done.



Optimize your flows for performance and scalability, so they run smoothly no matter how complex business grows.

Why error handling matters

Business disruptions

- Workflow chaos
- Approval delays
- Unseen interruptions

Data inconsistency

- Asymmetrical sync
- Data incomplete
- Poor data

User frustration

- Confusion
- Missing notifications
- Manual work

Hidden failures

- No logs = no clues
- Failures in the shadow
- Quiet breakage

Common pitfalls



Run after

No configured “Run After” conditions



API status

Assuming APIs and connectors always succeed



Retry policies


No “Retry policy” configured



Centralized Management

No centralized monitoring or alerting

The solution

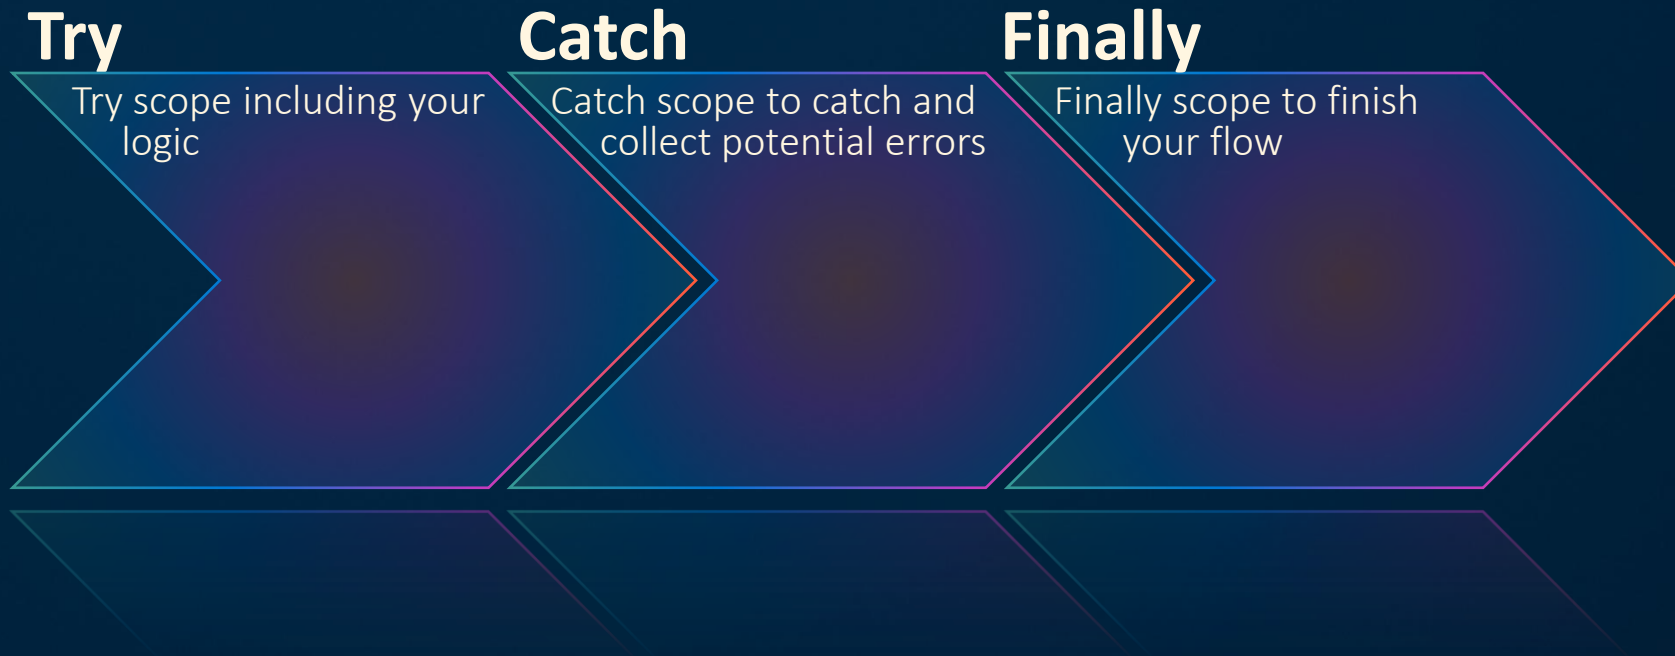

- Configure Retry policies with exponential backoff for transient errors
- Design parallel branches for compensation or rollback mechanisms
- Leverage variables to capture and pass error details for downstream diagnostics
- Set up notifications on failure paths for immediate alerting
- Use Terminate actions to gracefully end flows with custom status and messages
- Add structured logging (Dataverse, SharePoint list, Azure Application Insights)

Interactive demo - Case



Interactive demo - Purpose



Understand the
importance of error
handling



Learn how to implement
Try-Catch-Finally logic




Implement custom error
messages and
notifications

Flow without error handling

Car registry log with date, license plate, vehicle type, and color

DATE	LICENSE PLATE	TYPE	COLOR
29 Oct 2025 14:58	ZF 36 350	Minivan	Blue
29 Oct 2025 15:01	YD 21 143	Minivan	Blue
29 Oct 2025 15:01	XF 17 426	Sedan	Black
29 Oct 2025 15:02	TR 64 674	Sedan	Blue
29 Oct 2025 15:02	WR 55 320	Rust Bucket	Red
29 Oct 2025 15:04	TQ 44 784	Convertible	Black
29 Oct 2025 15:06	LP 22 634	Sedan	Black
29 Oct 2025 15:18	QS 68 737	Sedan	Black
30 Oct 2025 14:04	KZ 67 648	Rust Bucket	Black
30 Oct 2025 14:09	YL 82 447	Sedan	Blue
30 Oct 2025 14:44	OI 37 553	Convertible	Red
15 Jun 2026 23:02	EM 81 511	Convertible	Blue
15 Jun 2026 23:52	KO 56 184	Sedan	Black
15 Jun 2026 23:52	RS 46 253	Convertible	Red
24 Jun 2026 22:22	YS 45 314	Sedan	Green

Flow without error handling

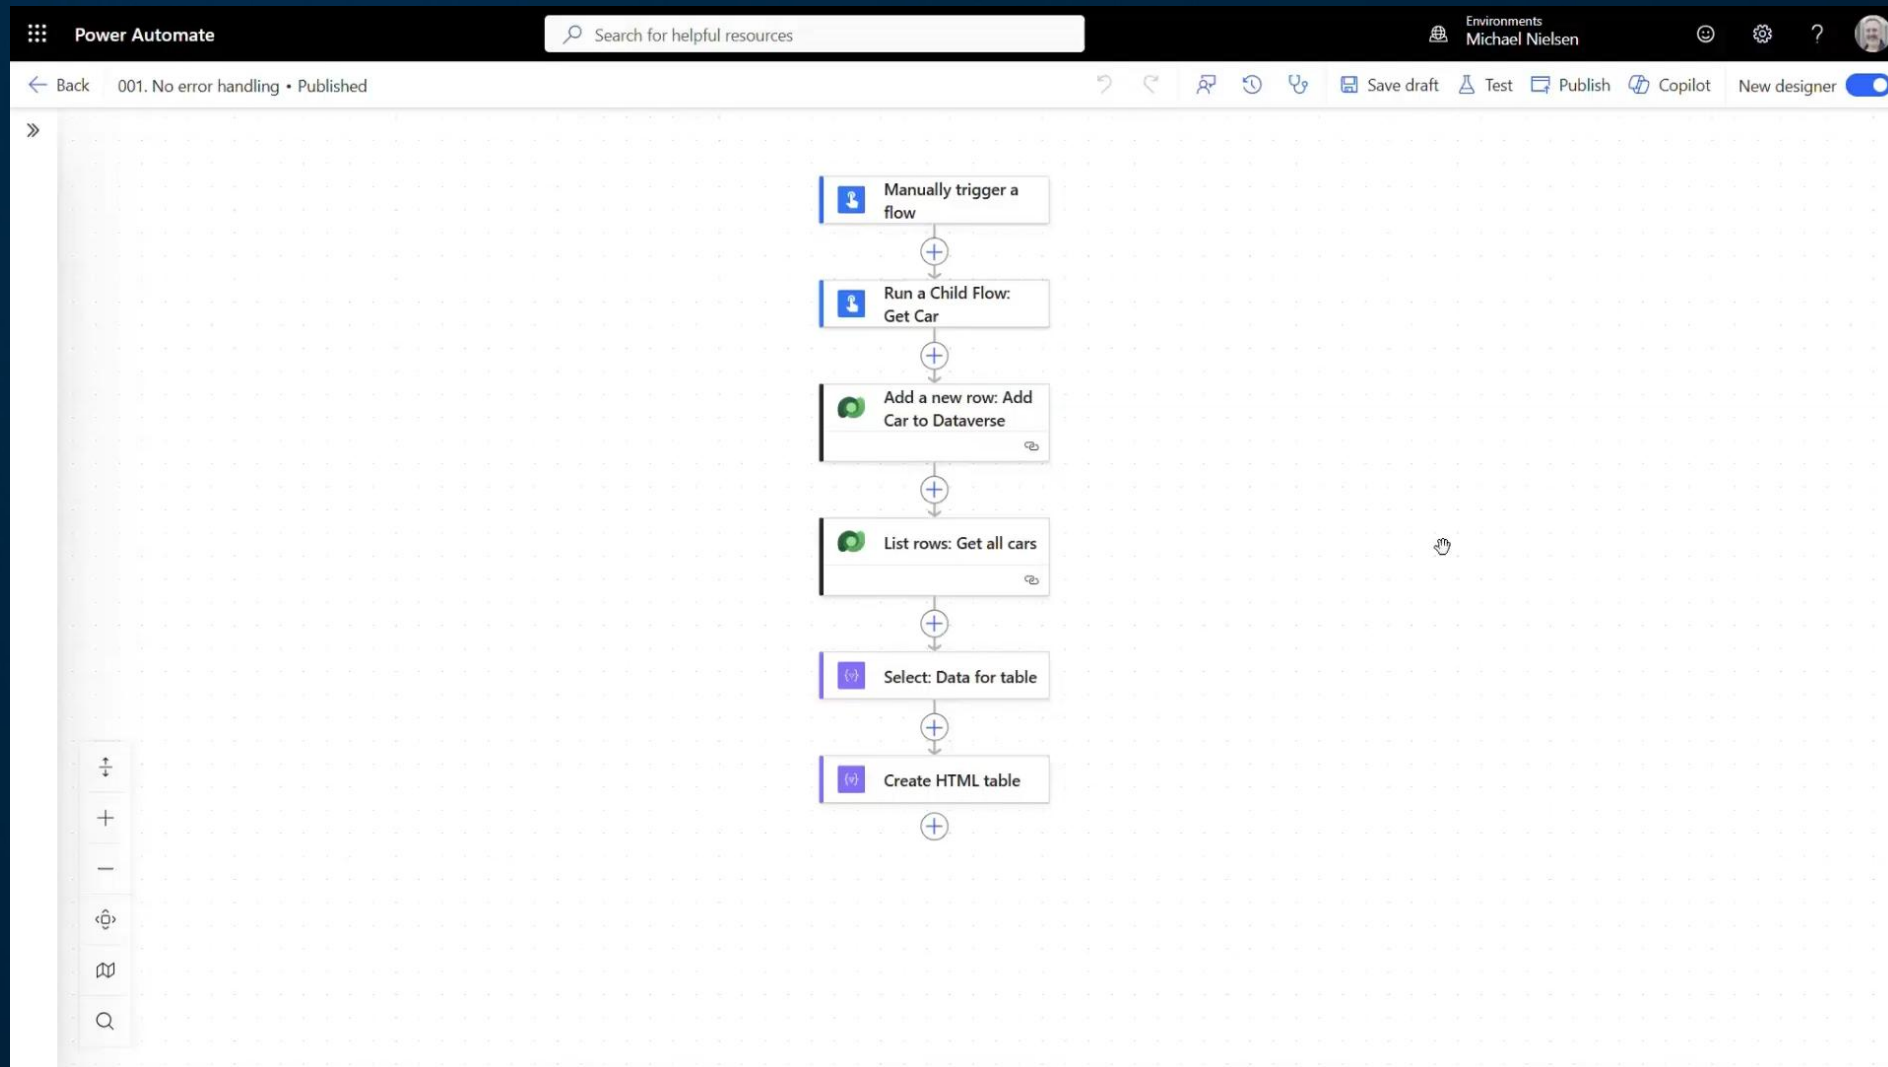

Who is going to know?



How will you know if a flow fails

You will receive an email

You can see it in the flow run history

28-day run history ⓘEdit columns🔄 All runs

Start	Duration	Status
May 15, 09:37 AM (3 sec ago)	00:00:01	Failed
May 12, 11:33 AM (2 d ago)	00:00:01	Test failed
May 12, 11:24 AM (2 d ago)	00:00:01	Test failed
May 12, 11:17 AM (2 d ago)	00:00:01	Test failed
May 12, 11:06 AM (2 d ago)	00:05:01	Test succeeded
May 12, 10:53 AM (2 d ago)	00:00:05	Test succeeded

 Power Automate

❗ 5 of your flow(s) have failed

The flow(s) listed failed in the past week and may need your attention.

5 Notifications:

Flow name	Failure count
050. Get flow runs	2
003. Advanced error handling	49
002. Basic error handling	18
001. No error handling	29
020. Initialize data	5

If you need more help, please visit the [Power Automate support page](#).

Did you find this email helpful? [Yes](#) [No](#)

How will you know if a flow fails

28-day run history ⓘ			Edit columns	↻ All runs
Start	Duration	Status		
May 15, 09:37 AM (3 sec ago)	00:00:01	Failed		
May 12, 11:33 AM (2 d ago)	00:00:01	Test failed		
May 12, 11:24 AM (2 d ago)	00:00:01	Test failed		
May 12, 11:17 AM (2 d ago)	00:00:01	Test failed		
May 12, 11:06 AM (2 d ago)	00:05:01	Test succeeded		
May 12, 10:53 AM (2 d ago)	00:00:05	Test succeeded		

May 15, 10:23 AM (5 d ago)

00:00:02

Test succeeded

May 15, 10:23 AM (5 d ago)

00:00:02

Test succeeded

How will you know if a flow fails



Power Automate

!

5 of your flow(s) have failed

The flow(s) listed failed in the past week and may need your attention.

5 Notifications:


Flow name	Failure count
050. Get flow runs	2
003. Advanced error handling	49
002. Basic error handling	18
001. No error handling	29
020. Initialize data	5

If you need more help, please visit the [Power Automate](#) support page.


Did you find this email helpful? [Yes](#) [No](#)

But only once per day.

Basic error handling – Parallel Actions

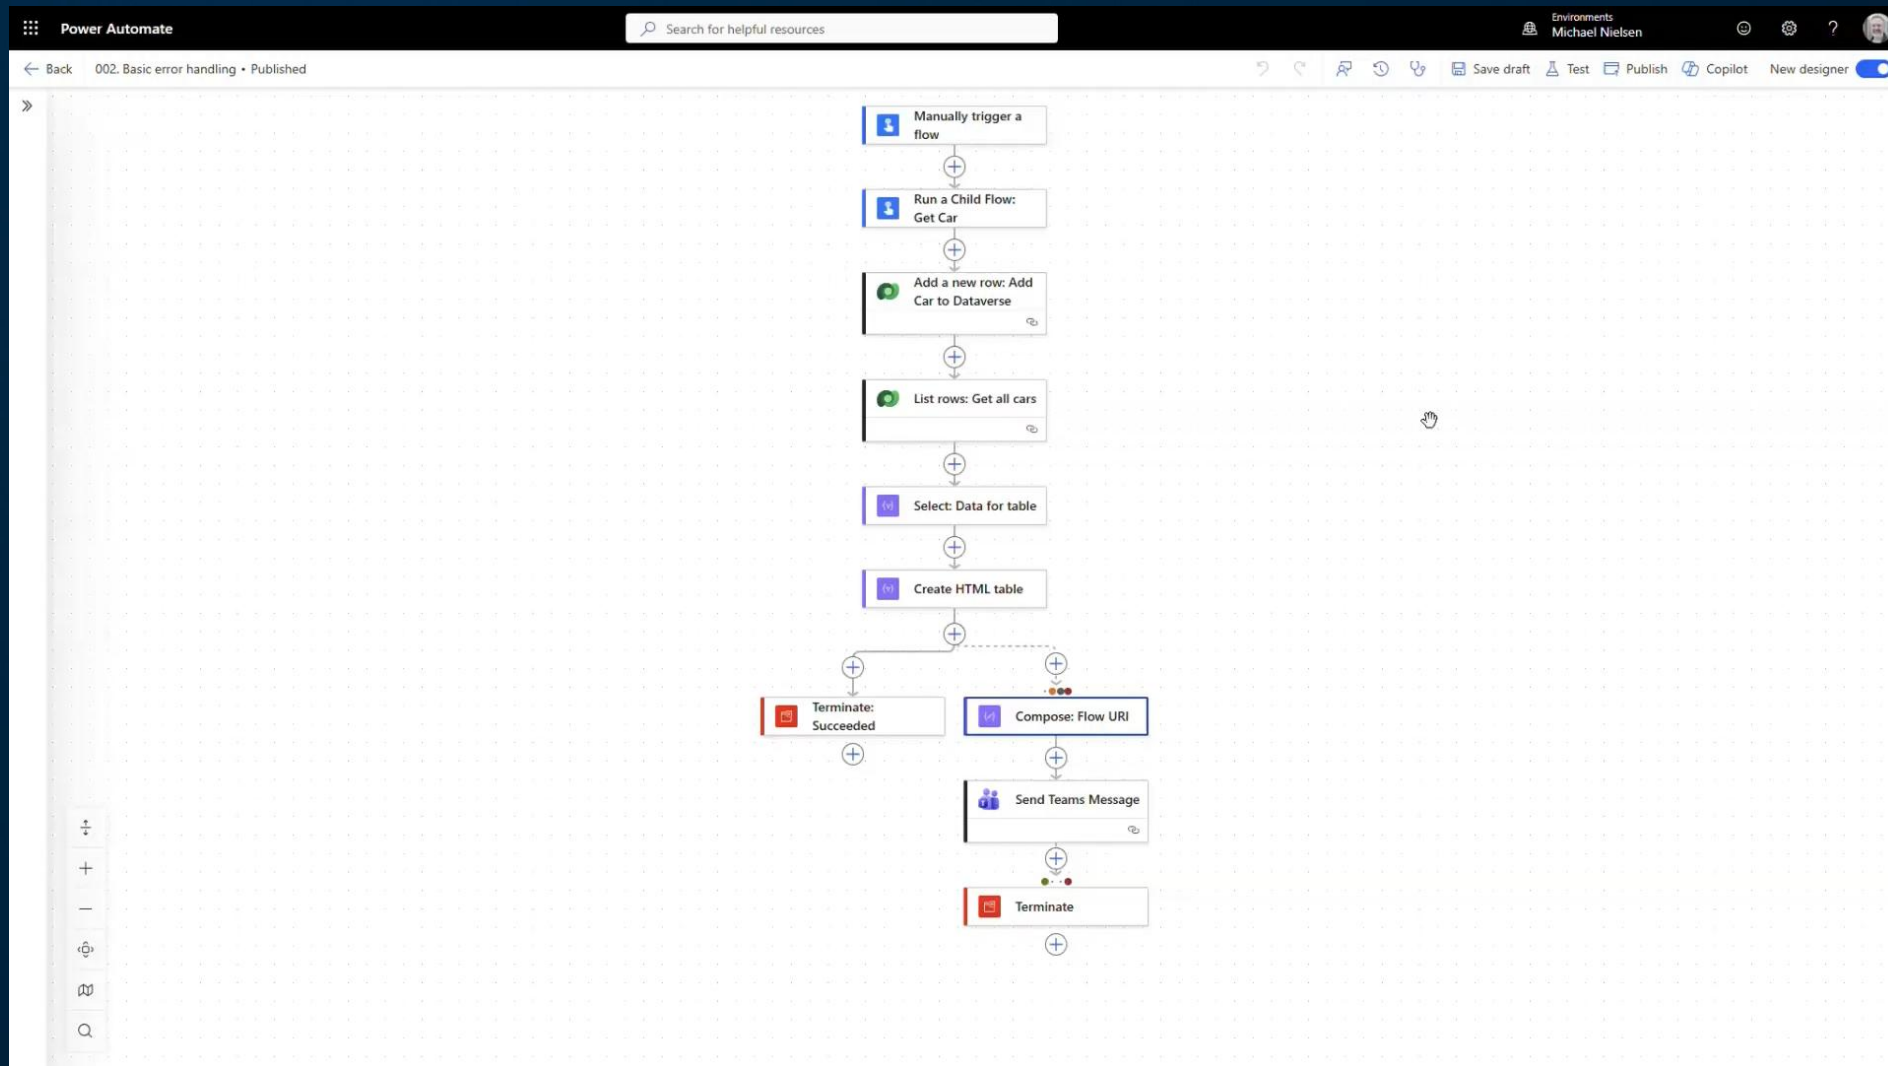

Lets run the parallel actions

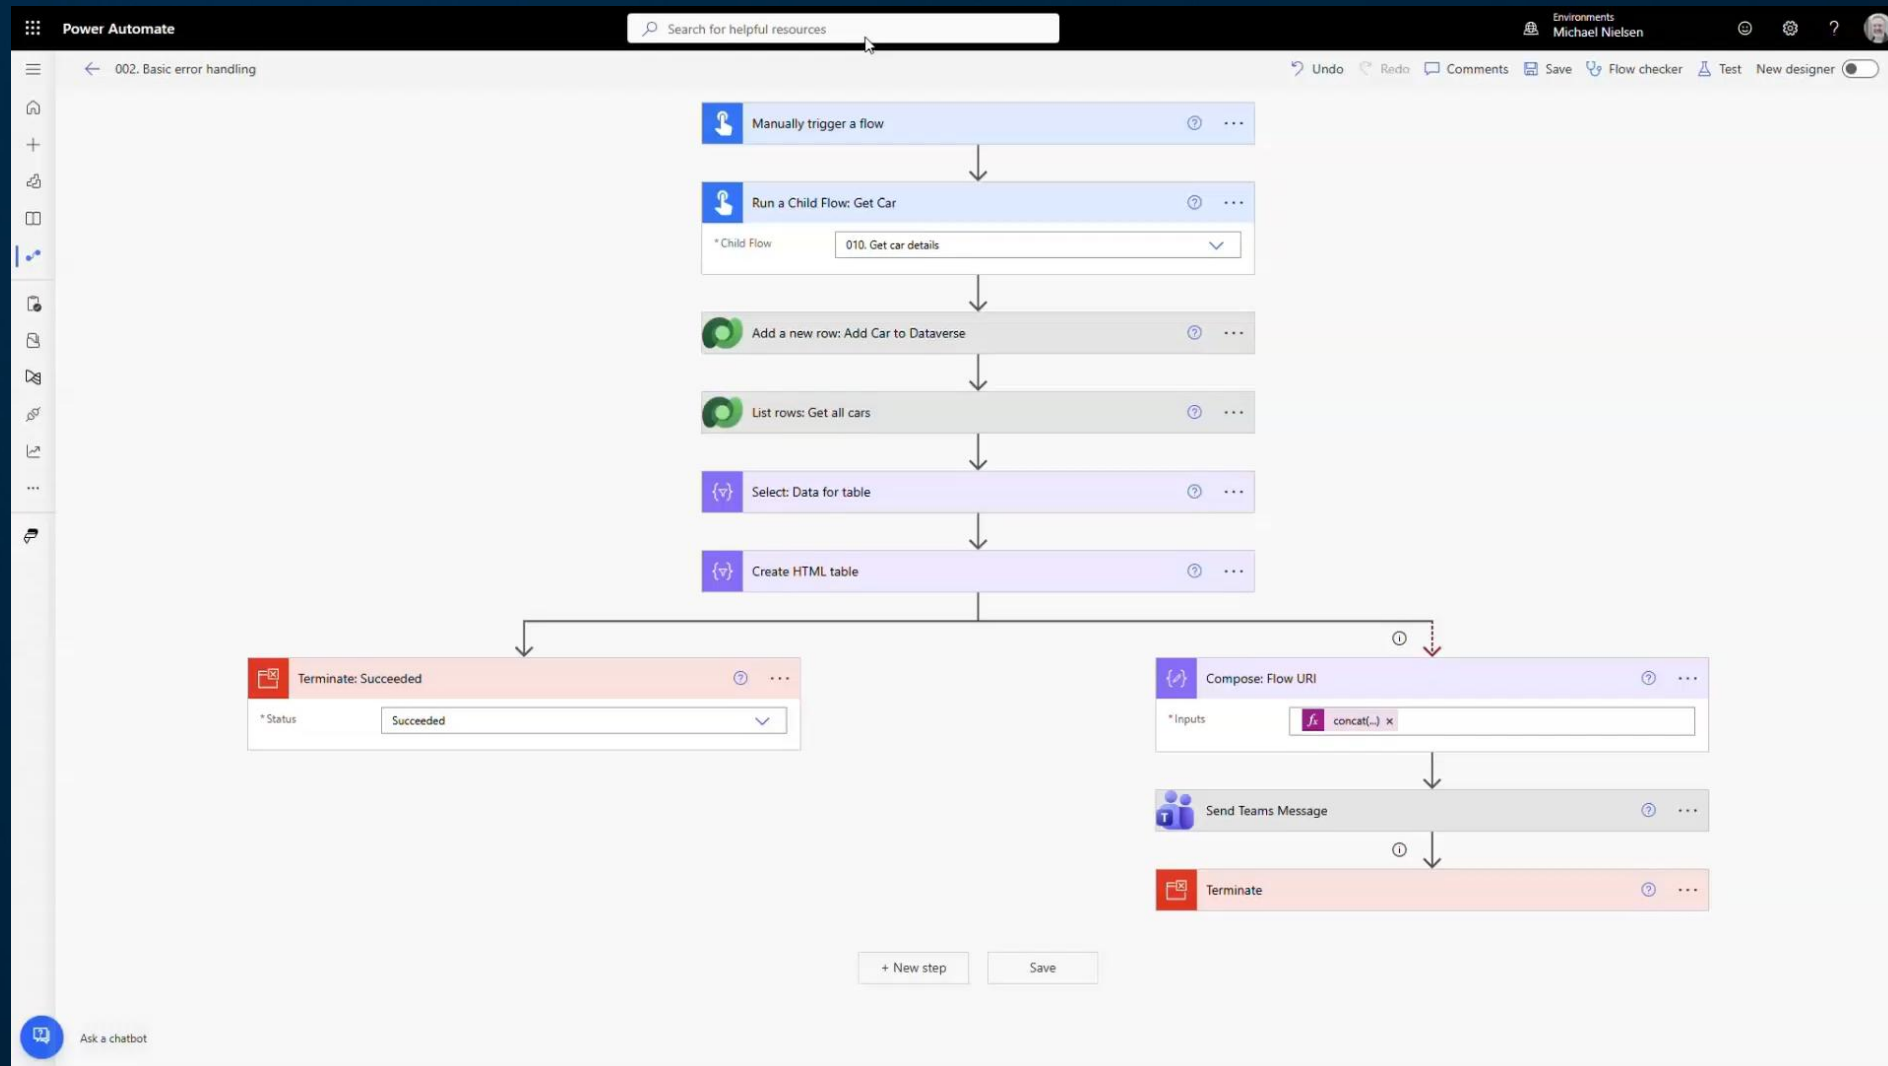

Messages received after error handling

An error occurred in your flow:

002. Basic error handling

Action	Error
Add_a_new_row:_Add_Car_to_Dataverse	Unable to process template language expressions in action 'Add_a_new_row:_Add_Car_to_Dataverse' inputs at line '0' and column '0': 'The template language expression 'body('Run_a_Child_Flow:_Get_Car')['Name']' cannot be evaluated because property 'Name' doesn't exist, available properties are 'License Plate, Type, Color, Already Collected'. Please see https://aka.ms/logicexpressions for usage details.'

[Link to run](#)

Start time
Jun 24, 11:50 PM (5 d ago)

Duration
00:00:02

Error

Action
'Add_a_new_row:_Add_Car_to_Dataverse'
failed

Unable to process template language expressions in action 'Add_a_new_row:_Add_Car_to_Dataverse' inputs at line '0' and column '0': 'The template language expression 'body('Run_a_Child_Flow:_Get_Car')['Name']' cannot be evaluated because property 'Name' doesn't exist, available

Name of flow that failed

An error occurred in your flow:

002. Basic error handling

Action	Error
Add_a_new_row:_Add_Car_to_Dataverse	Unable to process template language expressions in action 'Add_a_new_row:_Add_Car_to_Dataverse' inputs at line '0' and column '0': 'The template language expression 'body('Run_a_Child_Flow:_Get_Car')['Name']' cannot be evaluated because property 'Name' doesn't exist, available properties are 'License Plate, Type, Color, Already Collected'. Please see https://aka.ms/logicexpressions for usage details.'

[Link to run](#)

[Link to run](#)

The action that failed

An error occurred in your flow:

002. Basic error handling

Action	Error
Add_a_new_row: Add_Car_to_Dataverse	Unable to process template language expressions in action 'Add_a_new_row: Add_Car_to_Dataverse' inputs at line '0' and column '0': 'The template language expression 'body('Run_a_Child_Flow: Get_Car')['Name']' cannot be evaluated because property 'Name' doesn't exist, available properties are 'License Plate, Type, Color, Already Collected'. Please see https://aka.ms/logicexpressions for usage details.'

[Link to run](#)

[Link to run](#)

The actual error of the action

An error occurred in your flow:

002. Basic error handling

Action	Error
Add_a_new_row:_Add_Car_to_Dataverse	Unable to process template language expressions in action 'Add_a_new_row:_Add_Car_to_Dataverse' inputs at line '0' and column '0': 'The template language expression 'body('Run_a_Child_Flow:_Get_Car')['Name']' cannot be evaluated because property 'Name' doesn't exist, available properties are 'License Plate, Type, Color, Already Collected'. Please see https://aka.ms/logicexpressions for usage details.'

[Link to run](#)

[Link to run](#)

A link to my flow

An error occurred in your flow:


002. Basic error handling

Action	Error
Add_a_new_row:_Add_Car_to_Dataverse	Unable to process template language expressions in action 'Add_a_new_row:_Add_Car_to_Dataverse' inputs at line '0' and column '0': 'The template language expression 'body('Run_a_Child_Flow:_Get_Car')['Name']' cannot be evaluated because property 'Name' doesn't exist, available properties are 'License Plate, Type, Color, Already Collected'. Please see https://aka.ms/logicexpressions for usage details.'

[Link to run](#)

[Link to run](#)

Error message within flow

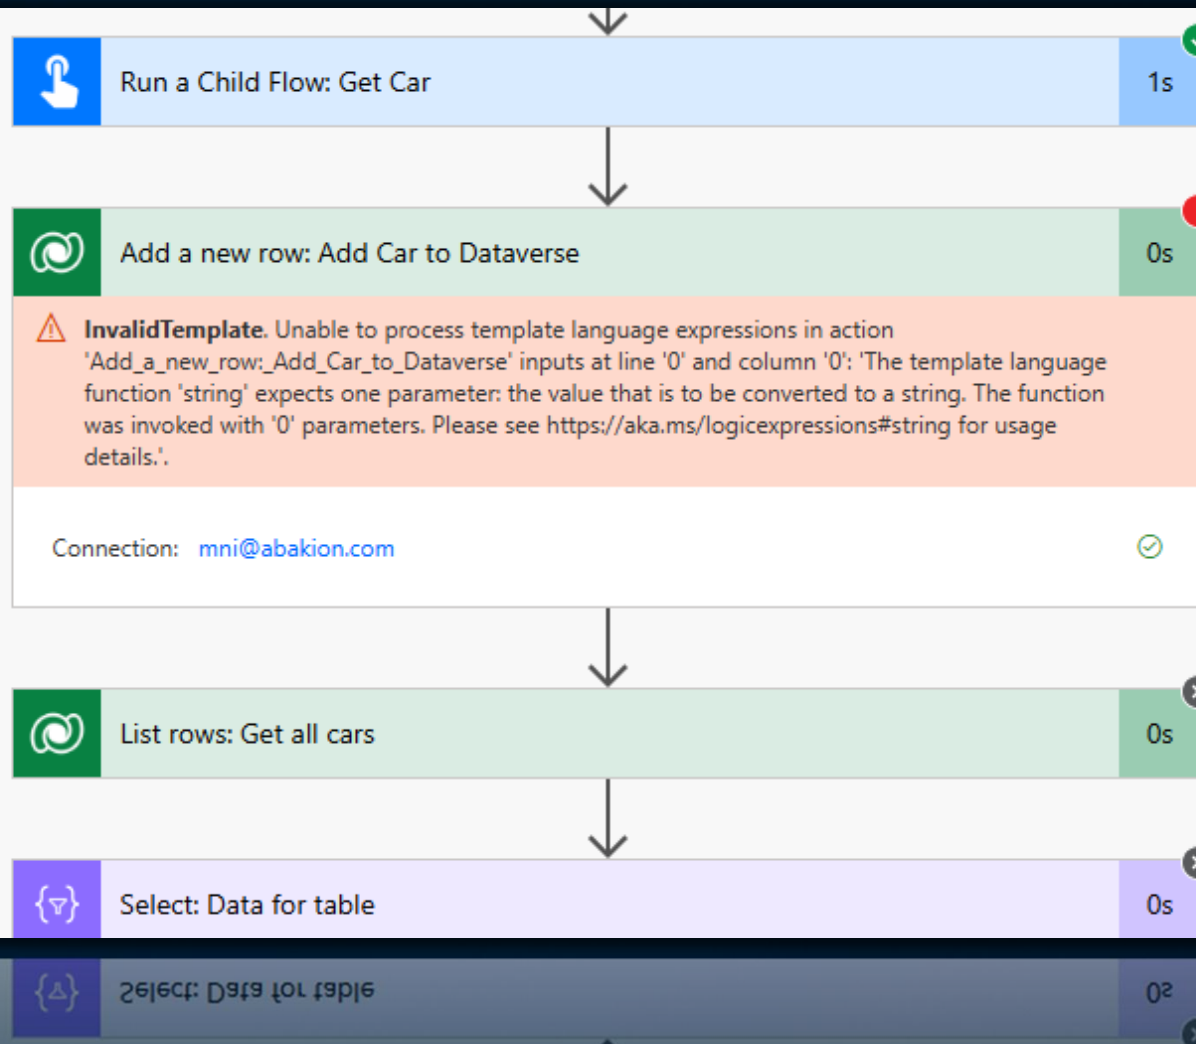

Create the URI for the actual flow run

The screenshot shows the configuration for a 'Compose: Flow URI' step in a Power Automate flow. The step is highlighted in purple and has a green checkmark icon in the top right corner. A red dashed arrow points down to the step from an information icon above it. The step is divided into two sections: 'INPUTS' and 'OUTPUTS'. Both sections contain a text box with the following URI: `https://make.powerautomate.com/environments/bb330eaf-8eea-e8fb-8ad2`. The 'INPUTS' section has a '0s' timer and a close icon, while the 'OUTPUTS' section has a '0s' timer and a checkmark icon. On the right side of the screen, there is a feedback prompt: 'Is this content helpful?' with a thumbs-up icon.

Send the Teams message

 Send Teams Message 1s 

INPUTS

Post as

Flow bot

Post in

Chat with Flow bot


Recipient

mnj@abakion.com;

Message

```
<br/>
<table>
<tr><th>Action</th><th>Error</th></tr>
<tr><td>Add_a_new_row:_Add_Car_to_Dataverse</td><td>Unable to proce
</table>
```

Terminate the flow as failed

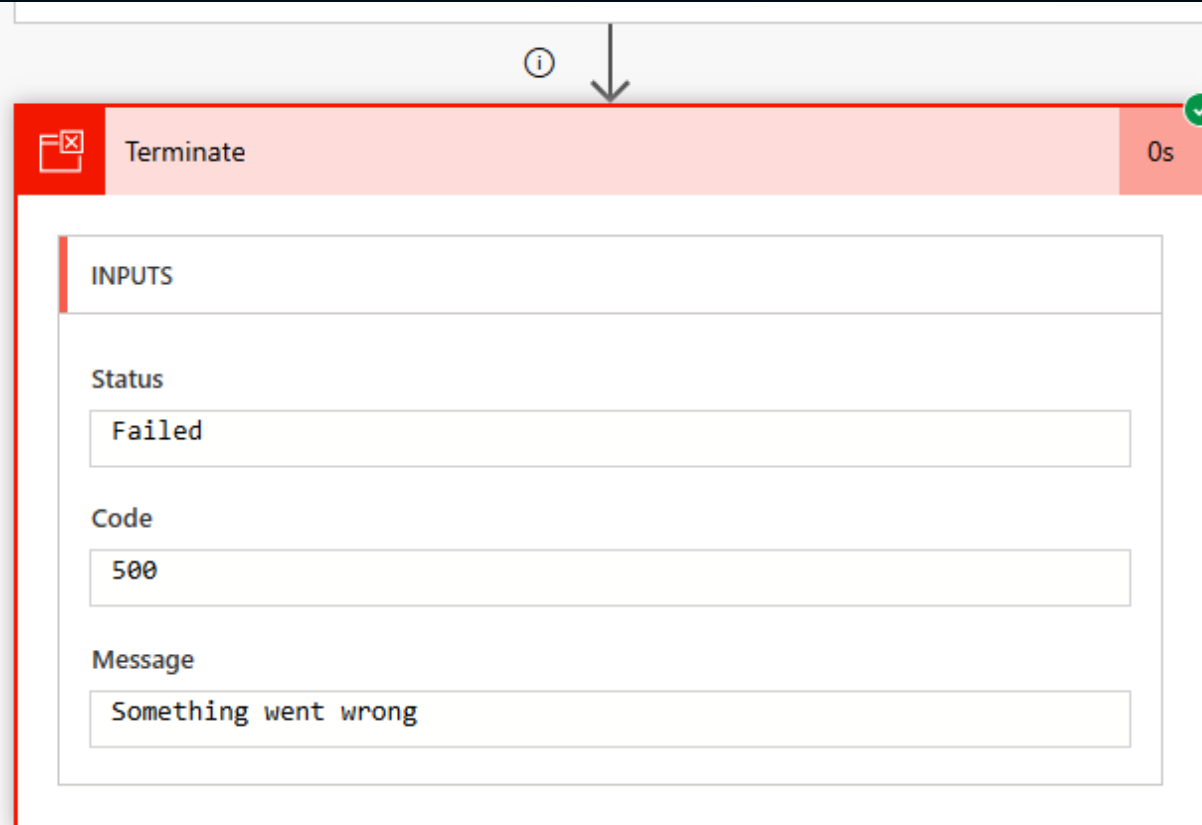

The screenshot shows a 'Terminate' action in a flow. The action is highlighted with a red border. Above the action, there is an information icon (i) and a downward arrow. The action's header is 'Terminate' with a red 'x' icon on the left and a green checkmark icon on the right, next to a '0s' duration. The 'INPUTS' section is expanded, showing three fields: 'Status' set to 'Failed', 'Code' set to '500', and 'Message' set to 'Something went wrong'.

Terminate	
Inputs	
Status	Failed
Code	500
Message	Something went wrong

Unexpected Failure

But what if another action, than the one you expected fails?

Run Details

Start time

May 19, 11:56 PM (3 sec ago)

Duration

00:00:02

Error

Action 'Select:_Data_for_table' failed

The 'from' property value in the 'select' action inputs is of type 'String'. The value must be an array.

Failure is in another action



Bad Data was introduced to Select: Data for table

Select: Data for table 0s

BadRequest. The 'from' property value in the 'select' action inputs is of type 'String'. The value must be an array.

INPUTS

From

This is bad data
[{"@odata.type": "#Microsoft.Dynamics.CRM.mni_session_errorhandling_

Basic error handling

The screenshot displays a Power Automate flow with two actions:


- Compose: Flow URI** (0s duration, green checkmark icon)
- Send Teams Message** (0s duration, red exclamation mark icon)

An error message is shown below the 'Send Teams Message' action:

InvalidTemplate. Unable to process template language expressions in action 'Send_Teams_Message' inputs at line '0' and column '0': 'The template language expression 'actions('Add_a_new_row:Add_Car_to_Dataverse')['error']['message']' cannot be evaluated because property 'error' doesn't exist, available properties are 'name, inputs, outputs, startTime, endTime, trackingId, clientTrackingId, clientKeywords, code, status'. Please see <https://aka.ms/logicexpressions> for usage details.'

Connection: mni@abakion.com (green checkmark icon)



Basic error handling

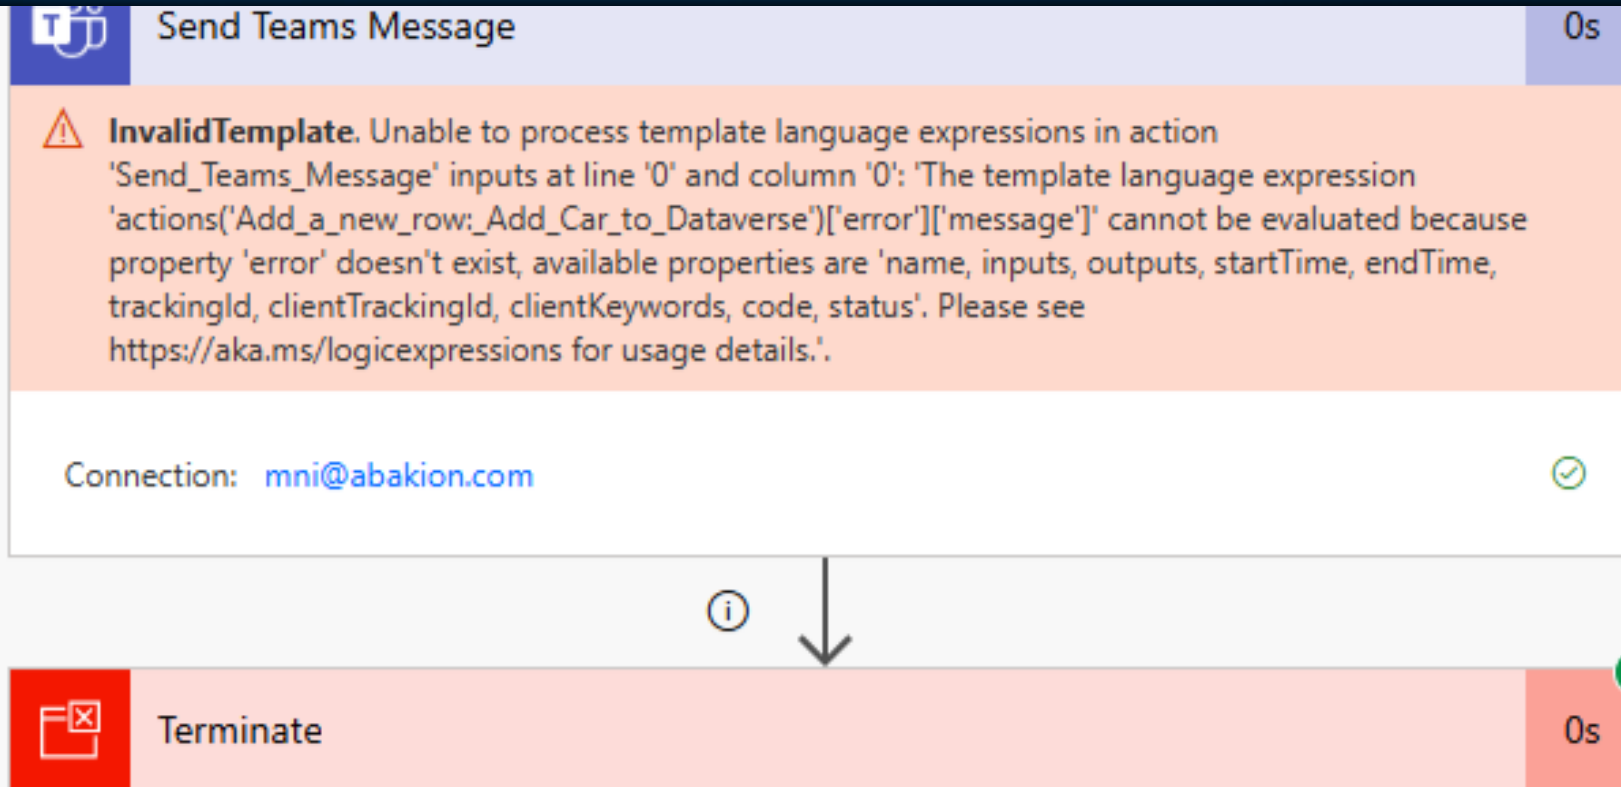

Implement Try-Catch-Finally

- **Try Scope**
Encloses the logic where errors can occur.
- **Catch Scope**
Catches and retrieves any errors that occur in the Try scope.
- **Finally Scope**
Runs regardless of whether an error occurred or not, useful for cleanup operations.



Implement flow with Try-Catch-Finally logic

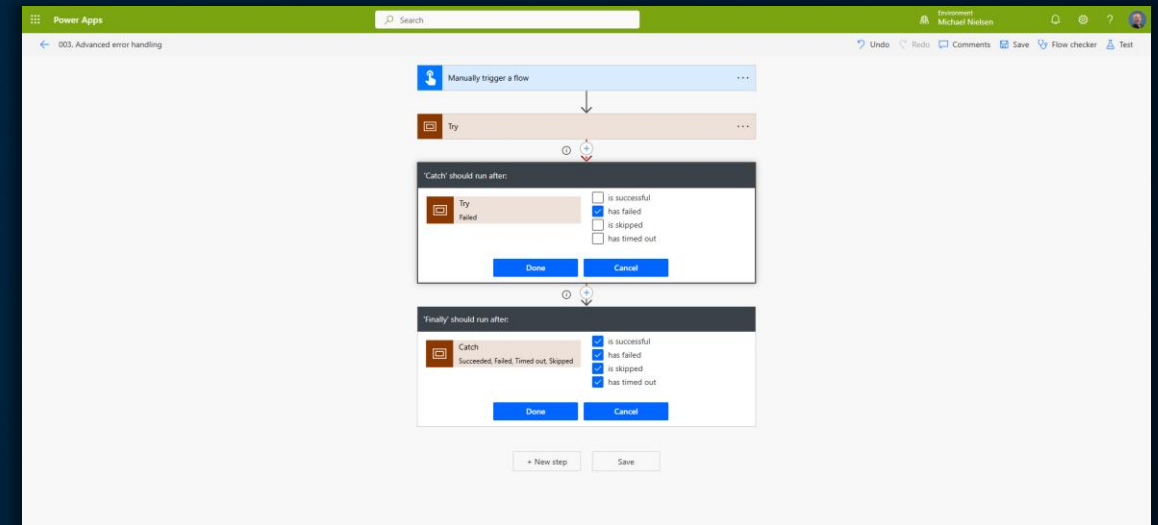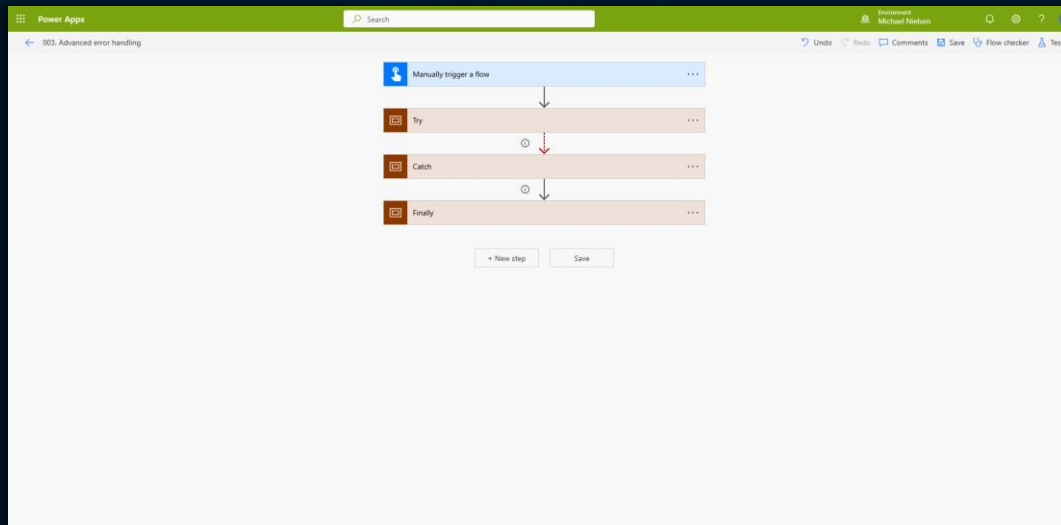


Implement flow with Try-Catch-Finally logic




Implement flow with Try-Catch-Finally logic

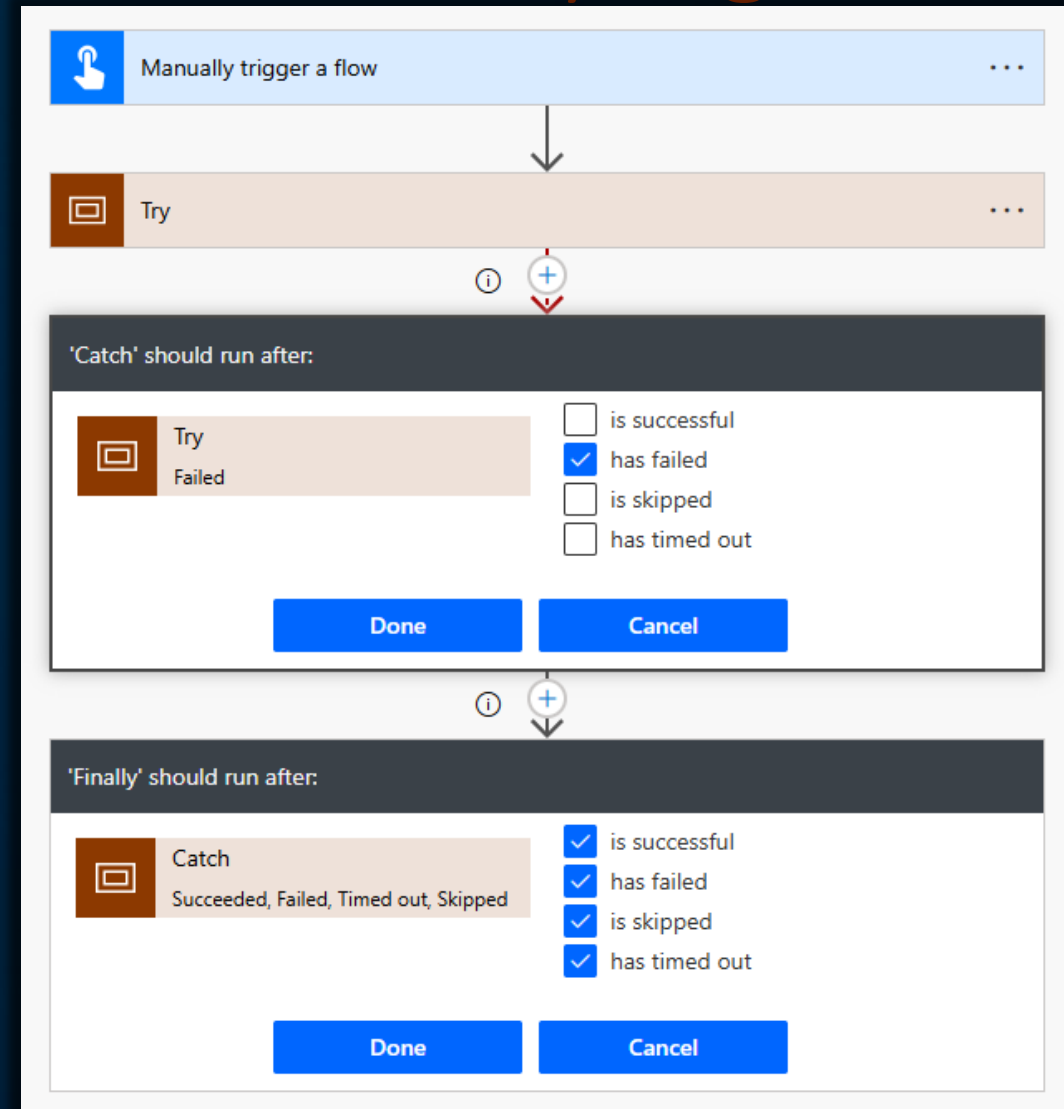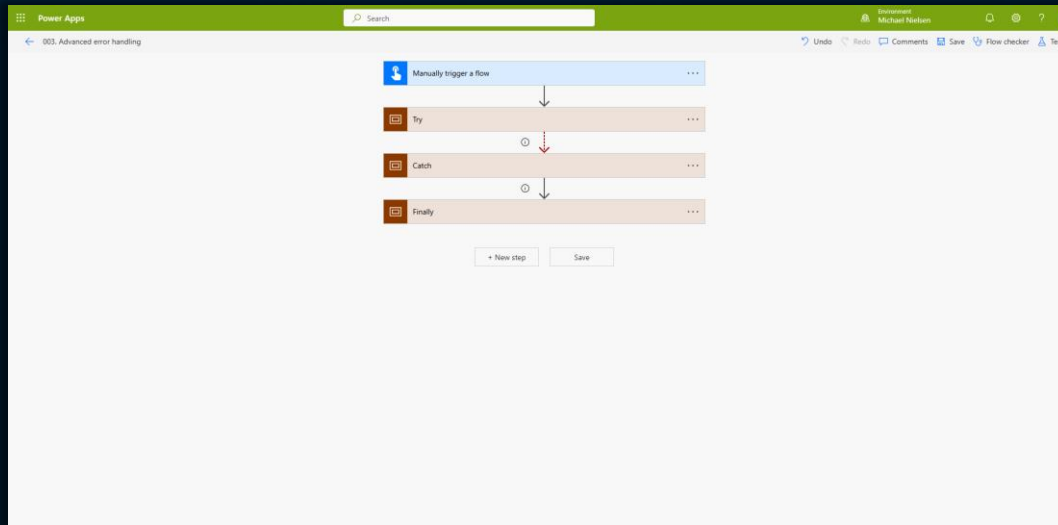

Full flow

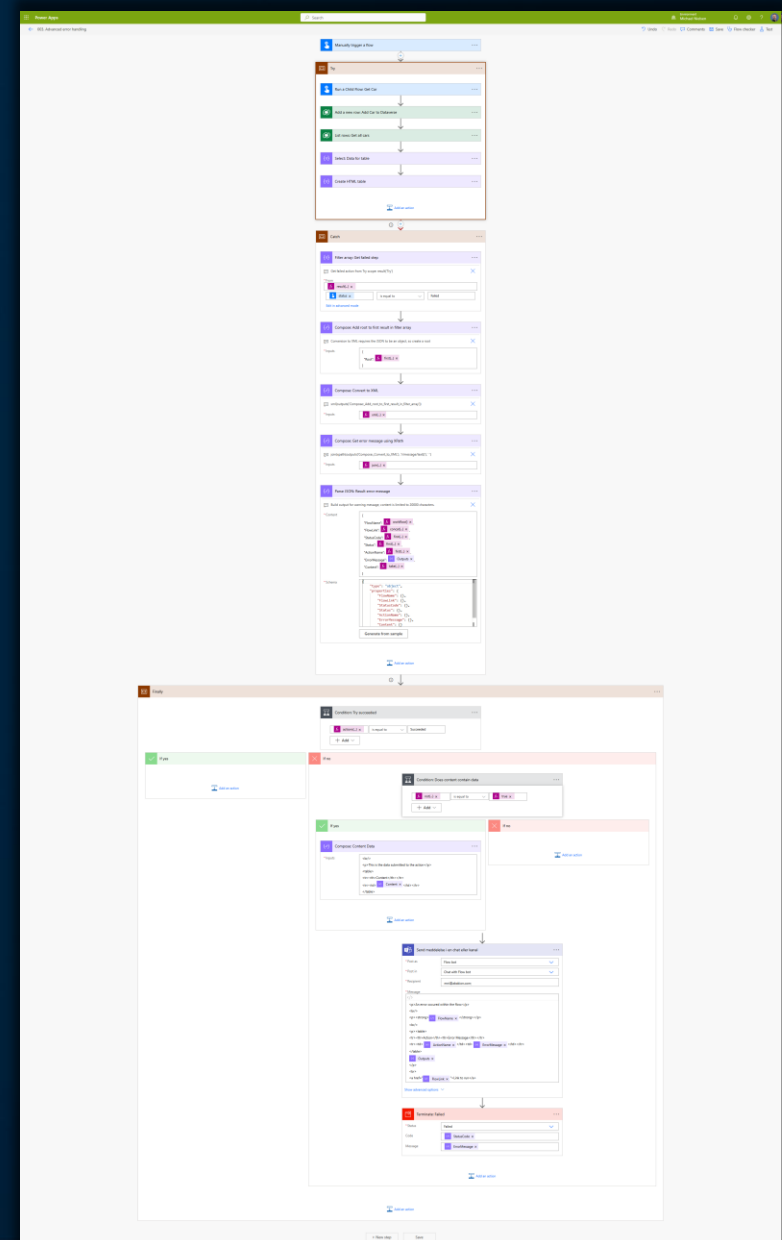

Try Scope

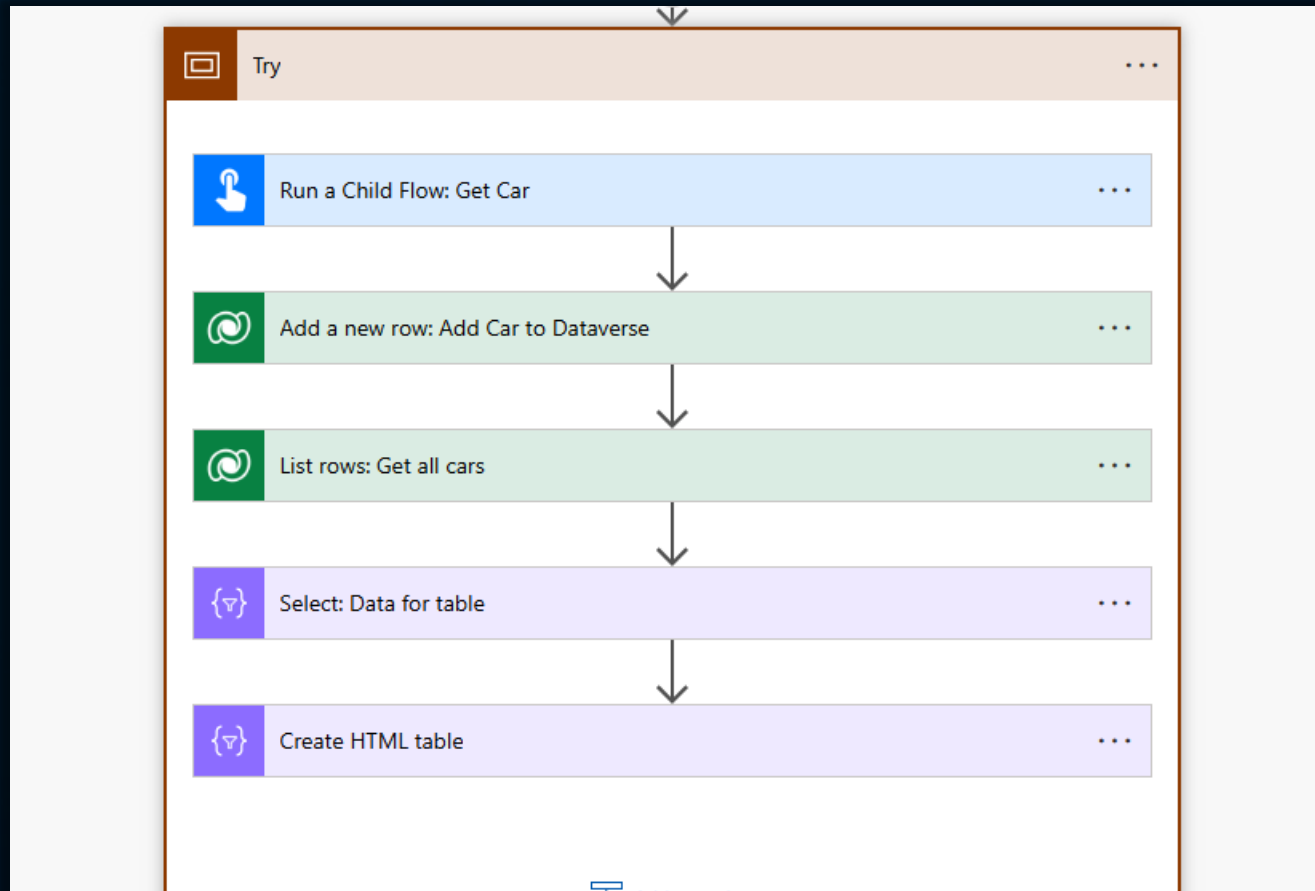

No changes to logic

Catch Scope - Filter array

The screenshot shows the configuration for a 'Catch' scope in a Power Platform workflow. The main action is 'Filter array: Get failed step'. Below this, a configuration box shows the filter logic: 'Get failed action from Try scope: result("Try")' followed by a condition 'result(...) is equal to Failed'. The 'From' field is set to 'result(...)' and the 'status' field is set to 'Failed'. An arrow points down to the next action, 'Compose: Add root to first result in filter array'. A warning message at the bottom states: 'Conversion to XML requires the JSON to be an object, so create a root'.

Filter actions within the Try scope container to identify failed steps.

This process filters based on a status of 'Failed'.

Make new JSON object

The screenshot shows a Power Automate workflow with two compose actions. The first action, 'Compose: Add root to first result in filter array', includes a message box stating 'Conversion to XML requires the JSON to be an object, so create a root'. Its input is a JSON object with a 'Root' property containing the output of the 'first(...)' function. The second action, 'Compose: Convert to XML', takes the output of the first action as input and uses the 'xml(...)' function.

```
graph TD; A[Compose: Add root to first result in filter array] --> B[Compose: Convert to XML];
```

Compose: Add root to first result in filter array

Conversion to XML requires the JSON to be an object, so create a root

* Inputs

```
{
  "Root": first(...)
}
```


Compose: Convert to XML

* Inputs

```
xml(...)
```

Next, we need to format the data into an object to ensure proper conversion to XML.

Convert to XML

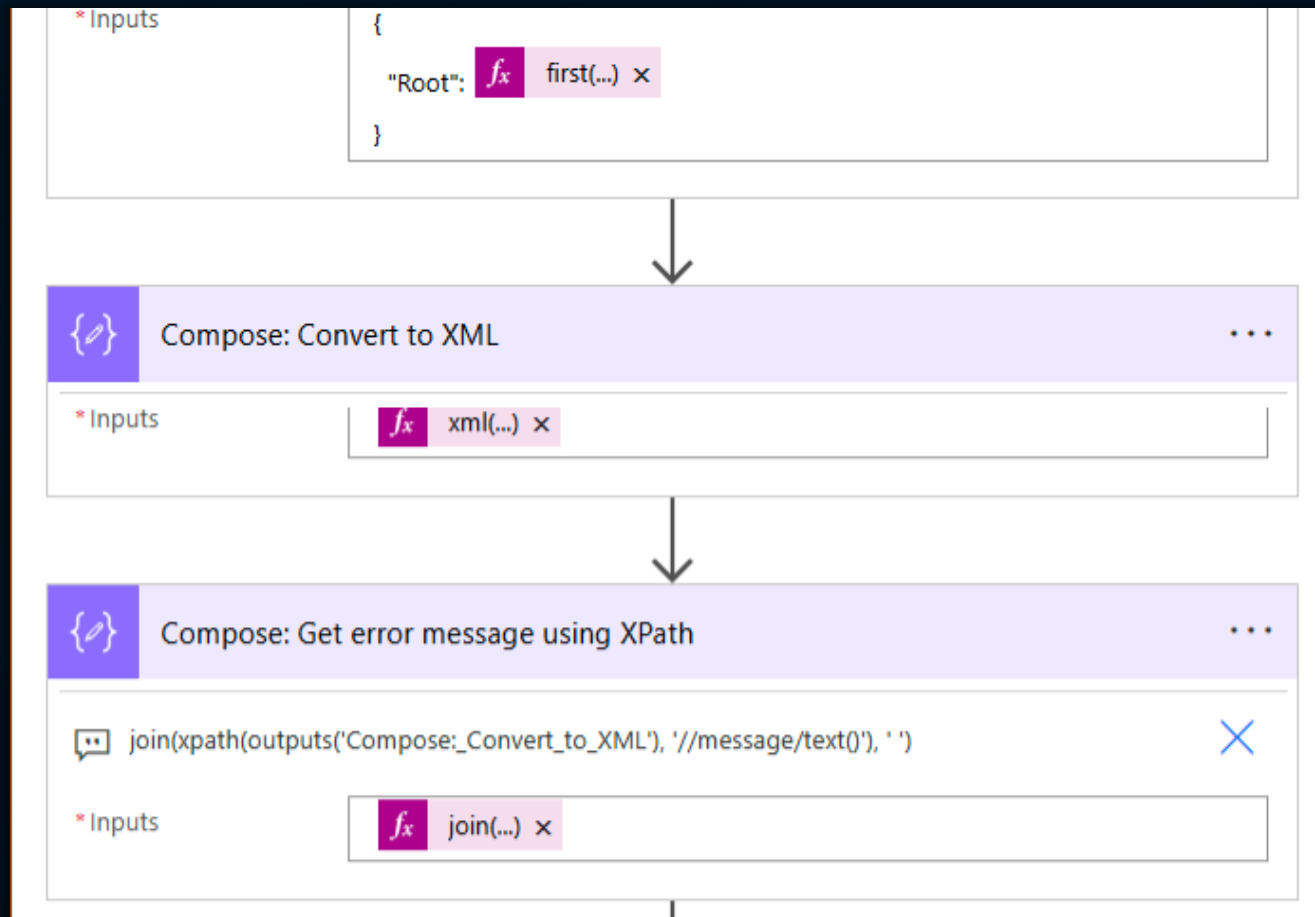

Convert the structured JSON object to XML using the `xml()` function.

XPATH Magic

```
<Root>
  <name>List_rows_Get_all_cars</name>
  <inputs>
    <host>
      <apiId>subscriptions/9beb10fe-386f-4597-9e9c-35c0803d67b2/providers/Microsoft.Web/locations/westeurope/runtimes/europe-002/apis/commondataserviceforapps</apiId>
      <connectionReferenceName>shared_commondataserviceforapps</connectionReferenceName>
      <operationId>ListRecords</operationId>
    </host>
    <parameters>
      <entityName>mni_session_errorhandling_cars</entityName>
      <_x0024_select>mni_session_errorhandling_color,mni_session_errorhandling_type,mni_session_errorhandling_licenseplate,createdon</_x0024_select>
      <_x0024_filter>abc eq 3424</_x0024_filter>
    </parameters>
  </inputs>
  <outputs>
    <statusCode>400</statusCode>
    <headers>
      <Cache-Control>no-cache</Cache-Control>
      <Set-Cookie>
ARRAffinity=aef46c7d0a097b5773958bc2f3b99a7ca129004741d0b69030609019892c0cf615134d20c556b0b34b9b6ae43ec3f5dcdad61788de889ffc592af7aca85fc1c508DDA53; path=/; secure; HttpOnly,ReqClientId=0381256b-63f9-44d6-89f2-715a1f91add7; expires=Thu, 06-Jun-2075 19:44:34 GMT; path=/; secure; HttpOnly,ARRAffinity=aef46c7d0a097b5773958bc2f3b99a7ca129004741d0b69030609019892c0cf615134d20c556b0b34b9b6ae43ec3f5dcdad61788de889ffc592af7aca85fc1c508DDA53; path=/; secure; HttpOnly</Set-Cookie>
      <x-ms-service-request-id>7afafcca-4cee-44af-900c-e16d28dfc53f</x-ms-service-request-id>
      <Strict-Transport-Security>max-age=31536000; includeSubDomains</Strict-Transport-Security>
      <REQ_ID>7afafcca-4cee-44af-900c-e16d28dfc53f,7afafcca-4cee-44af-900c-e16d28dfc53f</REQ_ID>
      <CRM.ServiceId>CRMAppPool</CRM.ServiceId>
      <AuthActivityId>6a19acf6-0ac8-4abc-83d2-97911fd96f8c</AuthActivityId>
      <x-ms-dop-hint>4</x-ms-dop-hint>
      <x-ms-ratelimit-time-remaining-xrm-requests>1,199.45</x-ms-ratelimit-time-remaining-xrm-requests>
      <x-ms-ratelimit-burst-remaining-xrm-requests>7998</x-ms-ratelimit-burst-remaining-xrm-requests>
      <mise-correlation-id>f9cc6531-a63c-45ae-896d-d37a727f67c0</mise-correlation-id>
      <X-Content-Type-Options>nosniff</X-Content-Type-Options>
      <OData-Version>4.0</OData-Version>
      <X-Source>
15646178130123065243981352242232082219912178912206316770152112738718619361207136206,764820319923219080163166112462061867413114242422105158482112301
      </X-Source>
      <Public>OPTIONS,GET,HEAD,POST</Public>
      <Date>Fri, 06 Jun 2025 19:44:34 GMT</Date>
      <Allow>OPTIONS,GET,HEAD,POST</Allow>
      <Content-Type>application/json; odata.metadata=full</Content-Type>
      <Expires>-1</Expires>
      <Content-Length>145</Content-Length>
    </headers>
    <body>
      <error>
        <code>0x80060888</code>
        <message>Could not find a property named 'abc' on type 'Microsoft.Dynamics.CRM.mni_session_errorhandling_car'.</message>
      </error>
    </body>
  </outputs>
  <startTime>2025-06-06T19:44:34.3418363Z</startTime>
  <endTime>2025-06-06T19:44:34.3786514Z</endTime>
  <trackingId>64d8d08c-fc4a-4254-8ede-6eb5685b2f82</trackingId>
  <clientTrackingId>085845236781804449416560904030U61</clientTrackingId>
  <clientKeywords>testFlow</clientKeywords>
  <code>BadRequest</code>
  <status>Failed</status>
</Root>
```

Use XPath to extract all <message> elements from the XML and join them into a single string.

XPATH Magic

Use XPath to extract the contents of all <message> elements from the XML. This allows us to retrieve detailed error messages for logging or notifications.

The screenshot displays the Power Platform Compose interface with two steps:

- Compose: Convert to XML**: The input field contains the function `xml(...)`.
- Compose: Get error message using XPath**: The formula bar contains the XPath expression `join(xpath(outputs('Compose:_Convert_to_XML'), '//message/text()'), ' ')`. The input field contains the function `join(...)`.

Below the steps, an XML snippet is shown with a red box highlighting the error message content:

```
<Content-Length>143</Content-Length>
</headers>
<body>
  <error>
    <code>0x80060888</code>
    <message>Could not find a property named 'abc' on type 'Microsoft.Dynamics.CRM.mni_session_errorhandling_car'.</message>
  </error>
</body>
</outputs>
<startTime>2025-06-06T19:44:34.3418363Z</startTime>
```

Result error object

Parse JSON: Result error message

Build output for warning message, content is limited to 20000 characters.

* Content


```
{
  "FlowName": workflow() ,
  "FlowLink": concat(...) ,
  "StatusCode": first(...) ,
  "Status": first(...) ,
  "ActionName": first(...) ,
  "ErrorMessage": Outputs ,
  "Content": take(...)
}
```

* Schema

```
{
  "type": "object",
  "properties": {
    "FlowName": {
      "type": "string"
    },
    "FlowLink": {
      "type": "string"
    },
    "StatusCode": {
      "type": "string"
    },
    "Status": {
      "type": "string"
    },
    "ActionName": {
      "type": "string"
    },
    "ErrorMessage": {
      "type": "string"
    },
    "Content": {
      "type": "string"
    }
  }
}
```

A custom object containing all necessary details for error message.

CATCH SCOPE – Commands (1)

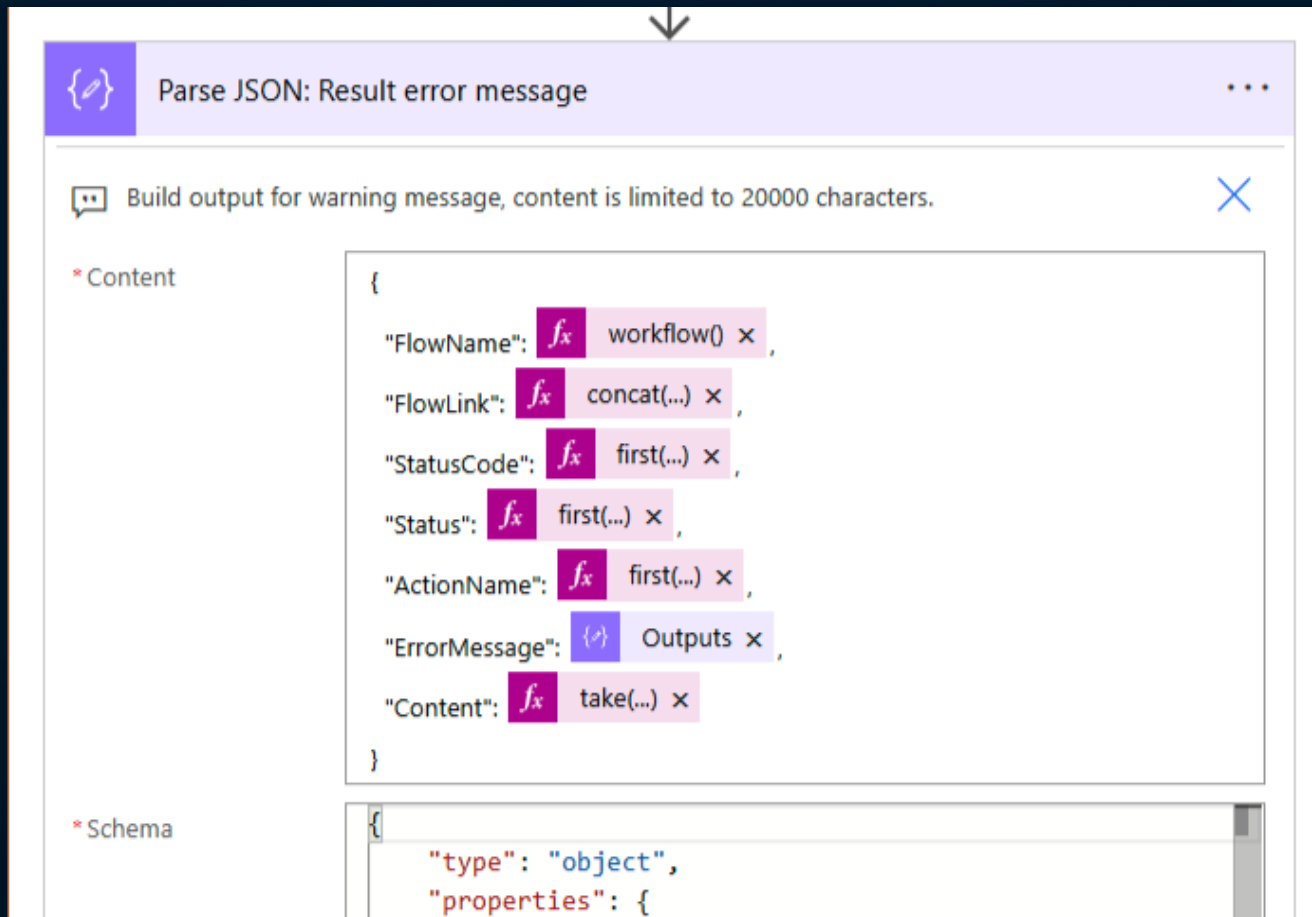

FlowName

`workflow().tags.flowDisplayName`

FlowLink

`concat('https://make.powerautomate.com/environments/', workflow().tags.environmentName, '/flows/', workflow().name, '/runs/', workflow().run.name)`

StatusCode

`first(xpath(outputs('Compose:_Convert_to_XML'), '//code/text()))`

Status

`first(xpath(outputs('Compose:_Convert_to_XML'), '//status/text()))`

CATCH SCOPE – Commands (2)

Parse JSON: Result error message

Build output for warning message, content is limited to 20000 characters.

* Content

```
{
  "FlowName": workflow() ×,
  "FlowLink": concat(...) ×,
  "StatusCode": first(...) ×,
  "Status": first(...) ×,
  "ActionName": first(...) ×,
  "ErrorMessage": Outputs ×,
  "Content": take(...) ×
}
```

* Schema

```
{
  "type": "object",
  "properties": {
    "statusCode": {
      "type": "string",
      "enum": [
        "Success",
        "Warning",
        "Error"
      ]
    },
    "flowName": {
      "type": "string"
    },
    "flowLink": {
      "type": "string"
    },
    "status": {
      "type": "string"
    },
    "actionName": {
      "type": "string"
    },
    "errorMessage": {
      "type": "string"
    },
    "content": {
      "type": "string"
    }
  }
}
```

ActionName

```
first(xpath(outputs('Compose:_Convert_to_XML'), '//name/text()'))
```


ErrorMessage

```
outputs('Compose:_Get_error_message_using_XPath')
```

Content


```
take(string(first(body('Filter_array:_Get_failed_step'))), 20000)
```

CATCH SCOPE – Child flow

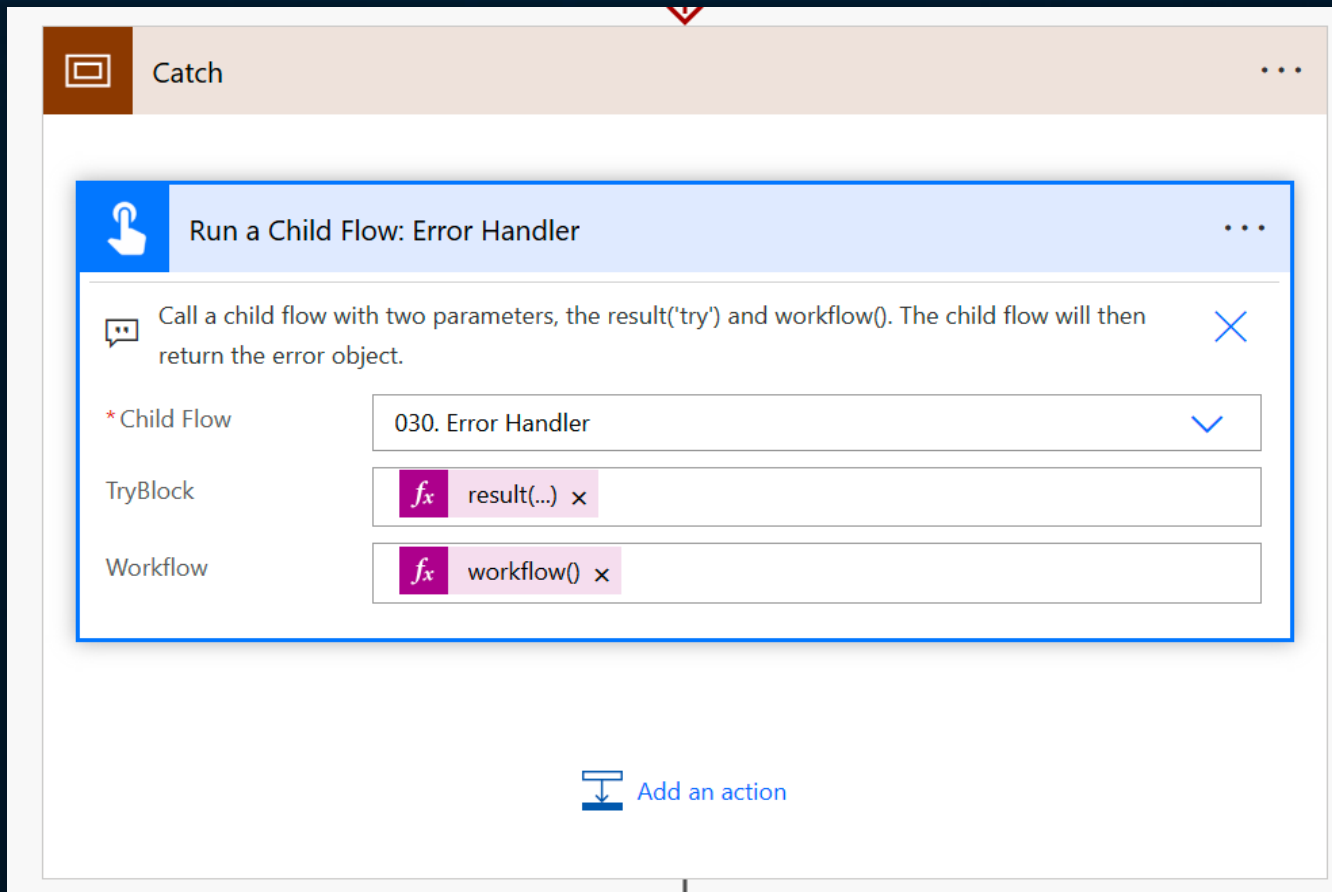

Make the Catch logic into a child flow that can be reusable across all of your flows.

FINALLY SCOPE – Was Try successful?

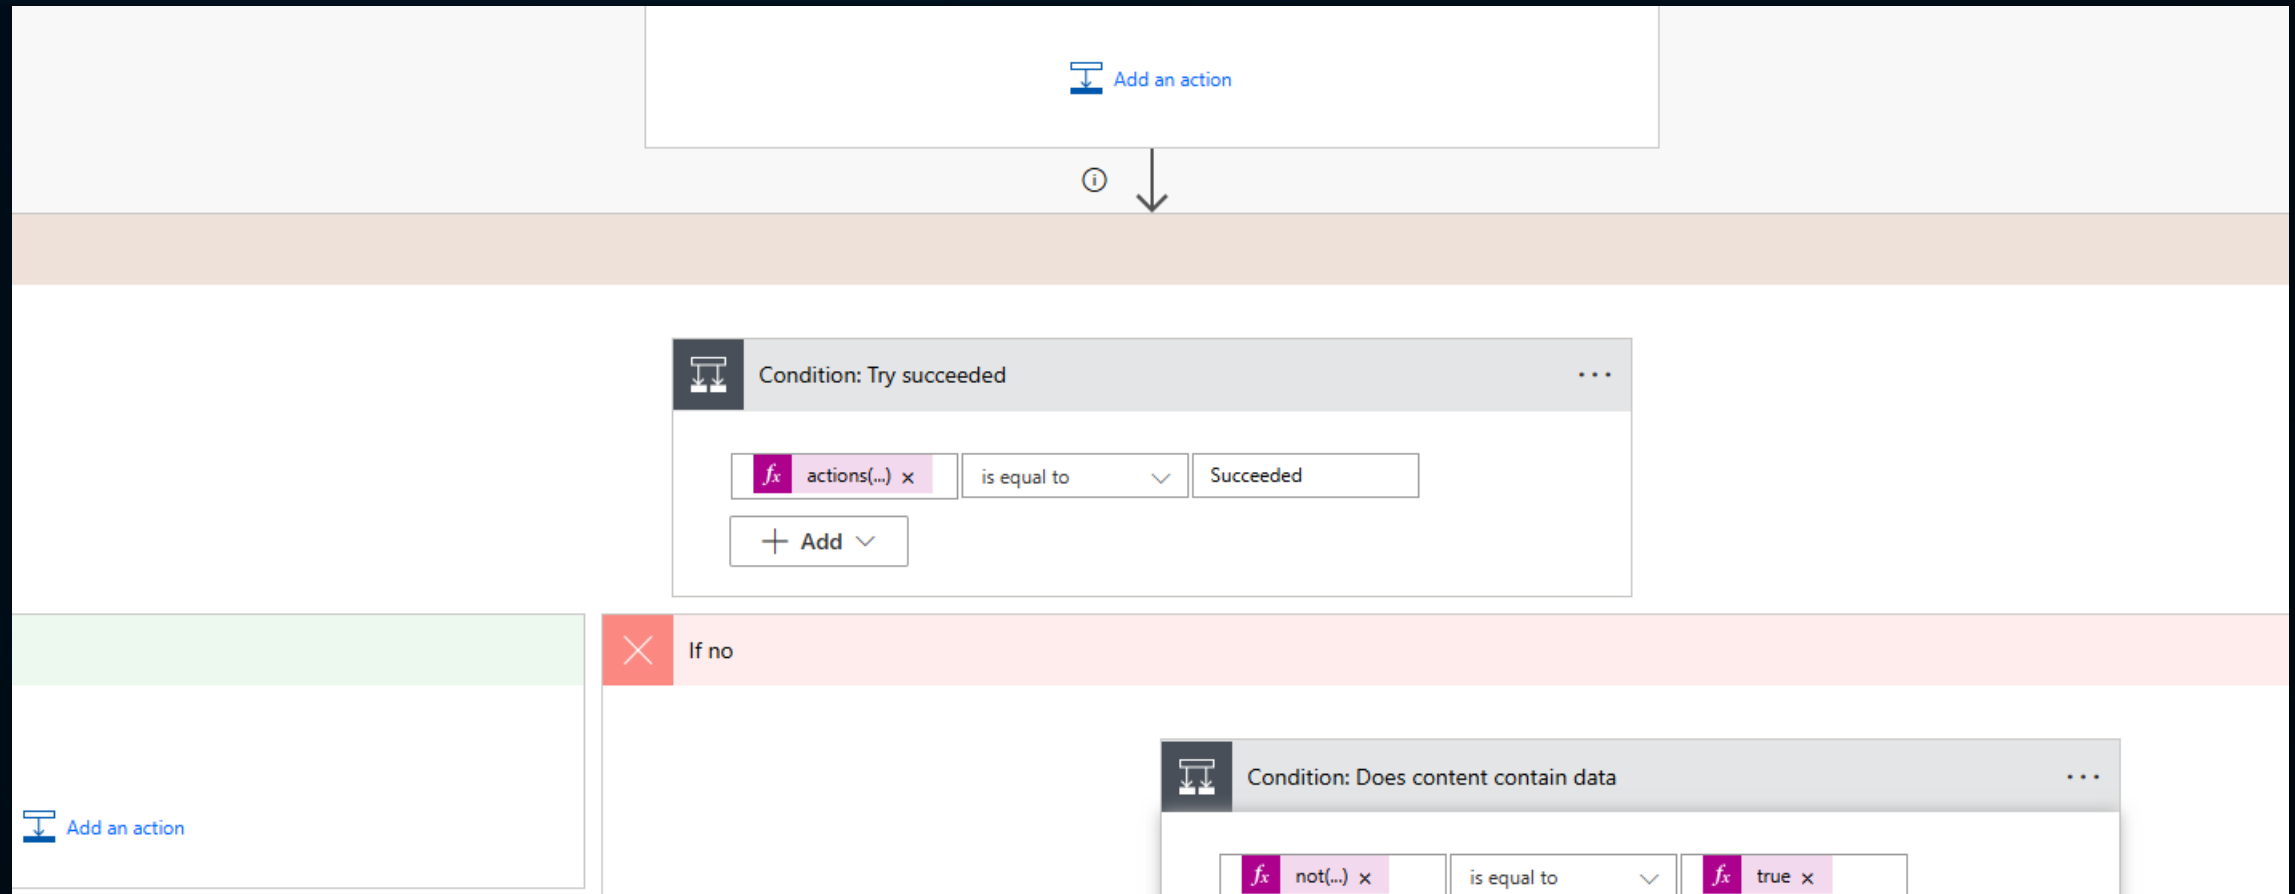

FINALLY SCOPE – Try failed, is there content

The screenshot displays a Power Automate flow editor with a 'Try' scope. The 'Try' scope has two branches:

- If no (Failed):** This branch is highlighted in red. It contains a condition: 'Condition: Does content contain data'. The condition is evaluated as 'not(...) is equal to true', which is false, leading to the 'If no' branch.
- If yes (Successful):** This branch is highlighted in green. It contains an action: 'Compose: Content Data'. The inputs for this action are:
* Inputs:

<p>This is the data submitted to the action</p>
<p>This is the data submitted to the action</p>
<p>This is the data submitted to the action</p>

At the top of the flow, there is a condition: 'actions(...) is equal to Succeeded'. Below this condition is a '+ Add' button.

FINALLY SCOPE – Format content

Condition: Does content contain data

f_x not(...) x is equal to f_x true x

+ Add v

✓ If yes

✗ If no

Compose: Content Data

* Inputs

```
<br/>
<p>This is the data submitted to the action</p>
<table>
<tr><th>Content</th></tr>
<tr><td>Content</td></tr>
</table>
```

Add an action

Add an action

FINALLY SCOPE – Send Teams message

Send meddelelse i en chat eller kanal

* Post as: Flow bot

* Post in: Chat with Flow bot

* Recipient: mni@abakion.com;

* Message

```
</>
<p>An error occurred within the flow:</p>
<br/>
<p><strong>{FlowName}</strong></p>
<br/>
<p><table>
<tr><th>Action</th><th>Error Message</th></tr>
<tr><td>{ActionName}</td><td>{ErrorMessage}</td></tr>
</table>
{Outputs}
</p>
<br>
<a href="{FlowLink}">Link to run</a>
```

FINALLY SCOPE – Terminate as failed

Link to run

Show advanced options ▾

↓

✖

Terminate: Failed

⋮

* Status

Failed ▾

Code

{StatusCode}

Message

{ErrorMessage}

⌵

Add an action

⌵

Add an action

Child flow for sending notification

✕

If no



Run a Child Flow: Send notification

...



Call a child flow that sends a notification by either Teams or Email

✕

* Child Flow

040. Send notification

▼

MessageType

Teams

ErrorObject



Body ✕









Terminate: Failed

...

*Status

Failed

▼

Code



StatusCode ✕

Message



ErrorMessage ✕

Message



ErrorMessage ✕

Code



StatusCode ✕

This far

- How to setup Try-Catch-Finally
- How to extract the error message and related details
- Use dynamic content to create custom error messages

What is not covered in this kind of error handling

Loops and conditions are difficult to extract the errors from.

- Try (Scope)
 - API Action
 - Loop that iterate through API Data
 - Action to retrieve data from Dataverse
 - Action to write data to Dataverse **(FAILS)**

An action failed. No dependent actions succeeded.

An error occurred within the flow:

005. Flow with For Each and Switch - Without additional error handling.

Action	Error Message
Apply_to_each:_Direction	An action failed. No dependent actions succeeded.

This is the data submitted to the action

Content
<pre>{"name":"Apply_to_each:_Direction","inputs":{"foreachItems":[{"Direction":"East"}, {"Direction":"West"}, {"Direction":"Nowhere"}, {"Direction":"East"}, {"Direction":"West"}, {"Direction":"Nowhere"}]}, "inputsMetadata": {"foreachItemsCount":6}, "startTime":"2025-06-18T22:51:23.3137558Z", "endTime":"2025-06-18T22:51:26.1082844Z", "trackingId":"f3f6430d-da8c-44d5-a160-c4281fe962b9", "clientTrackingId":"08584513198026585602344733126CU216", "clientKeywords":["testFlow"], "code":"ActionFailed", "status":"Failed", "error":{"code":"ActionFailed", "message":"An action failed. No dependent actions succeeded."}}</pre>

[Link to run](#)


[Link to run](#)

Let's look at it live






Please rate
this session
on the app

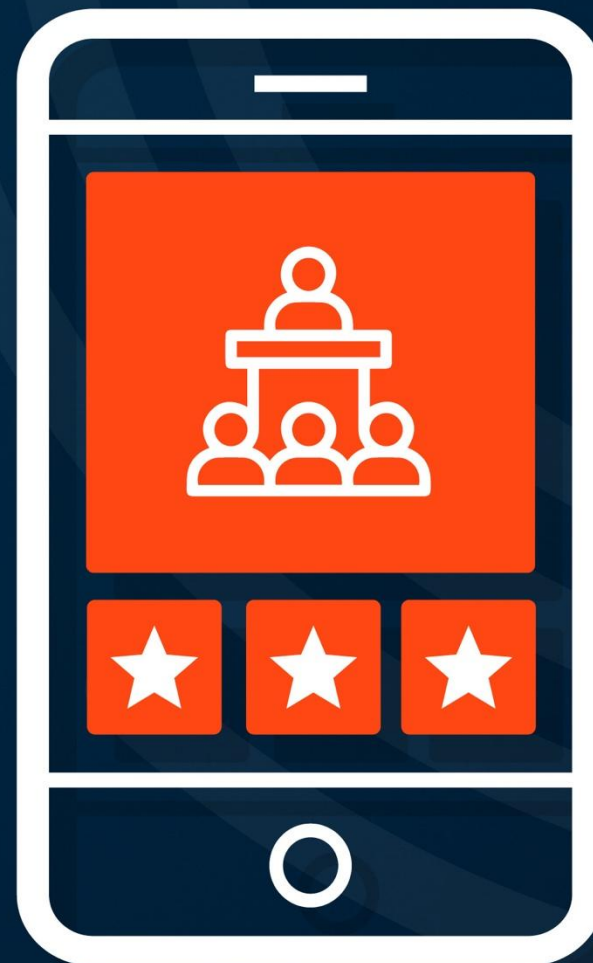


cvent



?

QUESTIONS


Let's connect

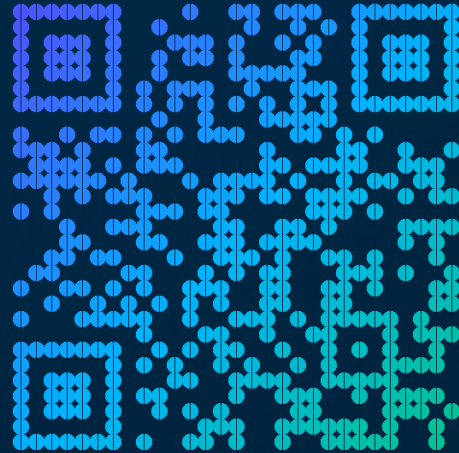

Ask the experts

Tuesday: *Power Automate* (13.15 – 14.00)

Wednesday: *Security* (13.15 – 14.00)

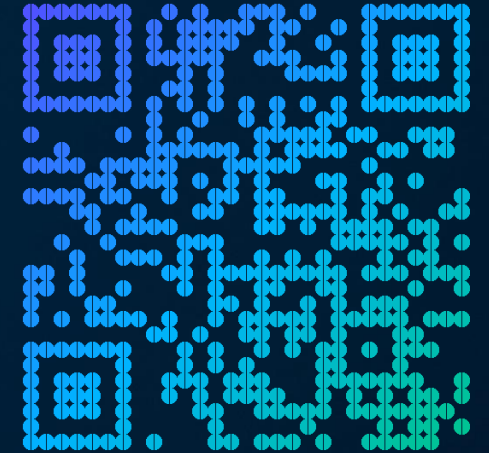

Ask the experts

Tuesday: *Power Automate* (13.15 – 14.00)

Wednesday: *Power Automate* (13.15 – 14.00)