

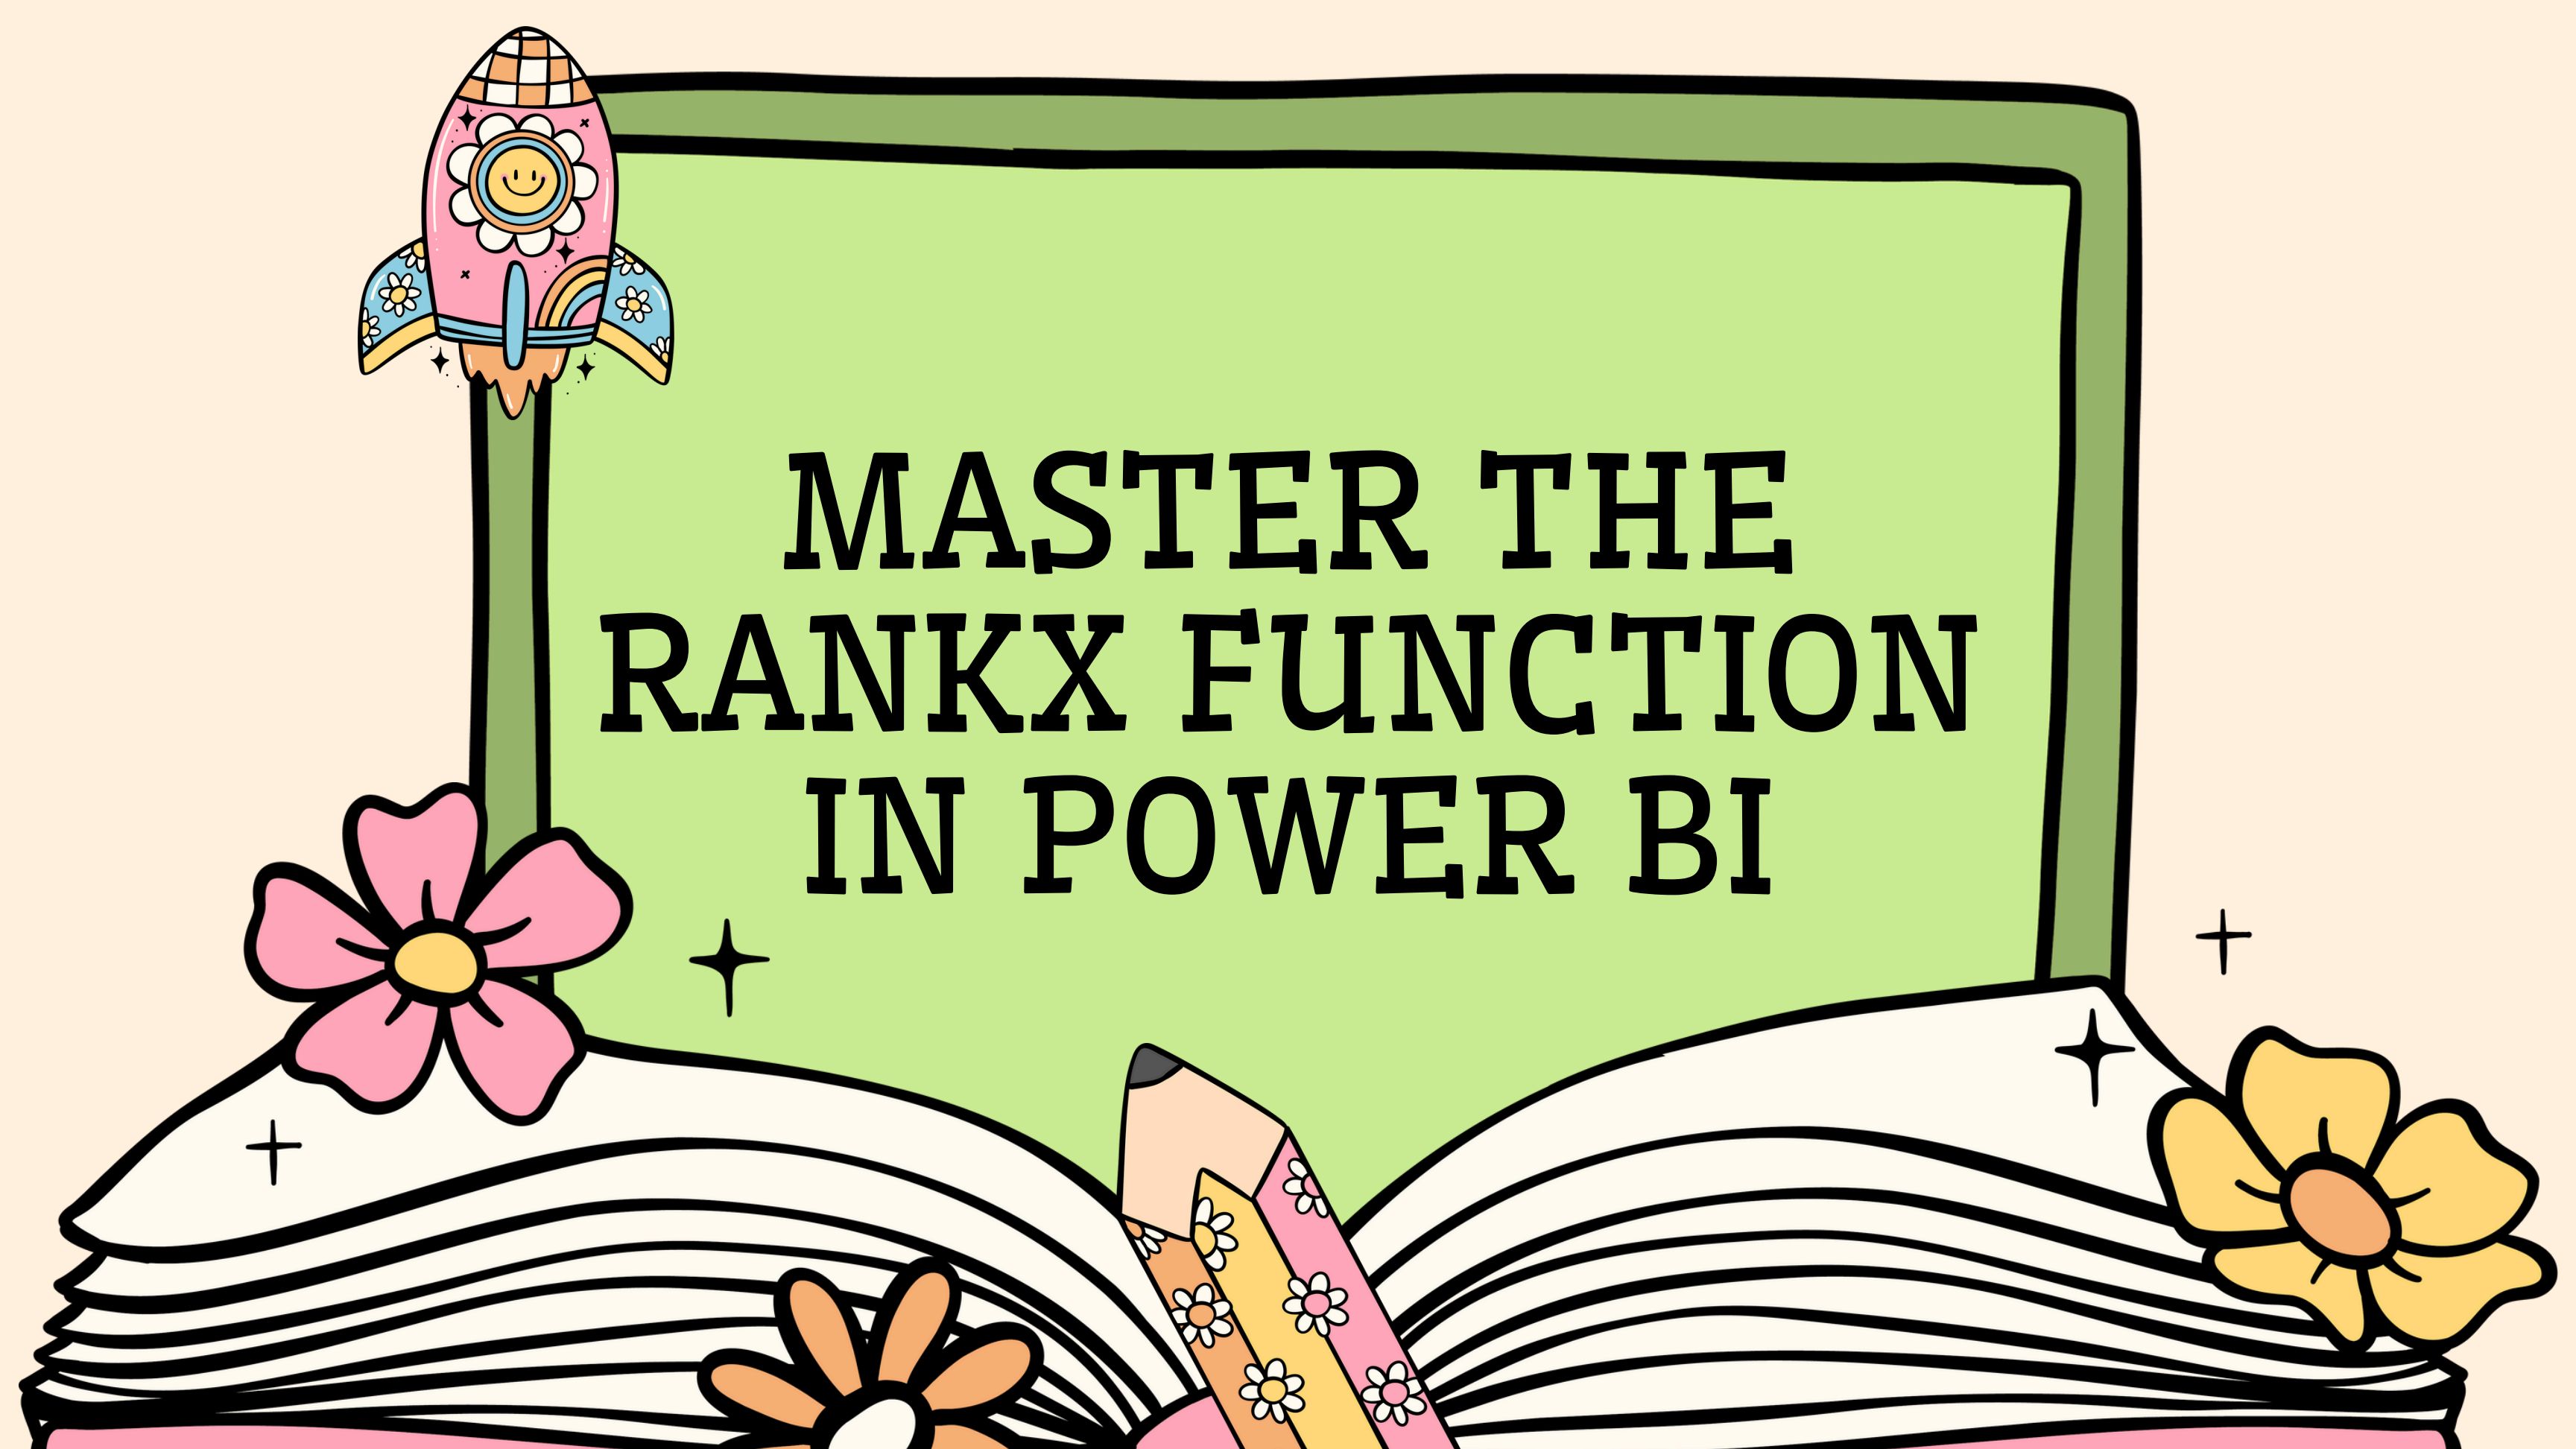



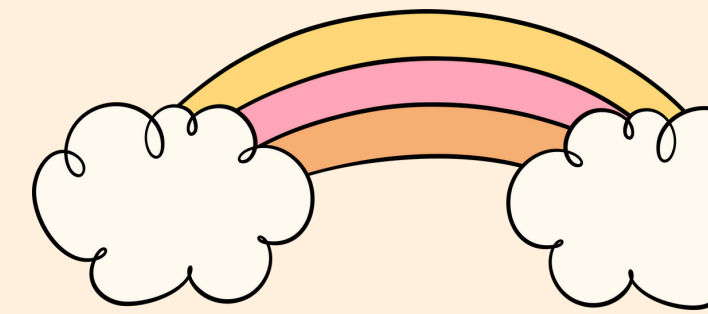




MASTER THE RANKX FUNCTION IN POWER BI



RANKX SYNTAX & CORE PARAMETERS

```
RANKX(  
  [Table/Column],      // Table or column to rank  
  [Expression],        // Value to rank (e.g., Sales, Score)  
  [Value],             // (Optional) Specific value to rank against  
  [Order],             // 0 = Descending (default), 1 = Ascending  
  [Ties Handling]      // "Dense" or skip (default)  
)
```

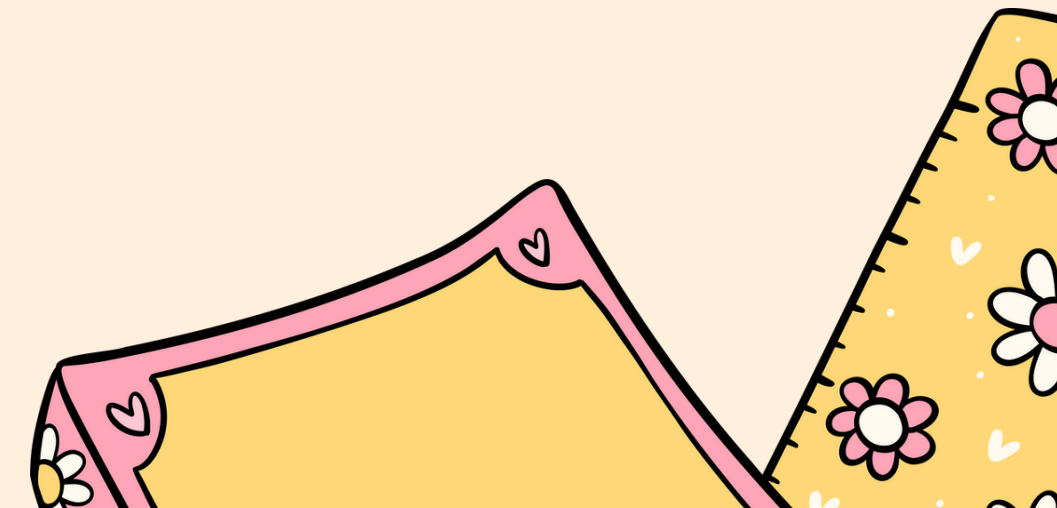
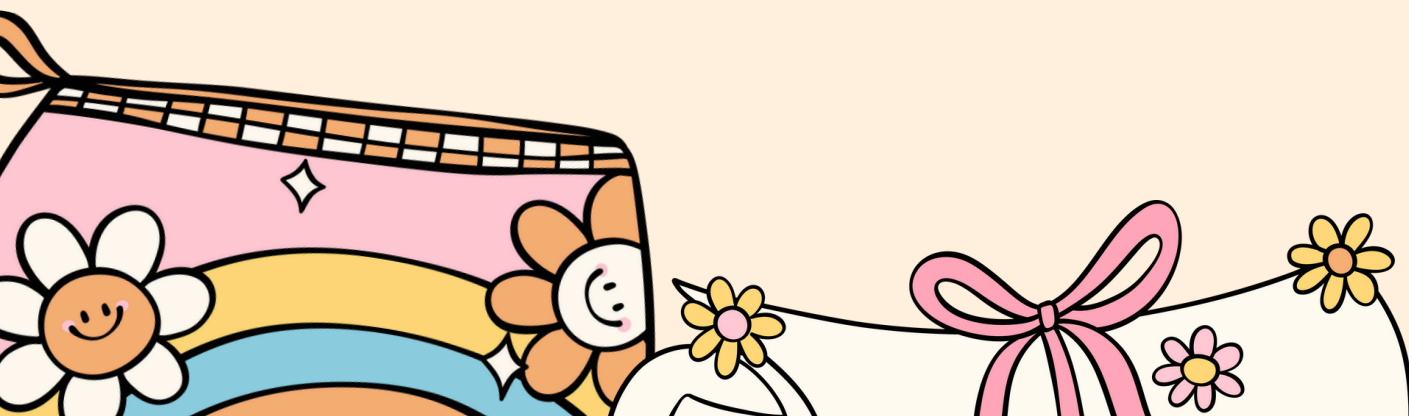


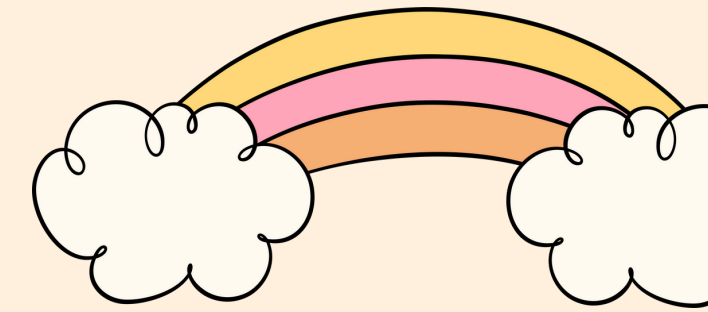


RANKX SYNTAX & CORE PARAMETERS


Key Notes:

- **Context is King:** RANKX respects filters but ignores row context (use ALLEXCEPT or FILTER to control scope).
- **Ties:** Default skips ranks after ties (1,1,3), while Dense doesn't skip (1,1,2).

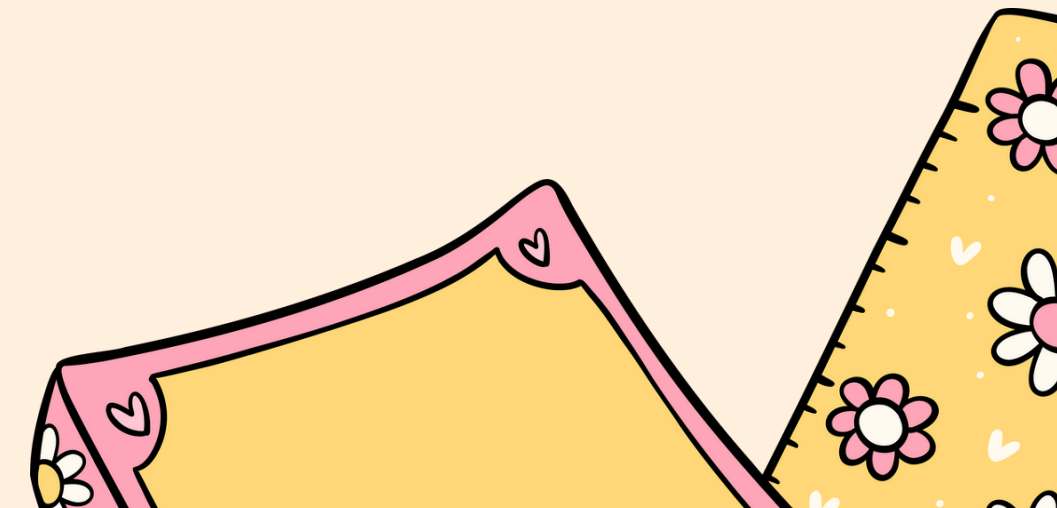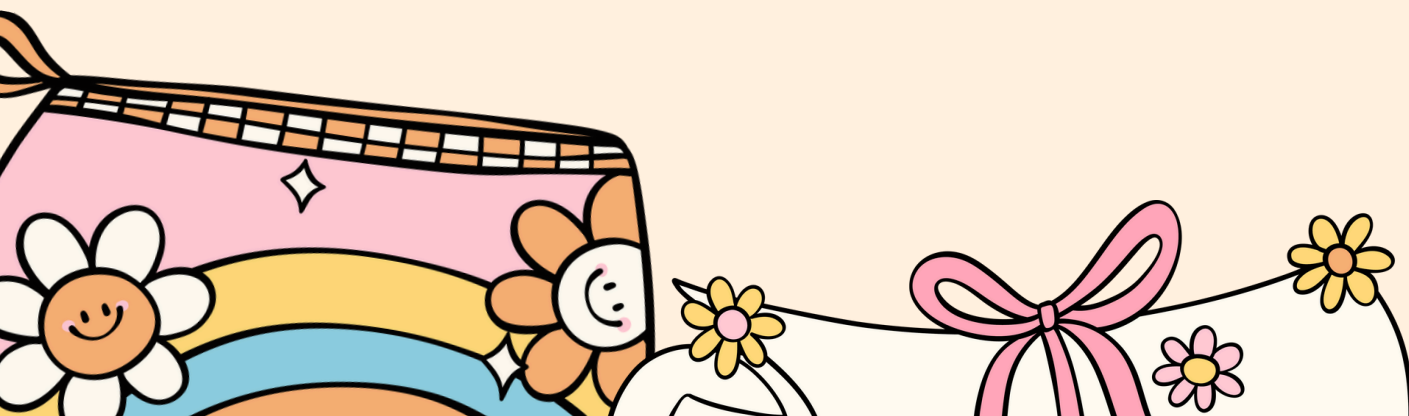



SCENARIO 1: SIMPLE SALES RANKING

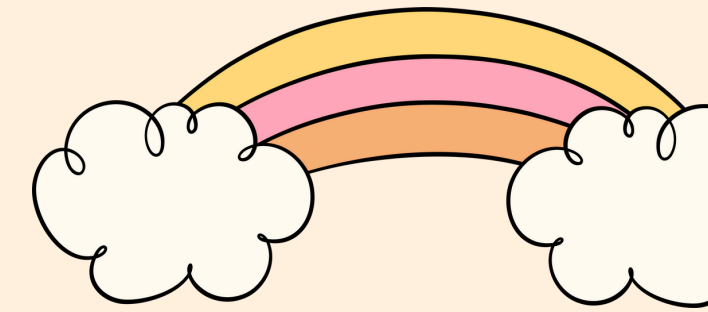

Goal: Rank products by sales.

dax:-

Product Rank =

RANKX(



ALL('Products'[Product]), // Remove row context


[Total Sales] // Rank by sales

)


OUTPUT

Product	Total Sales	Rank
Laptop	\$50,000	1
Phone	\$30,000	2
Monitor	\$30,000	2
Keyboard	\$10,000	4

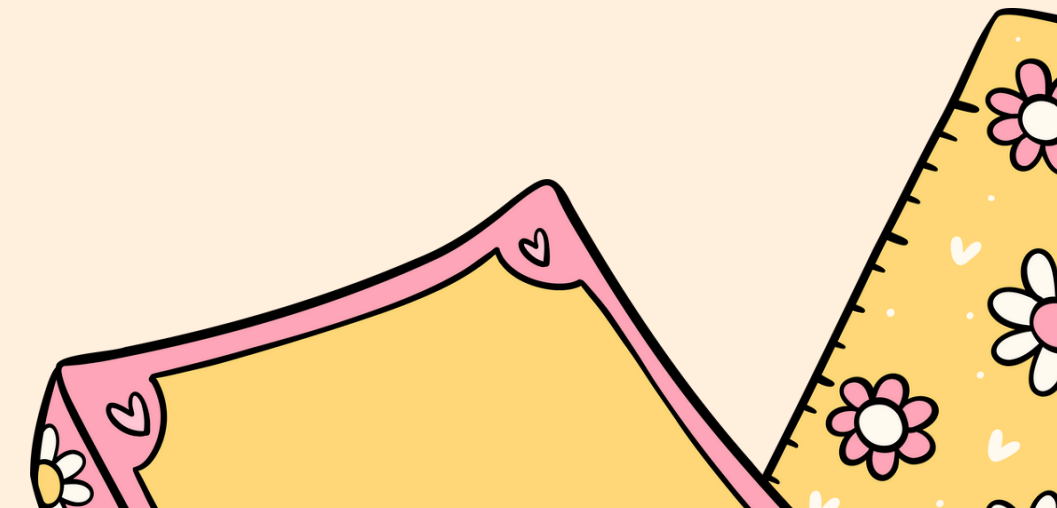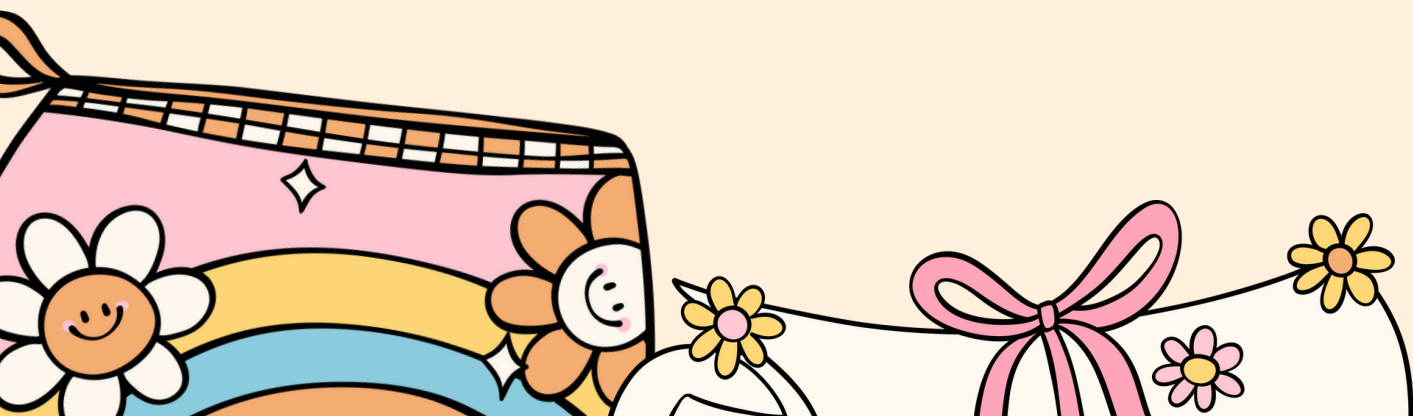



SCENARIO 2: HANDLE TIES WITH DENSE RANKING


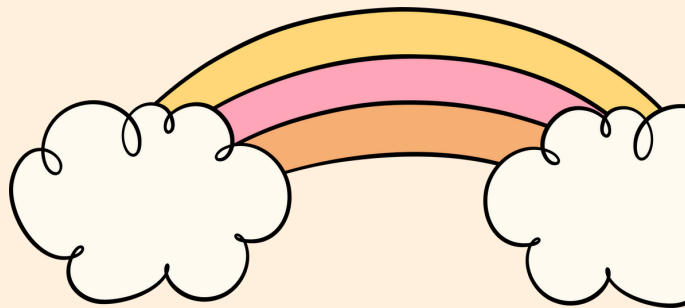




Goal: Avoid rank skips for tied products.

```
dax:-
Product Rank Dense =
RANKX(
    ALL('Products'[Product]),
    [Total Sales],
    "", // Order defaults to Descending
    DENSE // No rank skipping
)
```


OUTPUT

Product	Total Sales	Rank
Laptop	\$50,000	1
Phone	\$30,000	2
Monitor	\$30,000	2
Keyboard	\$10,000	3

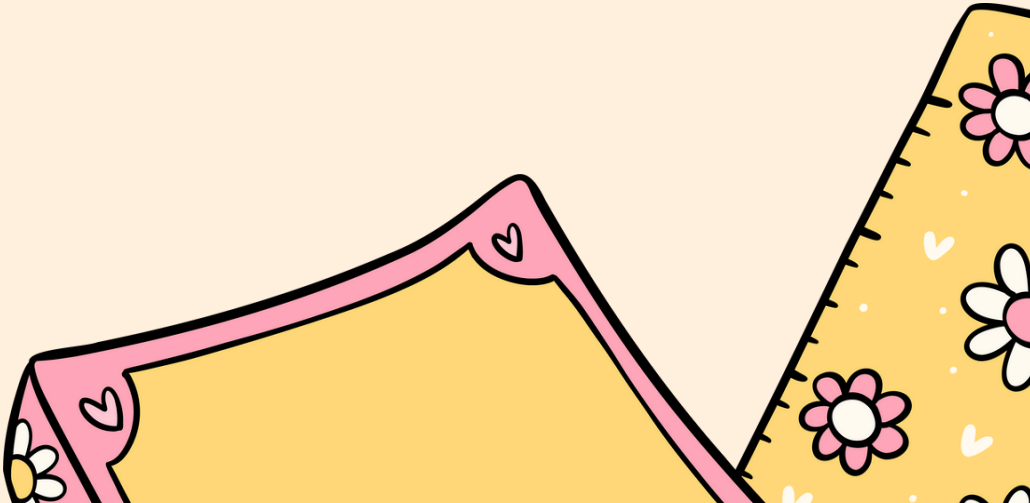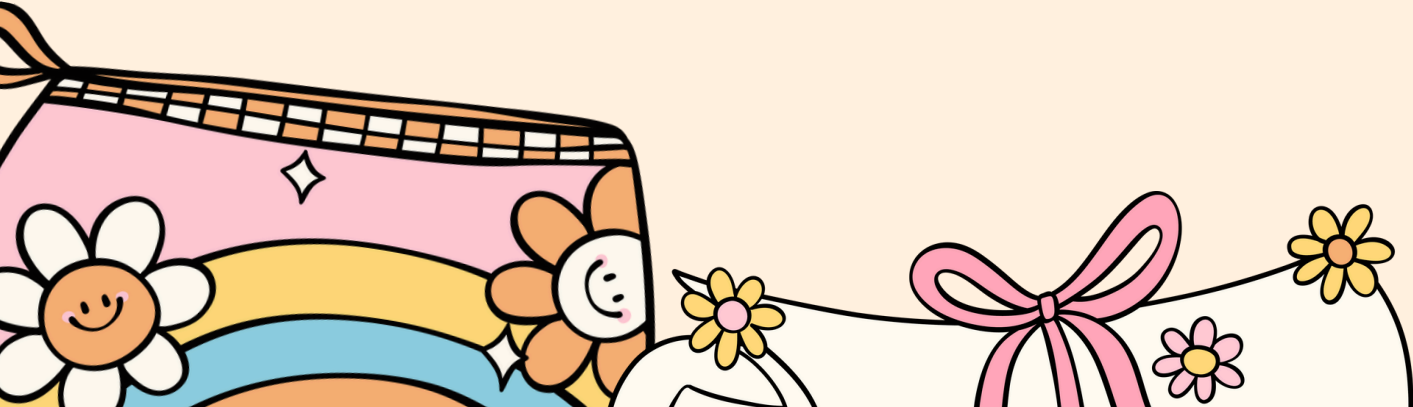



SCENARIO 3: CATEGORY-SPECIFIC RANKING

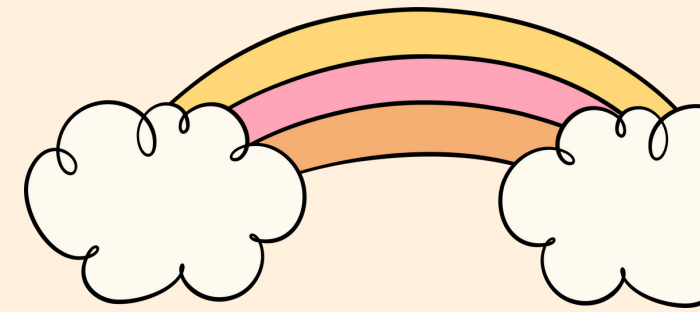

Goal: Rank products within their own category.



dax:-


Category Rank =

```
RANKX(  
    FILTER( // Reset context per category  
        ALL('Products'),  
        'Products'[Category] = EARLIER('Products'[Category])  
    ),  
    [Total Sales]  
)
```


OUTPUT

Product	Category	Sales	Rank
iPad	Tech	\$40K	1
iPhone	Tech	\$35K	2
Shirt	Apparel	\$20K	1

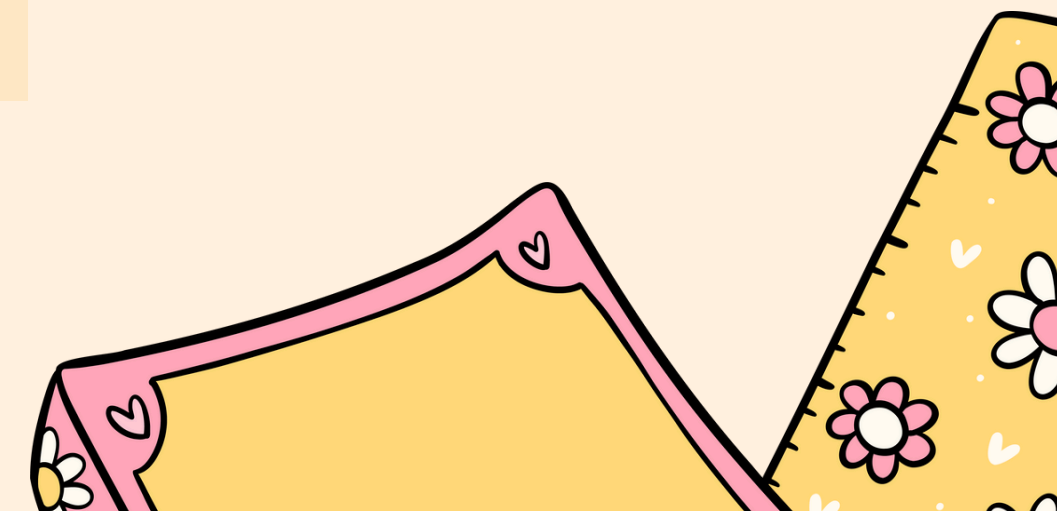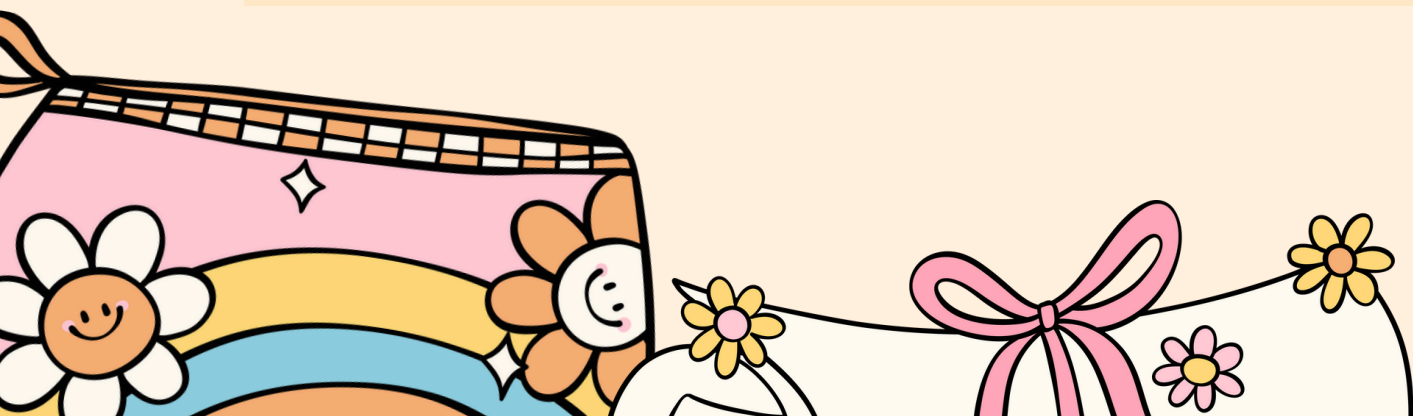



SCENARIO 4: DYNAMIC TIME RANKING

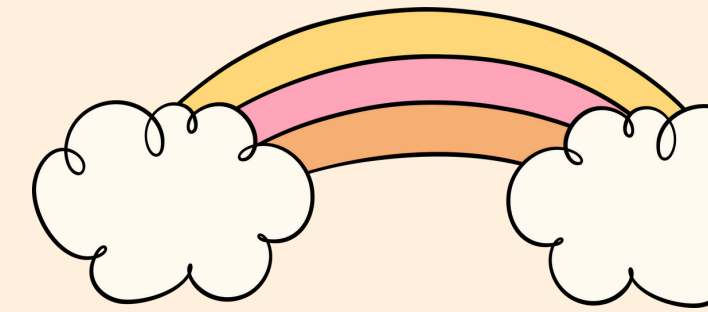

Goal: Rank months by sales, resetting annually.



dax:-


Monthly Rank =

```
RANKX(  
    FILTER(  
        ALL(Dates),  
        YEAR(Dates[Date]) = YEAR(MAX(Dates[Date])) // Current  
year only  
    ),  
    [Monthly Sales],  
    1 // Ascending: Low sales = rank 1  
)
```


OUTPUT

Month	Sales	Rank
Jan	\$5K	1
Feb	\$8K	2
Mar	\$15K	3

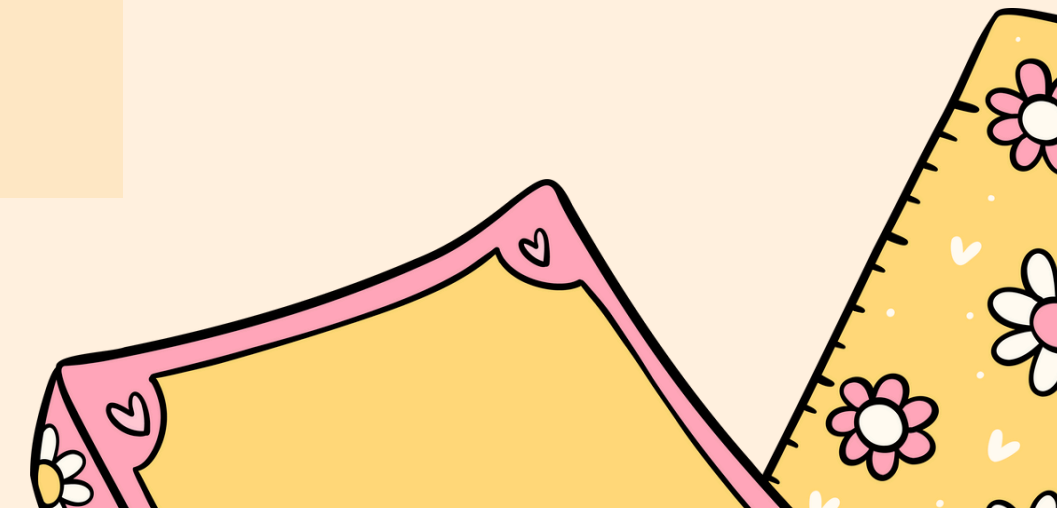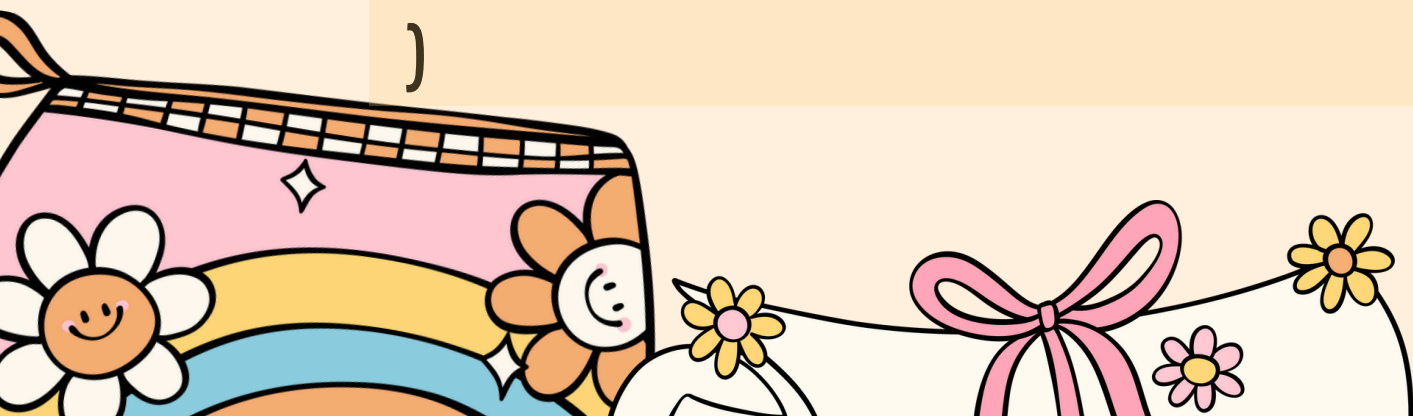



PRO TIPS:

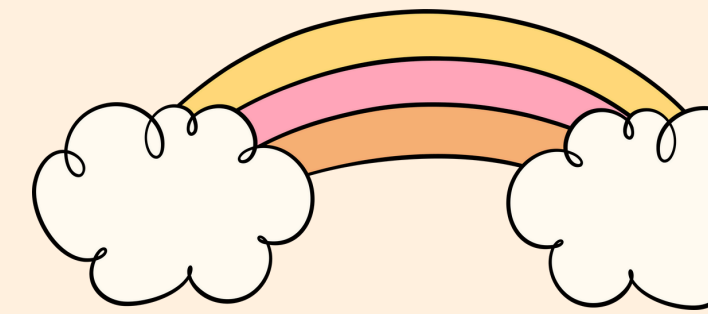

Avoid Blanks: Wrap in `IF(NOT ISBLANK([Metric]), RANKX(...))` to exclude nulls.

Optimize Performance: Use variables for complex expressions:

VAR Sales = [Total Sales]

RETURN RANKX(**ALL**('Products'), Sales)

Interactive Reports: Pair with `ALLSELECTED()` for slicer-responsive rankings!

