


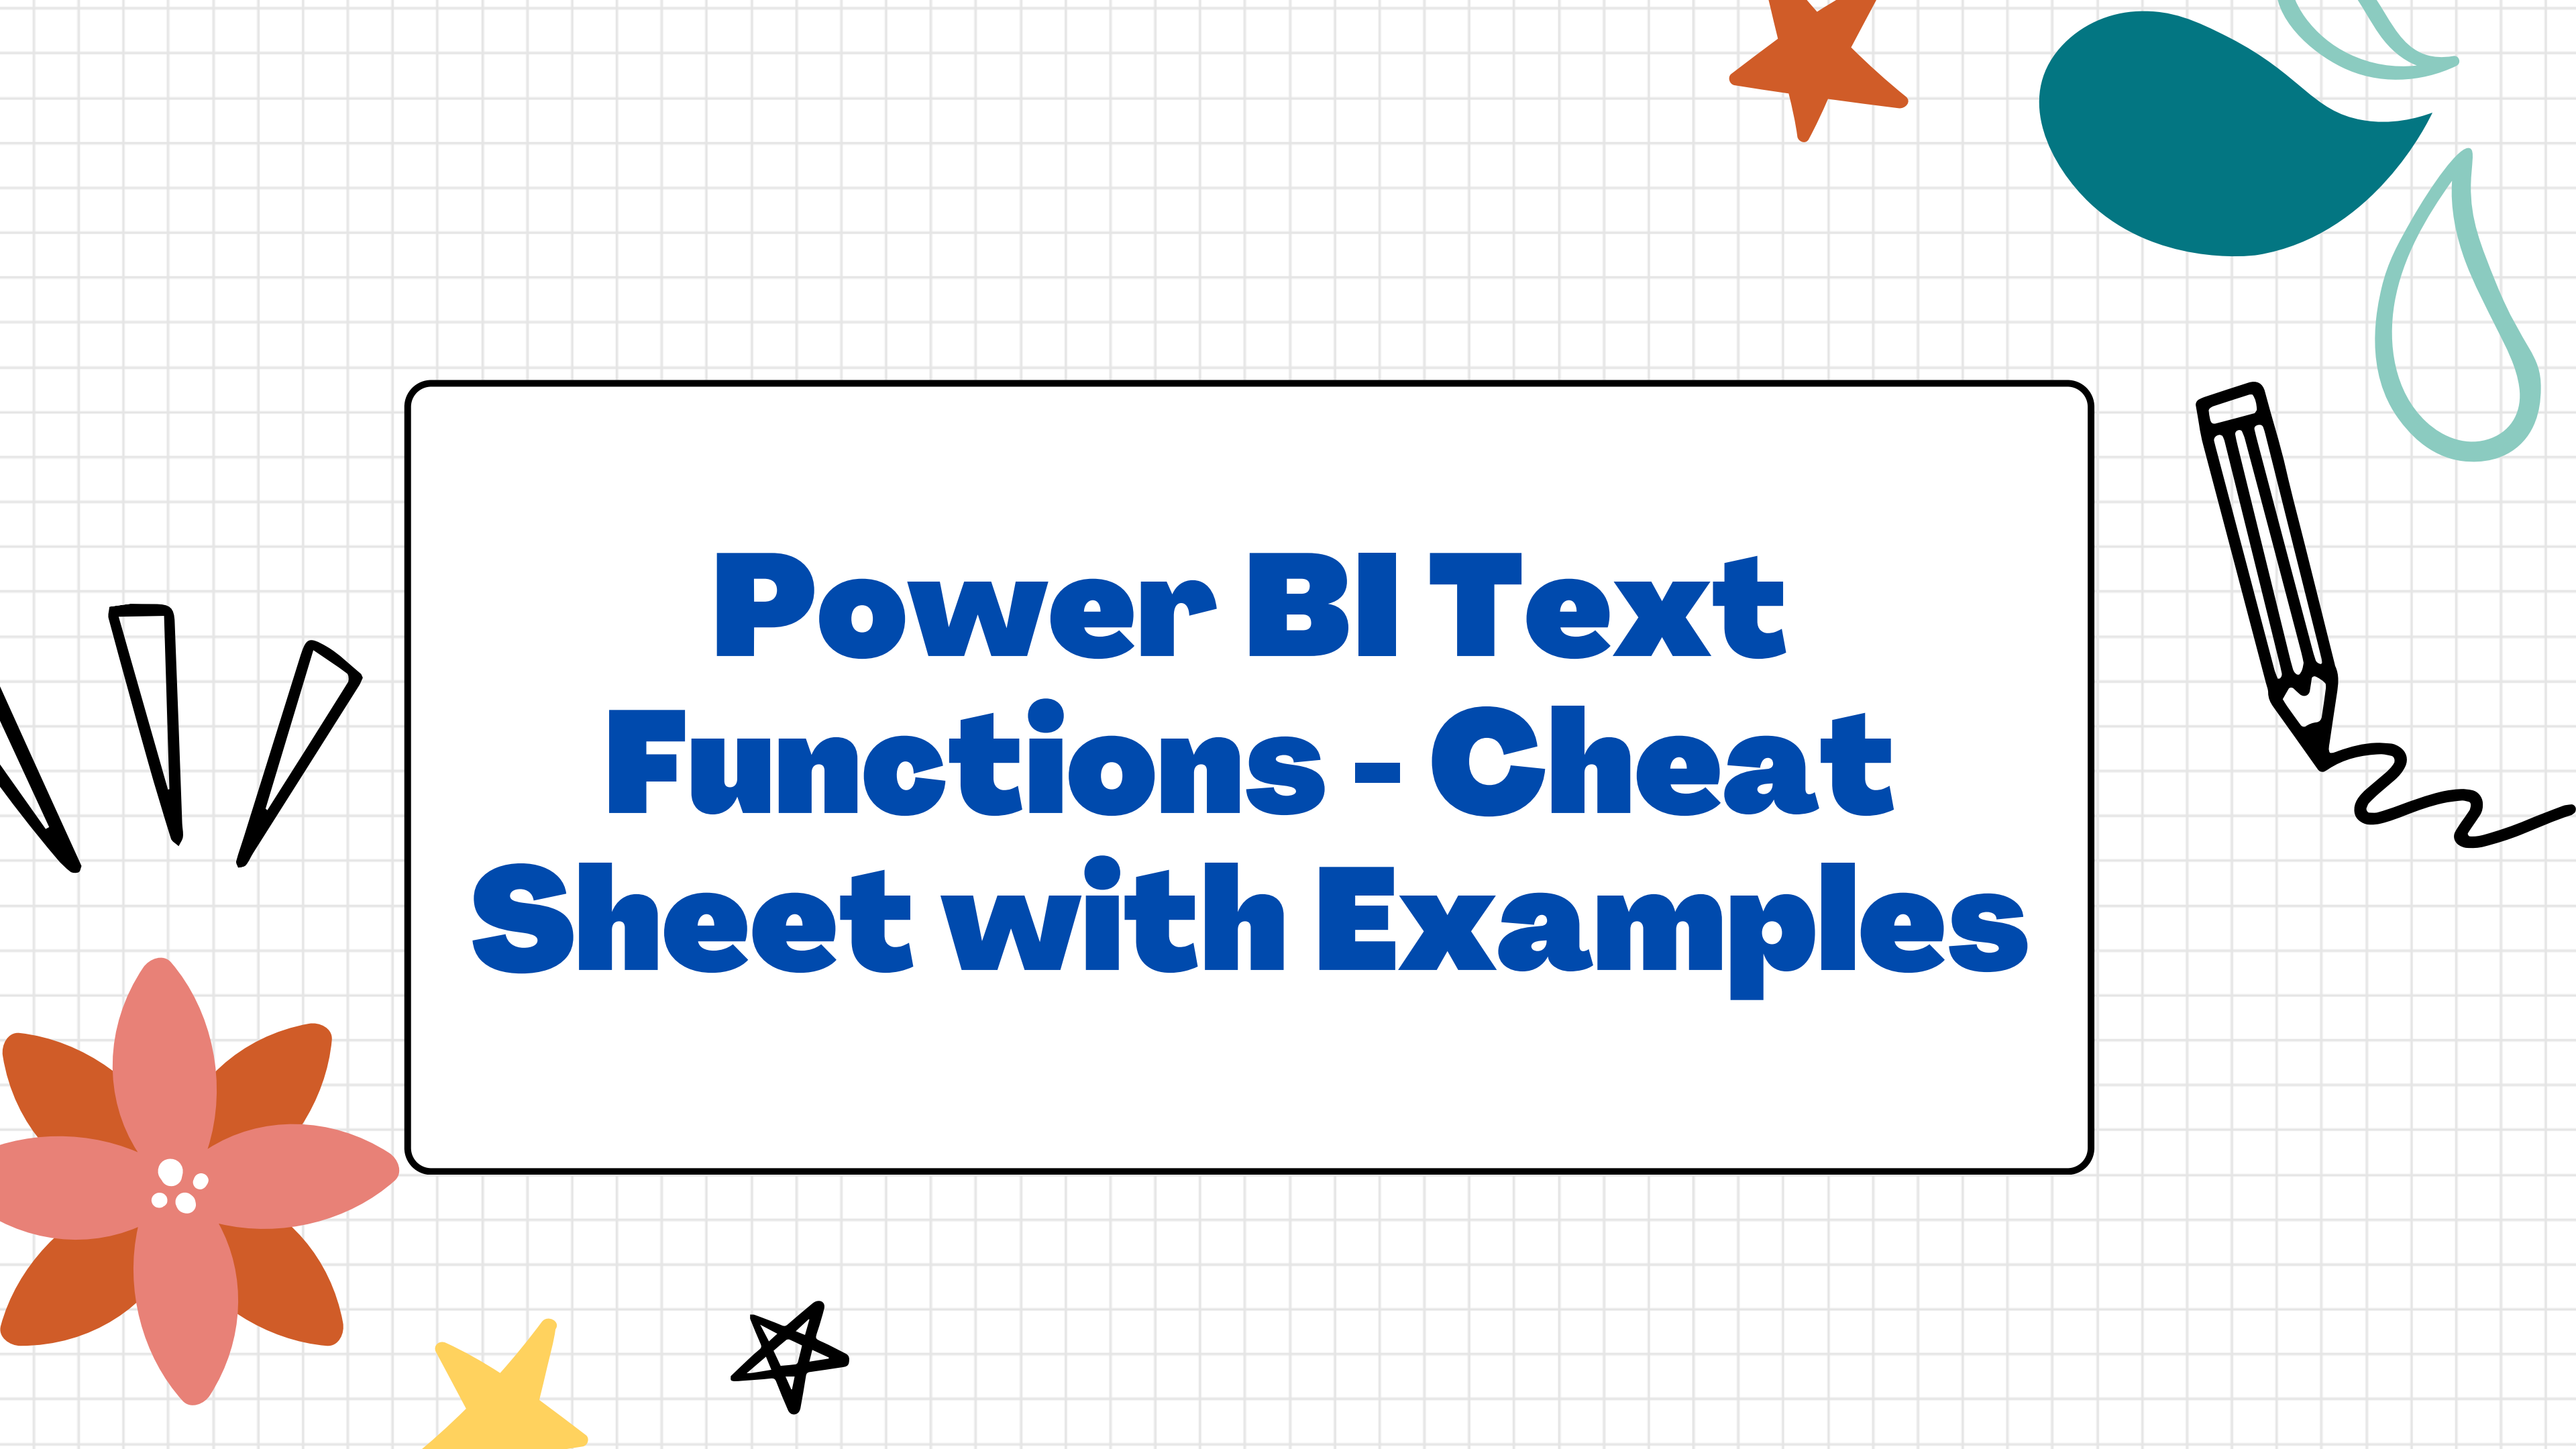

Power BI Text Functions - Cheat Sheet with Examples

1. LEFT()

Returns the leftmost characters from
a text string.

```
First3Chars = LEFT('Customer'[CustomerName], 3)
```

➔ If CustomerName = "Microsoft", result = "Mic"

2. RIGHT()

Returns the rightmost characters
from a text string.

```
Last4Chars = RIGHT('Customer'[CustomerName], 4)
```

➔ If CustomerName = "Microsoft", result = "soft"

3. MID()

Returns a substring from the middle of a text string.

```
MiddleText = MID('Customer'[CustomerName], 2, 4)
```

➔ If CustomerName = "PowerBI", result = "ower"
(start from 2nd character, take 4 chars)

4. LEN()

Returns the number of characters in a text string.

```
NameLength = LEN('Customer'[CustomerName])
```

➔ If CustomerName = "Amazon", result = 6

5. CONCATENATE() / "&"

Joins two text strings together.

```
FullName = CONCATENATE('Customer'[FirstName],  
                        'Customer'[LastName])
```

-- OR using &

```
FullName = 'Customer'[FirstName] & " " & 'Customer'[LastName]
```

➔ If FirstName = "John" and LastName = "Doe", result = "John Doe"

6. UPPER() / LOWER()

Converts text to uppercase or lowercase.

```
UpperName = UPPER('Customer'[CustomerName])  
LowerName = LOWER('Customer'[CustomerName])
```

➔ If CustomerName = "Google", result = "GOOGLE" and "google"

7. PROPER()

Capitalizes the first letter of each word.

```
ProperName = PROPER("john smith")
```

➔ Result = "John Smith"

8. **SEARCH()** / **FIND()**

Finds the position of a substring in text.

- SEARCH is case-insensitive, FIND is case-sensitive.

Position = SEARCH("BI", "PowerBI", 1)

➔ Result = 6 (BI starts at 6th position)

9. REPLACE()

Replaces part of a text string with another text.

```
ReplaceText = REPLACE("PowerBI", 1, 5, "Data")
```

➔ Result = "DataBI"

10. SUBSTITUTE()

Replaces existing text with new text
(all occurrences).

```
SubText = SUBSTITUTE("Power BI is BI tool", "BI", "Business  
Intelligence")
```

➔ Result = "Power Business Intelligence is Business Intelligence tool"

11. FORMAT()

Converts a value to text with a specified format.

```
FormattedDate = FORMAT(TODAY(), "DD-MMM-YYYY")
```

```
FormattedNumber = FORMAT(12345, "#,###0")
```

➔ Result = "28-Sep-2025", "12,345"

12. TRIM()

Removes extra spaces (leading, trailing, and multiple spaces between words).

```
TrimText = TRIM(" Power BI ")
```

➔ Result = "Power BI"