


01.

```
class Example01{  
    public static void main(String args[]){  
        System.out.println("Hello Wordl");  
    }  
}
```

Output>>

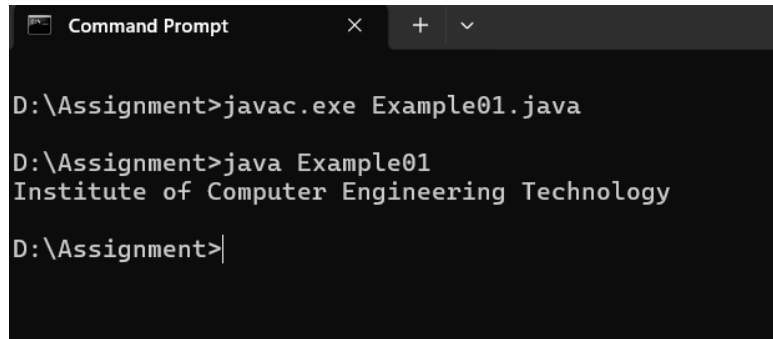


```
Command Prompt  
D:\Assignment>javac.exe Example01.java  
D:\Assignment>java Example01  
Institute of Computer Engineering Technology  
D:\Assignment>|
```

02.

```
class Example02 {  
    public static void main(String args[]){  
        System.out.println("Institute of Computer Engineering Technology");  
        System.out.println("223 A,");  
        System.out.println("Galle Road,");  
        System.out.println("Panadura");  
    }  
}
```

Output>>

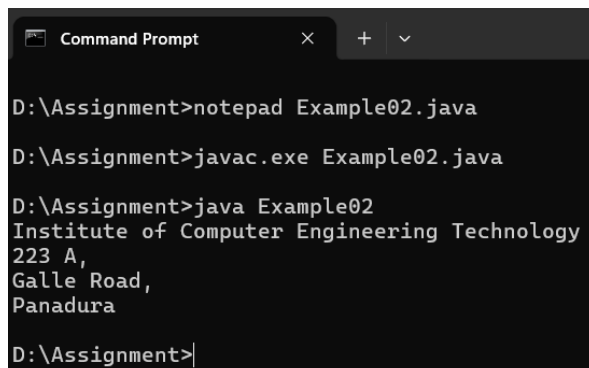

```
Command Prompt  
D:\Assignment>notepad Example02.java  
D:\Assignment>javac.exe Example02.java  
D:\Assignment>java Example02  
Institute of Computer Engineering Technology  
223 A,  
Galle Road,  
Panadura  
D:\Assignment>|
```

03.

```
class Example03 {  
  
    public static void main(String args[]){  
  
        System.out.println("J");  
  
        System.out.println("A");  
  
        System.out.println("V");  
  
        System.out.println("A");  
  
    }  
}
```

Output>>

```
C:\Users\wijem>notepad Example03.java  
C:\Users\wijem>javac.exe Example03.java  
C:\Users\wijem>java Example03.java  
J  
A  
V  
A
```

04.

```
class Example04 {  
  
    public static void main(String args[]){  
  
        System.out.println("1");  
  
        System.out.println(1000);  
  
        System.out.println(1.23);  
  
    }  
}
```

Output>>

```
C:\Users\wijem>notepad Example04.java  
C:\Users\wijem>javac.exe Example04.java  
C:\Users\wijem>java Example04.java  
1  
1000  
1.23
```

05.

```
class Example05 {  
    public static void main(String args[]){  
        System.out.println("Hello");  
        System.out.println("A");  
        System.out.println(1234);  
        System.out.println(-1234);  
        System.out.println(1.2334);  
        System.out.println(0.0032);  
        System.out.println(-0.0023);  
        System.out.println('A');  
        System.out.println('6');  
        System.out.println(true);  
        System.out.println(false);  
    }  
}
```


Output>>

```
D:\Assignment>notepad Example05.java  
D:\Assignment>javac.exe Example05.java  
D:\Assignment>java Example05  
Hello  
A  
1234  
-1234  
1.2334  
0.0032  
-0.0023  
A  
6  
true  
false
```

06.

```
class Example06 {  
  
    public static void main(String args[]){  
  
        System.out.print("A");  
  
        System.out.print("B");  
  
        System.out.print("C");  
  
        System.out.print("D");  
  
    }  
}
```

Output>>

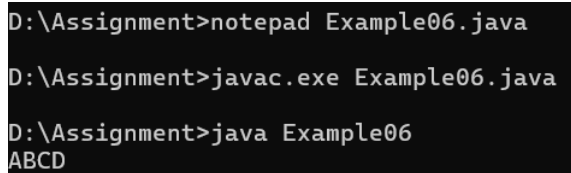

```
D:\Assignment>notepad Example06.java  
  
D:\Assignment>javac.exe Example06.java  
  
D:\Assignment>java Example06  
ABCD
```

07.

```
class Example07 {  
  
    public static void main(String args[]){  
  
        System.out.println("1");  
  
        System.out.print("2 ");  
  
        System.out.println("3 ");  
  
        System.out.print("4 ");  
  
        System.out.print("5 ");  
  
        System.out.println("6 ");  
  
        System.out.print("7 ");  
  
        System.out.print("8 ");  
  
        System.out.print("9 ");  
  
        System.out.println("10 ");  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example07.java
D:\Assignment>javac.exe Example07.java
D:\Assignment>java Example07
1
2 3
4 5 6
7 8 9 10
```

08.

```
class Example08 {
    public static void main(String args []){
        System.out.print("1");
        System.out.println();
        System.out.print("2 ");
        System.out.print("3 ");
        System.out.println();
        System.out.print("4 ");
        System.out.print("5 ");
        System.out.print("6 ");
        System.out.println();
        System.out.print("7 ");
        System.out.print("8 ");
        System.out.print("9 ");
        System.out.print("10 ");
    }
}
```


Output>>

```
D:\Assignment>notepad Example08.java
D:\Assignment>javac.exe Example08.java
D:\Assignment>java Example08.java
1
2 3
4 5 6
7 8 9 10
```

09.

```
class Example09 {  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        System.out.println();  
        System.out.println("C");  
        System.out.println("D");  
        System.out.print("");  
    }  
}
```

Output>>

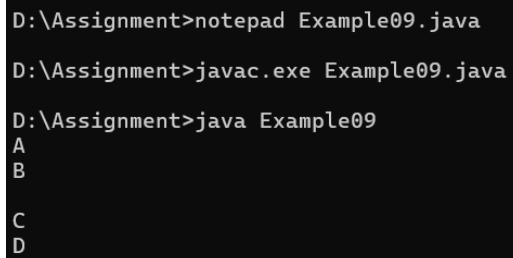

```
D:\Assignment>notepad Example09.java  
D:\Assignment>javac.exe Example09.java  
D:\Assignment>java Example09  
A  
B  
  
C  
D
```

10.

```
class Example10 {  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        System.out.print();  
        System.out.println("C");  
        System.out.println("D");  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example10.java

D:\Assignment>javac.exe Example10.java
Example10.java:5: error: no suitable method found for print(no arguments)
    System.out.print();
                  ^
    method PrintStream.print(boolean) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(char) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(int) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(long) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(float) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(double) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(char[]) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(String) is not applicable
      (actual and formal argument lists differ in length)
    method PrintStream.print(Object) is not applicable
      (actual and formal argument lists differ in length)
1 error
```

***error**

11.

```
class Example11 {

    public static void main(String args[]){

        int a;

        a=100;

        System.out.println("a");

        System.out.println(a);

    }

}
```

Output>>

```
D:\Assignment>notepad Example11.java

D:\Assignment>javac.exe Example11.java

D:\Assignment>java Example11
a
100
```

12.

```
class Example12 {  
    public static void main(String args[]){  
        int a;  
        System.out.println("a");  
        System.out.println(a);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example12.java  
  
D:\Assignment>javac.exe Example12.java  
Example12.java:5: error: variable a might not  
        System.out.println(a);  
                        ^  
1 error  
  
D:\Assignment>
```

*error

13.

```
class Example13 {  
    public static void main(String args[]){  
        int a=100;  
        System.out.println(a);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example13.java  
  
D:\Assignment>javac.exe Example13.java  
  
D:\Assignment>java Example13  
100
```


14.

```
class Example14{  
    public static void main(String args[]){  
        int a;  
        System.out.println(a);  
        a=100;  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example14.java  
  
D:\Assignment>javac.exe Example14.java  
Example14.java:4: error: variable a might not have been initialized  
    System.out.println(a);  
                        ^  
1 error
```

***error**

15.

```
class Example15{  
    public static void main(String args[]){  
        int x;  
        x=100;  
        x=200;  
        System.out.println(x);  
    }  
}
```


Output>>

```
D:\Assignment>notepad Example15.java  
  
D:\Assignment>javac.exe Example15.java  
  
D:\Assignment>java Example15  
200
```

16.

```
class Example16{  
    public static void main(String args[]){  
        int x;  
        x=100;  
        System.out.println(x);  
        x=200;  
        System.out.println(x);  
    }  
}
```

Output>>

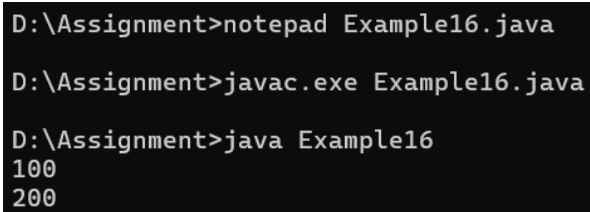

```
D:\Assignment>notepad Example16.java  
D:\Assignment>javac.exe Example16.java  
D:\Assignment>java Example16  
100  
200
```

17.

```
class Example17{  
    public static void main(String args[]){  
        int x=100;  
        int y=200;  
        System.out.println(x);  
        System.out.println(y);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example17.java  
D:\Assignment>javac.exe Example17.java  
D:\Assignment>java Example17  
100  
200
```

18.

```
class Example18{  
    public static void main(String args[]){  
        int x;  
        x=1000;  
        System.out.println(x);  
        var y=2000;  
        System.out.println(y);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example18.java  
D:\Assignment>javac.exe Example18.java  
D:\Assignment>java Example18.java  
1000  
2000
```

19.

```
class Example19{  
    public static void main(String args[]){  
        int x=100;  
        int y=200;  
        int z;  
        System.out.println(x);  
        System.out.println(y);  
        System.out.println(z);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example19.java  
  
D:\Assignment>javac.exe Example19.java  
Example19.java:8: error: variable z might not have been initialized  
        System.out.println(z);  
                        ^  
1 error
```

20.

```
class Example20{  
    public static void main(String args[]){  
        int x=100,y,z=200;  
        System.out.println(x);  
        y="java";  
        System.out.println(y);  
        System.out.println(z);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example20.java

D:\Assignment>javac.exe Example20.java
Example20.java:5: error: incompatible types: String cannot be converted to i
nt
        y="java";
        ^
1 error
```

21.

```
class Example21{

    public static void main(String args[]){

        System.out.println("A");

        //System.out.println("B");

        System.out.println("C");

        //System.out.println("D");

        System.out.println("E");

    }

}
```

Output>>

```
D:\Assignment>notepad Example21.java

D:\Assignment>javac.exe Example21.java

D:\Assignment>java Example21
A
C
E
```

22.

```
class Example22 {  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        /*System.out.println("C");  
        System.out.println("D");  
        System.out.println("E");*/  
        System.out.println("F");  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example22.java  
D:\Assignment>javac.exe Example22.java  
D:\Assignment>java Example22.java  
A  
B  
F
```

23.

```
class Example23{  
    public static void main(String args[]){  
        int x=100;  
        int y=200;  
        System.out.println(x);  
        System.out.println(y);  
        x=y;  
        System.out.println(x);  
        System.out.println(y);  
    }  
}
```

```
}
```

Output>>

```
D:\Assignment>notepad Example23.java  
D:\Assignment>javac.exe Example23.java  
D:\Assignment>java Example23  
100  
200  
200  
200
```

24.

```
class Example24{  
    public static void main(String args[]){  
        System.out.println(true);  
        System.out.println("true");  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example24.java  
D:\Assignment>javac.exe Example24.java  
D:\Assignment>java Example24  
true  
true
```

25.

```
class Example25 {  
    public static void main(String args[]){  
        System.out.println(Java);  
        System.out.println("Java");  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example25.java  
D:\Assignment>javac.exe Example25.java  
Example25.java:3: error: cannot find symbol  
    System.out.println(Java);  
                        ^  
symbol:   variable Java  
location: class Example25  
1 error
```

*error

26.

```
class Example26 {  
    public static void main(String args[]){  
        System.out.println('A');  
        System.out.println("A");  
        System.out.println('2');  
        System.out.println("2");  
        System.out.println('JAVA');  
        System.out.println("JAVA");  
    }  
}
```


Output>>

```
D:\Assignment>notepad Example26.java

D:\Assignment>javac.exe Example26.java
Example26.java:7: error: unclosed character literal
    System.out.println('JAVA');
                        ^
Example26.java:7: error: unclosed character literal
    System.out.println('JAVA');
                        ^
Example26.java:7: error: not a statement
    System.out.println('JAVA');
                        ^
3 errors
```

*error

27.

```
class Example27 {

    public static void main(String args[]){

        System.out.println("Hellooooo\tJAVA");

        System.out.println("Hellooooo\t\t\tJAVA");

    }

}
```

Output>>

```
D:\Assignment>notepad Example27.java

D:\Assignment>javac.exe Example27.java

D:\Assignment>java Example27
Hellooooo      JAVA
Hellooooo      JAVA
```

28.

```
class Example28 {  
  
    public static void main(String args[]){  
  
        System.out.println("Hi\tJAVA");  
  
        System.out.println("Hello\tWorld");  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example28.java  
  
D:\Assignment>javac.exe Example28.java  
  
D:\Assignment>java Example28  
Hi      JAVA  
Hello   World
```

29.

```
class Example29 {  
  
    public static void main(String args[]){  
  
        System.out.println("AB\nCD");  
  
        System.out.println("");  
  
        System.out.println("EF\tGH\n\nIJ\tKL");  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example29.java  
  
D:\Assignment>javac.exe Example29.java  
  
D:\Assignment>java Example29  
AB  
CD  
  
EF      GH  
  
IJ      KL
```

30.

```
class Example30 {  
  
    public static void main(String args[]){  
  
        System.out.println("time - "17:56:02");  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example30.java  
  
D:\Assignment>javac.exe Example30.java  
Example30.java:3: error: ')' or ',' expected  
        System.out.println("time - "17:56:02");  
                                   ^  
1 error
```

*error

31.

```
class Example31 {  
  
    public static void main(String args[]){  
  
        System.out.println("\'iCET\");  
  
        System.out.println("\"Institute of Computer Engineering Technology\");  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example31.java  
  
D:\Assignment>javac.exe Example31.java  
  
D:\Assignment>java Example31  
'iCET'  
"Institute of Computer Engineering Technology"
```

32.

```
class Example32 {  
    public static void main(String args[]){  
        System.out.println("First Line \nSecond Line");  
        System.out.println("A \tB \tC");  
        System.out.println("D \tE \tF");  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example32.java  
D:\Assignment>javac.exe Example32.java  
D:\Assignment>java Example32  
First Line  
Second Line  
A      B      C  
D      E      F
```

33.

```
class Example33 {  
    public static void main(String args[]){  
        System.out.println("AB\nCD");  
        System.out.println("AB\tCD");  
        System.out.println("AB\fCD");  
        System.out.println("AB\bCD");  
        System.out.println("AB\rCD");  
        System.out.println("AB\\CD");  
    }  
}
```

```
}
```

Output>>

```
D:\Assignment>notepad Example33.java
D:\Assignment>javac.exe Example33.java
D:\Assignment>java Example33
AB
CD
AB      CD
AB
      CD
ACD
CD
AB\CD
```

34.

```
class Example34 {
    public static void main(String args[]){
        System.out.println(10+20);
        System.out.println("10"+"20");
        System.out.println("10"+20);
        System.out.println(10+"20");
    }
}
```

Output>>

```
D:\Assignment>notepad Example34.java
D:\Assignment>javac.exe Example34.java
D:\Assignment>java Example34
30
1020
1020
1020
```

35.

```
class Example35 {  
  
    public static void main(String args[]){  
  
        System.out.println(20230326);  
  
        System.out.println("2023-03-26");  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example35.java  
  
D:\Assignment>javac.exe Example35.java  
  
D:\Assignment>java Example35  
20230326  
2023-03-26
```

36.

```
class Example36 {  
  
    public static void main(String args[]){  
  
        int x,y,z;  
  
        x=10;  
  
        y=20;  
  
        z=x+y;  
  
        System.out.println(x+" "+y+"="+z);  
  
    }  
}
```


Output>>

```
D:\Assignment>notepad Example36.java  
  
D:\Assignment>javac.exe Example36.java  
  
D:\Assignment>java Example36  
10+20=30
```

37.

```
class Example37 {  
  
    public static void main(String args[]){  
  
        int x=10,y=20;  
  
        System.out.println(x+y);  
  
        System.out.println("x"+"y");  
  
        System.out.println("x+y");  
  
        System.out.println("x"+y);  
  
        System.out.println(x+"y");  
  
    }  
}
```

Output>>

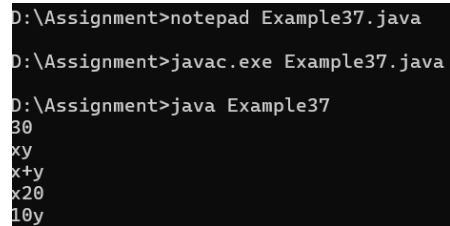

```
D:\Assignment>notepad Example37.java  
D:\Assignment>javac.exe Example37.java  
D:\Assignment>java Example37  
30  
xy  
x+y  
x20  
10y
```

38.

```
class Example38 {  
  
    public static void main(String args[]){  
  
        System.out.println(10+20+30);  
  
        System.out.println("10+20+30");  
  
        System.out.println(10+20+30);  
  
        System.out.println("10+20"+30);  
  
        System.out.println("10"+"20"+"30");  
  
        System.out.println("10"+20+30);  
  
        System.out.println(10+20+"30");  
  
        System.out.println(10+"20"+30);  
  
    }  
}
```

```
}  
}
```

Output>>

```
D:\Assignment>notepad Example38.java  
D:\Assignment>javac.exe Example38.java  
D:\Assignment>java Example38  
60  
10+20+30  
60  
10+2030  
102030  
102030  
3030  
102030
```

39.

```
class Example39 {  
    public static void main(String args[]){  
        String s1="Hello";  
        System.out.println(s1);  
        System.out.println(s1.concat(" JAVA"));  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example39.java  
D:\Assignment>javac.exe Example39.java  
D:\Assignment>java Example39  
Hello  
Hello JAVA
```

40.

```
class Example40 {  
    public static void main(String args[]){  
        int x, y, z;
```



```

x=10;

y=20;

z=x+y;

System.out.println(x+" + "+y+" = "+z);

z=x-y;

System.out.println(x+" - "+y+" = "+z);

z=x*y;

System.out.println(x+" * "+y+" = "+z);

}

}

```

Output>>

```

D:\Assignment>notepad Example40.java

D:\Assignment>javac.exe Example40.java

D:\Assignment>java Example40
10 + 20 = 30
10 - 20 = -10
10 * 20 = 200

```

41.

```

class Example41 {

    public static void main(String args[]){

        int x, y;

        x=10;

        y=20;

        System.out.println(x+" + "+y+" = "+(x+y));

        System.out.println(x+" - "+y+" = "+(x-y));

        System.out.println(x+" * "+y+" = "+(x*y));

    }

}

```

Output>>

```
D:\Assignment>notepad Example41.java  
  
D:\Assignment>javac.exe Example41.java  
  
D:\Assignment>java Example41  
10 + 20 = 30  
10 - 20 = -10  
10 * 20 = 200
```

42.

```
class Example42{  
    public static void main(String args[]){  
        int x,y;  
        x=100;  
        y=200;  
  
        y=x;  
        System.out.println(x);  
        System.out.println(y);  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example42.java  
  
D:\Assignment>javac.exe Example42.java  
  
D:\Assignment>java Example42  
100  
100
```

43.

```
class Example43{

    public static void main(String args[]){

        int num=103;

        if(num>0){

            System.out.println(num+"is positive number");

        }else if(num<0){

            System.out.println(num+"is negative number");

        }else{

            System.out.println(num+"is 0");

        }

    }

}
```

Output>>

```
D:\Assignment>notepad Example43.java

D:\Assignment>javac.exe Example43.java

D:\Assignment>java Example43
103is positive number
```

44.

```
import java.util.*;

class Example44{

    public static void main(String args[]){

        Scanner input=new Scanner(System.in);

        System.out.print("input number -");

        int num=input.nextInt();

        if(num>0){

            System.out.println(num+"is positive number");

        }else if (num<0){
```

```

        System.out.println(num+"is negative number");
    }else{
        System.out.println(num+"is 0");
    }
}
}
}

```

Output>>

```

D:\Assignment>notepad Example44.java
D:\Assignment>javac.exe Example44.java
D:\Assignment>java Example44
input number -34
34is positive number

```

45.

```

import java.util.*;

class Example45 {
    public static void main(String args[]){
        Scanner input=new Scanner(System.in);
        System.out.print("Enter your marks -");
        int mark=input.nextInt();
        if(mark>=75){
            System.out.println("your grade is A");
        }else if(mark >=65){
            System.out.println("your grade is B");
        }else if(mark >=50){
            System.out.println("your grade is C");
        }else{
            System.out.println("your grade is F");
        }
    }
}

```

Output>>

```
D:\Assignment>notepad Example45.java  
D:\Assignment>javac.exe Example45.java  
D:\Assignment>java Example45  
Enter your marks -95  
your grade is A
```

46.

```
import java.util.*;  
  
class Example46 {  
    public static void main(String args[]){  
        Scanner input=new Scanner(System.in);  
        System.out.print("Enter your age -");  
        int age=input.nextInt();  
        if(age<18){  
            System.out.println("age is not valid to vote");  
        }else{  
            System.out.println("welcome to vote");  
        }  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example46.java  
D:\Assignment>javac.exe Example46.java  
D:\Assignment>java Example46  
Enter your age -20  
welcome to vote
```

47.

```
class Example47 {  
  
    public static void main(String args[]){  
  
        double x, y, z;  
  
        x=3;  
  
        y=4;  
  
        z=Math.sqrt(x*x + y*y);  
  
        System.out.println("Hypotenuse is "+z);  
  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example47.java  
  
D:\Assignment>javac.exe Example47.java  
  
D:\Assignment>java Example47  
Hypotenuse is 5.0
```

48.

```
import java.util.*;  
  
class Example48 {  
  
    public static void main(String args[]) {  
  
        Scanner input=new Scanner(System.in);  
  
        System.out.print("Enter any number - ");  
  
        int num=input.nextInt();  
  
        int fact=1;  
  
        for(int i=1;i<num;i++){  
  
            fact=fact*i;
```

```

    }

    System.out.println("The factorial of "+num+" is "+fact);

}

}

```

Output>>

```

D:\Assignment>notepad Example48.java

D:\Assignment>javac.exe Example48.java

D:\Assignment>java Example48
Enter any number - 400
The factorial of 400 is 0

```

49.

```

import java.util.*;

class Example49 {

    public static void main(String args[]) {

        Scanner input=new Scanner(System.in);

        System.out.print("Input your age - ");

        int age=input.nextInt();

        if(age < 18){

            System.out.println("age is not valid to vote");

        }

        else {

            System.out.println("welcome to vote");

        }

    }

}

```

Output>>

```
D:\Assignment>notepad Example49.java  
  
D:\Assignment>javac.exe Example49.java  
  
D:\Assignment>java Example49  
Input your age - 12  
age is not valid to vote
```

50.

```
public class Example50 {  
    public static void main(String args[]) {  
        for(int i=-5;i<6;i++){  
            int result = i!=0 ? 100/i : 0 ;  
            if(i!=0){  
                System.out.println("100/"+i+" is "+result);  
            }  
        }  
    }  
}
```

Output>>

```
D:\Assignment>notepad Example50.java  
  
D:\Assignment>javac.exe Example50.java  
  
D:\Assignment>java Example50  
100/-5 is -20  
100/-4 is -25  
100/-3 is -33  
100/-2 is -50  
100/-1 is -100  
100/1 is 100  
100/2 is 50  
100/3 is 33  
100/4 is 25  
100/5 is 20
```