

Q1.

```
class Q1 {  
    public static void main(String[] args){  
        for(int i=0;i<10;i++){  
            System.out.println("Hello World");  
        }  
    }  
}
```

Output>>

[illegible]

Q2.

```
class Q2 {  
    public static void main(String[] args){  
        for(int i=1;i<=100;i++){  
            System.out.println(i);  
        }  
    }  
}
```

Output>>

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

Q3.

```
class Q3 {  
    public static void main(String[] args){  
        for(int i=100;i>=1;i--){  
            System.out.println(i);  
        }  
    }  
}
```

Output>>

```
100  
99  
98  
97  
96  
95  
94  
93  
92  
91  
90  
89  
88  
87  
86  
85  
84  
83  
82  
81  
80  
79  
78  
77  
76  
75  
74  
73  
72  
71  
70  
69  
68  
67  
66  
65  
64  
63  
62  
61  
60
```

```
59  
58  
57  
56  
55  
54  
53  
52  
51  
50  
49  
48  
47  
46  
45  
44  
43  
42  
41  
40  
39  
38  
37  
36  
35  
34  
33  
32  
31  
30  
29  
28  
27  
26  
25  
24  
23  
22  
21  
20  
19  
18  
17  
16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1
```

Q4.

```
class Q4 {  
    public static void main(String[] args){  
        for(int i=2;i<=100;i++){  
            System.out.println(i);  
            i++;  
        }  
    }  
}
```

Output>>

```
2  
4  
6  
8  
10  
12  
14  
16  
18  
20  
22  
24  
26  
28  
30  
32  
34  
36  
38  
40  
42  
44  
46  
48  
50  
52  
54  
56  
58  
60  
62  
64  
66  
68  
70  
72  
74  
76  
78  
80  
82  
84  
86  
88  
90  
92  
94  
96  
98  
100
```

Q5.

```
import java.util.*;

class Q5 {
    public static void main(String[] args){
        Random r=new Random();
        for(int i = 0;i<10;i++){
            int rand=r.nextInt(100)+1;
            System.out.println(rand);
        }
    }
}
```

Output>>

```
41
71
23
99
94
81
52
32
29
5
```

Q6.

```
import java.util.*;
class Q6 {
    public static void main(String[] args){
        Random ran = new Random();

        for(int i = 0;i<=50;i++){
            int rand = ran.nextInt(100)+1;
            if(rand%2==1){
                System.out.println(rand);
            }
        }
    }
}
```

Output>>

```
55
11
47
71
17
73
9
23
7
67
13
17
81
67
29
73
17
15
19
81
83
95
7
43
13
15
37
33
61
11
85
77
95
63
5
41
```

Q7.

```
import java.util.*;
class Q7 {
    public static void main(String[] args){

        for(char ch = 'A';ch<='Z';ch++ ){
            System.out.print(ch+" ");
        }
    }
}
```

Output>>

```
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q8.

```
import java.util.*;
class Q8 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Enter number : ");
        long num1 = input.nextInt();

        long x ;
        long factorial = 1;
        for(x=num1;x>0;x--){
            factorial*=x;
        }
        System.out.print("Factorial of "+ num1 +" ! "+" = "+ factorial);
    }
}
```

Output>>

```
1 Enter number : 4
   Factorial of 4 !  = 24

   -----
   (program exited with code: 0)

   Press any key to continue . . . |
```

Q9.

```
import java.util.*;

class Q9 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);
        int num = 0 ;
        int count=0;
        for(int i = 1 ;i<=50;i++){

            System.out.print("Enter number"+ i +" : ");
            num =input.nextInt();

            if(num>100){
                count++;
            }

            System.out.println();
            System.out.println( count + " Numbers are "+"greater that 100 ");

        }
    }
}
```

Output>>

```
Enter number1 : 345
Enter number2 : 34
Enter number3 : 35
Enter number4 : 36
Enter number5 : 75
Enter number6 : 36
Enter number7 : 56
Enter number8 : 3546
Enter number9 : 24
Enter number10 : 43
Enter number11 : 245
Enter number12 : 253434
Enter number13 : 5
Enter number14 : 452
Enter number15 : 4
Enter number16 : 53
Enter number17 : 5
Enter number18 : 52
Enter number19 : 45
Enter number20 : 3
Enter number21 : 454
Enter number22 : 3
Enter number23 : 53
Enter number24 : 5
Enter number25 : 3
Enter number26 : 53
Enter number27 : 345
Enter number28 : 3
Enter number29 : 53
Enter number30 : 4
Enter number31 : 53
Enter number32 : 65
Enter number33 : 4
Enter number34 : 3535
Enter number35 : 34
Enter number36 : 5
Enter number37 : 45
Enter number38 : 345
Enter number39 : 3
Enter number40 : 53
Enter number41 : 453
Enter number42 : 35
Enter number43 : 3
Enter number44 : 5
Enter number45 : 45
Enter number46 : 25
Enter number47 : 33
Enter number48 : 343
Enter number49 : 4
Enter number50 : 356

12 Numbers are greater that 100
```

Q10.

```
import java.util.*;

class Q10 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);
        int total = 0;
        int max = 0 ;
        int min = 0 ;

        for(int i = 1; i<=10;i++){

            System.out.print("Enter "+i+" Subject Marks : ");
            int num = input.nextInt();
            total+=num;
            if(i==1){
                max=num ;
                min=num ;
            }else{

                if(max>num){
                    max=num ;
                }
                if (min<num){
                    min=num ;
                }
            }
        }
        double average = total/10;
        System.out.println("Total : " + total );
        System.out.println("Max : " + max);
        System.out.println("Min : " + min);
        System.out.println("Average : "+ average);
    }
}
```

Output>>

```
Enter 1 Subject Marks : 47
Enter 2 Subject Marks : 89
Enter 3 Subject Marks : 87
Enter 4 Subject Marks : 68
Enter 5 Subject Marks : 57
Enter 6 Subject Marks : 78
Enter 7 Subject Marks : 98
Enter 8 Subject Marks : 78
Enter 9 Subject Marks : 76
Enter 10 Subject Marks : 65
Total : 743
Max : 47
Min : 98
Average : 74.0
```

Q11.

```
import java.util.*;
class Q11 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);
        double hei_total = 0;
        double wei_total = 0;
        double avg_wei = 0;
        double avg_wei = 0;

        for(int i = 1;i<=100;i++){
            System.out.println("Enter "+i+" student \n ");

            System.out.print("        height :");
            double stu_wei = input.nextInt();

            System.out.print("        weight :");
            double stu_wei = input.nextInt();

            System.out.println("\n");

            hei_total +=stu_wei;
            wei_total +=stu_wei;

            avg_wei = hei_total /100;
            avg_wei = wei_total /100;

        }
        System.out.print("Average Height : "+avg_wei);
        System.out.print("\n");
        System.out.print("Average Weight : "+avg_wei);
    }
}
```

Output>>

After the 100 inputs:

```
Enter 100 student

        height :5
        weight :64

Average Height : 9.05
Average Weight : 96.64
```

Q12.

```
class Q12{
    public static void main(String args[]){

        System.out.println("Print Hello World Using for-loop");
        for (int i = 1; i<=10; i++){
            System.out.println("    Hello world");
        }
        System.out.println();

        System.out.println("Print Hello World Using while-loop");

        int num = 0;
        while(num<10){
            System.out.println("    Hello world");
            num++;
        }

    }
}
```

Output>>

[illegible]

Q13.

```
class Q13 {  
    public static void main(String[] args){  
  
        int num = 1;  
        while(num<=100){  
  
            System.out.println(num);  
            num++;  
  
        }  
    }  
}
```

Output>>

```
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80
```

```
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100
```

Q14.

```
class Q14 {  
    public static void main(String[] args){  
  
        int num = 1;  
  
        while(num<=100){  
  
            if(num%2==0){  
                System.out.println(num);  
  
            }  
            num++;  
        }  
    }  
}
```

Output>>

```
Q1 2  
1 4  
2 6  
3 8  
4 10  
5 12  
6 14  
7 16  
8 18  
9 20  
0 22  
1 24  
2 26  
3 28  
4 30  
5 32  
6 34  
7 36  
8 38  
9 40  
0 42  
1 44  
2 46  
3 48  
4 50  
5 52  
6 54  
7 56  
8 58  
9 60  
0 62  
1 64  
2 66  
3 68  
4 70  
5 72  
6 74  
7 76  
8 78  
9 80  
0 82  
1 84  
2 86  
3 88  
4 90  
5 92  
6 94  
7 96  
8 98  
9 100
```

Q15.

```
import java.util.*;
class Q15 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Input an integer : ");
        int num=input.nextInt();
        int n=0;//no of digits
        for(int i=num;i>0;i/=10){
            int s_num =i%10;
            n+=s_num;
        }
        System.out.println("sum of digits : "+n);
    }
}
```

Output>>

```
Input an integer : 3456
sum of digits : 18
```

Q16.

```
class Q16 {
public static void main(String[] args) {
    for (int i = 0; i < 10; i++){
        System.out.println(i);
    }
    for (int i = 0; i < 10; i++){
        System.out.println(i++);
    }
    for (int i = 0; i < 10; i++){
        System.out.println(++i);
    }
    int j=0;
    while(j<10){
        System.out.println(j);
        j++;
    }
    int k=0;
    while(k<10){
        System.out.println(k++);
    }
    int m=0;
    while(m<10){
        System.out.println(++m);
    }
    int n=0;
    while(n++<10){
        System.out.println(n);
    }
    int p=0;
    while(++p<10){
        System.out.println(p);
    }
    int q=0;
    do{
        System.out.println(q++);
    }while(q<10);
    int s=0;
    do{
        System.out.println(++s);
    }while(s<10);
    int t=0;
    do{
        System.out.println(t);
    }while(t++<10);
    int u=0;
    do{
        System.out.println(u);
    }while(++u<10);
}
```

Output>>Explain

1. First For Loop

- **Description:** Prints numbers from 0 to 9 in the normal order.
- **Output:** 0, 1, 2, 3, 4, 5, 6, 7, 8, 9

2. Second For Loop

- **Description:** The value increases inside the print statement and also increases at the loop header, so the value increases by two steps at a time.
- **Output:** 0, 2, 4, 6, 8

3. Third For Loop

- **Description:** The value increases before printing and also increases at the loop header, resulting in odd numbers.
- **Output:** 1, 3, 5, 7, 9

4. First While Loop

- **Description:** Prints the current value of j first, then increases the value by 1.

- **Output:** 0, 1, 2, 3, 4, 5, 6, 7, 8, 9

5. Second While Loop

- **Description:** Prints the value and then increases it immediately, so it prints normally from 0 to 9.
- **Output:** 0, 1, 2, 3, 4, 5, 6, 7, 8, 9

6. Third While Loop

- **Description:** Increases the value before printing, so it prints from 1 to 10.
- **Output:** 1, 2, 3, 4, 5, 6, 7, 8, 9, 10

7. Fourth While Loop

- **Description:** Increases the value while checking the condition, printing numbers from 1 to 10.
- **Output:** 1, 2, 3, 4, 5, 6, 7, 8, 9, 10

8. Fifth While Loop

- **Description:** Increases the value before checking the condition, running from 1 to 9.
- **Output:** 1, 2, 3, 4, 5, 6, 7, 8, 9

9. First Do-While Loop

- **Description:** Prints first and then increases the value, looping from 0 to 9.
- **Output:** 0, 1, 2, 3, 4, 5, 6, 7, 8, 9

10. Second Do-While Loop

- **Description:** Increases the value first and then prints, running from 1 to 10.
- **Output:** 1, 2, 3, 4, 5, 6, 7, 8, 9, 10

11. Third Do-While Loop

- **Description:** Prints the value first, then checks the condition while increasing, executing one extra time up to 10.
- **Output:** 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10

12. Fourth Do-While Loop

- **Description:** Prints the value and increases it during the condition check, running up to 9.
- **Output:** 0, 1, 2, 3, 4, 5, 6, 7, 8, 9

Q17.

```
import java.util.*;
class Q17 {
    public static void main(String[] args) {
        Scanner scan = new Scanner(System.in);
        System.out.print("Input number of Employees: ");
        int empCount = scan.nextInt();

        for (int i = 1; i <= empCount; i++) {
            System.out.print("Input salary " + i + " : ");
            double salary = scan.nextDouble();

            int n5000 = (int) (salary / 5000);
            int rem5000 = (int) (salary % 5000);

            int n2000 = rem5000 / 2000;
            int rem2000 = rem5000 % 2000;

            int n1000 = rem2000 / 1000;
            int rem1000 = rem2000 % 1000;

            int n500 = rem1000 / 500;
            int rem500 = rem1000 % 500;

            int n200 = rem500 / 200;
            int rem200 = rem500 % 200;

            int n100 = rem200 / 100;
            int rem100 = rem200 % 100;

            int n50 = rem100 / 50;
            int rem50 = rem100 % 50;

            int n20 = rem50 / 20;
            int rem20 = rem50 % 20;

            int n10 = rem20 / 10;
            int rem10 = rem20 % 10;

            int n5 = rem10 / 5;
            int rem5 = rem10 % 5;

            int n2 = rem5 / 2;
            int rem2 = rem5 % 2;
            int n1 = rem2 / 1;

            System.out.println();
            System.out.println("=====");
            System.out.println("R5000 notes\t: " + n5000 );
        }
    }
}
```

```

        System.out.println("R2000 notes\t: " + n2000);
        System.out.println("R1000 notes\t: " + n1000);
        System.out.println("R500 notes\t: " + n500);
        System.out.println("R200 notes\t: " + n200);
        System.out.println("R100 notes\t: " + n100);
        System.out.println("R50 notes\t: " + n50);
        System.out.println("R20 notes\t: " + n20);
        System.out.println("R10 coins\t: " + n10);
        System.out.println("R5 coins\t: " + n5);
        System.out.println("R2 coins\t: " + n2);
        System.out.println("R1 Coins\t: " + n1);

        System.out.println();

    }

}
}

```

Output>>

```

Input number of Employees: 3
Input salary 1 : 35567

=====
R5000 notes : 7
R2000 notes : 0
R1000 notes : 0
R500 notes : 1
R200 notes : 0
R100 notes : 0
R50 notes : 1
R20 notes : 0
R10 coins : 1
R5 coins : 1
R2 coins : 1
R1 Coins : 0

Input salary 2 : 34456

=====
R5000 notes : 6
R2000 notes : 2
R1000 notes : 0
R500 notes : 0
R200 notes : 2
R100 notes : 0
R50 notes : 1
R20 notes : 0
R10 coins : 0
R5 coins : 1
R2 coins : 0
R1 Coins : 1

Input salary 3 : 334455

=====
R5000 notes : 66
R2000 notes : 2
R1000 notes : 0
R500 notes : 0
R200 notes : 2
R100 notes : 0
R50 notes : 1
R20 notes : 0
R10 coins : 0
R5 coins : 1
R2 coins : 0
R1 Coins : 0

```

Q18.

```
class Q18 {  
    public static void main(String args[]){  
        int x = 0;  
        int y = 0;  
        for(int i = 0; i<5; i++){  
            if((++x > 2) || (++y > 2)){  
                x++;  
            }  
        }  
        System.out.println(x+" "+y);  
    }  
}
```

Correct Answer: C

Output>>

8 2

Q19.

```
class Q19 {  
    public static void main(String){  
  
        /*int i = 0;  
        for(int i =0;i<10;i++){} */  
  
        /*for(int i=0;i<10;i++){  
        for(int i=0;i<10;i++){} */  
  
        /*for(int i=0;i<10;i++){  
        int i =3;  
        } */  
  
        /*{int i=0;}  
        for(int i=0;i<10;i++){} */  
  
    }  
}
```

**In this picture I was input that answers as a comment*

Don't think about that i run all answers separately and

*Before add the comment signs.**

Answer Explain:

- **A. Illegal:** we cannot declare a variable named *i* outside and then declare *i* again inside the loop header. It causes a duplicate variable error.
- **B. Legal:** Both loops declare their own *i* inside their loop brackets. They have separate scopes and do not conflict.
- **C. Illegal:** we cannot declare `int i = 3;` inside the loop body because *i* is already declared in the loop header for that block.
- **D. Legal:** The first block `{ int i = 0; }` finishes and dies. Then the loop below it can safely create a new `int i = 0;`.

Correct Answer: B and D

Q20.

```
class Q20 {  
    public static void main(String[] args){  
        for(int i=100;i<110;i++){  
            System.out.println(i);  
        }  
    }  
}
```

```
class Q20 {  
    public static void main(String[] args){  
        int x=1;  
        for(int i=0;i<10;i++){  
            int k=100;  
            System.out.println(i+k);  
            k++;  
        }  
    }  
}
```

```
class Q20 {  
    public static void main(String[] args){  
        int k=100;  
        for(int i=0;i<10;i++){  
            System.out.println(k);  
            k++;  
        }  
    }  
}
```

Only Answer A , C ,E give the output of 100 to 109

Output>>

```
100  
101  
102  
103  
104  
105  
106  
107  
108  
109
```

Q21.

A.

```
class Q21 {  
    public static void main(String[] args){  
        for(int i = 0;;i++){  
            System.out.println("i : "+i);  
        }  
    }  
}
```

Answer a output is not ending it was

B.

```
class Q21 {  
    public static void main(String[] args){  
        int i=0;  
        for(;i<10;){  
            System.out.println("i : "+i++);  
        }  
    }  
}
```

Output>>

```
i : 0  
i : 1  
i : 2  
i : 3  
i : 4  
i : 5  
i : 6  
i : 7  
i : 8  
i : 9
```

C.

```
class Q21 {  
    public static void main(String[] args){  
        for(int i =0;i<10;i++){  
            System.out.println("i : "+i++);  
        }  
    }  
}
```

Output>>

```
i : 0  
i : 2  
i : 4  
i : 6  
i : 8
```

D.

```
class Q21 {  
    public static void main(String[] args){  
        for(char ch ='A';ch<91;ch++){  
            System.out.println("ch : "+ch);  
        }  
    }  
}
```

Output>>

```
ch : A  
ch : B  
ch : C  
ch : D  
ch : E  
ch : F  
ch : G  
ch : H  
ch : I  
ch : J  
ch : K  
ch : L  
ch : M  
ch : N  
ch : O  
ch : P  
ch : Q  
ch : R  
ch : S  
ch : T  
ch : U  
ch : V  
ch : W  
ch : X  
ch : Y  
ch : Z
```

E.

```
class Q21 {  
    public static void main(String[] args){  
        for(int i =0,j=10;i<=j;i++,j--){  
            System.out.println(i+" "+j);  
        }  
    }  
}
```

Output>>

```
0 10  
1 9  
2 8  
3 7  
4 6  
5 5
```

F.

```
class Q21 {  
    public static void main(String[] args){  
        for(int i =0;i<128;i++){  
            System.out.println((char)i+" "+i);  
        }  
    }  
}
```

Output>>it 's given ascii table.

```
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
```

```
A 65
B 66
C 67
D 68
E 69
F 70
G 71
H 72
I 73
J 74
K 75
L 76
M 77
N 78
O 79
P 80
Q 81
R 82
S 83
T 84
U 85
V 86
W 87
X 88
Y 89
Z 90
[ 91
\ 92
] 93
^ 94
_ 95
` 96
a 97
b 98
c 99
d 100
e 101
f 102
g 103
h 104
i 105
j 106
k 107
l 108
m 109
n 110
o 111
p 112
q 113
r 114
s 115
t 116
u 117
v 118
w 119
x 120
y 121
z 122
{ 123
| 124
} 125
~ 126
127
```

G.

```
class Q21 {  
    public static void main(String[] args){  
        int x = 1;  
        for(int i =0;i<10;i++){  
            int k = 100;  
            System.out.println(x+k);  
            k++ ;  
        }  
    }  
}
```

Output>>

```
101  
101  
101  
101  
101  
101  
101  
101  
101  
101  
101
```

Q22.

- A. `for(int i=0;i<10;i++){}` — Standard and correct loop.
- C. `for(int i=0;;i++){}` — Valid loop with an empty condition (creates an infinite loop).
- D. `for(int i=0;i<10;){}` — Valid loop with an empty update section.
- E. `for(double d=0;d<10;d++){}` — Valid loop using double type.
- F. `for(;;){}` — Valid infinite loop with all sections empty.
- G. `for(byte b=0;b<10;b++){}` — Valid loop using byte type.
- J. `for(int i=0;){}` — Valid loop with only initialization.
- K. `for(char ch='A'; ch>92; ch++){}` — Valid loop using char type.

Q23.

```
import java.util.*;
class Q23 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);
        int less_count = 0 ;
        int greater_count =0;

        for(int i = 1;;){
            while(true){
                System.out.print("Enter "+i+" integer number : ");
                double num = input.nextInt();
                if(num==-1){
                    break;
                }
                if(num<1000){
                    less_count++;
                }else if(num>1000){
                    greater_count++;
                }
                i++;
            }
            System.out.println(less_count+" numbers are less than 1000");
            System.out.println(greater_count+" numbers are greater than 1000");
        }
    }
}
```

Output>>

```
Enter 1 integer number : 24
Enter 2 integer number : 356
Enter 3 integer number : 4678
Enter 4 integer number : 45679
Enter 5 integer number : 34
Enter 6 integer number : -1
3 numbers are less than 1000
2 numbers are greater than 1000
Enter 6 integer number : |
```

Q24.

```
Q7.java ✕ Q8.java ✕ Q9.java ✕ Q10.java ✕ Q6.java ✕ Q11.java ✕ Q12.java ✕ Q13.java ✕ Q14.java ✕
import java.util.*;
class Q24 {
    public static void main(String[] args){
        Random r = new Random();

        int head_count = 0 ;
        int tail_count = 0 ;

        for(int i = 0 ; i<10 ; i++){

            boolean ishead = r.nextBoolean();

            if(ishead){
                System.out.println("HEAD");
                head_count++;
            }else{
                System.out.println("TAIL");
                tail_count++;
            }

        }
        System.out.println("Statistic: "+head_count+" and "+tail_count+" Tails");
    }
}
```

Output>>

```
TAIL
HEAD
TAIL
HEAD
HEAD
HEAD
HEAD
HEAD
TAIL
TAIL
Statistic: 6 and 4 Tails
```

```
-----
(program exited with code: 0)
```

Q25.

```
import java.util.*;
class Q25 {
    public static void main(String[] args){
        Random r = new Random();

        for(int i = 0 ;i<5;i++){
            int diceroll = r.nextInt(6)+1;
            System.out.print(diceroll+" ");
        }
    }
}
```

Output>>

```
1 6 1 2 3
-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q26.

```
import java.util.*;
class Q26 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);
        Random r = new Random();
        System.out.print("What number do you expect : ");
        int num = input.nextInt();

        int r_rolled;
        do{
            r_rolled = r.nextInt(6)+1;
            System.out.println(r_rolled);
        }while(r_rolled!=num);
    }
}
```

Output>>

```
What number do you expect : 5
1 6
2 4
3 4
4 2
5 1
6 6
7 1
8 6
9 1
0 1
1 1
2 5
3
```

Q27.

```
import java.util.*;
class Q27 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Input an integer : ");
        int n=input.nextInt();
        int n_digi=0;//no of digits
        for(int i=n;i>0;i/=10){
            int s_num =i%10;
            n_digi+=s_num;
        }
        System.out.println("sum of digits : "+n_digi);
    }
}
```

Output>>

```
10.
: Input an integer : 3456
: sum of digits : 18
:
: -----
: (program exited with code: 0)
```

Q28.

```
import java.util.*;
class Q28 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Input integer number : ");
        int num = input.nextInt();

        while(num!=0){
            System.out.print(num%10);
            num/=10;
        }
    }
}
```

Output>>

```
Input integer number : 3456
6543
-----
(program exited with code: 0)
```

Q29.

```
import java.util.*;
class Q29 {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);

        System.out.print("How many bottles of beer are on the wall: ");
        int bottles = scanner.nextInt();

        for (int i = bottles; i > 0; i--) {
            if (i == 1) {
                System.out.println("1 bottle of beer on the wall, 1 bottle of beer.");
                System.out.println("Take one down, pass it around, no more bottles of beer on the wall.");
            } else {
                System.out.println(i + " bottles of beer on the wall, " + i + " bottles of beer.");
                System.out.println("Take one down, pass it around, " + (i - 1) + " bottles of beer on the wall.\n");
            }
        }
    }
}
```

Output>>

```
How many bottles of beer are on the wall: 5
5 bottles of beer on the wall, 5 bottles of beer.
Take one down, pass it around, 4 bottles of beer on the wall.

4 bottles of beer on the wall, 4 bottles of beer.
Take one down, pass it around, 3 bottles of beer on the wall.

3 bottles of beer on the wall, 3 bottles of beer.
Take one down, pass it around, 2 bottles of beer on the wall.

2 bottles of beer on the wall, 2 bottles of beer.
Take one down, pass it around, 1 bottles of beer on the wall.

1 bottle of beer on the wall, 1 bottle of beer.
Take one down, pass it around, no more bottles of beer on the wall.

-----
```

Q30.

```
import java.util.*;
class Q30 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Input integer number : ");
        int num = input.nextInt();

        int originalNum = num;
        int reversedNum = 0;

        while(num != 0){
            int digit = num % 10;
            reversedNum = (reversedNum * 10) + digit;
            num /= 10;
        }

        if(originalNum == reversedNum) {
            System.out.println(originalNum + " is a Palindrome number.");
        } else {
            System.out.println(originalNum + " is not a Palindrome number.");
        }
    }
}
```

Outputs>>

```
Input integer number : 1234
1234 is not a Palindrome number.
```

```
Input integer number : 1221
1221 is a Palindrome number.
```

Q31.

```
import java.util.*;
class Q31 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("How many classes : ");
        int no_classes = input.nextInt();

        for(int i = 1; i<=no_classes ; i++) {
            System.out.println("\n--- Class " + i + " ---");

            System.out.print("No of Students : ");
            int num = input.nextInt();

            if(num == -1) {
                System.out.println("Program terminated.");
                break;
            }

            double total = 0;
            double max = 0;
            double min = 0;

            for(int x = 1; x <= num; x++) {
                System.out.print("Enter " + x + " marks : ");
                double marks = input.nextDouble();

                total += marks;

                if(x == 1) {
                    max = marks;
                    min = marks;
                } else {
                    if(marks > max) {
                        max = marks;
                    }
                    if(marks < min) {
                        min = marks;
                    }
                }
            }

            double average = total / num;

            System.out.println("\nNo of Students : " + num);
            System.out.println("Total marks : " + (int)total);
            System.out.println("Maximum : " + (int)max);
            System.out.println("Minimum : " + (int)min);
            System.out.printf("Average : %.2f\n", average);
        }
    }
}
```

Output>>

```
How many classes : 2

--- Class 1 ---
No of Students : 2
Enter 1 marks : 56
Enter 2 marks : 76

No of Students : 2
Total marks : 132
Maximum : 76
Minimum : 56
Average : 66.00

--- Class 2 ---
No of Students : 5
Enter 1 marks : 34
Enter 2 marks : 54
Enter 3 marks : 76
Enter 4 marks : 87
Enter 5 marks : 67

No of Students : 5
Total marks : 318
Maximum : 87
Minimum : 34
Average : 63.60
```

Q32.

```
import java.util.*;
class Q32 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("When user input - ");
        String text = input.nextLine();

        String reversed = "";

        for (int i = text.length() - 1; i >= 0; i--) {
            reversed += text.charAt(i);
        }

        System.out.println("Reverse word -" + reversed);
    }
}
```

Output>>

```
When user input - Hello World!
Reverse word -!dlroW olleH
_____
```

Q33.

```
Q15.java × Q16.java × Q17.java × Q18.java × Q19.java × Q20.java × Q21.java
import java.util.*;
class Q33 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("Enter a word: ");
        String original = input.nextLine();

        String reversed = "";

        for (int i = original.length() - 1; i >= 0; i--) {
            reversed += original.charAt(i);
        }

        if (original.equals(reversed)) {
            System.out.println(original + " is a palindrome.");
        } else {
            System.out.println(original + " is not a palindrome.");
        }
    }
}
```

Output>>

```
bl
Enter a word: roor
roor is a palindrome.
```

```
cu
ys
tr
Enter a word: dooks
dooks is not a palindrome.
tr
```

Q34.

```
import java.util.*;
class Q34 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("Enter a string: ");
        String str_text = input.nextLine();

        System.out.print("Enter the character to search: ");
        char ser_charac = input.next().charAt(0);

        int count = 0;

        for (int i = 0; i < str_text.length(); i++) {
            if (str_text.charAt(i) == ser_charac) {
                count++;
            }
        }

        System.out.println("The character '" + ser_charac + "' appears " + count + " times.");
    }
}
```

Output>>

```
Enter a string: hello
Enter the character to search: l
The character 'l' appears 2 times.
```

(program exited with code: 0)

Q35.

```
import java.util.*;
class Q35 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("Enter base number: ");
        int base = input.nextInt();

        System.out.print("Enter exponent number: ");
        int exponent = input.nextInt();

        long result = 1;

        for (int i = 1; i <= exponent; i++) {
            result *= base;
        }

        System.out.println("Result: " + result);
    }
}
```

Output>>

```
Enter base number: 2
Enter exponent number: 2
Result: 4
```

Q36.

```
import java.util.*;
class Q36 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("Enter a string: ");
        String text = input.nextLine();

        int vowels = 0;
        int consonants = 0;

        for (int i = 0; i < text.length(); i++) {
            char ch = text.charAt(i);

            if (ch == 'a' || ch == 'e' || ch == 'i' || ch == 'o' || ch == 'u' ||
                ch == 'A' || ch == 'E' || ch == 'I' || ch == 'O' || ch == 'U') {
                vowels++;
            } else if ((ch >= 'a' && ch <= 'z') || (ch >= 'A' && ch <= 'Z')) {
                consonants++;
            }
        }

        System.out.println("Vowels: " + vowels);
        System.out.println("Consonants: " + consonants);
    }
}
```

Output>>

```
Enter a string: hello world
Vowels: 3
Consonants: 7
```

Q37.

```
Q19.java ✕ Q20.java ✕ Q21.java ✕ Q23.java ✕ Q24.java ✕ Q25.java ✕ Q26.java ✕
import java.util.*;
class Q37 {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);

        System.out.print("Enter first positive integer: ");
        int num1 = input.nextInt();

        System.out.print("Enter second positive integer: ");
        int num2 = input.nextInt();

        int gcd = 1;


        for (int i = 1; i <= num1 && i <= num2; i++) {
            if (num1 % i == 0 && num2 % i == 0) {
                gcd = i;
            }
        }

        System.out.println("Greatest Common Divisor: " + gcd);
    }
}
```

Output>>

```
Enter first positive integer: 4
Enter second positive integer: 6
Greatest Common Divisor: 2
```


Q38.

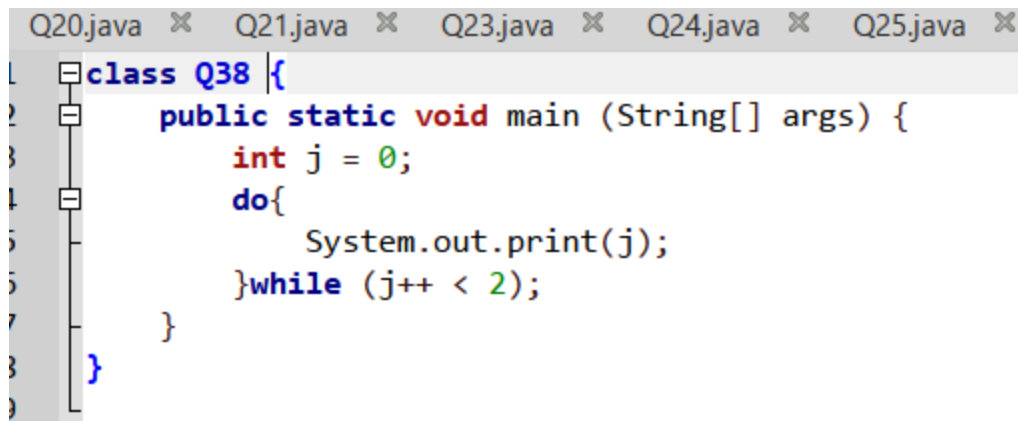

```
Q20.java ✕ Q21.java ✕ Q23.java ✕ Q24.java ✕ Q25.java ✕
class Q38 {
    public static void main (String[] args) {
        int j = 0;
        do{
            System.out.print(j);
        }while (j++ < 2);
    }
}
```

Answer is B

Output>>

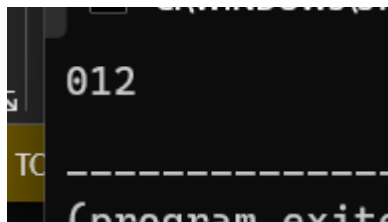

```
012
-----
(program exited)
```

Q39.

```
Q21.java Q23.java Q24.java Q25.java Q26.java
class Q39 {
    public static void main(String[] args){
        int j=0;
        while(j++<2){
            System.out.print(j+" ");
        }
    }
}
```

Output>>

```
C:\WINDOWS\SYSTEM32\cmd
1 2
-----
(program exited with code: 0)
```

Q40.

```
class Q40 {  
    public static void main(String[] args){  
        int x = 0;  
        int y = 11;  
        do{}while(x++<y);  
        System.out.println(x);  
    }  
}
```

Output>>

12

(program exited with code: 0)

Press any key to continue

Q41.

```
Q24.java x Q25.java x Q26.java x Q27.java x Q28.java x (
class Q41 {
    public static void main(String[] args) {
        for (int i = 0; i <= 4; i++) {
            for (int j = 0; j <= 4; j++) {

                System.out.println(
                    i + " " + j + "\t" +
                    j + " " + i + "\t" +
                    (5 - i) + " " + j + "\t" +
                    (5 - i) + " " + (5 - j)
                );
            }
        }
    }
}
```

Output>>

```
Q24. C:\WINDOWS\system32\cmd
0 0      0 0      5 0      5 5
0 1      1 0      5 1      5 4
0 2      2 0      5 2      5 3
0 3      3 0      5 3      5 2
0 4      4 0      5 4      5 1
1 0      0 1      4 0      4 5
1 1      1 1      4 1      4 4
1 2      2 1      4 2      4 3
1 3      3 1      4 3      4 2
1 4      4 1      4 4      4 1
2 0      0 2      3 0      3 5
2 1      1 2      3 1      3 4
2 2      2 2      3 2      3 3
2 3      3 2      3 3      3 2
2 4      4 2      3 4      3 1
3 0      0 3      2 0      2 5
3 1      1 3      2 1      2 4
3 2      2 3      2 2      2 3
3 3      3 3      2 3      2 2
3 4      4 3      2 4      2 1
4 0      0 4      1 0      1 5
4 1      1 4      1 1      1 4
4 2      2 4      1 2      1 3
4 3      3 4      1 3      1 2
4 4      4 4      1 4      1 1
```

Q42.

```
class Q42 {
    public static void main(String[] args){

        for(int i = 1 ;i<=10;i++){
            for(int j=1;j<=10;j++){
                System.out.print("* ");

            }

            System.out.println();
            System.out.println();

        }

    }
}
```

Output>>

A 10x10 grid of asterisks on a black background. The asterisks are arranged in 10 rows and 10 columns, forming a solid square pattern. The first row contains 10 asterisks, the second row contains 10 asterisks, and so on, up to the tenth row which also contains 10 asterisks. The spacing between the asterisks is uniform both horizontally and vertically.

Q43.

```
class Q43 {  
    public static void main(String[] args){  
  
        for(int i = 0 ;i<=10;i++){  
            for(int j = 1;j<=i;j++){  
                System.out.print("* ");  
            }  
            System.out.println();  
        }  
    }  
}
```

Output>>

```
*  
* *  
* * *  
* * * *  
* * * * *  
* * * * * *  
* * * * * * *  
* * * * * * * *  
* * * * * * * * *  
* * * * * * * * * *  
* * * * * * * * * *
```

Q44.

```
class Q44 {
    public static void main(String[] args){

        for(int i = 0 ;i<10;i++){
            for(int j = 10;j>i;j--){
                System.out.print("* ");
            }
            System.out.println();
        }
    }
}
```

Output>>

```

* * * * *
* * * * *
* * * * *
* * * * *
* * * * *
* * * *
* * * *
* * *
* * *
* *
*

```

Q45.

```
import java.util.*;
class Q45 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Enter the size : ");
        int size = input.nextInt();
        System.out.print(" * | ");
        for(int i = 1; i<=size;i++){

            System.out.print(" "+i+" ");
        }
        System.out.println();
        for(int b = 1; b<=size;b++){
            System.out.print("----");

        }
        System.out.println();
        for(int d = 1 ;d<=size;d++){
            System.out.print(" "+d+" | ");

            for(int j = 1 ;j<=size ; j++){
                System.out.print((d*j) +" | ");
            }
            System.out.println();
        }
    }
}
```

Output>>

```

Enter the size : 10
* | 1 2 3 4 5 6 7 8 9 10
-----
1 | 1 2 3 4 5 6 7 8 9 10
2 | 2 4 6 8 10 12 14 16 18 20
3 | 3 6 9 12 15 18 21 24 27 30
4 | 4 8 12 16 20 24 28 32 36 40
5 | 5 10 15 20 25 30 35 40 45 50
6 | 6 12 18 24 30 36 42 48 54 60
7 | 7 14 21 28 35 42 49 56 63 70
8 | 8 16 24 32 40 48 56 64 72 80
9 | 9 18 27 36 45 54 63 72 81 90
10 | 10 20 30 40 50 60 70 80 90 100

```

Q46.

```

import java.util.*;
class Q46 {
    public static void main(String[] args){
        Scanner input =new Scanner(System.in);
        Random r = new Random();

        int r_num = r.nextInt(100)+1;
        int num = -1;

        while (num != r_num) {
            System.out.print("Enter your guessing number : ");
            num = input.nextInt();

            if(num > r_num){
                System.out.println("Too high, try again.");
            } else if(num < r_num){
                System.out.println("Too low, try again.");
            } else {
                System.out.println("Your Guessing is correct.");
            }
        }
    }
}

```

Output>>


```
Enter your guessing number : 23
Too low, try again.
Enter your guessing number : 57
Too low, try again.
Enter your guessing number : 98
Too high, try again.
Enter your guessing number : 76
Too low, try again.
Enter your guessing number : 78
Your Guessing is correct.
```

Q47.

```
Q30.java Q31.java Q32.java Q33.java Q34.java Q35.java
class Q47 {
    public static void main(String[] args){

        for(int i = 0 ;i<=7;i++){
            for(int j = 1;j<=i;j++){
                System.out.print(j);
            }
            System.out.println();
        }
    }
}
```

Output>>

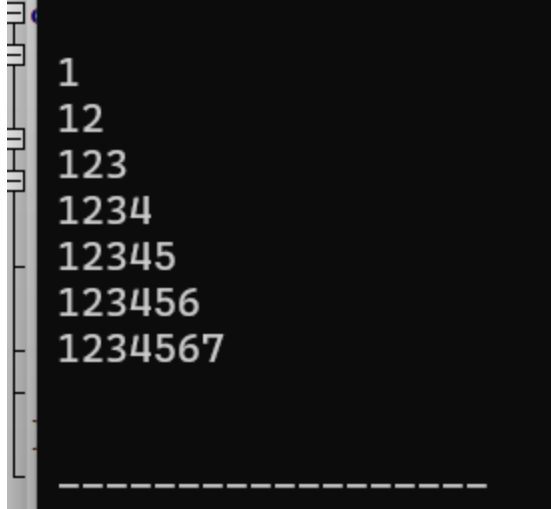

Q48.

```
class Q48 {  
    public static void main(String[] args) {  
        int i = 2;  
        while (i <= 100) {  
            int j = 2;  
            boolean prime = true;  
            while (j <= i / 2) {  
                if (i % j == 0) {  
                    prime = false;  
                    break;  
                }  
                j++;  
            }  
            if (prime) {  
                System.out.println(i);  
            }  
            i++;  
        }  
    }  
}
```

Output>>

```
< 2  
1 3  
2 5  
3 7  
4 11  
5 13  
6 17  
7 19  
8 23  
9 29  
10 31  
11 37  
12 41  
13 43  
14 47  
15 53  
16 59  
17 61  
18 67  
19 71  
20 73  
21 79  
22 83  
89  
97
```

Q49.

```
import java.util.*;
class Q49 {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);

        System.out.print("Enter a number: ");
        int num = scanner.nextInt();

        int o_num = num;
        int sum = 0;

        while (num > 0) {
            int digit = num % 10;
            sum += (digit * digit * digit);
            num /= 10;
        }
        if (sum == o_num) {
            System.out.println(o_num + " is an Armstrong number.");
        } else {
            System.out.println(o_num + " is not an Armstrong number.");
        }
    }
}
```

Output>>

```
Enter a number: 371
371 is an Armstrong number.
```

```
Enter a number: 234
234 is not an Armstrong number.
```

Q50.

```
Q53.java Q54.java Q55.java Q56.java Q57.java Q58.java Q59.java Q40.java
class Q50 {
    public static void main(String[] args){
        int sum = 0 ;

        for(int i = 1;i<1000;i++ ){
            if(i %3==0 || i % 5==0){
                sum+=i;
            }
        }
        System.out.println(sum+" of numbers are multiples of 3 or 5 below 1000 ");
    }
}
```

Output>>

```
C:\WINDOWS\SYSTEM32\cmd
233168 of numbers are multiples of 3 or 5 below 1000
```

Q51.

```
class Q51 {
    public static void main(String[] args) {
        long number = 1;
        boolean found = false;

        while (!found) {
            boolean isDivid = true;
            for (int i = 1; i <= 20; i++) {
                if (number % i != 0) {
                    isDivid = false;
                    break;
                }
            }

            if (isDivid) {
                System.out.println("The smallest multiple is: " + number);
                found = true;
            } else {
                number++;
            }
        }
    }
}
```

Output>>

```
The smallest multiple between 1 to 20 and it is: 232792560
```

```
-----
(program exited with code: 0)
```

```
Press any key to continue . . . |
```

Q52.

```
import java.util.*;
class Q52 {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);

        System.out.print("Enter words: ");
        String input_num = scanner.nextLine();

        int count = 0;
        int i = 0;

        while (i < input_num.length()) {
            char ch = input_num.charAt(i);

            if (ch == 'a' || ch == 'e' || ch == 'i' || ch == 'o' || ch == 'u' ||
                ch == 'A' || ch == 'E' || ch == 'I' || ch == 'O' || ch == 'U') {
                count++;
            }

            i++;
        }

        System.out.println("Number of vowels: " + count);
    }
}
```

Output>>

```
Enter words: hello world
Number of vowels: 3
```

Q53.

```
import java.util.*;

class Q53 {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);

        System.out.print("Enter base: ");
        int base = scanner.nextInt();

        System.out.print("Enter exponent: ");
        int exponent = scanner.nextInt();

        long result = 1;
        int i = 0;

        while (i < exponent) {
            result *= base;
            i++;
        }

        System.out.println("Result: " + result);
    }
}
```

Output>>

```
Enter base: 2
Enter exponent: 2
Result: 4
```

Q54.

```
class Q54 {  
    public static void main(String[] args) {  
        for (int i = 1; i <= 100; i++) {  
            int count = 0;  
  
            for (int j = 1; j <= i; j++) {  
                if (i % j == 0) {  
                    count++;  
                }  
            }  
  
            if (count == 2) {  
                System.out.println(i);  
            }  
        }  
    }  
}
```

Output>>

```
2  
3  
5  
7  
11  
13  
17  
19  
23  
29  
31  
37  
41  
43  
47  
53  
59  
61  
67  
71  
73  
79  
83  
89  
97
```

Q55.

```
class Q55 {
    public static void main(String[] args) {
        System.out.println("Starting random point generation inside the unit circle:\n");

        int totalPoints = 0;

        while (true) {
            double x = Math.random() * 2.0 - 1.0;
            if (x < -1.0) {
                x = -1.0;
            } else if (x > 1.0) {
                x = 1.0;
            }

            double y = Math.random() * 2.0 - 1.0;
            if (y < -1.0) {
                y = -1.0;
            } else if (y > 1.0) {
                y = 1.0;
            }

            totalPoints++;

            if (x * x + y * y <= 1.0) {
                System.out.printf("Point %d (Inside): x = %.1f, y = %.1f\n", totalPoints, x, y);
            } else {
                System.out.printf("Caught an outsider! x = %.1f, y = %.1f (Outside the circle)\n", x, y);
                System.out.println("Total generated points : " + totalPoints);
                break;
            }
        }
    }
}
```

Output>>

```
Starting random point generation inside the unit circle:

Point 1 (Inside): x = -0.9, y = 0.1
Point 2 (Inside): x = -0.1, y = -0.8
Point 3 (Inside): x = 0.4, y = 0.2
Point 4 (Inside): x = 0.5, y = 0.7
Caught an outsider! x = -1.0, y = 0.6 (Outside the circle)
Total generated points : 5
```

Q56.

```
class Q56 {  
    public static void main(String[] args){  
        int a,b,c,d,e ;  
        for( int i = 0 ;i<10;i++){  
            a=i;  
        }  
  
        int j =0;  
        while(j++<10){  
            b=j;  
        }  
  
        int k =0;  
        do{  
            c=j;  
        }while(j++<10);  
  
        int m = 0;  
        switch(m){  
            case 0 :d=0;  
        }  
  
        int n = 0 ;  
        sw  itch(n){  
            default :e=0;  
        }  
  
        System.out.println(a);  
        System.out.println(b);  
        System.out.println(c);  
        System.out.println(d);  
        System.out.println(e);  
    }  
}
```

***This will show errors .because there is 5 errors are occurred
And those 4 errors are given below and other 5 error is switch
must be call like switch but In that code .one switch call
“sw itch”and that is the other one(error).***

```
Q56.java:29: error: variable a might not have been initialized  
        System.out.println(a);  
                        ^  
Q56.java:30: error: variable b might not have been initialized  
        System.out.println(b);  
                        ^  
Q56.java:32: error: variable d might not have been initialized  
        System.out.println(d);  
                        ^  
Q56.java:33: error: variable e might not have been initialized  
        System.out.println(e);  
                        ^
```

```
int n = 0 ;  
sw  itch(n){  
    default :e=0;  
}
```

Q57.

```
import java.util.*;
class Q57 {
    public static void main(String[] args){
        Scanner input = new Scanner(System.in);

        System.out.print("Enter integer number : ");
        int num = input.nextInt();

        for(int i = 1; i<=num;i++){
            if(num%i==0){
                System.out.print(i+" ");
            }
        }
    }
}
```

Output>>

```
Enter integer number : 24
1 2 3 4 6 8 12 24
```

Q58.

```
Q54.java Q55.java Q56.java Q57.java
class Q58 {
    public static void main(String[] args){
        boolean b = false ;
        int i = 1 ;
        do{
            i++;
            b = !b;
        }while(b);
        System.out.println(i);
    }
}
```

Output>>


Answer E

```
E
3
-----
(program exited with c
```

Q59.

```
alc_Number_Converter.java x Calc_Number_Converter.java x Q59.j
class Q59 {
    public static void main(String[] args){
        int k = 0;
        int l = 0;
        for(int i = 0; i<=3; i++){
            k++;
            if(i==2) break;
            l++;
        }
        System.out.println(k + ", " + l);
    }
}
```

Output>>

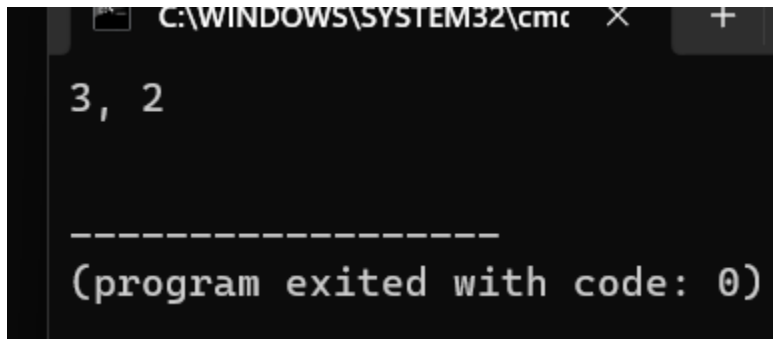

```
C:\WINDOWS\SYSTEM32\cmd.exe
3, 2
-----
(program exited with code: 0)
```


- A. The program will fail to compile.
- B. The program will print 3, 3 when run.
- C. The program will print 4, 3 when run if break is replaced by continue.
- D. The program will fail to compile if break is replaced by return.
- E. The program will fail to compile if break is simply removed

One of these answers are not correct one.

Q60.

Answers are A and c.

Q61.

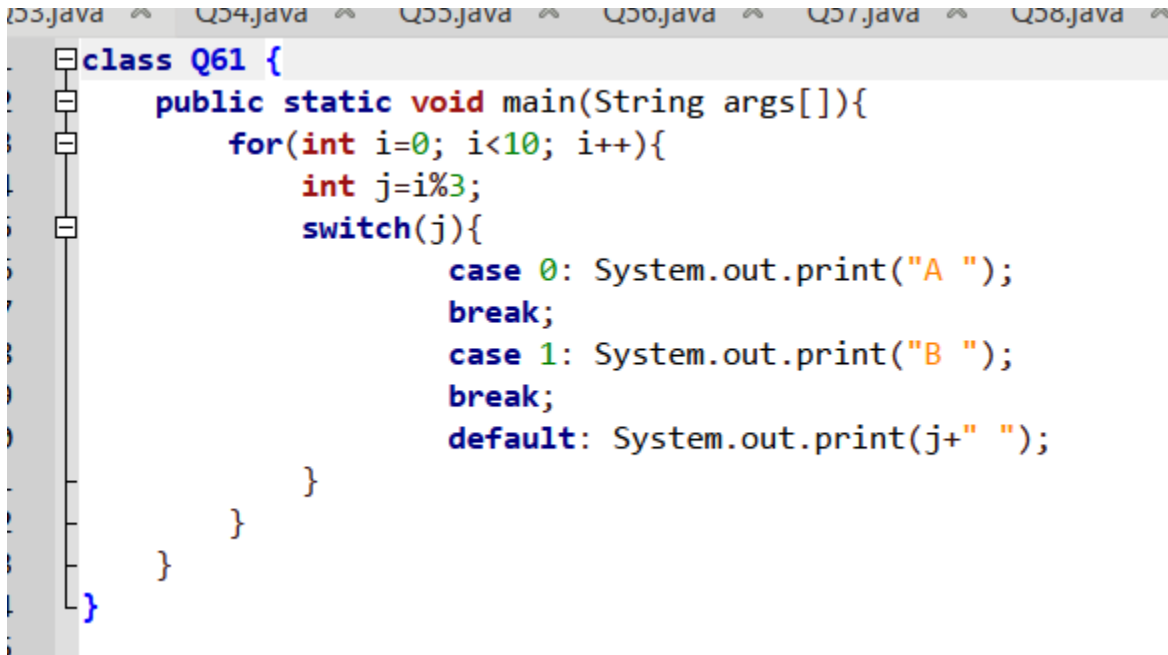A screenshot of a Java IDE with multiple tabs at the top labeled Q53.java, Q54.java, Q55.java, Q56.java, Q57.java, and Q58.java. The active tab is Q56.java, which contains the following Java code:

```
class Q61 {  
    public static void main(String args[]){  
        for(int i=0; i<10; i++){  
            int j=i%3;  
            switch(j){  
                case 0: System.out.print("A ");  
                break;  
                case 1: System.out.print("B ");  
                break;  
                default: System.out.print(j+" ");  
            }  
        }  
    }  
}
```

• Answer D

Output>>

A B 2 A B 2 A B 2 A

(program exited with code: 0)

Press any key to continue . . . |

Q62.

```
class Q62 {  
    public static void main (String[] args) {  
        outer:for (int i = 0; i < 3; i++) {  
            for (int j = 0; j < 2; j++) {  
                if (i == j) {  
                    continue outer;  
                }  
                System.out.println("i=" + i + ", j=" + j);  
            }  
        }  
    }  
}
```

Answers A and D

Output>>

```
i=1, j=0  
i=2, j=0  
i=2, j=1
```

Q63.

```
Q3.java ✕  Q54.java ✕  Q55.java ✕  Q56.java ✕  Q57.java ✕  
class Q63 {  
    public static void main (String args[]) {  
        int x=1;  
        L1:if(x>0){  
            System.out.print("A ");  
            L2:if(x==1){break L1;}  
            System.out.print("B ");  
        }  
    }  
}
```

Answer E

Output>>


```
C:\WINDOWS\SYSTEM32\cmd
A
-----
(program exited with code:
Press any key to continue
```

Q64.

```
Q64.java  Q64.java  Q64.java  Q64.java  Q64.java
class Q64 {
    public static void main(String args[]){
        for ( int i = 1 ; i <= 5 ; i++ ){
            if ( i < 5 ){
                continue;
            }else System.out.println( i );
        }
    }
}
```

Answer c

Output>>

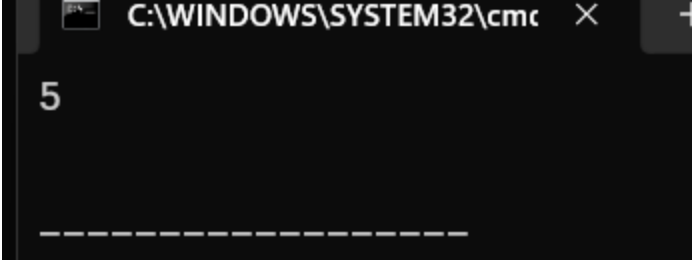

Q65.

```

class Q65 {
    public static void main (String args[]) {
        int i = 0;
        int j = 0;
        label1: while (i++<5) {
            label2: for (;;) {
                label3: do {
                    System.out.print(i+" "+j+" ");
                    switch (i+j++) {
                        case 0: continue label3;
                        case 1: continue label2;
                        case 2: continue label1;
                        case 3: break;
                        case 4: break label3;
                        case 5: break label2;
                        case 6: break label1;
                        default: break label1;
                    }
                } while (++j<5);
            }
        }
    }
}

```

Answer A

Output>>

```

1 0 1 1 2 2 2 3 3 4

```

```

-----
(program exited with code: 0)

```

```

Press any key to continue

```