Runs on every example: figures by run and model


Runs of `docs/paper_plan.md`, made on 2026-10-11 on Jev, Liquid d1 and GPT-6 Luna Decisions. Each run has one table with the models as rows. `python scripts/runs_report.py paper_runs --out docs/paper_runs.html` rebuilds this page from the results folders and `src/grjev/definitions/paper_runs.json`.

Summary charts

Order: share of the predictions at each position of a list of 5 duplicates

The list holds 5 copies of one correct option and is sent in its 5 cyclic permutations, so each copy is at each position once.

dashed line: every position gets the same share; numbers under the bars: position

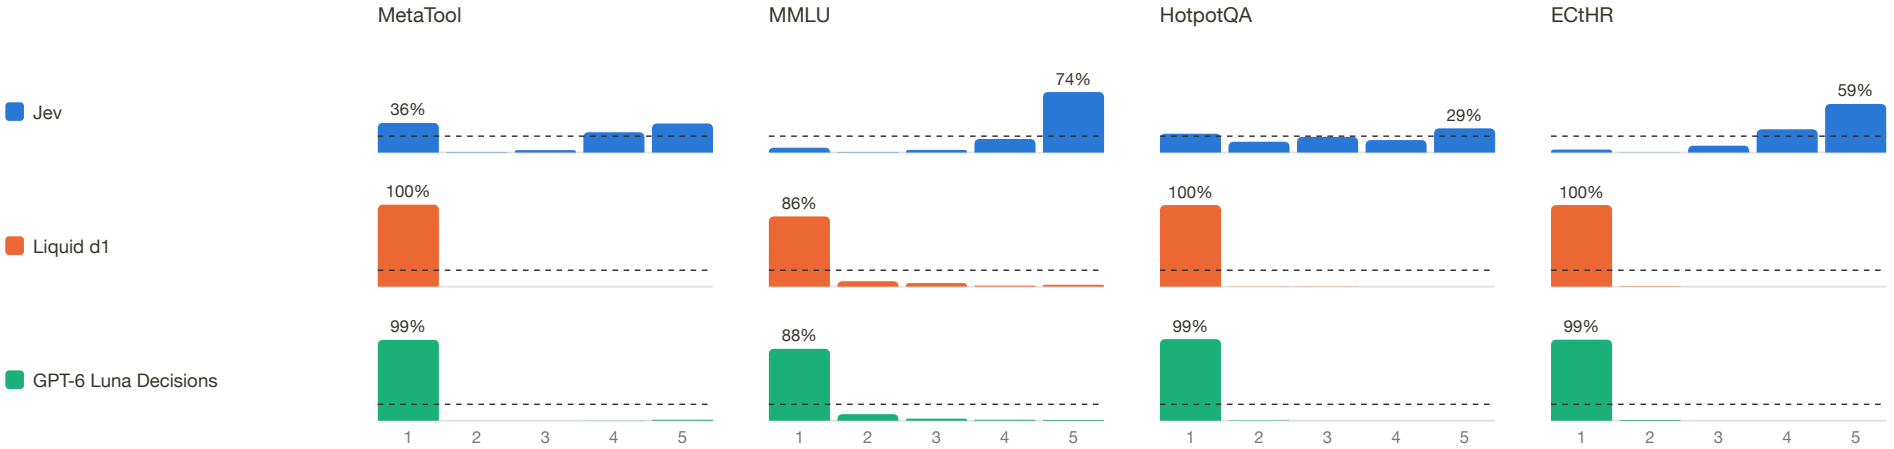


Allocation: mean probability of the lowest and of the highest correct option

Lists that hold several correct options and distractors.

Jev Liquid d1 GPT-6 Luna Decisions

hollow marker: lowest correct option; filled marker: highest correct option

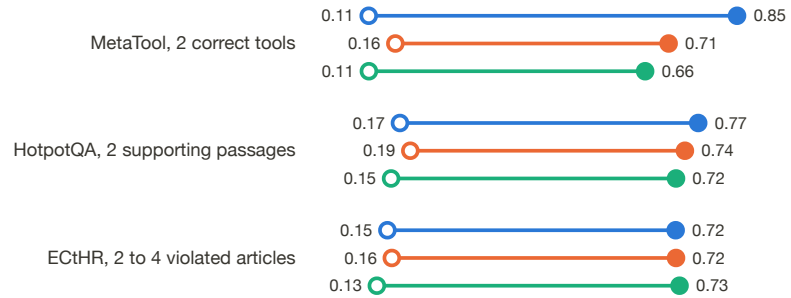

Dependence on the list: mean probability of the second correct option, before and after the removal of the correct option with the highest probability

The second correct option is the correct option with the second-highest probability in the full list.


Jev Liquid d1 GPT-6 Luna Decisions

hollow marker: before the removal; filled marker: after the removal




Abstention: mean confidence on lists with no correct option and no NOTA

Confidence is the highest probability of an answer. The bar of a model is over the lists that it answered.

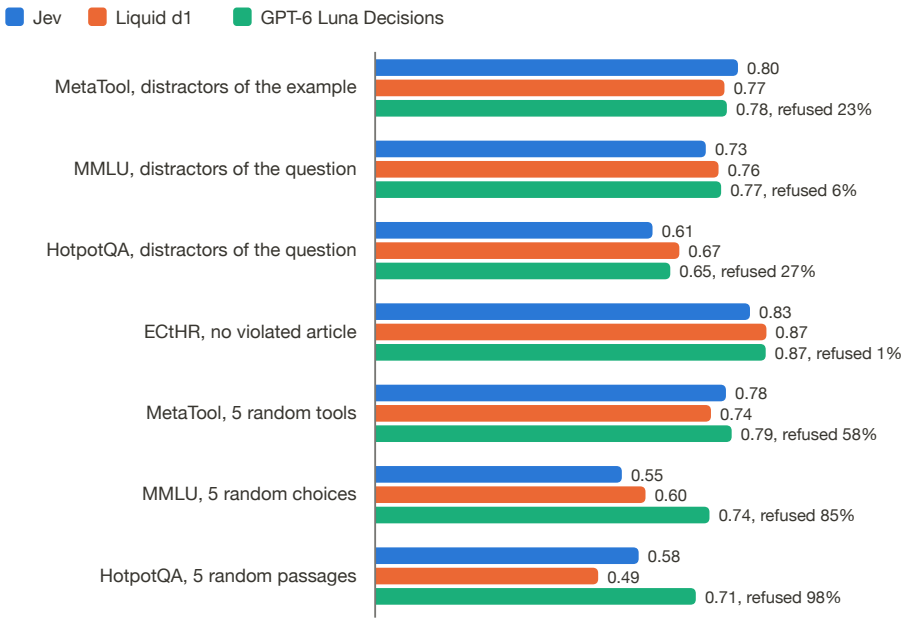

Calibration: mean confidence minus accuracy

A bar to the right of 0 is overconfidence. Accuracy is the share of the answers whose prediction is a correct option.

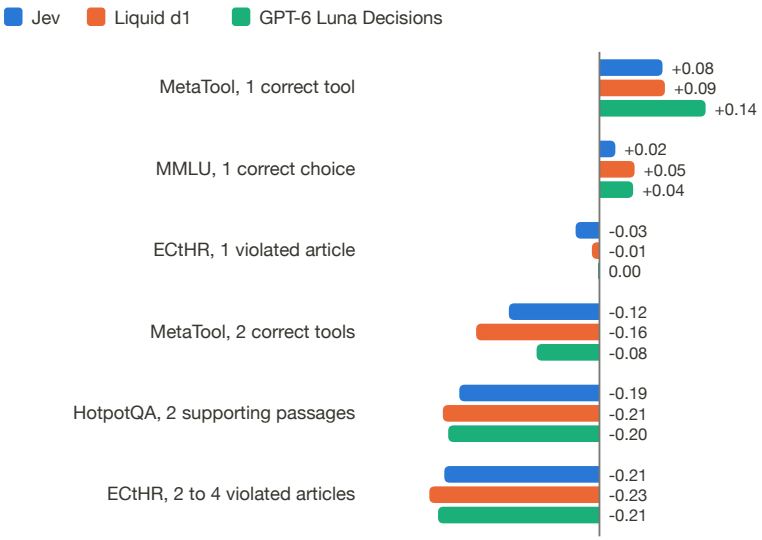

Terms

- **Option**: one entry of the list sent with a query: a tool on MetaTool, a choice on MMLU, a passage on HotpotQA, an article on ECtHR.
- **Correct option**: an option that the dataset labels as correct for the query.
- **Distractor**: an option that is not a correct option.
- **NOTA**: an option that says no other option is correct: "None" on MetaTool, "None of the above" on MMLU, "None of the passages" on HotpotQA, "None of these articles" on ECtHR. It is the correct option of a list that holds no other correct option.
- **Prediction**: the option that the model selects, the field `choice` of its answer.
- **Confidence**: the highest probability of an answer. It is not the field `confidence` of the model's answer.
- **Refused list**: a list for which the model returns an answer of type `refusal` and no probabilities.
- **Accuracy**: the share of the answers whose prediction is a correct option.
- **Exact match**: for a list with k correct options, k being 2 or more: the share of the answers whose k options with the highest probabilities are the k correct options. A tie for place k is not a match.
- **Overconfidence**: mean confidence minus accuracy.
- **ECE (expected calibration error)**: the answers are put in 10 bins by confidence, from 0 to 0.1 up to 0.9 to 1.0. Each bin gives the distance between its mean confidence and its accuracy. ECE is the mean of the 10 distances, weighted by the number of answers in the bin.
- **Prediction minus runner-up**: the highest probability of an answer minus its second-highest probability.
- **Highest correct minus lowest correct**: the highest probability of a correct option minus the lowest probability of a correct option.
- **Highest correct minus highest distractor**: the highest probability of a correct option minus the highest probability of a distractor.

- **Lowest correct minus highest distractor**: the lowest probability of a correct option minus the highest probability of a distractor. It is negative when a distractor has a higher probability than a correct option.
- **Entropy**: the sum of -p log2(p) over the probabilities p of an answer, in bits. It is 0 when one option has 1.00. Its maximum is log2 of the number of options, reached when every option has the same probability, and the header of the column gives it.
- **Position**: the place of an option in the list sent, counted from the first.

---

1. Order: lists whose options are all correct

MetaTool: 5 duplicates of one correct tool

The list holds 5 copies of one correct tool of the example. The names of the copies differ only by extra spaces. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 3,292 examples, 16,460 lists. Options in a list: 5. Correct options in a list: 5.

Instruction: "Pick all the tools in the list that are relevant to the task at hand."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Highest correct minus lowest correct	Mean probability of each correct option, from the highest	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	16,460	0	0.32	0.09	+0.21	0.321, 0.232, 0.186, 0.148, 0.112	2.21	0.23, 0.12, 0.17, 0.23, 0.25	5,956, 86, 494, 4,073, 5,851
Liquid d1	16,460	0	0.81	0.73	+0.78	0.806, 0.078, 0.054, 0.035, 0.026	1.03	0.81, 0.07, 0.03, 0.03, 0.06	16,445, 10, 0, 0, 5
GPT-6 Luna Decisions	16,198	262	0.78	0.66	+0.77	0.783, 0.127, 0.049, 0.025, 0.015	1.02	0.78, 0.10, 0.04, 0.03, 0.05	15,970, 5, 11, 43, 169

`results/metatool_copied/2026-10-11_01`, every list

MMLU: 5 duplicates of the correct choice

The list holds 5 copies of the correct choice of the question. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 5.

Instruction: "Choose the correct answer to the question."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Highest correct minus lowest correct	Mean probability of each correct option, from the highest	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	5,000	0	0.33	0.09	+0.23	0.334, 0.240, 0.188, 0.136, 0.102	2.18	0.14, 0.12, 0.19, 0.24, 0.31	296, 27, 160, 824, 3,693
Liquid d1	5,000	0	0.50	0.31	+0.42	0.502, 0.187, 0.133, 0.102, 0.077	1.85	0.48, 0.16, 0.13, 0.10, 0.13	4,283, 329, 219, 52, 117
GPT-6 Luna Decisions	4,832	168	0.74	0.58	+0.73	0.743, 0.164, 0.053, 0.026, 0.014	1.03	0.71, 0.17, 0.06, 0.03, 0.03	4,242, 379, 116, 55, 40

`results/mmlu_copied/2026-10-11_01`, every list

HotpotQA: 5 duplicates of one supporting passage

The list holds 5 copies of one supporting passage of the question. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 5.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Highest correct minus lowest correct	Mean probability of each correct option, from the highest	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	5,000	0	0.34	0.11	+0.23	0.341, 0.226, 0.176, 0.143, 0.114	2.18	0.20, 0.18, 0.21, 0.19, 0.23	1,146, 664, 955, 761, 1,474
Liquid d1	5,000	0	0.73	0.63	+0.68	0.728, 0.101, 0.072, 0.057, 0.043	1.33	0.73, 0.09, 0.06, 0.05, 0.08	4,975, 10, 10, 0, 5
GPT-6 Luna Decisions	4,621	379	0.79	0.68	+0.78	0.792, 0.115, 0.049, 0.029, 0.015	1.00	0.79, 0.11, 0.04, 0.02, 0.05	4,595, 20, 3, 1, 2

`results/hotpotqa_copied/2026-10-11_01`, every list

ECtHR: 5 duplicates of one violated article

The list holds 5 copies of one article that the Court found violated in the case. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 847 examples, 4,235 lists. Options in a list: 5. Correct options in a list: 5.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Highest correct minus lowest correct	Mean probability of each correct option, from the highest	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	4,235	0	0.29	0.06	+0.17	0.295, 0.236, 0.194, 0.154, 0.122	2.24	0.16, 0.13, 0.21, 0.23, 0.27	153, 11, 357, 1,203, 2,511
Liquid d1	4,235	0	0.55	0.36	+0.48	0.547, 0.189, 0.109, 0.084, 0.070	1.80	0.55, 0.19, 0.10, 0.08, 0.08	4,217, 18, 0, 0, 0
GPT-6 Luna Decisions	4,179	56	0.67	0.45	+0.65	0.665, 0.212, 0.069, 0.033, 0.020	1.35	0.66, 0.21, 0.07, 0.03, 0.03	4,134, 41, 0, 4, 0

`results/ecthr_copied/2026-10-11_01`, every list

MetaTool: 5 paraphrases of one correct tool

The list holds 5 descriptions of one correct tool in 5 styles, written by Claude Opus 5.5. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,767 examples, 8,835 lists. Options in a list: 5. Correct options in a list: 5.

Instruction: "Pick all the tools in the list that are relevant to the task at hand."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Highest correct minus lowest correct	Mean probability of each correct option, from the highest	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	8,835	0	0.47	0.23	+0.42	0.468, 0.242, 0.152, 0.090, 0.047	1.85	0.23, 0.18, 0.17, 0.20, 0.21	2,336, 1,518, 1,279, 1,713, 1,989
Liquid d1	8,835	0	0.52	0.30	+0.46	0.517, 0.214, 0.124, 0.085, 0.059	1.80	0.45, 0.16, 0.12, 0.11, 0.17	6,571, 454, 415, 408, 987
GPT-6 Luna Decisions	8,155	680	0.59	0.37	+0.56	0.590, 0.223, 0.102, 0.054, 0.031	1.56	0.56, 0.19, 0.09, 0.06, 0.09	7,124, 670, 164, 81, 116

`results/metatool_rotated/2026-10-11_01`, every list

MetaTool: one correct tool at the first place of the list

The tool list of the example with its correct tool moved to the first place. "None" is the last option. Test files `similar_tools` and `scenario`. 2,795 examples, 2,795 lists. Options in a list: 6 to 16. Correct options in a list: 1.

Instruction: "Choose the tool that is applicable to the user's query. If no tool in the list is applicable, choose None."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.58 to 4.00)
Jev	2,795	0	0.78	0.87	+0.08	0.08	0.77	+0.53	0.744	0.216	0.48
Liquid d1	2,795	0	0.69	0.80	+0.10	0.11	0.65	+0.33	0.629	0.303	0.78
GPT-6 Luna Decisions	2,793	2	0.80	0.89	+0.09	0.09	0.80	+0.55	0.760	0.206	0.44

`results/metatool_position/2026-10-11_01`, test files `similar_tools` and `scenario`, list `first`

MetaTool: one correct tool at the middle of the list

The tool list of the example with its correct tool moved to the middle. "None" is the last option. Test files `similar_tools` and `scenario`. 2,795 examples, 2,795 lists. Options in a list: 6 to 16. Correct options in a list: 1.

Instruction: "Choose the tool that is applicable to the user's query. If no tool in the list is applicable, choose None."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.58 to 4.00)
Jev	2,795	0	0.80	0.88	+0.08	0.08	0.79	+0.57	0.765	0.200	0.42
Liquid d1	2,795	0	0.74	0.82	+0.08	0.09	0.69	+0.43	0.686	0.252	0.70
GPT-6 Luna Decisions	2,793	2	0.72	0.87	+0.15	0.15	0.76	+0.42	0.686	0.266	0.53

`results/metatool_position/2026-10-11_01`, test files `similar_tools` and `scenario`, list `middle`

MetaTool: one correct tool at the last place of the list

The tool list of the example with its correct tool moved to the last place. "None" is the last option. Test files `similar_tools` and `scenario`. 2,795 examples, 2,795 lists. Options in a list: 6 to 16. Correct options in a list: 1.

Instruction: "Choose the tool that is applicable to the user's query. If no tool in the list is applicable, choose None."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.58 to 4.00)
Jev	2,795	0	0.80	0.88	+0.08	0.08	0.79	+0.56	0.763	0.202	0.43
Liquid d1	2,795	0	0.74	0.83	+0.09	0.09	0.70	+0.45	0.696	0.245	0.66
GPT-6 Luna Decisions	2,793	2	0.67	0.86	+0.19	0.19	0.75	+0.35	0.647	0.301	0.53

`results/metatool_position/2026-10-11_01`, test files `similar_tools` and `scenario`, list `last`

2. Allocation: lists with several correct options

MetaTool: two correct tools, "Choose one of them."

The tool list of the example, which holds two correct tools, in 9 orders: the released order, the two correct tools next to each other at 5 places, and apart at 3 pairs of places. 497 examples, 4,473 lists. Options in a list: 10. Correct options in a list: 2.

Instruction: "Two tools in the list are appropriate to solve the user's query. Choose one of them."

Model	Lists answered	Lists refused	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.32)
Jev	4,473	0	0.97	0.74	0.82	-0.15	0.15	0.67	+0.68	+0.77	+0.09	0.817, 0.136	0.045	0.61
Liquid d1	4,473	0	0.95	0.72	0.77	-0.17	0.17	0.58	+0.60	+0.68	+0.08	0.758, 0.159	0.075	0.77
GPT-6 Luna Decisions	4,473	0	0.93	0.60	0.79	-0.14	0.14	0.64	+0.64	+0.66	+0.02	0.761, 0.118	0.097	0.81

`results/metatool_position/2026-10-11_02`, every list

MetaTool: two correct tools, "Choose both."

The tool list of the example, which holds two correct tools, in 9 orders: the released order, the two correct tools next to each other at 5 places, and apart at 3 pairs of places. 497 examples, 4,473 lists. Options in a list: 10. Correct options in a list: 2.

Instruction: "Two tools in the list are appropriate to solve the user's query. Choose both."

Model	Lists answered	Lists refused	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.32)
Jev	4,473	0	0.98	0.82	0.82	-0.16	0.16	0.65	+0.66	+0.77	+0.11	0.809, 0.149	0.039	0.65
Liquid d1	4,473	0	0.95	0.74	0.75	-0.20	0.20	0.54	+0.56	+0.65	+0.09	0.737, 0.173	0.083	0.84
GPT-6 Luna Decisions	4,473	0	0.90	0.57	0.74	-0.16	0.16	0.58	+0.58	+0.57	-0.01	0.697, 0.116	0.123	1.15

`results/metatool_position/2026-10-11_03`, every list

MetaTool: two correct tools, every needed tool is asked for

The tool list of the example in the released order. 497 examples, 497 lists. Options in a list: 10. Correct options in a list: 2.

Instruction: "Choose every tool in the list that is needed to solve the user's query."

Model	Lists answered	Lists refused	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.32)
Jev	497	0	0.98	0.73	0.86	-0.12	0.12	0.73	+0.74	+0.81	+0.07	0.847, 0.109	0.042	0.52
Liquid d1	497	0	0.91	0.70	0.74	-0.16	0.17	0.53	+0.55	+0.59	+0.05	0.710, 0.162	0.117	0.88
GPT-6 Luna Decisions	497	0	0.82	0.52	0.74	-0.08	0.08	0.56	+0.55	+0.49	-0.06	0.663, 0.110	0.173	1.09

`results/metatool_removal/2026-10-11_01`, list `full`

HotpotQA: the passages of the question, "supports"

The passages of the question in the released order. Two of them hold a supporting fact. 7,405 examples, 7,405 lists. Options in a list: 2 to 10. Correct options in a list: 2.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Lists with a correct option and a distractor	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 1.00 to 3.32)
Jev	7,405	0	7,384	0.97	0.82	0.78	-0.19	0.19	0.60	+0.60	+0.72	+0.13	0.769, 0.172	0.046	0.74
Liquid d1	7,405	0	7,384	0.96	0.85	0.76	-0.21	0.21	0.55	+0.55	+0.69	+0.14	0.743, 0.193	0.050	0.83
GPT-6 Luna Decisions	7,396	9	7,375	0.95	0.70	0.75	-0.20	0.20	0.57	+0.57	+0.65	+0.08	0.725, 0.154	0.077	1.00

`results/hotpotqa_removal/2026-10-11_01`, list `full`

HotpotQA: the passages of the question, "may support"

The passages of the question in the released order. Two of them hold a supporting fact. 7,405 examples, 7,405 lists. Options in a list: 2 to 10. Correct options in a list: 2.

Instruction: "Choose every passage in the list that may support the answer to the question."

Model	Lists answered	Lists refused	Lists with a correct option and a distractor	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 1.00 to 3.32)
Jev	7,405	0	7,384	0.97	0.82	0.78	-0.19	0.19	0.58	+0.59	+0.72	+0.13	0.765, 0.179	0.044	0.75
Liquid d1	7,405	0	7,384	0.96	0.85	0.76	-0.21	0.21	0.55	+0.55	+0.69	+0.14	0.742, 0.192	0.051	0.85
GPT-6 Luna Decisions	7,401	4	7,380	0.94	0.70	0.75	-0.20	0.20	0.57	+0.57	+0.65	+0.08	0.725, 0.155	0.078	0.99

`results/hotpotqa_removal/2026-10-11_01`, list `full_may`

HotpotQA: the passages of the question, "definitely supports"

The passages of the question in the released order. Two of them hold a supporting fact. 7,405 examples, 7,405 lists. Options in a list: 2 to 10. Correct options in a list: 2.

Instruction: "Choose every passage in the list that definitely supports the answer to the question."

Model	Lists answered	Lists refused	Lists with a correct option and a distractor	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 1.00 to 3.32)
Jev	7,405	0	7,384	0.97	0.81	0.79	-0.18	0.18	0.60	+0.60	+0.73	+0.12	0.772, 0.169	0.045	0.73
Liquid d1	7,405	0	7,384	0.96	0.85	0.76	-0.21	0.21	0.55	+0.55	+0.69	+0.14	0.743, 0.192	0.050	0.83
GPT-6 Luna Decisions	7,387	18	7,366	0.95	0.68	0.74	-0.20	0.20	0.57	+0.57	+0.64	+0.07	0.723, 0.151	0.079	1.02

`results/hotpotqa_removal/2026-10-11_01`, list `full_definitely`

ECtHR: cases with 2 to 4 violated articles

The 10 articles. Each example is sent with the 10 cyclic permutations of the list, so each option is at each position once. 192 examples, 1,920 lists. Options in a list: 10. Correct options in a list: 2 to 4.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.32)
Jev	1,920	0	0.95	0.76	0.74	-0.21	0.21	0.54	+0.58	+0.65	+0.08	highest 0.724, lowest 0.147	0.069	0.89
Liquid d1	1,920	0	0.96	0.73	0.74	-0.23	0.23	0.54	+0.57	+0.66	+0.09	highest 0.725, lowest 0.155	0.065	0.96
GPT-6 Luna Decisions	1,920	0	0.96	0.70	0.74	-0.21	0.21	0.57	+0.61	+0.67	+0.07	highest 0.732, lowest 0.125	0.060	1.06

`results/ecthr_own/2026-10-11_01`, cases with 2 to 4 labels, every list

3. Abstention: lists with no correct option

MetaTool: 5 random tools, no "None"

The list holds 5 tools of the dataset that are not in the tool list of the example, chosen with a seed. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 3,292 examples, 16,460 lists. Options in a list: 5. Correct options in a list: 0.

Instruction: "Pick all the tools in the list that are relevant to the task at hand."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	16,460	0	0.78	0.63	0.83	0.20, 0.21, 0.18, 0.20, 0.20	3,405, 3,457, 2,991, 3,328, 3,279
Liquid d1	16,460	0	0.74	0.60	0.98	0.19, 0.21, 0.21, 0.18, 0.22	3,260, 3,458, 3,383, 2,851, 3,508
GPT-6 Luna Decisions	6,950	9,510	0.79	0.67	0.94	0.25, 0.21, 0.19, 0.16, 0.19	1,568, 1,466, 1,313, 1,151, 1,452

`results/metatool_unrelated/2026-10-11_01`, every list

MMLU: 5 random choices, no NOTA

The list holds 5 choices of other questions, chosen with a seed. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 0.

Instruction: "Choose the correct answer to the question."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	5,000	0	0.55	0.34	1.66	0.22, 0.22, 0.17, 0.20, 0.20	1,083, 1,115, 768, 1,028, 1,006
Liquid d1	5,000	0	0.60	0.41	1.48	0.28, 0.24, 0.19, 0.12, 0.17	1,580, 1,258, 931, 467, 764
GPT-6 Luna Decisions	772	4,228	0.74	0.61	1.11	0.38, 0.23, 0.14, 0.11, 0.14	334, 179, 93, 78, 88

`results/mmlu_unrelated/2026-10-11_01`, every list

HotpotQA: 5 random passages, no NOTA

The list holds 5 passages of other questions, chosen with a seed. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 0.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	5,000	0	0.58	0.38	1.55	0.21, 0.22, 0.18, 0.19, 0.20	1,012, 1,186, 881, 925, 996
Liquid d1	5,000	0	0.49	0.29	1.78	0.14, 0.25, 0.22, 0.16, 0.23	488, 1,473, 1,105, 637, 1,297
GPT-6 Luna Decisions	99	4,901	0.71	0.55	1.25	0.22, 0.18, 0.19, 0.09, 0.32	16, 19, 17, 10, 37

`results/hotpotqa_unrelated/2026-10-11_01`, every list

MetaTool: 4 distractors of the example, no "None"

The list holds 4 tools of the tool list of the example that are not correct. Each example is sent with the 4 cyclic permutations of the list, so each option is at each position once. 995 examples, 3,980 lists. Options in a list: 4. Correct options in a list: 0.

Instruction: "Pick all the tools in the list that are relevant to the task at hand."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 2.00)	Mean probability at each position	Predictions at each position
Jev	3,980	0	0.80	0.65	0.68	0.26, 0.26, 0.24, 0.25	1,036, 1,017, 939, 988
Liquid d1	3,980	0	0.77	0.61	0.82	0.27, 0.26, 0.25, 0.22	1,117, 1,023, 991, 849
GPT-6 Luna Decisions	3,059	921	0.78	0.63	0.86	0.29, 0.27, 0.24, 0.20	916, 826, 711, 606

`results/metatool_distractors/2026-10-11_01`, every list

MMLU: the 3 distractors of the question, no NOTA

The list holds the 3 choices of the question that are not correct. Each example is sent with the 3 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 3,000 lists. Options in a list: 3. Correct options in a list: 0.

Instruction: "Choose the correct answer to the question."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 1.58)	Mean probability at each position	Predictions at each position
Jev	3,000	0	0.73	0.53	0.89	0.35, 0.34, 0.32	1,059, 1,018, 923
Liquid d1	3,000	0	0.76	0.58	0.82	0.33, 0.34, 0.33	1,013, 1,025, 962
GPT-6 Luna Decisions	2,832	168	0.77	0.59	0.80	0.42, 0.30, 0.29	1,246, 796, 790

`results/mmlu_distractors/2026-10-11_01`, every list

MetaTool: the tool list without its two correct tools

The tool list of the example in the released order, without the two correct tools. 497 examples, 497 lists. Options in a list: 8. Correct options in a list: 0.

Instruction: "Choose every tool in the list that is needed to solve the user's query."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 3.00)
Jev	497	0	0.82	0.68	0.67
Liquid d1	497	0	0.79	0.67	0.85
GPT-6 Luna Decisions	405	92	0.76	0.62	1.06

`results/metatool_removal/2026-10-11_01`, list `without_all`

HotpotQA: the passages without the supporting passages

The passages of the question in the released order, without the passages that hold a supporting fact. 7,377 examples, 7,377 lists. Options in a list: 2 to 8. Correct options in a list: 0.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 1.00 to 3.00)
Jev	7,377	0	0.61	0.43	1.51
Liquid d1	7,377	0	0.67	0.51	1.32
GPT-6 Luna Decisions	5,352	2,025	0.65	0.50	1.48

`results/hotpotqa_removal/2026-10-11_01`, list `without_all`

ECtHR: the articles without the violated articles

The 10 articles in the released order, without the articles that the Court found violated. 847 examples, 847 lists. Options in a list: 6 to 9. Correct options in a list: 0.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 2.58 to 3.17)
Jev	847	0	0.74	0.57	0.99
Liquid d1	847	0	0.74	0.60	1.09
GPT-6 Luna Decisions	610	237	0.71	0.58	1.39

`results/ecthr_removal/2026-10-11_01`, list `without_all`

ECtHR: cases with no violated article, no NOTA

The 10 articles. Each example is sent with the 10 cyclic permutations of the list, so each option is at each position once. 153 examples, 1,530 lists. Options in a list: 10. Correct options in a list: 0.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Mean confidence	Prediction minus runner-up	Mean entropy in bits (maximum 3.32)
Jev	1,530	0	0.83	0.71	0.66
Liquid d1	1,530	0	0.87	0.77	0.54
GPT-6 Luna Decisions	1,515	15	0.87	0.78	0.62

`results/ecthr_own/2026-10-11_01`, cases with no label, every list

MetaTool: 4 random tools and "None"

The list holds 4 tools of the dataset that are not in the tool list of the example, and "None", which is the correct option. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 995 examples, 4,975 lists. Options in a list: 5. Correct options in a list: 1.

Instruction: "Choose the tool that is applicable to the user's query. If no tool in the list is applicable, choose None."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each positior
Jev	4,975	0	0.95	0.95	0.00	0.01	0.91	+0.86	0.929	0.068	0.16	0.20, 0.20, 0.20, 0.20, 0.20	990, 1,009, 972, 1,002, 1,002
Liquid d1	4,975	0	0.98	0.97	-0.01	0.01	0.93	+0.92	0.957	0.040	0.14	0.20, 0.20, 0.20, 0.20, 0.20	985, 995, 999, 990, 1,006
GPT-6 Luna Decisions	4,966	9	0.93	0.95	+0.02	0.02	0.91	+0.82	0.902	0.087	0.24	0.20, 0.20, 0.20, 0.20, 0.19	1,014, 999, 987, 987, 979

`results/metatool_absent_random/2026-10-11_01`, every list

MMLU: 4 random choices and NOTA

The list holds 4 choices of other questions and NOTA, which is the correct option. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 1.

Instruction: "Choose the correct answer to the question."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each positior
Jev	5,000	0	0.97	0.95	-0.03	0.03	0.91	+0.89	0.936	0.049	0.26	0.20, 0.20, 0.20, 0.20, 0.20	1,006, 998, 987, 1,001, 1,008
Liquid d1	5,000	0	0.99	0.98	-0.01	0.01	0.96	+0.95	0.973	0.021	0.10	0.20, 0.20, 0.20, 0.20, 0.20	1,005, 997, 1,001, 998, 999
GPT-6 Luna Decisions	4,996	4	0.99	0.94	-0.05	0.05	0.90	+0.90	0.936	0.041	0.34	0.21, 0.21, 0.20, 0.19, 0.19	1,007, 1,002, 996, 995, 996

`results/mmlu_absent_random/2026-10-11_01`, every list

HotpotQA: 4 random passages and NOTA

The list holds 4 passages of other questions and NOTA, which is the correct option. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 1.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each pos
Jev	5,000	0	1.00	1.00	0.00	0.00	0.99	+0.99	0.995	0.004	0.03	0.20, 0.20, 0.20, 0.20, 0.20	1,000, 1,000, 1,000, 1,000, 1
Liquid d1	5,000	0	1.00	1.00	0.00	0.00	1.00	+1.00	1.000	0.000	0.00	0.20, 0.20, 0.20, 0.20, 0.20	1,000, 1,000, 1,000, 1,000, 1
GPT-6 Luna Decisions	5,000	0	1.00	0.94	-0.06	0.06	0.91	+0.91	0.943	0.036	0.34	0.22, 0.19, 0.20, 0.20, 0.20	1,001, 1,000, 1,000, 999, 1

`results/hotpotqa_absent_random/2026-10-11_01`, every list

MMLU: the 3 distractors of the question and NOTA

The list holds the 3 choices of the question that are not correct and NOTA, which is the correct option. Each example is sent with the 4 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 4,000 lists. Options in a list: 4. Correct options in a list: 1.

Instruction: "Choose the correct answer to the question."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.00)	Mean probability at each position	Predictions at each position
Jev	4,000	0	0.65	0.77	+0.12	0.12	0.61	+0.23	0.575	0.341	0.85	0.26, 0.25, 0.24, 0.25	1,053, 998, 971, 978
Liquid d1	4,000	0	0.72	0.81	+0.10	0.10	0.68	+0.40	0.668	0.273	0.69	0.22, 0.25, 0.27, 0.26	880, 978, 1,097, 1,045
GPT-6 Luna Decisions	4,000	0	0.54	0.76	+0.22	0.22	0.59	+0.10	0.497	0.395	0.89	0.28, 0.25, 0.25, 0.23	1,183, 963, 940, 914

`results/mmlu_absent/2026-10-11_01`, every list

HotpotQA: 4 distractors of the question and NOTA

The list holds 4 passages of the question that hold no supporting fact and NOTA, which is the correct option. Each example is sent with the 5 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 5,000 lists. Options in a list: 5. Correct options in a list: 1.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.32)	Mean probability at each position	Predictions at each position
Jev	5,000	0	0.84	0.82	-0.01	0.03	0.69	+0.55	0.752	0.199	0.67	0.19, 0.21, 0.19, 0.20, 0.21	973, 1,047, 970, 998, 1,012
Liquid d1	5,000	0	0.88	0.90	+0.02	0.02	0.82	+0.70	0.840	0.136	0.39	0.19, 0.20, 0.20, 0.20, 0.21	975, 999, 1,015, 992, 1,019
GPT-6 Luna Decisions	5,000	0	0.79	0.77	-0.01	0.04	0.63	+0.44	0.677	0.232	0.92	0.24, 0.20, 0.20, 0.18, 0.18	1,184, 967, 998, 905, 946

`results/hotpotqa_absent/2026-10-11_01`, every list

MetaTool `reliability`: the tool list of the example and "None"

The tool list of the example in the released order with "None" as the last option. No tool of the list is correct, and "None" is the correct option. 995 examples, 995 lists. Options in a list: 11. Correct options in a list: 1.

Instruction: "Choose the tool that is applicable to the user's query. If no tool in the list is applicable, choose None."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.46)
Jev	995	0	0.91	0.91	+0.01	0.02	0.84	+0.74	0.864	0.127	0.31
Liquid d1	995	0	0.98	0.94	-0.03	0.03	0.90	+0.88	0.933	0.056	0.25
GPT-6 Luna Decisions	993	2	0.94	0.95	+0.01	0.03	0.92	+0.84	0.912	0.077	0.21

`results/metatool_position/2026-10-11_01`, test file `reliability`, list `released`

ECtHR: the 10 articles and NOTA, cases with no violated article

The 10 articles in the released order with NOTA as the last option, which is the correct option. 153 examples, 153 lists. Options in a list: 11. Correct options in a list: 1.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.46)
Jev	153	0	0.37	0.66	+0.29	0.30	0.39	-0.13	0.392	0.524	1.09
Liquid d1	153	0	0.07	0.79	+0.72	0.72	0.64	-0.64	0.132	0.767	0.81
GPT-6 Luna Decisions	153	0	0.17	0.72	+0.55	0.55	0.54	-0.42	0.233	0.652	1.09

`results/ecthr_with_none/2026-10-11_01`, cases with no label, list `own`

4. Calibration: lists with one correct option

MetaTool: one correct tool, the 6 orders of the list

The tool list of the example in the released order and with its correct tool at 5 places. "None" is the last option. Test files `similar_tools` and `scenario`. 2,795 examples, 16,770 lists. Options in a list: 6 to 16. Correct options in a list: 1.

Instruction: "Choose the tool that is applicable to the user's query. If no tool in the list is applicable, choose None."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.58 to 4.00)
Jev	16,770	0	0.79	0.88	+0.08	0.08	0.78	+0.55	0.756	0.207	0.45
Liquid d1	16,770	0	0.72	0.81	+0.09	0.09	0.67	+0.40	0.669	0.268	0.72
GPT-6 Luna Decisions	16,758	12	0.73	0.87	+0.14	0.14	0.77	+0.45	0.701	0.256	0.49

`results/metatool_position/2026-10-11_01`, test files `similar_tools` and `scenario`, every list

MMLU: the 4 choices of the question

The 4 choices of the question. Each example is sent with the 4 cyclic permutations of the list, so each option is at each position once. 1,000 examples, 4,000 lists. Options in a list: 4. Correct options in a list: 1.

Instruction: "Choose the correct answer to the question."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 2.00)	Mean probability at each position	Predictions at each position
Jev	4,000	0	0.92	0.94	+0.02	0.04	0.89	+0.77	0.878	0.104	0.26	0.25, 0.25, 0.25, 0.25	1,000, 1,001, 995, 1,004
Liquid d1	4,000	0	0.84	0.89	+0.05	0.05	0.81	+0.65	0.807	0.153	0.42	0.24, 0.25, 0.25, 0.25	971, 1,011, 1,022, 996
GPT-6 Luna Decisions	3,989	11	0.83	0.88	+0.04	0.05	0.80	+0.64	0.796	0.157	0.44	0.26, 0.25, 0.25, 0.24	1,060, 989, 998, 942

`results/mmlu_own/2026-10-11_01`, every list

ECtHR: cases with 1 violated article

The 10 articles. Each example is sent with the 10 cyclic permutations of the list, so each option is at each position once. 655 examples, 6,550 lists. Options in a list: 10. Correct options in a list: 1.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.32)
Jev	6,550	0	0.89	0.86	-0.03	0.03	0.75	+0.66	0.818	0.156	0.52
Liquid d1	6,550	0	0.88	0.87	-0.01	0.01	0.77	+0.66	0.819	0.155	0.51
GPT-6 Luna Decisions	6,550	0	0.90	0.89	0.00	0.01	0.82	+0.72	0.845	0.121	0.47

`results/ecthr_own/2026-10-11_01`, cases with 1 label, every list

ECtHR: the 10 articles and NOTA, cases with 1 violated article

The 10 articles in the released order with NOTA as the last option. 655 examples, 655 lists. Options in a list: 11. Correct options in a list: 1.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.46)
Jev	655	0	0.84	0.74	-0.10	0.11	0.54	+0.44	0.682	0.242	0.95
Liquid d1	655	0	0.88	0.86	-0.03	0.04	0.76	+0.65	0.800	0.154	0.62
GPT-6 Luna Decisions	655	0	0.87	0.83	-0.05	0.05	0.72	+0.63	0.778	0.153	0.76

`results/ecthr_with_none/2026-10-11_01`, cases with 1 label, list `own`

---

5. Dependence on the list: a correct option is removed

MetaTool: the tool list without one of its two correct tools

The tool list of the example in the released order without one correct tool. Each example gives 2 lists, one per removed tool. 497 examples, 994 lists. Options in a list: 9. Correct options in a list: 1.

Instruction: "Choose every tool in the list that is needed to solve the user's query."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.17)
Jev	994	0	0.86	0.90	+0.04	0.04	0.81	+0.66	0.821	0.163	0.36
Liquid d1	994	0	0.78	0.85	+0.07	0.07	0.72	+0.50	0.732	0.237	0.57
GPT-6 Luna Decisions	987	7	0.67	0.82	+0.15	0.15	0.70	+0.32	0.620	0.303	0.80

`results/metatool_removal/2026-10-11_01`, lists `without_1` and `without_2`

HotpotQA: the passages without one supporting passage

The passages of the question in the released order without one supporting passage. Each question gives one list per removed passage. 7,384 examples, 14,768 lists. Options in a list: 2 to 9. Correct options in a list: 1.

Instruction: "Choose every passage in the list that supports the answer to the question."

Model	Lists answered	Lists refused	Accuracy	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 1.00 to 3.17)
Jev	14,768	0	0.84	0.83	-0.02	0.03	0.72	+0.59	0.758	0.169	0.72
Liquid d1	14,768	0	0.84	0.85	+0.01	0.02	0.76	+0.61	0.778	0.165	0.61
GPT-6 Luna Decisions	14,327	441	0.80	0.80	0.00	0.03	0.69	+0.51	0.703	0.194	0.92

`results/hotpotqa_removal/2026-10-11_01`, lists `without_1` and `without_2`

ECtHR: the articles without one violated article

The 10 articles in the released order without one violated article, for the cases with 2 to 4 violated articles. Each case gives one list per removed article. 192 examples, 435 lists. Options in a list: 9. Correct options in a list: 1 to 3.

Instruction: "Choose every article in the list that the European Court of Human Rights found violated in this case."

Model	Lists answered	Lists refused	Accuracy	Exact match	Mean confidence	Overconfidence	ECE	Prediction minus runner-up	Highest correct minus lowest correct	Highest correct minus highest distractor	Lowest correct minus highest distractor	Mean probability of each correct option, from the highest	Mean probability of the highest distractor	Mean entropy in bits (maximum 3.17)
Jev	435	0	0.90	0.86	0.83	-0.07	0.07	0.70	+0.19	+0.66	+0.47	highest 0.785, lowest 0.593	0.126	0.64
Liquid d1	435	0	0.90	0.81	0.83	-0.07	0.07	0.71	+0.19	+0.65	+0.46	highest 0.779, lowest 0.585	0.130	0.70
GPT-6 Luna Decisions	426	9	0.92	0.85	0.84	-0.08	0.08	0.75	+0.23	+0.71	+0.48	highest 0.805, lowest 0.576	0.096	0.75

`results/ecthr_removal/2026-10-11_01`, lists `without_1` to `without_4`

MetaTool: the second correct option before and after the removal

The second correct option of an example is the correct option with the second-highest probability in the full list.

Model	Examples with both lists answered	Mean probability of the second correct option in the full list	Its mean probability in the list without the correct option that has the highest probability
Jev	497	0.11	0.71
Liquid d1	497	0.16	0.62
GPT-6 Luna Decisions	490	0.11	0.53

`results/metatool_removal/2026-10-11_01`, list `full` and the list without the correct option that has the highest probability there

HotpotQA: the second correct option before and after the removal

The second correct option of an example is the correct option with the second-highest probability in the full list.

Model	Examples with both lists answered	Mean probability of the second correct option in the full list	Its mean probability in the list without the correct option that has the highest probability
Jev	7,384	0.17	0.66
Liquid d1	7,384	0.19	0.68
GPT-6 Luna Decisions	7,044	0.16	0.60

`results/hotpotqa_removal/2026-10-11_01`, list `full` and the list without the correct option that has the highest probability there

ECtHR: the second correct option before and after the removal

The second correct option of an example is the correct option with the second-highest probability in the full list.

Model	Examples with both lists answered	Mean probability of the second correct option in the full list	Its mean probability in the list without the correct option that has the highest probability
Jev	192	0.19	0.71
Liquid d1	192	0.16	0.68
GPT-6 Luna Decisions	183	0.15	0.68

`results/ecthr_removal/2026-10-11_01`, list `full` and the list without the correct option that has the highest probability there

HotpotQA: a yes/no question per passage

Each passage of a question is asked about in a yes/no question of its own. The 10 questions of an example are sent in one request.

Instruction: "Does this passage support the answer to the question? Passage: <name of the option>: <text of the option>"

Model	Questions answered	Questions refused	Correct options: mean probability of yes	Correct options with yes at 0.50 or more	Distractors: mean probability of yes	Distractors with yes at 0.50 or more
Jev	4,955	0	0.45	396 of 1,000	0.09	131 of 3,955
Liquid d1	4,955	0	0.40	375 of 1,000	0.06	125 of 3,955
GPT-6 Luna Decisions	4,951	4	0.52	508 of 1,000	0.06	181 of 3,951

`results/hotpotqa_yes_no/2026-10-11_01`, every question

ECtHR: a yes/no question per article

Each of the 10 articles is asked about in a yes/no question of its own. The 10 questions of a case are sent in one request.

Instruction: "Did the European Court of Human Rights find a violation of this article in this case? Article: <name of the option>: <text of the option>"

Model	Questions answered	Questions refused	Correct options: mean probability of yes	Correct options with yes at 0.50 or more	Distractors: mean probability of yes	Distractors with yes at 0.50 or more
Jev	10,000	0	0.67	964 of 1,090	0.15	607 of 8,910
Liquid d1	10,000	0	0.89	1,050 of 1,090	0.12	790 of 8,910
GPT-6 Luna Decisions	9,886	114	0.74	818 of 1,018	0.07	374 of 8,868

`results/ecthr_yes_no/2026-10-11_01`, every question

Notes

- Jev is `jev-1.13.0`, asked through TypeSafe's API. Liquid d1 (`liquid/d1`) and GPT-6 Luna Decisions (`openai/gpt-6-luna-decisions`) are asked through Vercel AI Gateway, which takes no model version. The three models get the same requests.
- Every figure of a row is computed over the lists that the model answered. A refused list has no answer. Jev and Liquid d1 refused no list.
- A column is left out of a table when no model has that figure: a list with no correct option has no accuracy, and a list with only correct options has no distractor.
- The three differences and the probabilities are computed for each answer and then averaged over the answers. The differences with a distractor use the answers to lists that hold a correct option and a distractor. Where a list of a run holds only correct options, the column "Lists with a correct option and a distractor" gives their number.
- The MMLU runs use a seeded sample of 1,000 of the 13,096 questions whose choices can be moved. The HotpotQA runs with 5 cyclic permutations and the HotpotQA run with 4 distractors and NOTA use a seeded sample of 1,000 of the 7,345 questions with 10 passages. The other runs use every example.
- MetaTool repeats queries across its test files. The 1,767 examples of the run with paraphrases give 1,047 different requests, and the 3,292 examples of the run with duplicates 3,275. An answer to a repeated request is counted once per example.
- The labels of ECtHR are the articles that the Court found violated in a case, and a case with no label is one in which it found no violation of the 10 articles.
- The yes/no question of a HotpotQA passage is sent for 500 questions, and that of an ECtHR article for the 1,000 test cases.