



UNIVERSITY OF
LIVERPOOL

FIRST SEMESTER EXAMINATIONS 2023/24

Advanced Artificial Intelligence

TIME ALLOWED : TWO Hours

INSTRUCTIONS TO CANDIDATES

NAME OF CANDIDATE SEAT NO

USUAL SIGNATURE

READ THE FOLLOWING CAREFULLY:

1. Each of the following questions comprise 5 statements, from which you should select one appropriate answer by placing ticks in the appropriate boxes.
2. The exam mark is based on the overall number of correctly answered questions. The more questions you answer correctly the higher your mark, incorrectly answered questions do not count against you.
3. Enter your name and examination number IN PENCIL on the computer answer sheet according to the instructions on that sheet.
4. When you have completed this exam paper, read the instructions on the computer answer sheet carefully and transfer your answers from the exam paper. Use a HB pencil to mark the computer answer sheet and if you change your mind be sure to erase the mark you have made. You may then mark the alternative answer.
5. At the end of the examination, be absolutely sure to hand in BOTH this exam paper AND the computer answer sheet.
6. Calculators are permitted.

THIS PAPER MUST NOT BE REMOVED FROM THE EXAMINATION ROOM

This page collects some formulas/expressions that may be used in this exam.

1. entropy:

$$- \sum_{y \in \text{values}(Y)} P(y) \log_2 P(y)$$

2. conditional entropy:

$$H(Y|X) = \sum_{x \in \text{values}(X)} P(X = x) H(Y|X = x)$$

where

$$H(Y|X = x) = - \sum_{y \in \text{values}(Y)} P(Y = y|X = x) \log_2 P(Y = y|X = x)$$

Part 1: Basic Knowledge

1. Assume that we have collected a set of labelled instances $\{(x^{(1)}, y^{(1)}), \dots, (x^{(n)}, y^{(n)})\}$, as well as a set of unlabelled instances $\{x^{(n+1)}, \dots, x^{(n+m)}\}$. The data instances are sampled from an unknown underlying distribution. We want to identify from the collected data a small subset of instances that are deviated from the distribution. Which of the following learning tasks is the most suitable one to describe the above intention?
 - ☒ **A.** Anomaly Detection
 - ☐ **B.** Supervised learning
 - ☐ **C.** Unsupervised learning
 - ☐ **D.** Semi-Supervised Learning
 - ☐ **E.** none of the above
2. Which of the following statements is incorrect?
 - ☐ **A.** In an active learning scheme, the learner can actively select instances for training.
 - ☐ **B.** The hypothesis space of a learning algorithm is the function space \mathcal{H} such that each element in \mathcal{H} is a possible model the learning algorithm will end up with.
 - ☐ **C.** Dimensionality reduction is to find a model $f \in \mathcal{H}$ that represents each instance \mathbf{x} with a lower-dimension feature vector while still preserving key properties of \mathbf{x} .
 - ☒ **D.** Training, test, and validation datasets cannot overlap to make sure that a training algorithm is not biased.
 - ☐ **E.** Anomaly detection is to learn model $f \in \mathcal{H}$ that represents “normal” instances, so that the model can later be used to determine whether a new data x looks normal or anomalous.

	Attendance = High	Attendance = Medium	Attendance = Low
Grade = A	0.20	0.09	0.03
Grade = B	0.09	0.20	0.08
Grade = C	0.03	0.08	0.20

Table 1: Joint probability for student grade and Attendance

3. According to the table in Table 1 about two random variables *Attendance* and *Grade*, please select a value for x to make the following expression hold (rounded to 2 decimal places):

$$P(\text{Grade} = C \mid \text{Attendance} = \text{High}) = x$$

- ☐ A. $x = 0.21$
☒ B. $x = 0.09$
☐ C. $x = 0.10$
☐ D. $x = 0.17$
☐ E. $x = 0.08$

4. Compute the following conditional probability according to Table 1 (rounded to 2 decimal places)

$$P(\text{Attendance} = \text{low} \mid \text{Grade} \in \{A, B\}) =$$

- ☒ A. 0.16
☐ B. 0.33
☐ C. 0.21
☐ D. 0.45
☐ E. 0.08

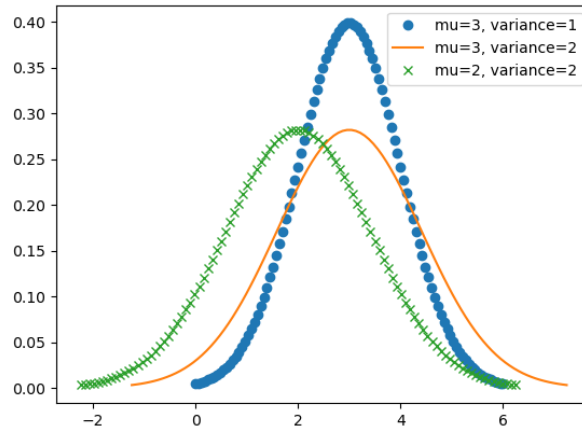


Figure 1: Diagram of three Gaussian distributions with different means and variances

5. Assume we have three functions f_1 , f_2 and f_3 , representing the three Gaussian distributions as in Figure 1. Specifically, we have $f_1 = \mathcal{N}(3, 1^2)$, $f_2 = \mathcal{N}(3, 2^2)$, and $f_3 = \mathcal{N}(2, 2^2)$. Which of the following statements is correct.

- ☐ A. $\arg \max_x f_1(x) \approx 0.4$
- ☒ B. $\max_x f_1(x) > \max_x f_2(x)$
- ☐ C. $\forall x : f_1(x) \geq f_2(x)$
- ☐ D. $\forall x : f_2(x) = f_3(x + 1)$
- ☐ E. $\arg \max_x f_2(x) = \arg \max_x f_3(x)$

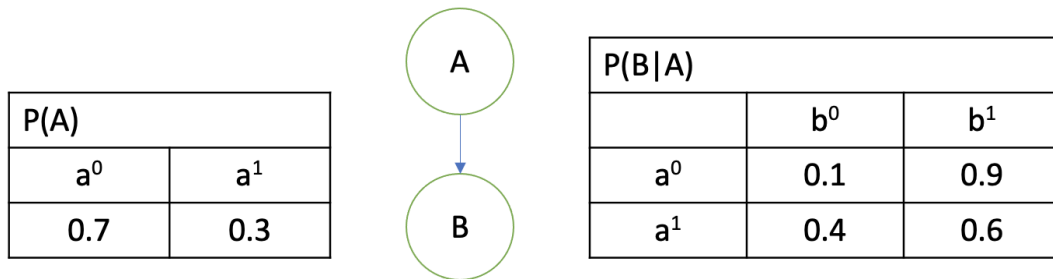


Figure 2: Probabilistic Graph of Diseases (A) and Symptom (B)

6. Use the information provided in Figure 2 to compute the following joint probability

$$P(A = a^0, B = b^1) =$$

- ☒ A. 0.63
☐ B. 0.28
☐ C. 0.18
☐ D. 0.27
☐ E. 0.42

7. Use the information provided in Figure 2 to compute the following maximum a posteriori expression

$$MAP(A, B) =$$

- ☐ A. 0.36
☐ B. a^1, b^1
☐ C. 0.5
☒ D. a^0, b^1
☐ E. a^1, b^1

8. Which of the following description on the data preprocessing techniques is incorrect?

- ☐ A. Mean normalisation is to remove the mean from each data sample, but it does not care about the standard deviation.
- ☐ B. Standardisation is to ensure all features are on the same scale.
- ☐ C. Whitening is to reduce the correlation between features.
- ☐ D. Other than mean normalisation, standardisation, and whitening, there can be more data preprocessing techniques for different datasets.
- ☒ E. In practice, one has to carefully select one data preprocessing technique to be applied, because multiple techniques may interfere with each other and eventually lead to worse performance.

9. Understanding simple NumPy command.

Assume that $a = \text{np.arange}(100).reshape((4, 25))$. Then $a[:, 3 : 5].T.shape =$

- ☐ A. (3,5)
- ☐ B. 10
- ☐ C. (2,5)
- ☐ D. (5,2)
- ☒ E. (2,4)

10. Let $x = (5, -2, 3, -6)$ be a vector. Then its L^2 norm $\|x\|_2 =$

- ☒ A. $\sqrt{74}$
- ☐ B. $\sqrt{30}$
- ☐ C. 10
- ☐ D. $\sqrt{22}$
- ☐ E. $\sqrt{54}$

11. Let $x = (-1, 3, -4, -5)$ be a vector. Then its L^∞ norm $\|x\|_\infty =$

- ☐ A. $\sqrt{30}$
- ☒ B. 5
- ☐ C. 6
- ☐ D. 10
- ☐ E. 13

Part 2: Simple Learning Models

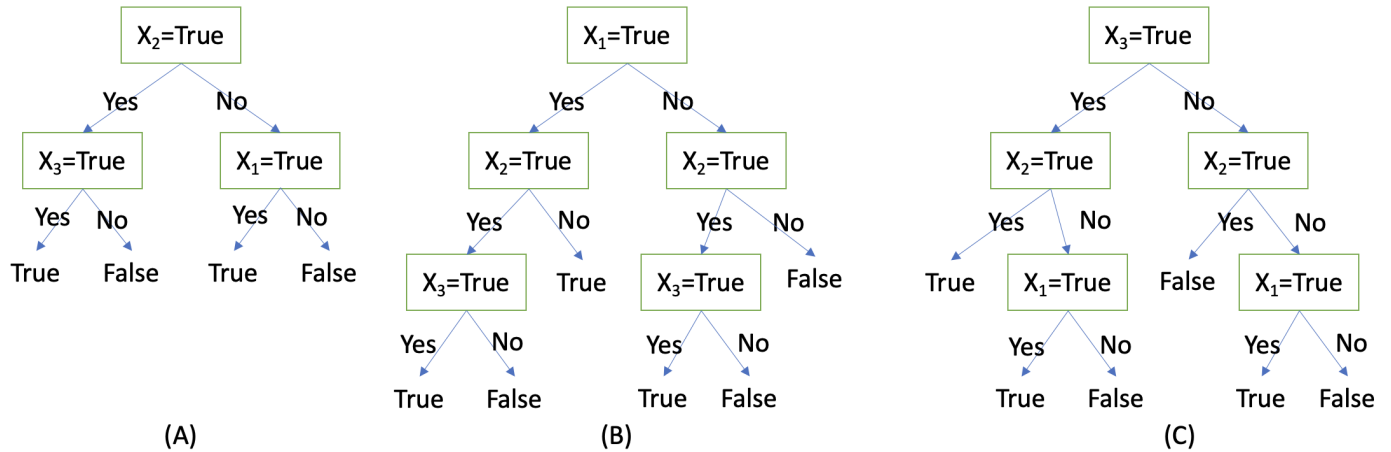


Figure 3: Decision Trees

12. Assume that we have three decision trees as in Figure 3. Two decision trees are equivalent if they perform exactly the same when classifying inputs, and they are different, otherwise. Which of the following statements is correct?

- ☐ A. All the three trees are different.
- ☐ B. Tree A is equivalent to Tree B, but not Tree C.
- ☐ C. Tree A is equivalent to Tree C, but not Tree B.
- ☐ D. Tree B is equivalent to Tree C, but not Tree A.
- ☒ E. All the three trees are equivalent.

Index	Sepal Length	Sepal Width	Petal Length	Petal Width	Iris Class
1	5	3	1	0.5	0
2	4	3	1	0.5	0
3	4	3	1	0.5	0
4	5	3	1	0.5	0
5	4	3	1	0.5	1
6	7	3	4	1	1
7	6	3	4	1	1
8	6	3	4	1	1
9	4	2	3	1	1
10	6	3	6	2	2
11	5	2	5	2	2
12	7	3	5	2	2
13	5	2	5	2	2
14	6	2	5	1	2

Table 2: Dataset for Iris Flowers

13. Table 2 gives an example dataset D about Iris flowers that has been adversarially attacked. Please indicate which of the following expressions is used to compute its entropy $H_D(Y)$, where Y is the random variable for labelling (i.e., Iris Class):

- ☐ A. $\frac{8}{14} \log_2\left(\frac{8}{14}\right) + \frac{6}{14} \log_2\left(\frac{6}{14}\right)$
- ☐ B. $-\frac{4}{14} \log_2\left(\frac{4}{14}\right) - \frac{4}{14} \log_2\left(\frac{4}{14}\right) - \frac{4}{14} \log_2\left(\frac{4}{14}\right) - \frac{2}{14} \log_2\left(\frac{2}{14}\right)$
- ☐ C. $\frac{4}{14} \log_2\left(\frac{4}{14}\right) + \frac{10}{14} \log_2\left(\frac{10}{14}\right)$
- ☒ D. $-\frac{5}{14} \log_2\left(\frac{5}{14}\right) - \frac{5}{14} \log_2\left(\frac{5}{14}\right) - \frac{4}{14} \log_2\left(\frac{4}{14}\right)$
- ☐ E. none of the above

14. Table 2 gives an example dataset D about Iris flowers that has been attacked by an adversary. Please compute the information gain of splitting over the feature Sepal Length, i.e., $\text{InfoGain}(D, \text{SepalLength}) = H_D(Y) - H_D(Y \mid \text{SepalLength})$ (rounded to two decimal places):
- ☐ A. 0.78
 - ☒ B. 0.57
 - ☐ C. -0.18
 - ☐ D. 0.39
 - ☐ E. 0.46
15. Table 2 gives an example dataset D about Iris flowers that has been attacked by an adversary. Please compute the information gain of splitting over the feature Sepal Width $\text{InfoGain}(D, \text{SepalWidth}) = H_D(Y) - H_D(Y \mid \text{SepalWidth})$ (rounded to two decimal places):
- ☒ A. 0.26
 - ☐ B. -0.19
 - ☐ C. 0.12
 - ☐ D. 0.15
 - ☐ E. 0.13

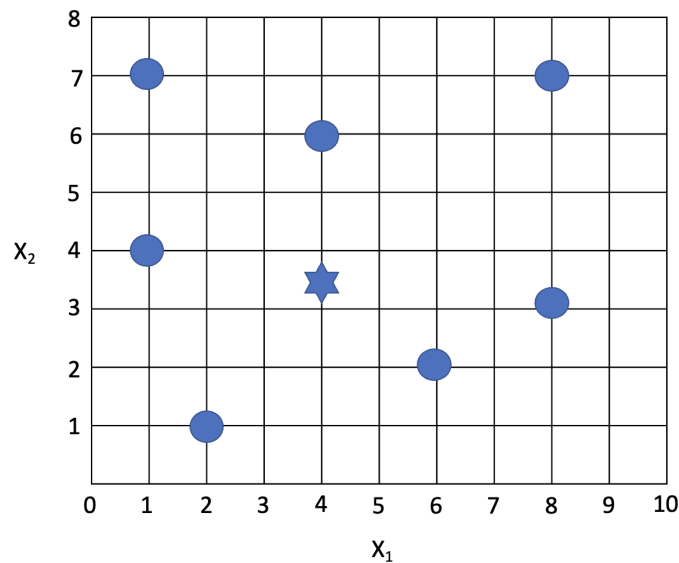


Figure 4: A set of two-dimensional input samples

16. Assume that, as shown in Figure 4, we have a set of training instances with two features X_1 and X_2 :

$$\{(1, 7), (1, 4), (2, 1), (4, 6), (6, 1.9), (8, 3), (8, 7)\}$$

such that

- the instance $(1, 7)$ is labeled with value 0,
- the instances $(1, 4), (2, 1)$ are labeled with value 1,
- the two instances $(6, 1.9), (8, 3)$ are labeled with value 2, and
- the instances $(4, 6), (8, 7)$ are labeled with value 3.

Now, we have a new input $(4, 3.5)$. Please indicate which of the following statements is correct, according to the L^2 distance and 3-nn (3-nearest neighbor) classification.

- ☐ A. Both $(4, 6)$ and $(6, 1.9)$ are *not* considered for the 3-nn classification.
- ☒ B. Both $(2, 1)$ and $(8, 7)$ are *not* considered for the 3-nn classification.
- ☐ C. $(1, 4)$ is *not* considered for the 3-nn classification.
- ☐ D. Both $(6, 1.9)$ and $(8, 3)$ are *not* considered for the 3-nn classification.
- ☐ E. Both $(2, 1)$ and $(6, 1.9)$ are *not* considered for the 3-nn classification.

17. Continue with the above over Figure 4. Now, for new input (4, 3.5), please compute its regression result for the 3-nn (3-nearest neighbor) regression, according to the L^2 distance (rounded to two decimal places).

- ☐ A. 1.80
- ☐ B. 2.73
- ☐ C. 3.67
- ☒ D. 2.00
- ☐ E. 2.33

18. Please select the correct statement from the following:

- ☐ A. Validation dataset is another terminology for training dataset.
- ☐ B. Validation dataset is always needed for a supervised training task.
- ☐ C. Validation dataset is part of the test dataset.
- ☒ D. Validation dataset can be used for regularization.
- ☐ E. Test dataset can be overlapped with the training dataset.

	actual class = positive	actual class = negative
predicted class = positive	a	b
predicted class = negative	c	d

Table 3: A confusion matrix for the two-class problem

19. Assume a two-class problem where each instance is classified as either 1 (positive) or -1 (negative). We have a training dataset of 1,000 instances, such that 600 of them are labeled as 1 and 400 of them are labeled as -1. After training, we apply the trained model to classify the 500 instances and find that 490 instances are classified correctly. Moreover, we know that, 300 instances are classified as 1 and, within the 300 instances, 5 instances are actually labeled as -1. Please indicate which numbers should be filled in to (a, b, c, d) in Table 3.

- ☐ A. (450, 50, 150, 350)
- ☐ B. (450, 50, 100, 400)
- ☐ C. (290, 10, 10, 190)
- ☒ D. (295, 5, 5, 195)
- ☐ E. None of the above is correct

20. Continue with the above question. Please compute the error rate of the trained model.

- ☐ A. 5%
- ☐ B. 15%
- ☐ C. 10%
- ☒ D. 2%
- ☐ E. None of the above is correct

21. Given a set of 4 training data $\{((0, 0), 1), (0, 1), 0), (1, 0), 0), (1, 1), 1)\}$, where each instance has two features X_1 and X_2 and a label y , linear regression is used to find a linear function $f(\mathbf{x}) = \mathbf{w}^T \mathbf{x} + b$. Please indicate which of the following statement is correct:

- ☐ A. if $f(\mathbf{x}) = 2X_1 + X_2 - 1.2$ then the training accuracy is 1.0.
- ☐ B. if $f(\mathbf{x}) = X_1 + 2X_2 - 2.5$ then the training accuracy is 1.0.
- ☐ C. if $f(\mathbf{x}) = 2X_1 + X_2 + 1.5$ then the training accuracy is 1.0.
- ☐ D. if $f(\mathbf{x}) = X_1 + X_2$ then the training accuracy is 1.0.
- ☒ E. none of the above statement is correct.

22. Let $f(X) = 3X_1 + 4e^{\sin(X_2)} + 5e^{-X_3}$ be a function, where X_1 , X_2 and X_3 are three variables. Please indicate which of the following gradient expressions is correct:

- ☐ A. $\nabla_X f(X) = (6X_1, 4\cos(X_2)e^{\sin(X_2)}, -5e^{-X_3})$
- ☒ B. $\nabla_X f(X) = (3, 4\cos(X_2)e^{\sin(X_2)}, -5e^{-X_3})$
- ☐ C. $\nabla_X f(X) = (6, 4\sin(X_2)e^{\sin(X_2)}, -5e^{-X_3})$
- ☐ D. $\nabla_X f(X) = (3X_1, 4e^{\sin(X_2)}, 5e^{-X_3})$
- ☐ E. $\nabla_X f(X) = (3, 4\cos(X_2)e^{\sin(X_2)}, 5e^{-X_3})$

Index	Sepal Length	Sepal Width	Petal Length	Petal Width	Iris Class
1	5	3	1	0.5	0
2	4	3	1	0.5	0
3	4	3	1	0.5	0
4	5	3	1	0.5	0
5	4	3	1	0.5	1
6	7	3	4	1	1
7	6	3	4	1	1
8	6	3	4	2	1
9	4	2	3	2	1
10	6	3	6	2	2
11	5	2	5	2	2
12	7	3	4	1	2
13	5	2	5	2	2
14	6	2	5	1	2

Table 4: Dataset for Iris Flowers

23. Assume a dataset as in Table 4, and a new data instance (6, 2, 4, 2), please indicate which class the new data instance will be classified into, if we consider Naive Bayes method:

- ☐ **A.** Class 0
- ☐ **B.** Class 1
- ☒ **C.** Class 2
- ☐ **D.** Either Class 1 or 2
- ☐ **E.** Naive Bayes cannot be applied to this dataset

Part 3: Deep Learning

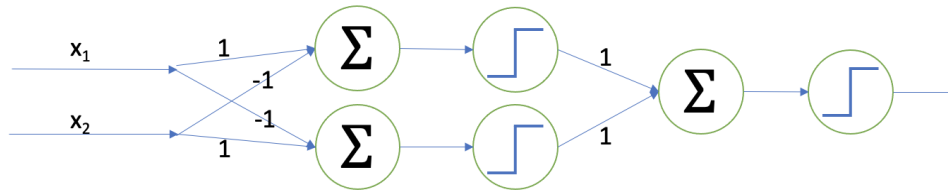


Figure 5: A simple two-layer perceptron

24. Consider a simple two-layer perceptron as in Figure 5, where each layer has a linear transformation – denoted as Σ in the figure – together with an activation function ReLU. ReLU activation function is defined as $ReLU = \max(0, x)$. Assume that we have a data instance (2, 3), please indicate which of the following options is the output of the network:
- ☐ A. 0
 - ☒ B. 1
 - ☐ C. 2
 - ☐ D. 3
 - ☐ E. None of the above is correct
25. Given a simple two-layer perceptron as in Figure 5, where each layer has a linear transformation – denoted as Σ in the figure – together with a Sigmoid activation function. Sigmoid activation function is defined as $S(x) = \frac{e^x}{e^x + 1}$. Please indicate which of the following statement is correct.
- ☐ A. The output of the network can be different for different inputs.
 - ☐ B. The output is always 1.
 - ☒ C. The output is always $\frac{e}{1 + e}$.
 - ☐ D. When $x_1 + x_2 = 0$, the output is also 0.
 - ☐ E. None of the above.
26. Which of the following statements is correct?
- ☐ A. The success of deep learning is based on various architectures such as the well-known recurrent neural network LSTM and the convolutional neural network.
 - ☒ B. Exclusive or (XOR) function can be modelled with multiple perceptrons.
 - ☐ C. One of the main contributions of Frank Rosenblatt is the concept of Perceptron.
 - ☐ D. Rosenblatt's algorithm can be applied to train deep neural networks.
 - ☐ E. None of the above statement is correct.

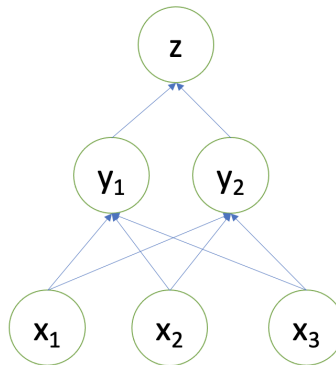


Figure 6: A simple 3-layer neural network

27. Figure 6 gives a simple 3-layer neural network with 3 inputs x_1, x_2, x_3 and a single output z . Let $z = 4y_1 + 3y_2 + 2$, $y_1 = 2x_1 + 3x_2 + x_3 + 1$, $y_2 = 3x_1 + x_2 + 5x_3 - 2$. Please indicate which of the following expressions is correct for the gradient ?

- ☒ **A.** $\frac{\partial z}{\partial x} = (17, 15, 19)$
- ☐ **B.** $\frac{\partial z}{\partial x} = (17, 6, 23)$
- ☐ **C.** $\frac{\partial z}{\partial x} = (17, 13, 23)$
- ☐ **D.** $\frac{\partial z}{\partial x} = (18, 15, 19)$
- ☐ **E.** None of the above is correct.

4	0	1	7
5	6	9	0
0	8	3	6
2	0	0	4

7	0
5	2

Table 5: A two-dimensional input (left) and a convolutional filter (right)

28. The following four questions are related to Table 5. In Table 5, we have a two-dimensional input and a convolutional filter. Given stride = 1, please indicate which of the following statements is correct if zero-padding is applied ?
- ☐ A. the result is a one dimensional array of length 9.
 - ☐ B. the result is a two dimensional array of shape (2, 2).
 - ☐ C. the result is a two dimensional array of shape (3, 3).
 - ☐ D. the result is a two dimensional array of shape (4, 4).
 - ☒ E. None of the above is correct.
29. Continue with the above question related to Table 5, where there are a two-dimensional input and a convolutional filter. Given stride=2, please indicate which of the following statements is correct for the result of applying the convolutional filter on the input if zero-padding is not applied ?
- ☐ A. there is an element 45.
 - ☐ B. the smallest element is 39.
 - ☐ C. there is an element 49.
 - ☐ D. the greatest element is 69.
 - ☒ E. None of the above is correct.
30. Take the same input as in Table 5 and apply max-pooling on 2×2 filter with a stride 2. Please indicate which of the following statements is correct ?
- ☐ A. the result is a one dimensional array of length 2.
 - ☐ B. the result is a one dimensional array of length 4.
 - ☒ C. the result is a two dimensional array of shape (2, 2).
 - ☐ D. the result is a two dimensional array of shape (3, 3).
 - ☐ E. None of the above is correct.

31. Continue with the above question. Please indicate which of the following statements is correct for the result of applying max-pooling on 2×2 filter (stride 2) on the input ?
- ☐ A. there is a single element with value 7.
 - ☐ B. there is a single element with value 6.
 - ☒ C. there are two elements with value 6.
 - ☐ D. there are three elements with value 6.
 - ☐ E. None of the above is correct.
32. Which of the following statements is incorrect with respect to the features and the feature manifolds?
- ☐ A. In an end-to-end learning of feature hierarchy, initial modules capture low-level features, middle modules capture mid-level features, and last modules capture high level, class specific features.
 - ☐ B. The computation of the coordinates of the data with respect to feature manifolds enables an easy separation of the data.
 - ☐ C. Generation of feature manifolds for a given dataset is a non-trivial task, and the dimensionality reduction techniques such as PCA and t-SNE cannot work well on complex datasets.
 - ☐ D. It is very often that high-dimensional data lie on lower dimensional feature manifolds.
 - ☒ E. Feature manifolds are linear, so it is easier to compute.

Part 4: Probabilistic Graphical Models

33. Which of the following statements is correct:

- ☐ A. Naive Bayes cannot be represented as a Bayesian network.
- ☐ B. Bayesian network is an alias of Bayesian neural network.
- ☐ C. Every node a in a Bayesian network is associated with a conditional probability table $P(a|S)$ with S being a nonempty set of other nodes.
- ☐ D. Graph and joint probability distribution are two key factors for Bayesian networks to represent joint probability distribution.
- ☒ E. None of the above statement is correct.

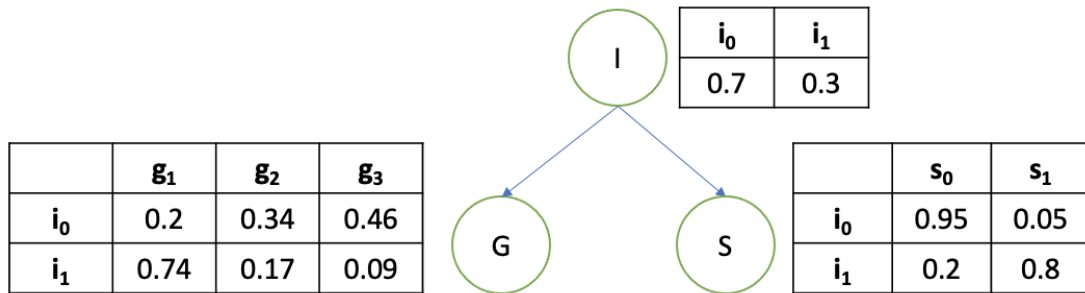


Figure 7: Simple Probabilistic Graphical Model

34. Figure 7 provides a simple probabilistic graphical model of three variables S , G , and I . We already know that

$$P \models (S \perp G \mid I)$$

Which of the following is the value of $P(i_1, s_0, g_2)$?

- ☐ A. 0.0161
- ☐ B. 0.2465
- ☐ C. 0.4082
- ☐ D. 0.0221
- ☒ E. 0.0102

X	Y	Z	P(X,Y,Z)
x_0	y_0	z_0	0.02
x_0	y_1	z_0	0.08
x_1	y_0	z_0	0.04
x_1	y_1	z_0	0.12
x_0	y_0	z_1	0.06
x_0	y_1	z_1	0.24
x_1	y_0	z_1	0.08
x_1	y_1	z_1	0.36

X	Y	Z	P(X,Y,Z)
x_0	y_0	z_0	0.01
x_0	y_1	z_0	0.04
x_1	y_0	z_0	0.02
x_1	y_1	z_0	0.06
x_0	y_0	z_1	0.07
x_0	y_1	z_1	0.28
x_1	y_0	z_1	0.10
x_1	y_1	z_1	0.42

Table 6: Two joint probability tables (a) and (b) of three random variables, where Table (a) is on the left and Table (b) is on the right.

35. Table 6 (a) provides a joint probability P . Let $I(P)$ be the set of conditional independence assertions of the form $(X \perp Y | Z)$ that hold in P . Which of the following is correct?
- ☐ A. $(X \perp Y | Z) \notin I(P)$ but $(Z \perp Y) \in I(P)$
 - ☐ B. $(Y \perp Z | X) \in I(P)$ but $(X \perp Y) \notin I(P)$
 - ☒ C. $(X \perp Y) \in I(P)$
 - ☐ D. $I(P) = \emptyset$
 - ☐ E. None of the above is correct
36. Table 6 (b) provides a joint probability P . Let $I(P)$ be the set of conditional independence assertions of the form $(X \perp Y | Z)$ that hold in P . Which of the following is correct?
- ☐ A. $(X \perp Z | Y) \notin I(P)$ but $(X \perp Z) \in I(P)$
 - ☐ B. $(Y \perp Z | X) \notin I(P)$ but $(Y \perp Z) \in I(P)$
 - ☐ C. $(X \perp Y) \notin I(P)$ and $(X \perp Z) \notin I(P)$
 - ☒ D. $I(P) \neq \emptyset$
 - ☐ E. None of the above is correct

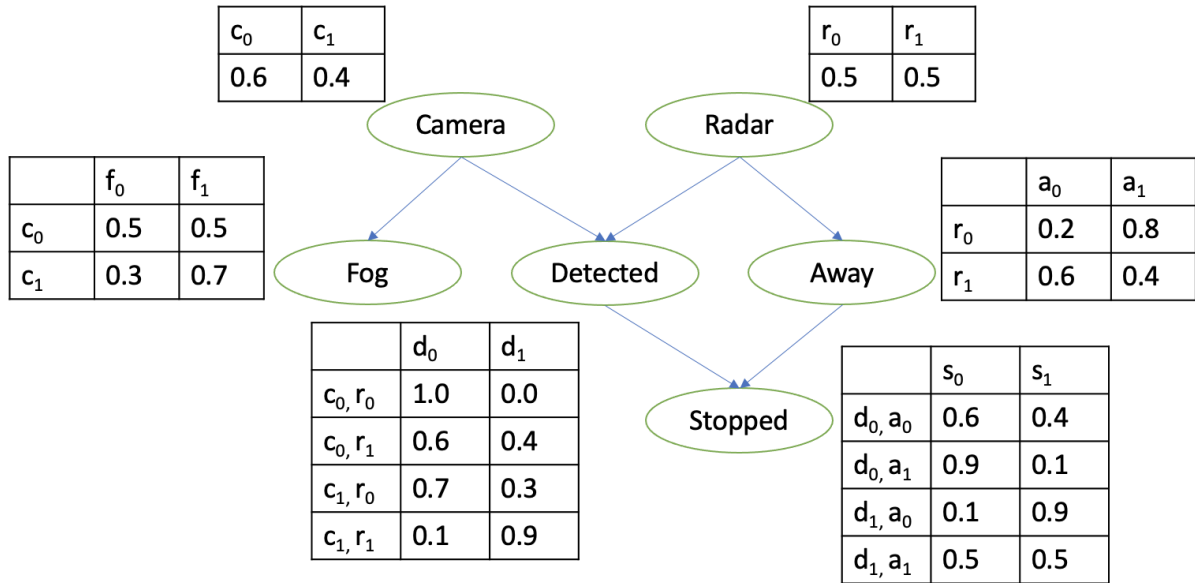


Figure 8: A Bayesian network G

37. Consider the Bayesian network model G in Figure 8 and indicate which of the following is not in the I-map $I(G)$:

- ☐ A. $(Away \perp Camera, Fog, Detected \mid Radar)$
- ☐ B. $(Fog \perp Radar, Detected, Away, Stopped \mid Camera)$
- ☐ C. $(Camera \perp Radar)$
- ☒ D. $(Detected \perp Radar, Fog, Stopped \mid Camera, Away)$
- ☐ E. All the above are in $I(G)$

38. Consider the Bayesian network model G in Figure 8 and calculate the following value (up to four decimal places)

$$P(c_1, r_0, a_0, d_1, f_1, s_1) =$$

- ☒ A. 0.0076
- ☐ B. 0.0424
- ☐ C. 0.0008
- ☐ D. 0.0252
- ☐ E. none of the above answers is correct

39. Consider the Bayesian network model G in Figure 8 and calculate the following conditional probability (rounded to two decimal places)

$$P(c_0 | s_1, d_0, a_1) =$$

- ☒ **A.** 0.72
- ☐ **B.** 0.68
- ☐ **C.** 0.03
- ☐ **D.** 0.81
- ☐ **E.** none of the above answers is correct

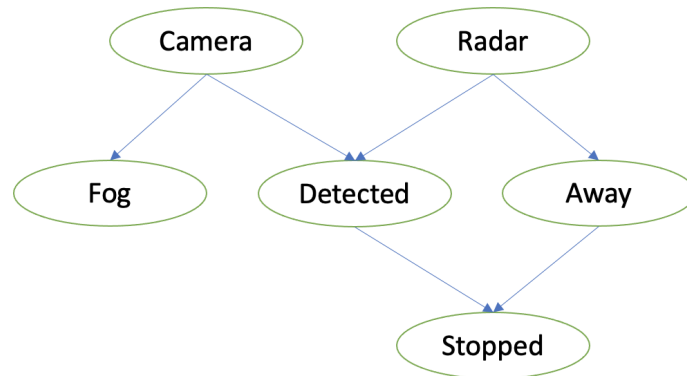


Figure 9: A simple probabilistic graphical model

40. Consider the probabilistic graphical model in Figure 9. Please indicate which of the following statements is incorrect.
- ☒ **A.** *Camera* can influence *Radar* when *Away* and *Fog* are observed.
 - ☐ **B.** *Away* can influence *Fog* when only *Stopped* and *Radar* are observed.
 - ☐ **C.** *Fog* can influence *Radar* when only *Stopped* is observed.
 - ☐ **D.** *Detected* can influence *Camera*.
 - ☐ **E.** *Camera* can influence *Away* when only *Detected* is observed.