




CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

MACHINE VISION LIGHTS

www.cvit.in

ABOUT US

At CVIT SOLUTION PVT LTD, we are dedicated to advancing the field of machine vision through innovative lighting solutions. Our mission is to enhance the capabilities of machine vision systems across various applications, from manufacturing to quality control. With a deep understanding of the critical role that lighting plays in machine vision, we specialize in designing and manufacturing high-performance machine vision lights that deliver exceptional illumination and reliability. Our products are engineered to meet the diverse needs of our clients, ensuring optimal performance in even the most challenging environments.

We pride ourselves on our commitment to quality, innovation, and customer satisfaction. Our team works closely with clients to understand their specific requirements and provide tailored solutions that drive efficiency and accuracy in their operations.

OVERVIEW

CVIT Solution Pvt Ltd is a pioneer in the specialized field of machine vision lighting, focused on creating advanced lighting solutions that empower machine vision systems to perform at their best. We leverage our deep technical expertise and industry insights to design and manufacture lights that are essential for precision in machine vision applications.

MACHINE VISION LIGHT INFORMATION & FEATURES

Machine vision lights are a crucial component in vision systems, playing a vital role in ensuring accurate image capture, which is essential for tasks such as inspection, measurement, and identification in various industrial applications. The right lighting can dramatically improve the performance of a machine vision system by enhancing contrast, reducing glare, and highlighting key features of the object being inspected.


Features of Machine Vision Lights

- High Intensity and Uniform Illumination
- Customizable Wavelengths
- Flexible Configurations
- Durability and Longevity
- Heat Management
- Easy Integration
- Controllable Intensity
- Low Power Consumption

TABLE OF CONTENTS

Machine Vision Bar Light.....	1
Machine Vision Dome Light.....	2
Machine Vision Ring Light.....	3
Machine Vision Angled Ring Light.....	4
Machine Vision Indirect Tunnel Light	5
Machine Vision Spot Light	6
Machine Vision Flat Direct Diffused Light (With Center Hole).....	7
Machine Vision Flat Direct Diffused Light.....	8
Machine Vision Indirect Flat Light.....	9
Machine Vision Back Light.....	10

Machine Vision Bar Light :-

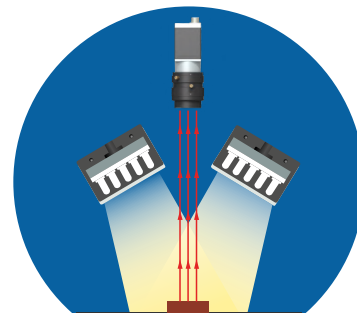


Provides consistent, high-intensity illumination across a long, narrow area. Its uniform light distribution minimizes shadows and enhances visibility of extended objects.

Specification :-

	CMVBRL12632240100	CMVBRL22632240150	CMVBRL32632240200	CMVBRL42632240250	CMVBRL40060240500
L	126	226	326	426	400
W	32				60
H	32				38
Electrical Input	24VDC				
Input Current	1A	1.5A	2A	2.5A	5A
Input Power	24 Watts	36 Watts	46 Watts	60 Watts	120 Watts
Lumens	900	1800	2700	3600	10800
Colour	Cool White				
Colour Temp	6500K				
Connector	M12 -2 P Connector				
Operating Temperature	0°C–50°C				
IP rating	IP 55				
Weight	0.192 KG	0.274 KG	0.350 KG	0.427 KG	0.747 KG
Warranty	6 Months				



Dimensions :-

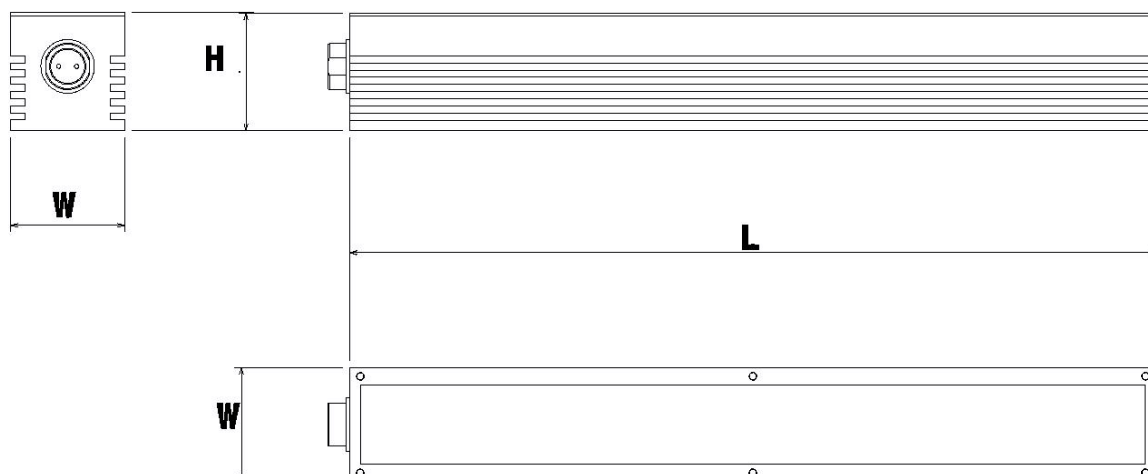

Machine Vision Dome Light :-



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

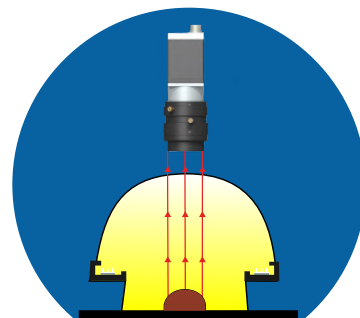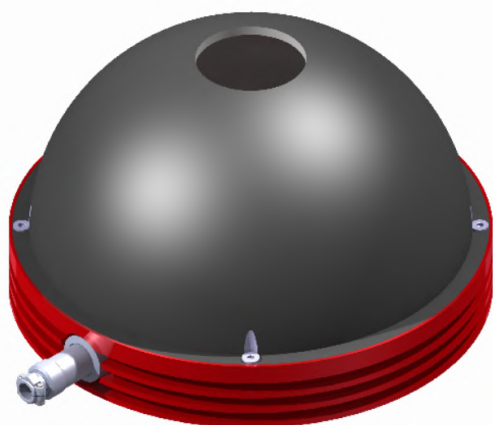


Produces diffuse, omnidirectional light for uniform coverage. Its dome shape minimizes shadows and provides consistent lighting across the entire inspection area.


Specification :-

	CMVDL629256240210	CMVDL7614888240210	CMVDL120200120240500	CMVDL170250135240500
ED (mm)	62	76	120	170
ID (mm)	34	38	38	40
OD (mm)	92	148	200	250
Height (mm)	56	88	120	135
Electrical Input	24 VDC			
Input Current	2.1 A	2.1 A	5 A	5 A
Input Power	50 Watts	50 Watts	120 Watts	120 Watts
Lumens	4352	6720	9128	10500
Colour	Cool White			
Colour Temp	6500K			
Connector	M12 - 2 Pin Connector			
Operating Temperature	0°C - 50°C			
IP Rating	IP 55			
Weight	0.39 KG	0.26 KG	0.38 KG	0.4 KG
Warranty	6 Months			

Dimensions :-

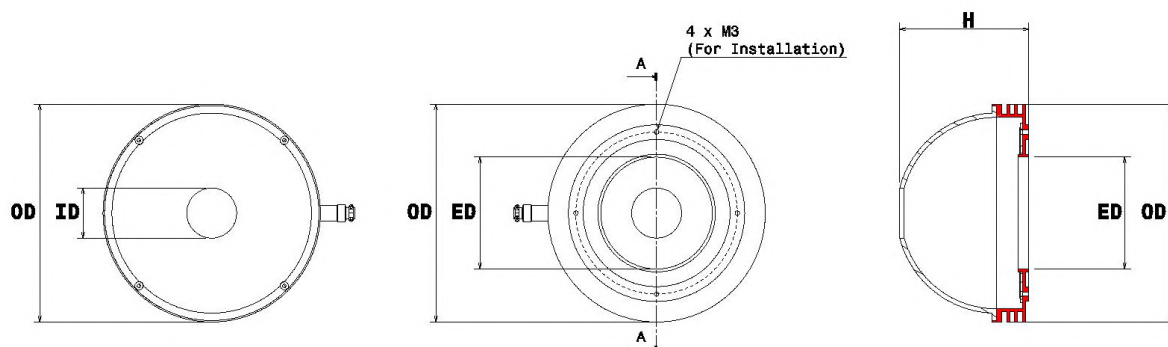

Machine Vision Ring Light :-


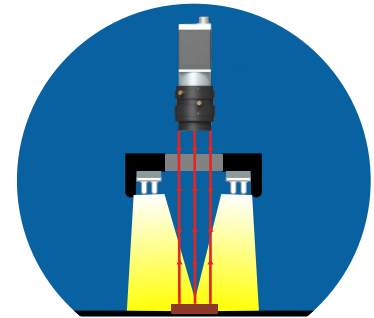


Offers even, circular illumination around the lens, reducing shadows and highlighting surface details. Ideal for applications requiring balanced, shadow-free lighting.

Specification :-

	CMVRL7038240210	CMVRL9953240210	CMVRL14069240210	CMVRL20065240500	CMVRL20095240500	CMVRL15090240210
OD	70	99	140	200	200	150
ID	38	53	69	65	95	90
H	20	16	26	-	-	-
Lighting Angle	0	0 deg	0 deg	0 deg	0 deg	0 deg
Electrical Input	24VDC					
Input Current	0.8A	2.1A	2.1A	5A	5A	2.1A
Input Power	24 Watts	50 Watts	50 Watts	50 Watts	120 Watts	50 Watts
Lumens	2088	4352	6720	9128	10500	7258
Color	Cool White					
Color Temp	6500K					
Connector	2 Pin Connector					
Operating Temperature	0°C–50°C					
IP Rating	IP 55					
Weight	0.124 KG	0.242 KG	0.363 KG	0.563 KG	0.463 KG	0.413 KG
Warranty	6 Months					



Dimensions :-

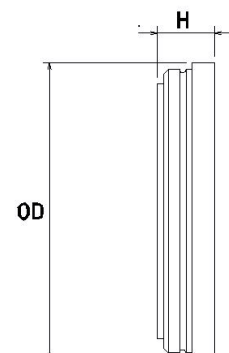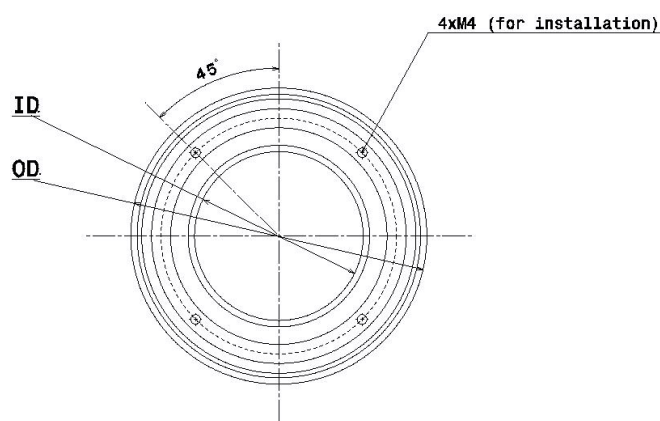

Machine Vision Angled Ring Light :-



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

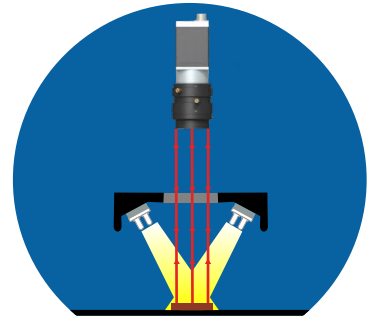
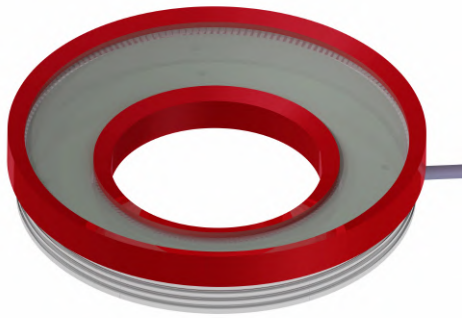


Delivers angled illumination for enhanced surface detail and depth perception. Its design reduces glare and provides better contrast for complex geometries.



Specification :-

	CMVLARL7038-240210	CMVLARL9953-240210	CMVLARL14069-240210	CMVLARL20065-240500	CMVLARL20095-240500	CMVLARL15090-240210
OD	70	99	140	200	200	150
ID	38	53	69	65	95	90
H	20	25	-	-	-	-
Lighting Angle	30,45,60 deg	30,45,60 deg	30,45,60 deg	20,30,45,60 deg	20,30,45,60 deg	20,30,45,60 deg
Electrical Input	24VDC					
Input Current	0.8A	2.1A	2.1A	5A	5A	2.1A
Input Power	24 Watts	50 Watts	50 Watts	50 Watts	120 Watts	50 Watts
Lumens	2088	4352	6720	9128	10500	7258
Color	Cool white					
Color Temp	6500K					
Connector	2 Pin Connector					
Operating Temperature	0°C–50°C					
IP Rating	IP 55					
Weight	0.136 KG	0.242 KG	0.363 KG	0.580 KG	0.493 KG	0.452 KG
Warranty	6 Months					

Dimensions :-

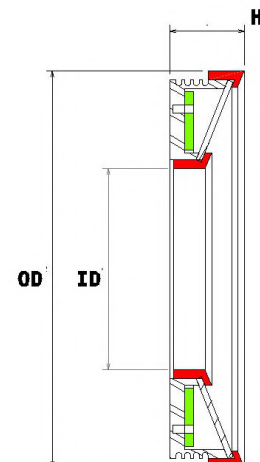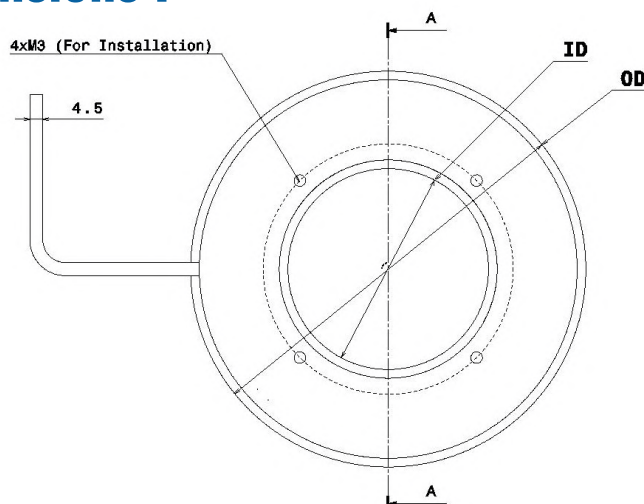

Machine Vision Indirect Tunnel Light :-

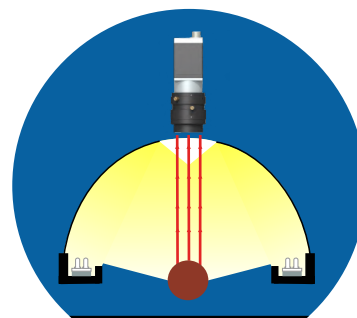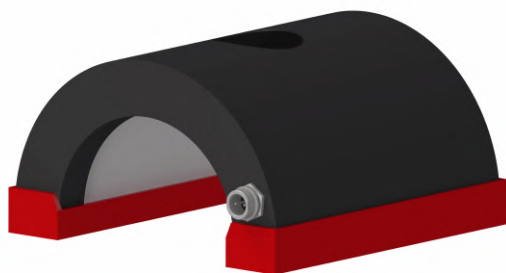


Features a tunnel shape that directs light indirectly, reducing glare and enhancing object visibility in confined spaces.


Specification :-

	CMVITL152156240200	CMVITL 252256240400	CMVITL280320240400
OD	152	262	280
ID	100	210	230
L	156	256	320
Electrical Input	24VDC		
Input Current	2 A	4 A	4 A
Input Power	48 Watts	94 Watts	94 Watts
Lumens	1640	3240	4860
Color	Cool white		
ColorTemp	6500K		
Connector	M12 - 2 Pin Connector		
Operating Temperature	0°C – 50°C		
IP rating	IP 55		
Weight	0.75 KG	0.87 KG	0.98 KG
Warranty	6 Months		

Dimensions :-

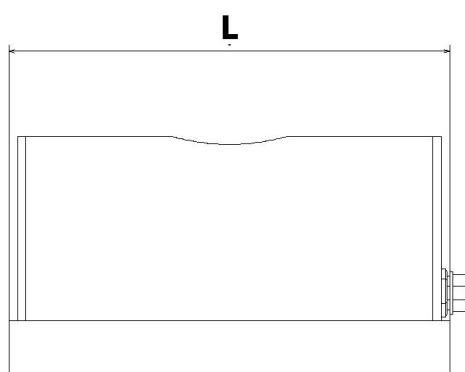

Side view

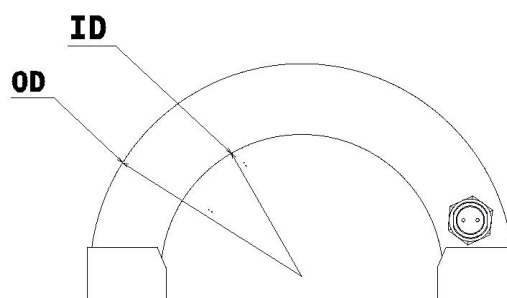


Front view

Machine Vision Spot Light :-



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

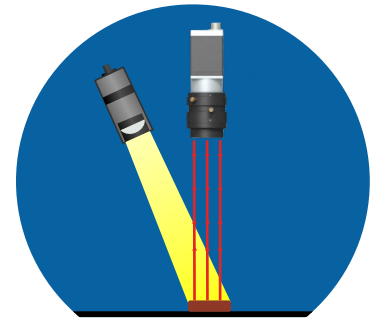


Focuses intense, concentrated light on a specific area. It enhances details and contrasts for precise inspections or measurements.

Specification :-

	CMVSPTL8660ADF240100	CMVSPTL6452AD240100
L	86	64
OD	60	52
Input Current	1 A	1 A
Input Power	3 Watts	3 Watts
Lumens	1200	1200
Color	Cold white	
Color Temp	6500K	
Connector	M12 -2 Pin Connector	
Operating Temperature	0°C – 50°C	
IP rating	IP 55	
Weight	0.124 KG	0.142 KG
Warranty	6 Months	



Dimensions :-

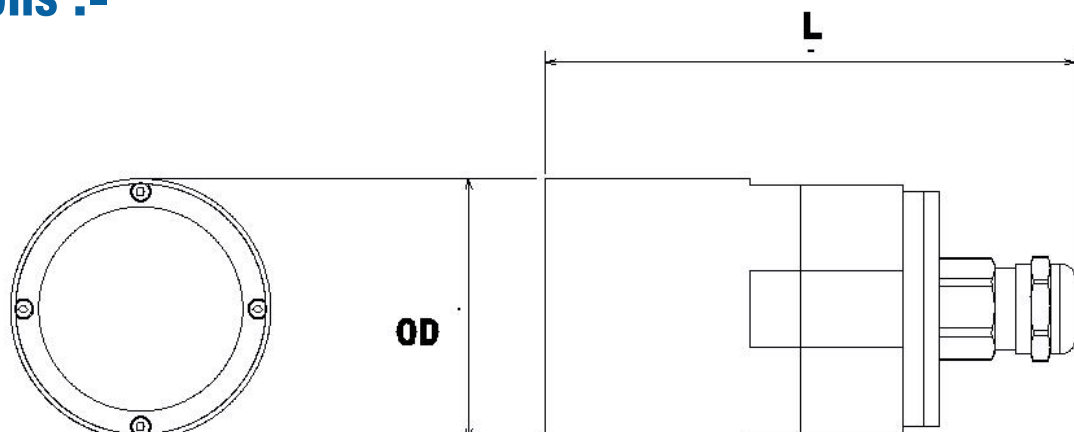

Machine Vision Flat Direct Diffused Light (With Center Hole) :-



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

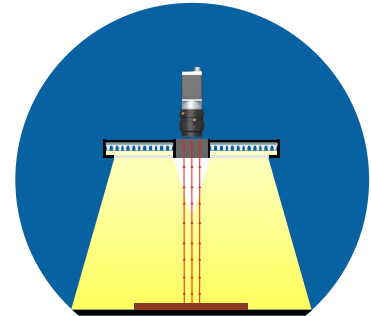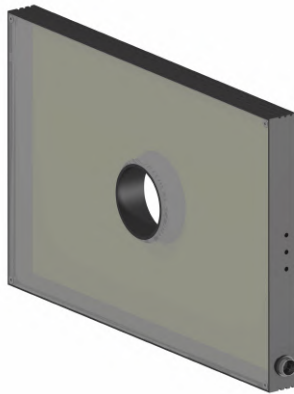


Features a central opening for direct lighting while diffusing light around the edges. This design balances focused illumination with a diffuse light spread.

Specification :-

	CMVDFLCH40040025240860	CMVDFLCH37227225240430	CMVDFLCH20020026240430
OD	400	372	200
ID	400	272	200
L	25	25	26
Electrical Input	24 VDC		
Input Current	8.6 A	4.3 A	4.3 A
Input Power	208 Watts	104 Watts	104 Watts
Lumens	25280	13640	11420
Color	Cool White		
Color Temp	6500 K		
Connector	M12- 2 Pin Connector		
Operating Temperature	0°C – 50°C		
IP rating	IP55		
Weight	3.143 KG	2.942 KG	1.863 KG
Warranty	6 Months		



Dimensions :-

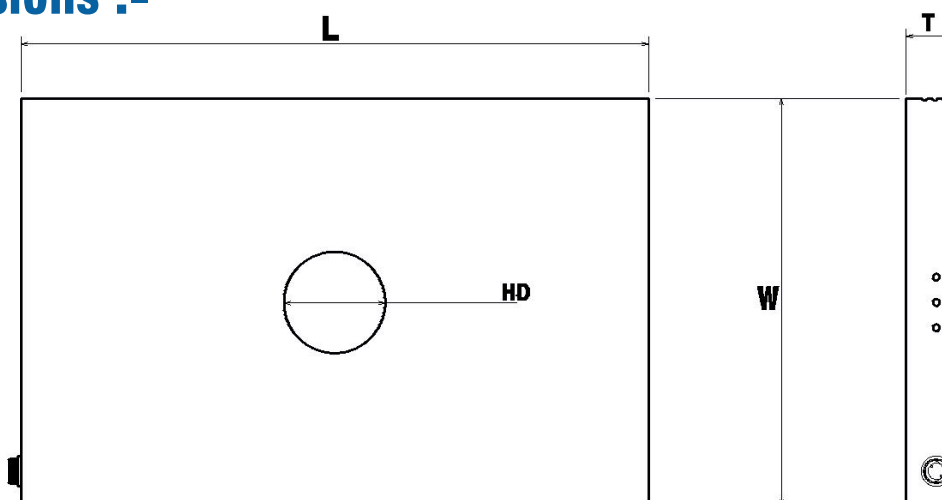

Machine Vision Flat Direct Diffused Light :-



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

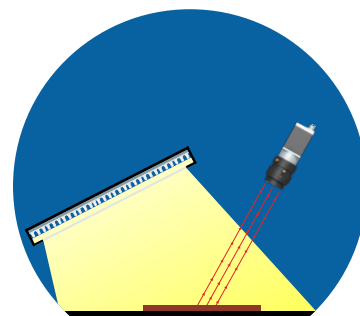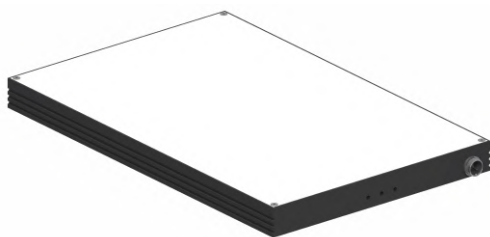


Provides direct, diffuse light across a flat surface. It ensures even illumination and reduces harsh shadows, ideal for inspecting flat objects.

Specification :-

	CMVDFL40040025240860	CMVDFL37227225240430	CMVDFL20020026240430
L	400	372	200
W	400	272	200
H	25	25	26
Input Current	8.6A	4.3 A	4.3 A
Input Power	208 Watts	104 Watts	104 Watts
Lumens	25280	13640	11420
Color	Cool white		
Color Temp	6500K		
Connector	M12 -2 Pin Connector		
Operating Temperature	0°C–50°C		
IP rating	IP 55		
Weight	3.143 KG	2.942 KG	1.863 KG
Warranty	6 Months		



Dimensions :-

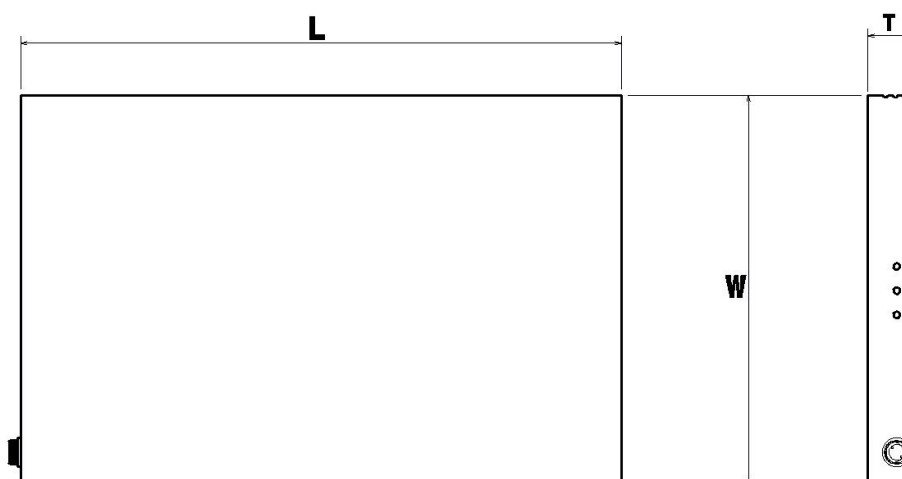

Machine Vision Indirect Flat Light :-



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS

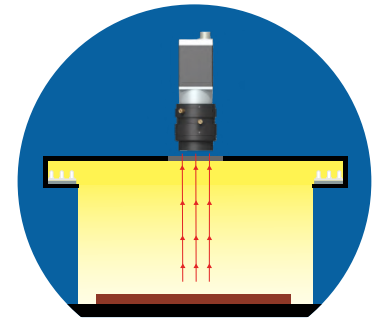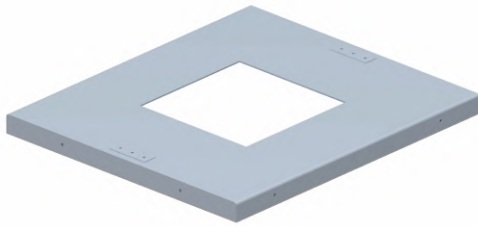


Offers indirect, diffuse light that softens shadows and minimizes glare. Its flat design provides uniform lighting across larger areas.


Specification :-

	CMVIDFLCH42032032-240800	CMVIDFLCH42035030-240800	CMVIDFLCH42042032-241000	CMVIDFLCH22014030-240600
L	420	420	420	220
W	320	350	420	140
H	32	30	32	30
Centre Hole Dimension	L-180, W-180	Dia 50	Dia 60	Dia 40
Input Current	8 A	8A	10 A	6 A
Input Power	192 Watts	104 Watts	240 Watts	144 Watts
Lumens	10080	10080	11800	4590
Color	Cool white			
Color Temp	6500K			
Connector	M12-2 Pin Connector			
Operating Temperature	0°C–50°C			
IP rating	IP 55			
Weight	3.443 KG	3.742 KG	3.963 KG	2.134 KG
Warranty	6 Months			

Dimensions :-

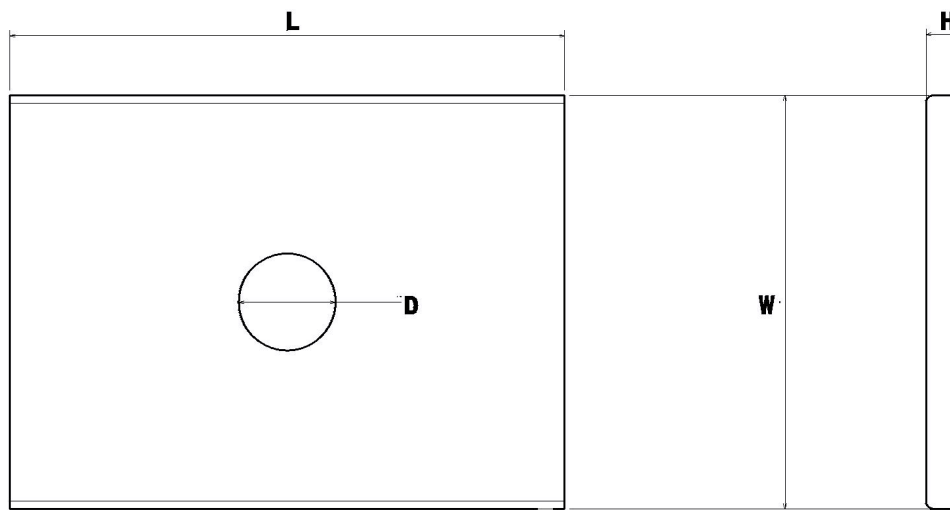

Machine Vision Back Light :-

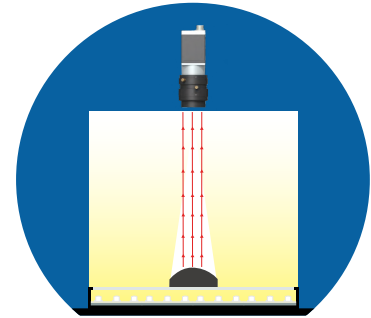


Illuminates objects from behind to create high-contrast silhouettes. This setup highlights edges and details by emphasizing the object's outline.

Specification :-

	CMVBKL70060050241000	CMVBKL45045045240500	CMVBKL35035045240600	CMVBKL22014040240200
L	700	450	350	220
W	600	450	350	140
H	50	45	45	40
Input Current	10A	5 A	6 A	2 A
Input Power	240 Watts	120 Watts	240 Watts	48 Watts
Lumens	19845	7200	5400	1350
Color	Cool white			
Color Temp	6500K			
Connector	M12-2 Pin Connector			
Operating Temperature	0°C–50°C			
IP rating	IP 55			
Weight	3.443 KG	3.742 KG	3.963KG	2.134 KG
Warranty	6 Months			

Dimensions :-

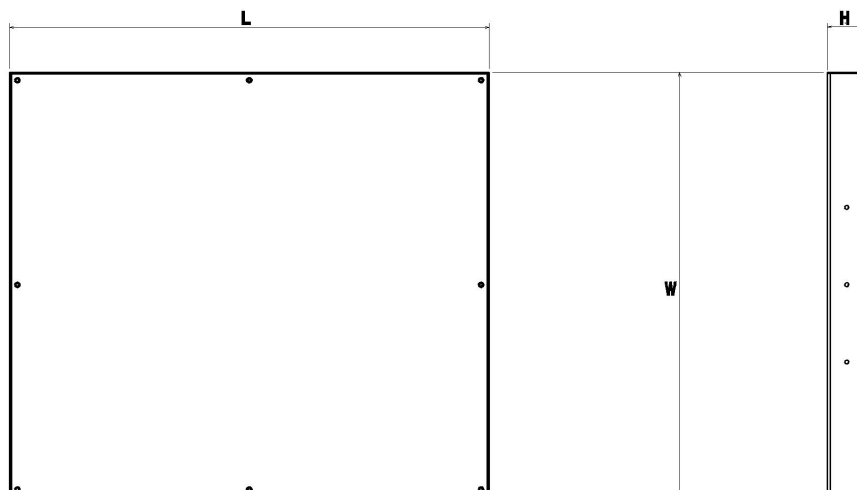

Sertifikat

Zertifikat

Certificato

Certificado

Certificate



Certificate



This is to certify that the technical documentation for the product:

MACHINE VISION LIGHTS

Manufactured by:

CVIT SOLUTION PRIVATE LIMITED

S.NO. 176/1/9/1 FL-203, SADGURU CL-03, MANJOBA MANDIR,
PUNE, MAHARASHTRA - 411057, INDIA.

Complies with the requirements (technical documentation including inspection & test results) of **Low Voltage Directive 2014/35/EU**. Hence manufacturer's declaration of conformity according to above regulation is accepted. **CVIT SOLUTION PRIVATE LIMITED** can place the CE marking as per laid down regulations on the products mentioned above.



Issue Date: 11/07/2024

Expiry Date: 10/07/2027

Certificate No : ECI/2407/0266



Certification Manager
Euroswiss Certification Inc.
Corporate Office - Route de Saint-Cergue 24bis Nyon,
VD 1260 Switzerland.



PAC-GEAC-2401-102

This certificate remains the property of Euroswiss Certification Inc. and shall be returned whenever demanded. The validity of this certificate can be verified at <http://www.euroswisscert.com>. Euroswiss Certification Inc. is an independent system, product and personnel assessment body accredited by Global Euro Accreditation Centre, Georgia. (GEAC -102). Email: info@euroswisscert.com

Sertifikat

Zertifikat

Certificato

Certificado

Certificate



Certificate

This is to certify that

CVIT SOLUTION PRIVATE LIMITED

S.NO. 176/1/9/1 FL-203, SADGURU CL-03, MANJOBA MANDIR,
PUNE, MAHARASHTRA - 411057, INDIA.

has been assessed by ECI and found to comply with the requirements of

RoHS

For the following activities:
MACHINE VISION LIGHTS

This certificate of compliance has been issued against RoHS 3 directive 2015/863/EU on the basis of product testing as per test standard. Technical file and test reports are at License holders disposal.



Issue Date: 11/07/2024

Expiry Date: 10/07/2027

Certificate No : ECI/2407/0267




Certification Manager
Euroswiss Certification Inc.
Corporate Office - Route de Saint-Cergue 24bis Nyon,
VD 1260 Switzerland.



PAC-GEAC-2401-102

This certificate remains the property of Euroswiss Certification Inc. and shall be returned whenever demanded. The validity of this certificate can be verified at <http://www.euroswisscert.com>. Euroswiss Certification Inc. is an independent system, product and personnel assessment body accredited by Global Euro Accreditation Centre, Georgia. (GEAC -102). Email: info@euroswisscert.com

With our manufacturing expertise and
ability to modify lighting products.

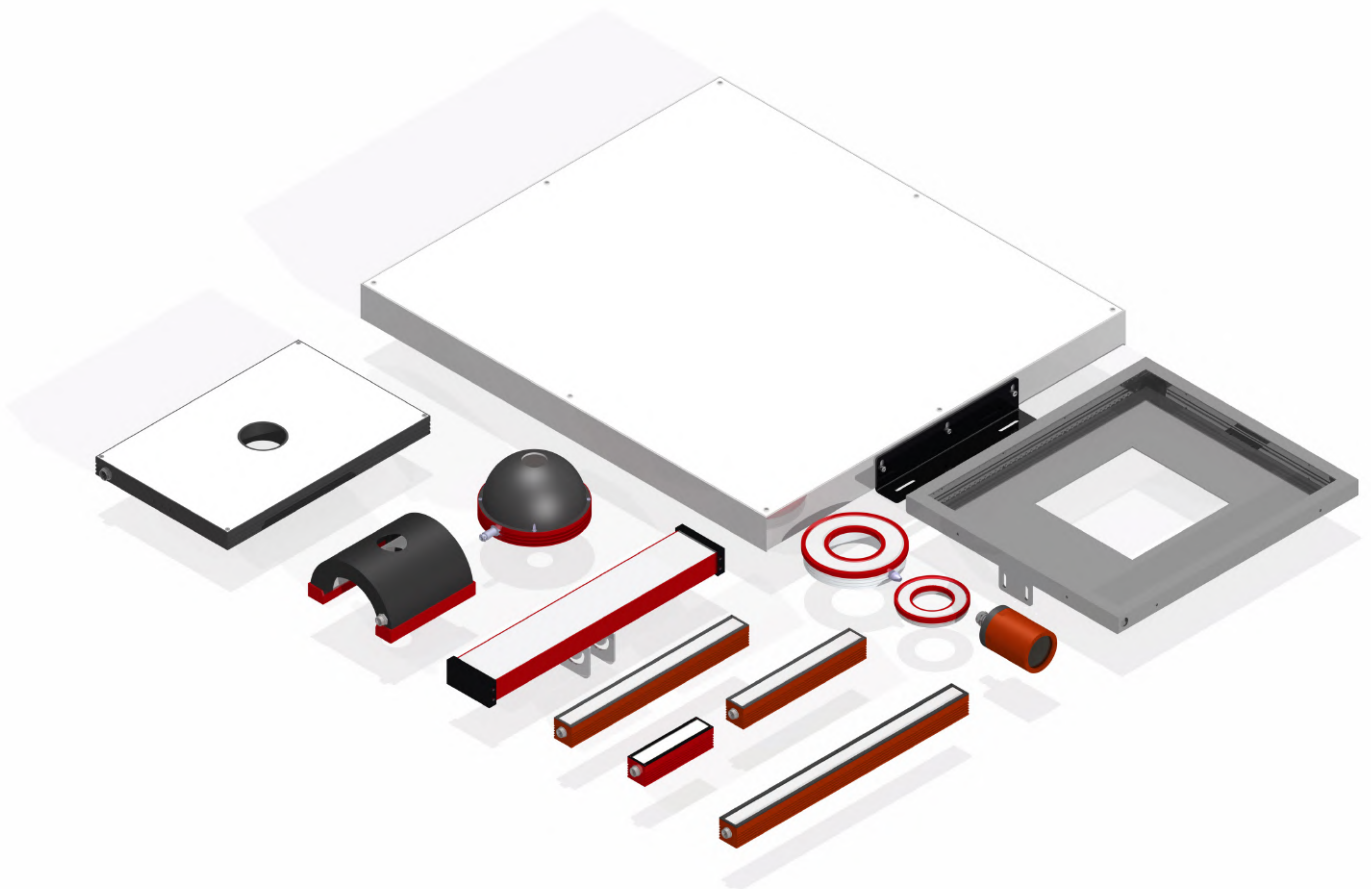


**We offer customized machine vision lighting
solution tailored to your specific needs.**

CONTACT US



CVIT SOLUTION
EMPOWERING INTELLIGENCE DELIVERING SOLUTIONS



www.cvit.in

CVIT SOLUTION PVT LTD

Sr.No.-176/1/9/1, Fl - 203, Sadguru Cl - 03, Samrat Chowk, Datt Mandir Road, Wakad,
Pune - 411057, Maharashtra, India.

Sales - Kunal Wankhede - +91 7507149084 | Technical - Nakul Ingole +91 8390245646

Email - sales@cvit.in