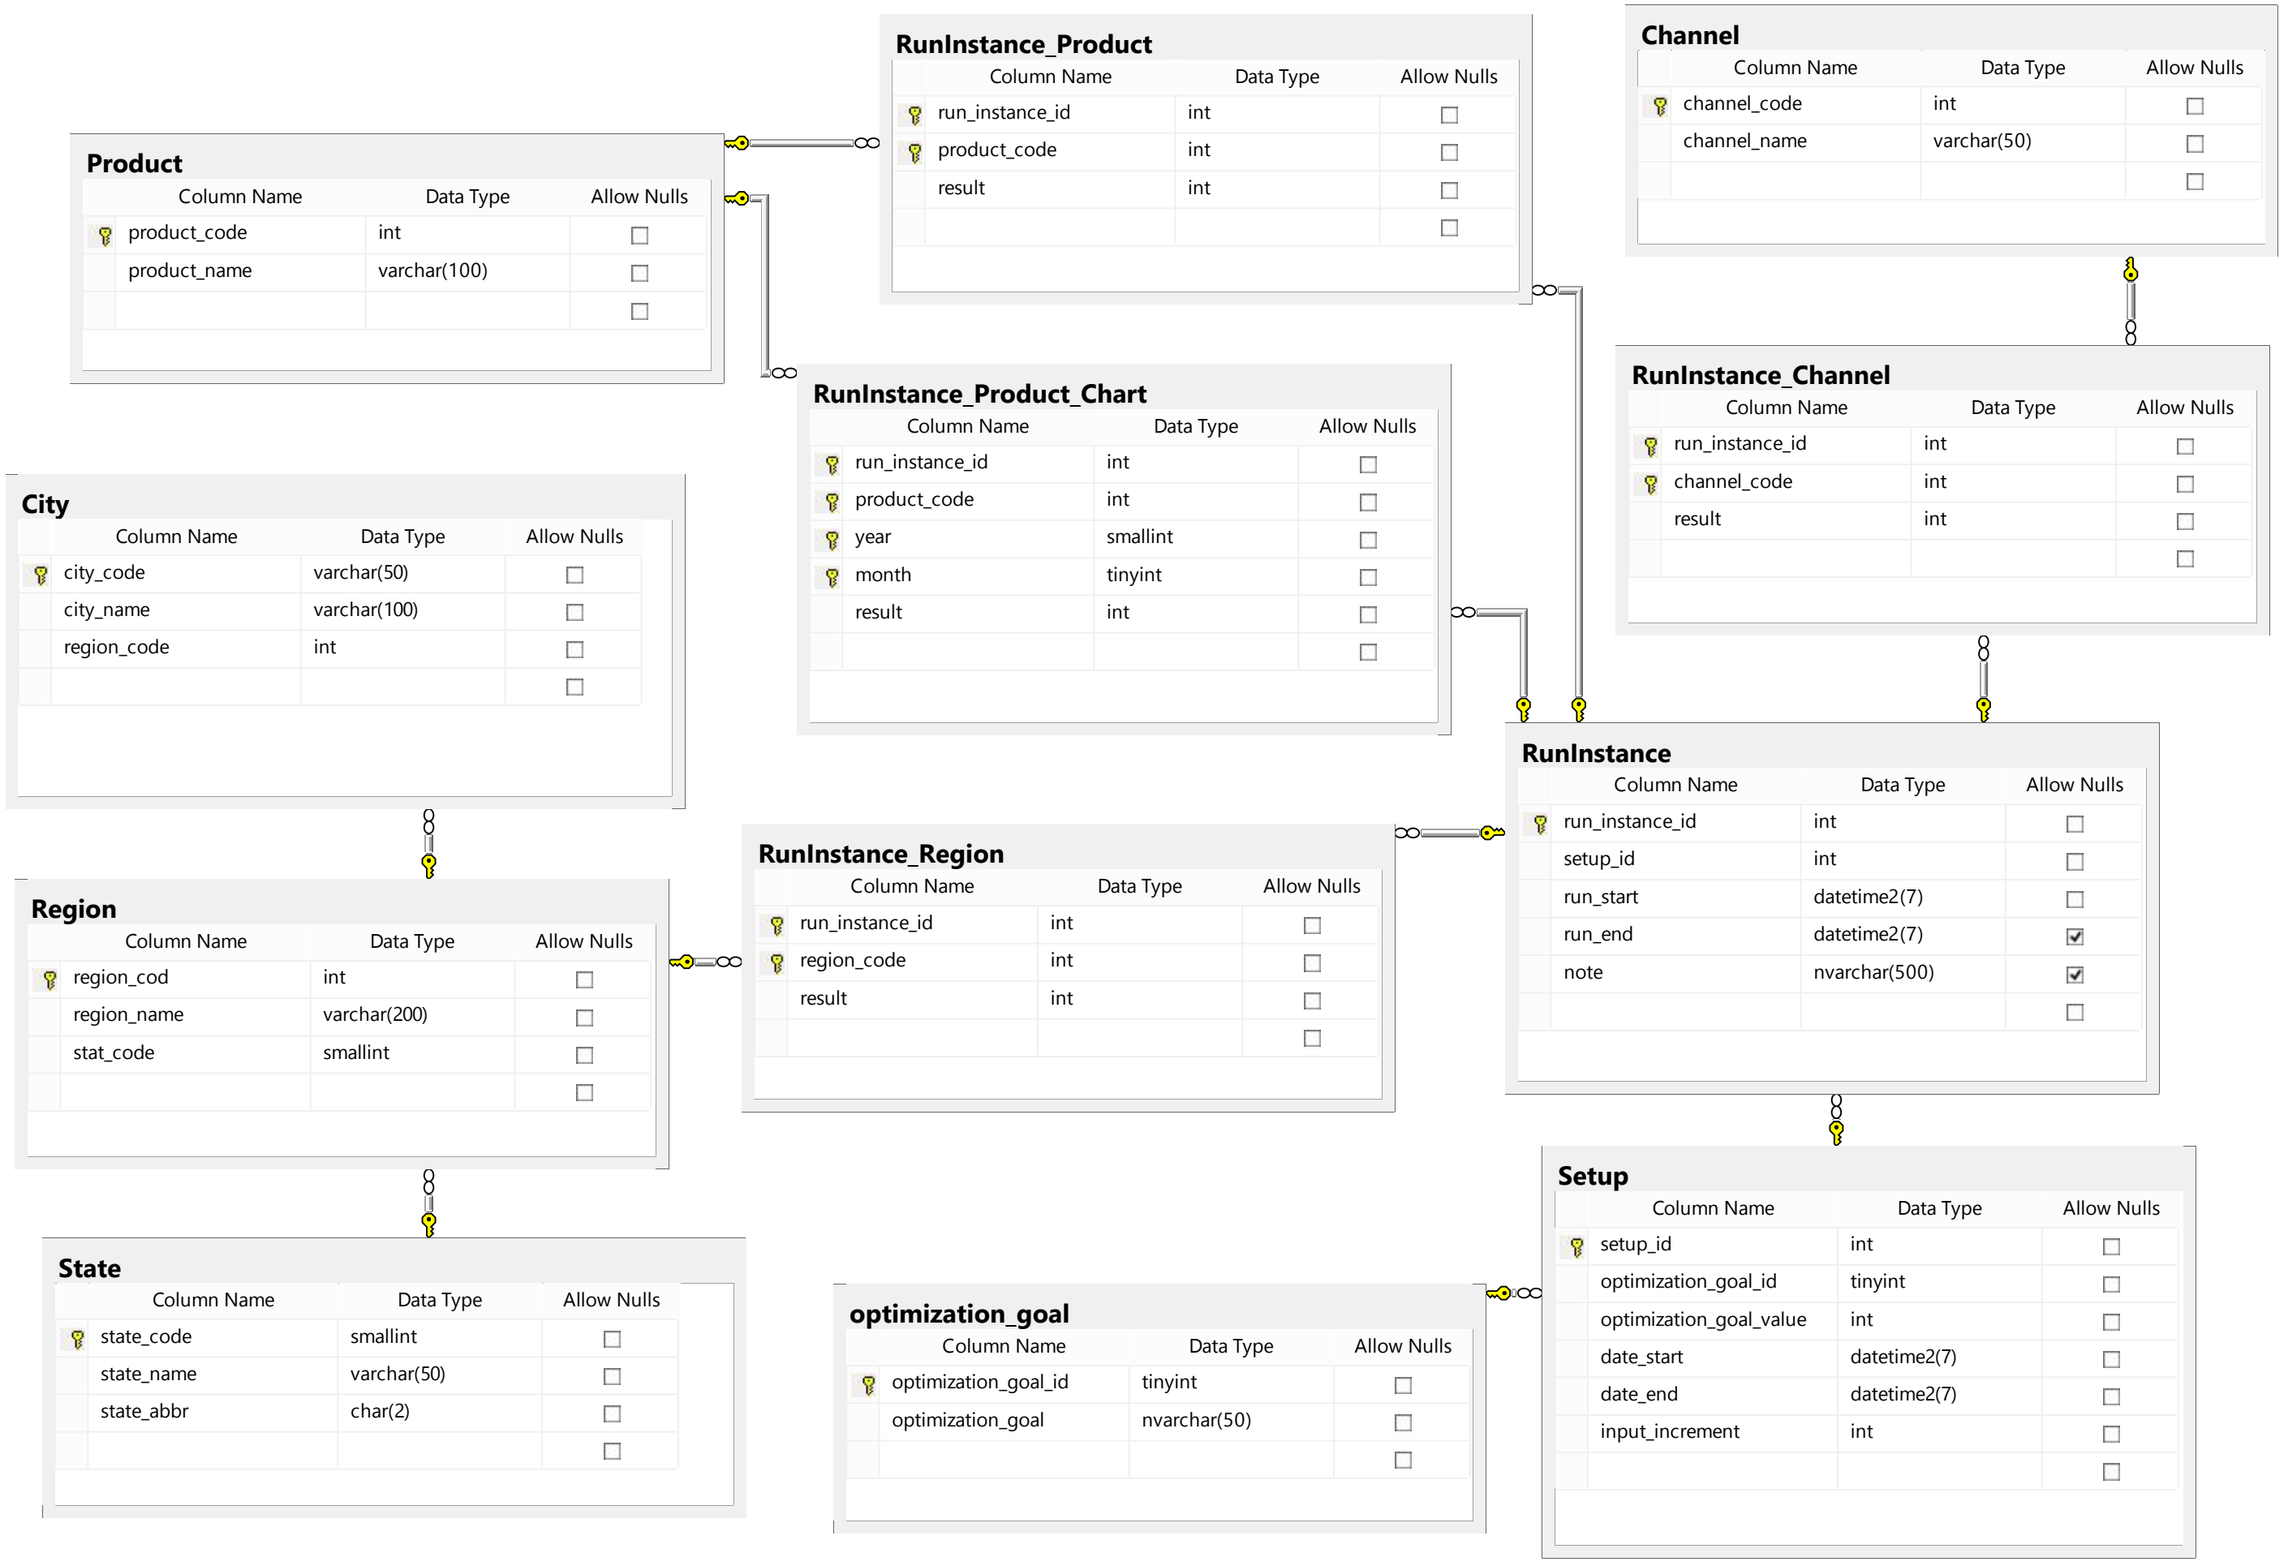
RunInstance_Product
Column Name Data Type Allow Nulls
run_instance_id int
product_code int
result int
Channel
Column Name Data Type Allow Nulls
channel_code int
channel_name varchar(50)
Product
Column Name Data Type Allow Nulls
product_code int
product_name varchar(100)
RunInstance_Product_Chart
Column Name Data Type Allow Nulls
run_instance_id int
product_code int
year smallint
month tinyint
result int
RunInstance_Channel
Column Name Data Type Allow Nulls
run_instance_id int
channel_code int
result int
City
Column Name Data Type Allow Nulls
city_code varchar(50)
city_name varchar(100)
region_code int
RunInstance
Column Name Data Type Allow Nulls
run_instance_id int
setup_id int
run_start datetime2(7)
run_end datetime2(7)
note nvarchar(500)
RunInstance_Region
Column Name Data Type Allow Nulls
run_instance_id int
region_code int
result int
Region
Column Name Data Type Allow Nulls
region_cod int
region_name varchar(200)
stat_code smallint
Setup
Column Name Data Type Allow Nulls
setup_id int
optimization_goal_id tinyint
optimization_goal_value int
date_start datetime2(7)
date_end datetime2(7)
input_increment int
State
Column Name Data Type Allow Nulls
state_code smallint
state_name varchar(50)
state_abbr char(2)
optimization_goal
Column Name Data Type Allow Nulls
optimization_goal_id tinyint
optimization_goal nvarchar(50)