


2. Przygotuj konfigurację usługi serwisu dynamicznego WWW, z wykorzystaniem dowolnie wybranej technologii typu backand. Serwis powinien pozwalać na rejestrowanie użytkowników w systemie w postaci loginu i hasła. Zalogowanie do systemu dla już zarejestrowanego użytkownika powinno powodować wyświetlenie raportu wszystkich jego logować z podaniem daty logowania oraz adresu IP z którego nawiązano połączenie. Wszystkie istotne kroki konfiguracji należy udokumentować w postaci zrzutów ekranu, należy również przesłać wszystkie pliki źródłowe utworzonego serwisu.



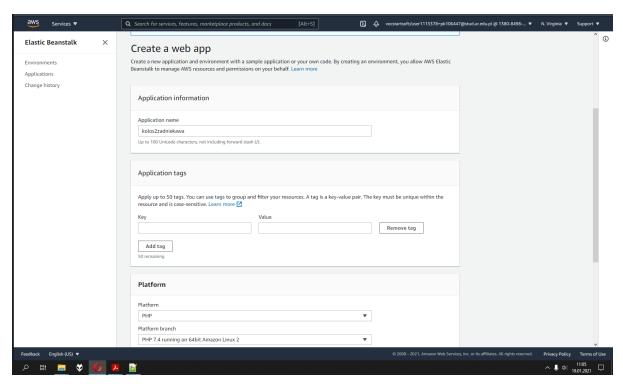


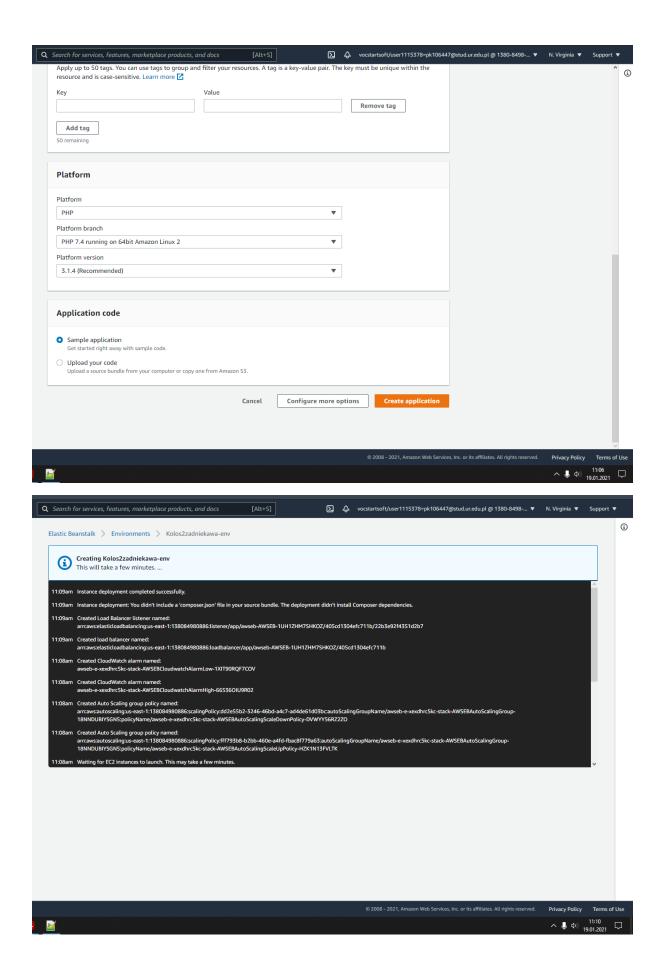

PHP działa:

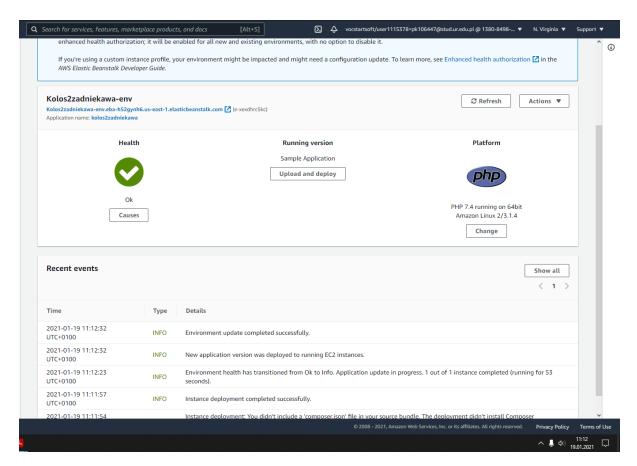

Teraz Baza Danych (RDS):

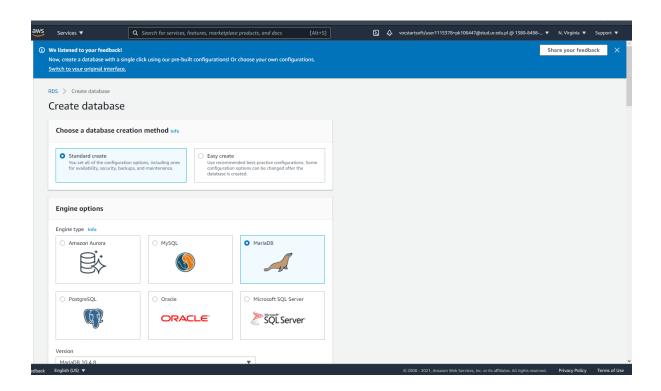

 Production Use defaults for high availability and fast, consistent performance. 	 Dev/Test This instance is intended for development use outside of a production environment. Free tier Use RDS Free Tier to develop new applications, test existing applications, or gain hands-on experience with Amazon RDS.
	Info
Settings	
DB instance identifier Info Type a name for your DB instance. The nar Region.	me must be unique across all DB instances owned by your AWS account in the current AW
Koloszad2	
The DB instance identifier is case-insensiti	ve, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 60 alphanumeric rver). First character must be a letter. Can't contain two consecutive hyphens. Can't end
The DB instance identifier is case-insensiti characters or hyphens (1 to 15 for SQL Sewith a hyphen.	
The DB instance identifier is case-insensiti characters or hyphens (1 to 15 for SQL Ser	
The DB instance identifier is case-insensiticharacters or hyphens (1 to 15 for SQL Sewith a hyphen. Credentials Settings Master username Info	rver). First character must be a letter. Can't contain two consecutive hyphens. Can't end
The DB instance identifier is case-insensiticharacters or hyphens (1 to 15 for SQL Sewith a hyphen. Credentials Settings Master username Info Type a login ID for the master user of your	rver). First character must be a letter. Can't contain two consecutive hyphens. Can't end
The DB instance identifier is case-insensitic characters or hyphens (1 to 15 for SQL Serwith a hyphen. Credentials Settings Master username Info Type a login ID for the master user of your admin	rver). First character must be a letter. Can't contain two consecutive hyphens. Can't end
The DB instance identifier is case-insensitic characters or hyphens (1 to 15 for SQL Serwith a hyphen. Credentials Settings Master username Info Type a login ID for the master user of your admin to 16 alphanumeric characters. First cha Auto generate a password	rver). First character must be a letter. Can't contain two consecutive hyphens. Can't end
The DB instance identifier is case-insensitic characters or hyphens (1 to 15 for SQL Sewith a hyphen. Credentials Settings Master username Info Type a login ID for the master user of your admin to 16 alphanumeric characters. First cha Auto generate a password	rver). First character must be a letter. Can't contain two consecutive hyphens. Can't end

