




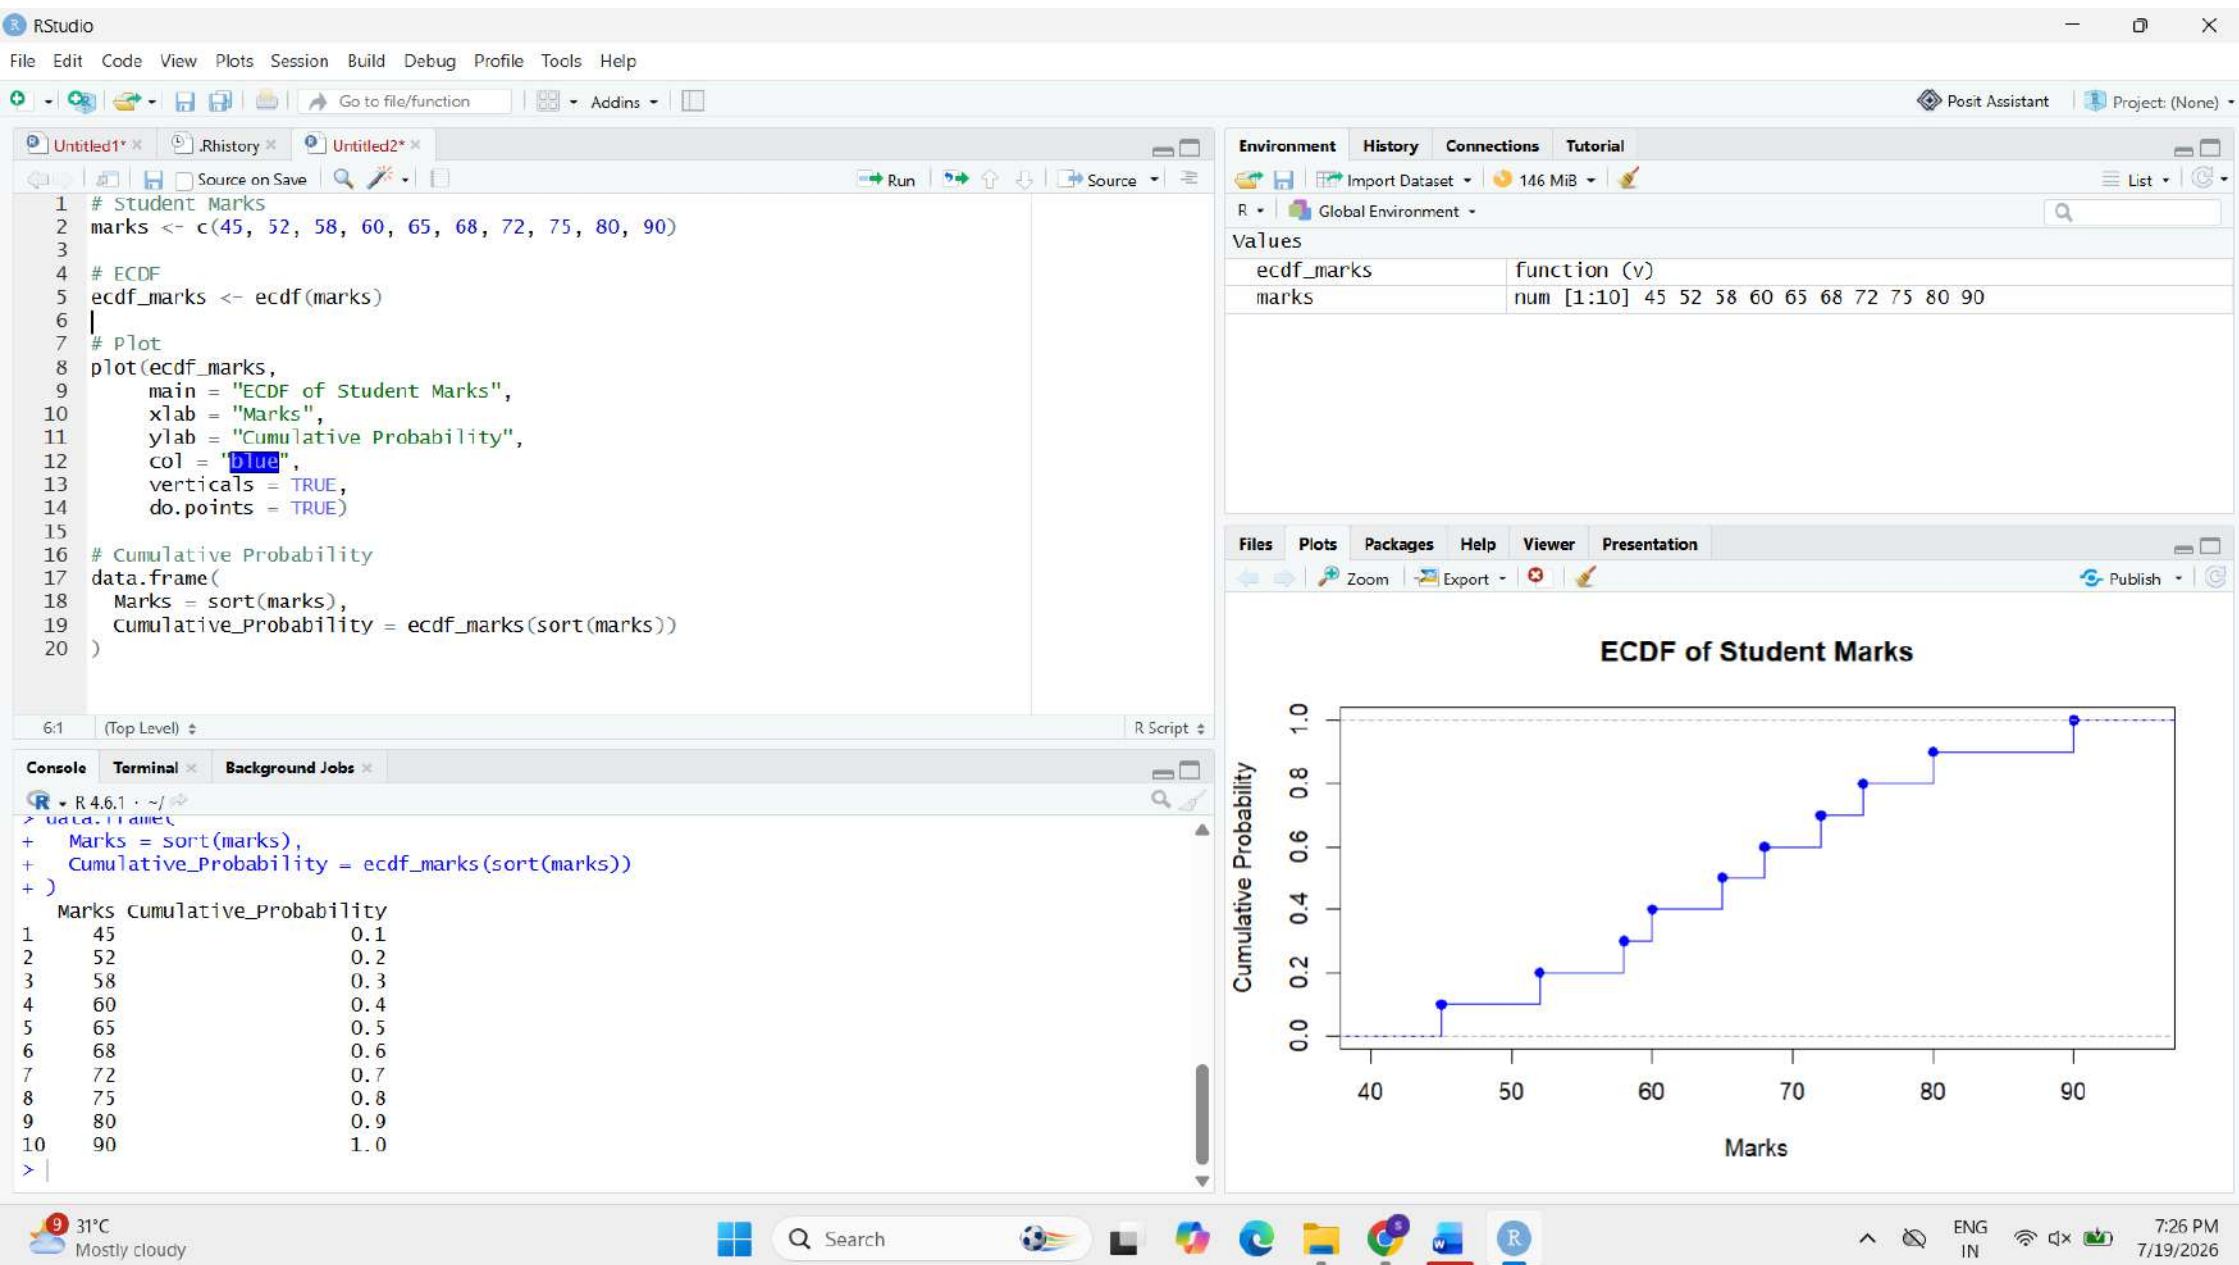

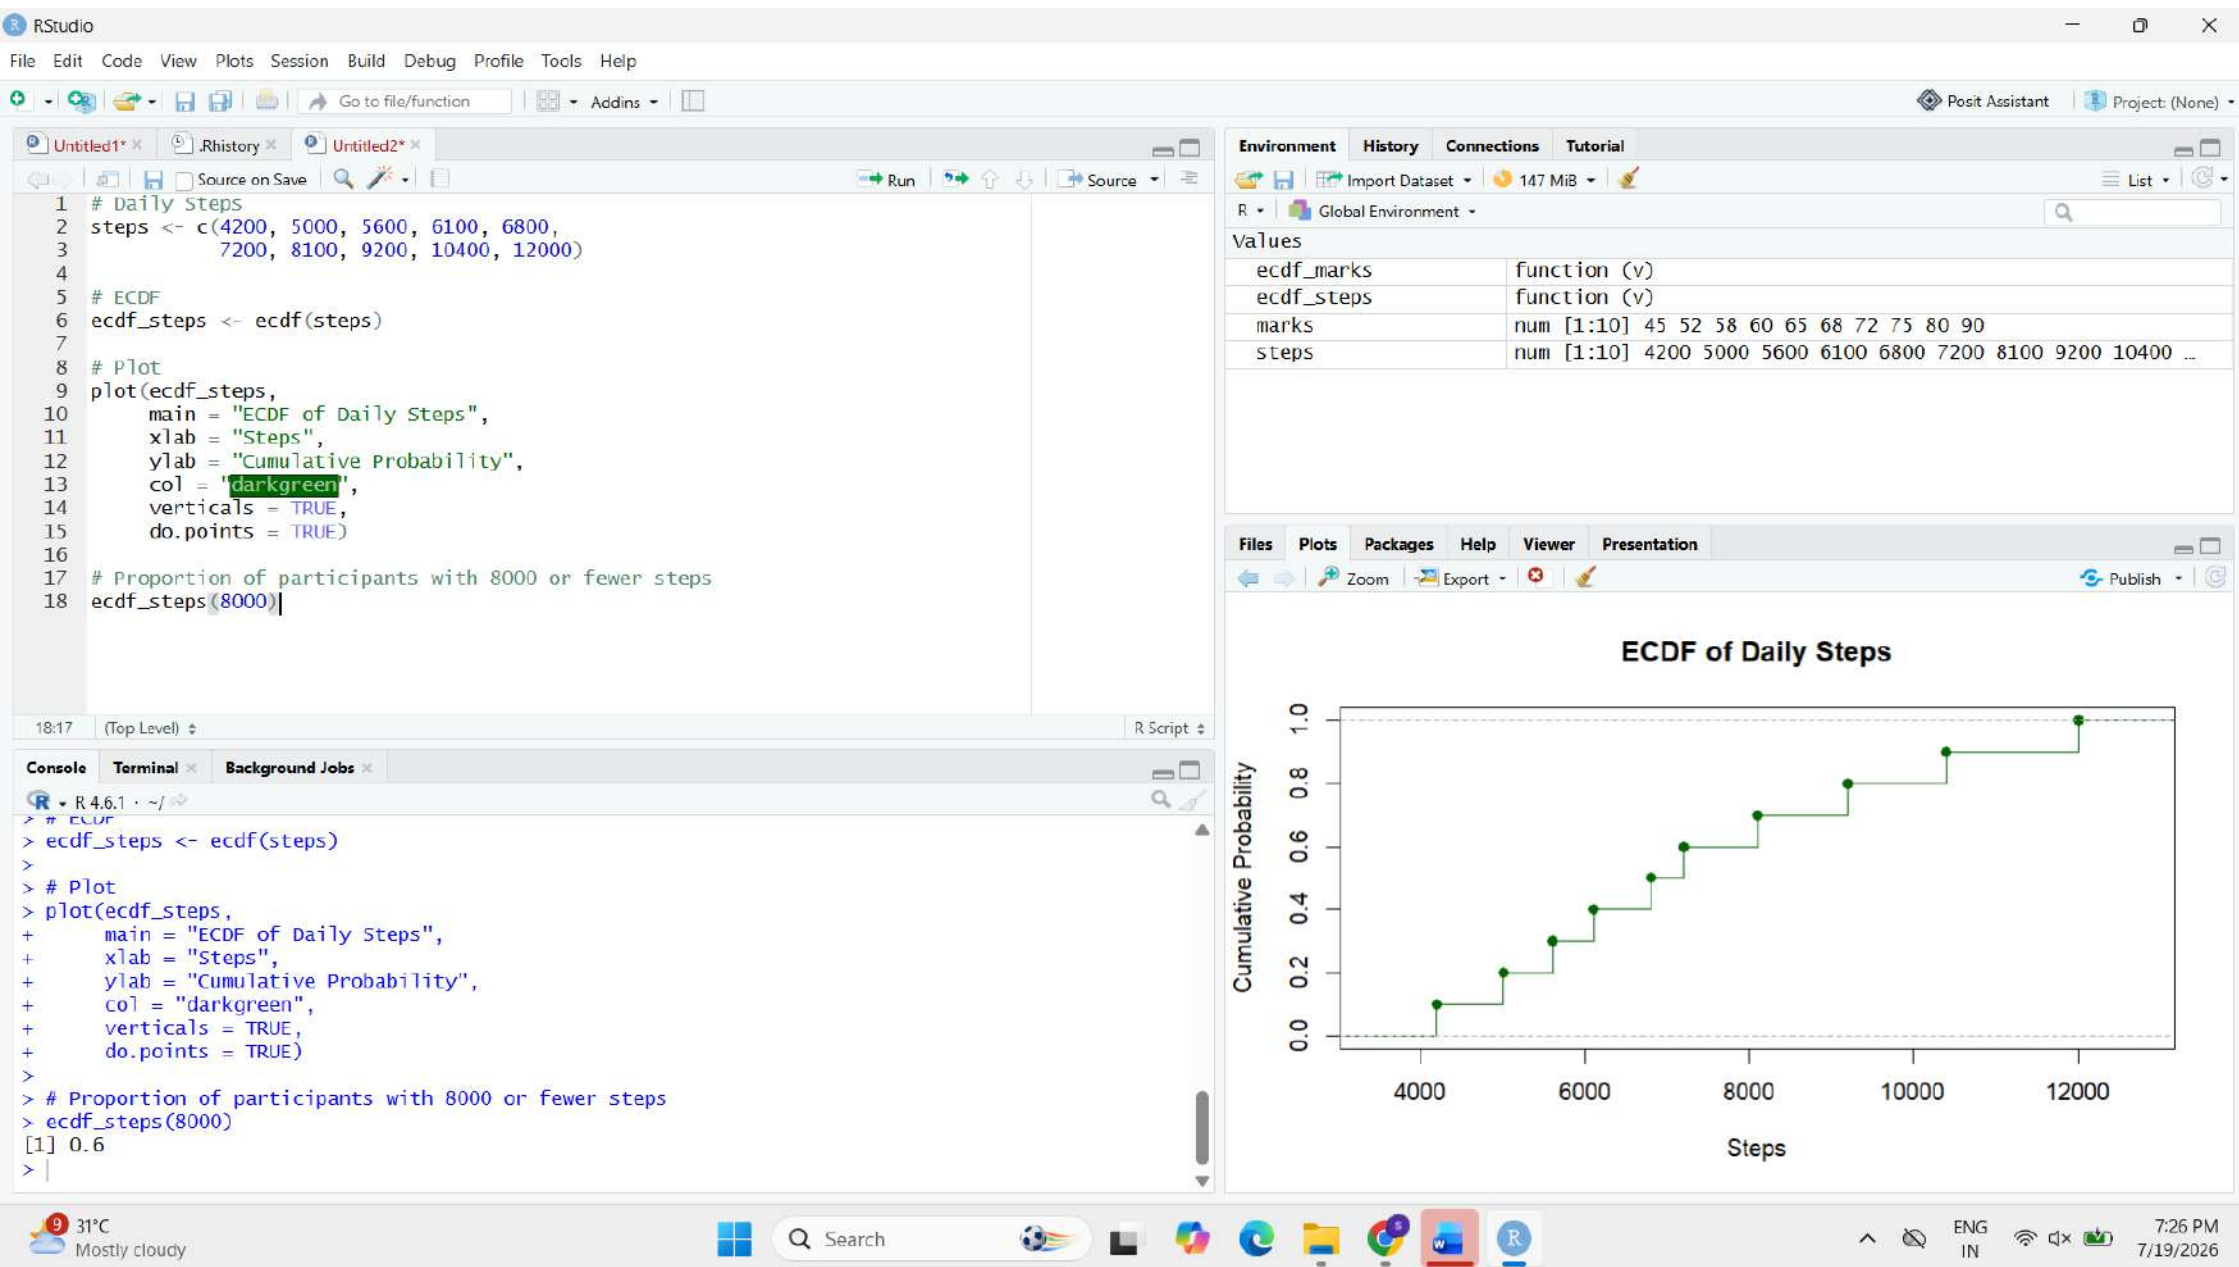

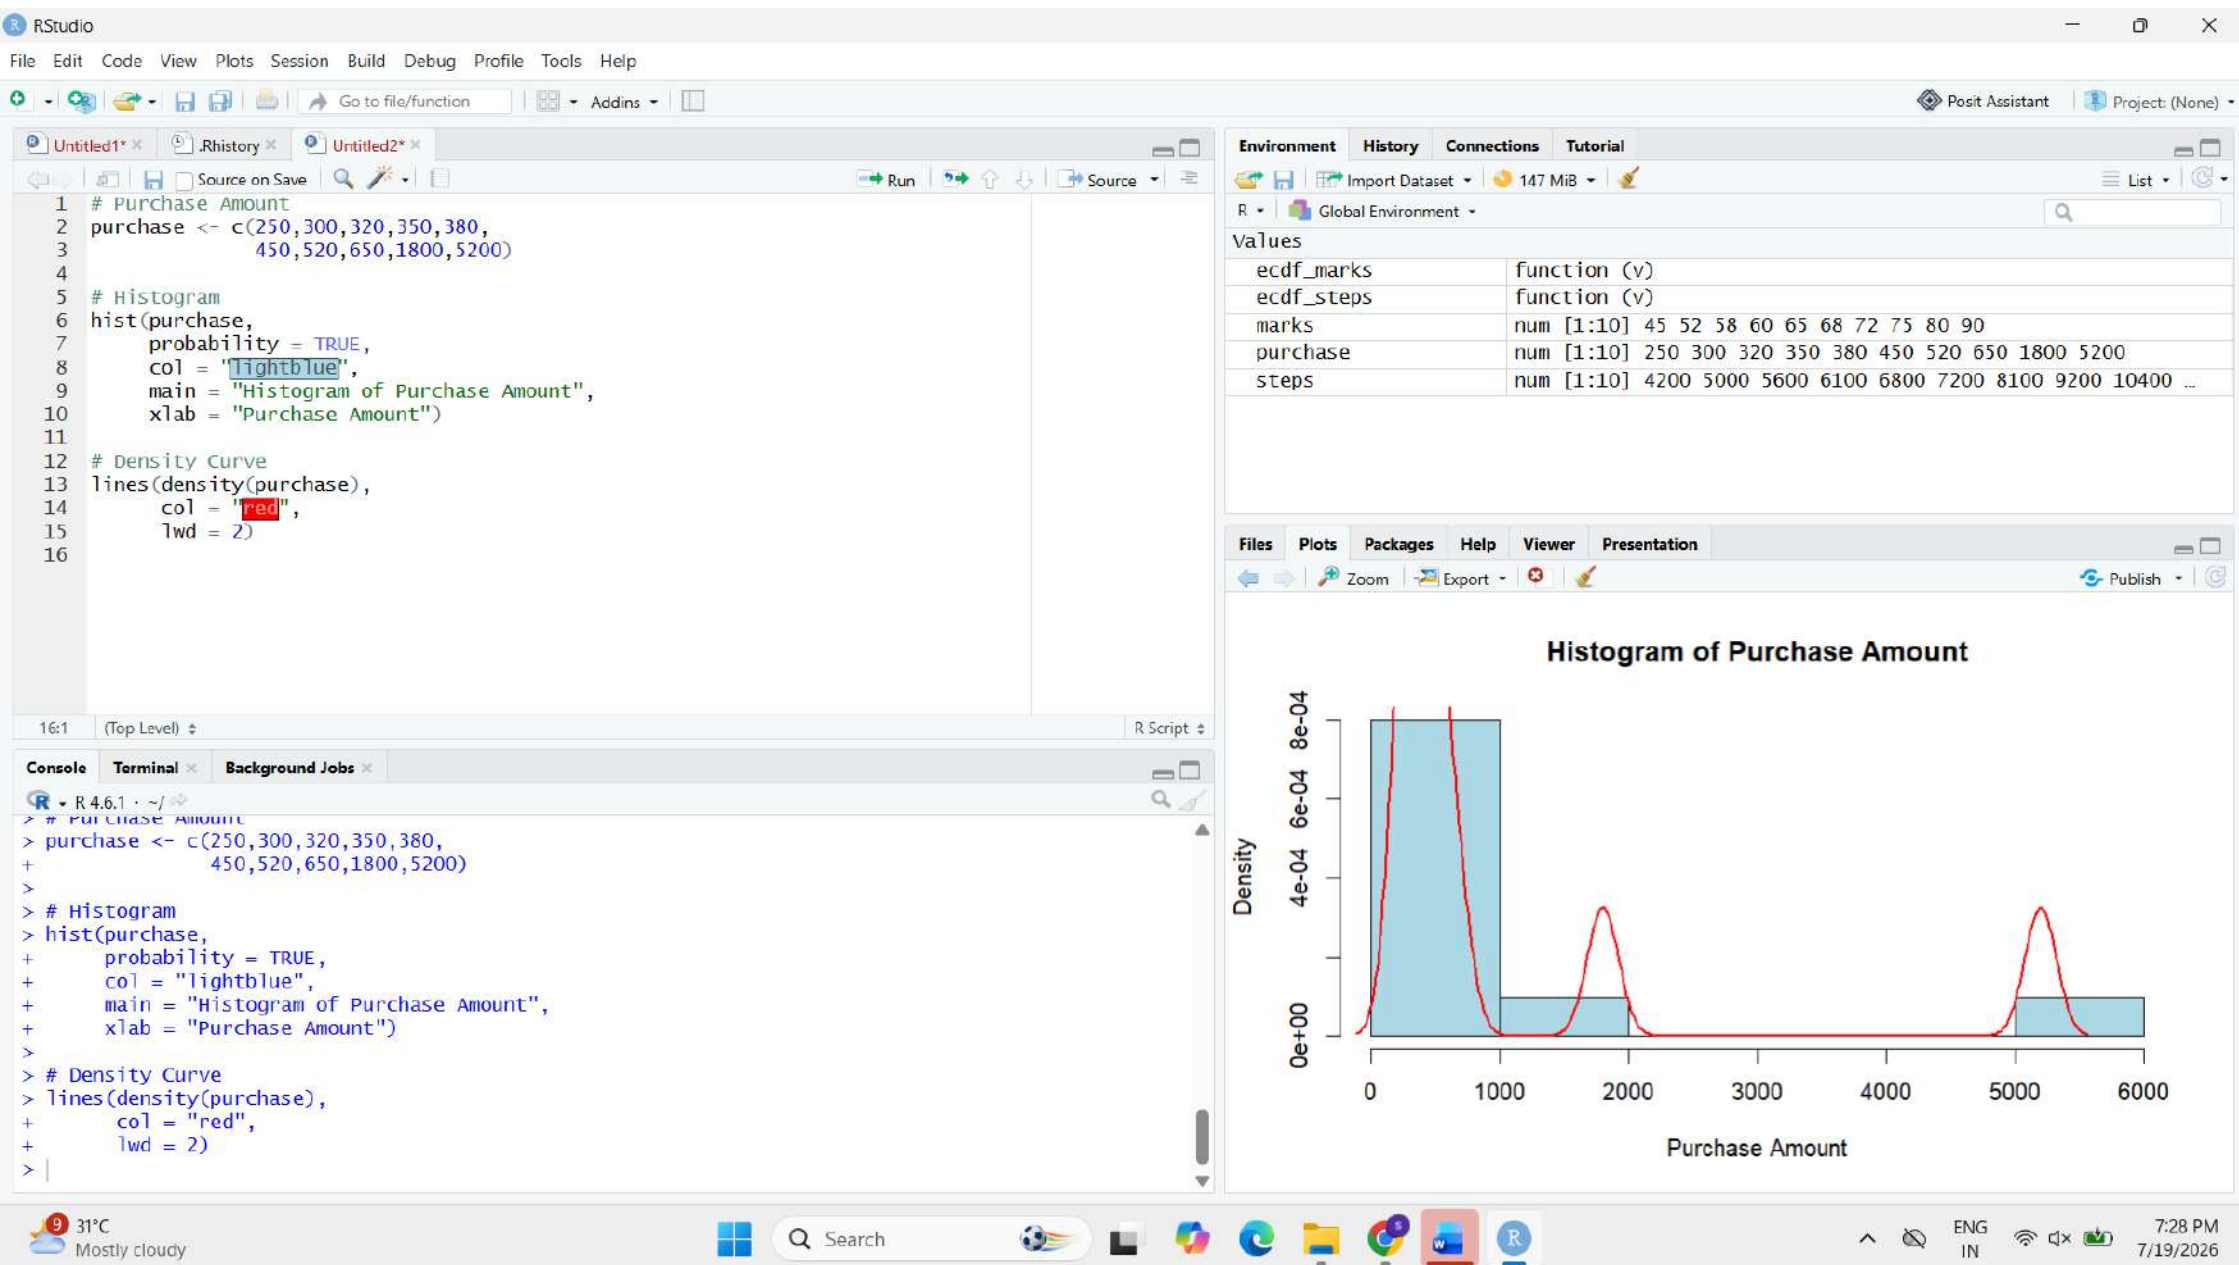

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

Untitled1* .Rhistory Untitled2*

Source on Save Run Source

```
1 # Waiting Time
2 waiting <- c(12,15,18,20,22,
3             24,25,28,30,32)
4
5 # Q-Q Plot
6 qqnorm(waiting,
7         main = "Normal Q-Q Plot of Waiting Time")
8
9 qqline(waiting,
10        col = "red",
11        lwd = 2)
```

Environment History Connections Tutorial

Import Dataset 147 MiB

R Global Environment

Values

ecdf_marks	function (v)
ecdf_steps	function (v)
marks	num [1:10] 45 52 58 60 65 68 72 75 80 90
purchase	num [1:10] 250 300 320 350 380 450 520 650 1800 5200
steps	num [1:10] 4200 5000 5600 6100 6800 7200 8100 9200 10400 ...
waiting	num [1:10] 12 15 18 20 22 24 25 28 30 32

Files Plots Packages Help Viewer Presentation

Zoom Export Publish

Normal Q-Q Plot of Waiting Time

A Normal Q-Q Plot showing the distribution of waiting times. The x-axis is labeled 'Theoretical Quantiles' and ranges from -1.5 to 1.5. The y-axis is labeled 'Sample Quantiles' and ranges from 15 to 30. The plot displays 10 data points as open circles, which closely follow a solid red diagonal line, indicating that the data is approximately normally distributed.

Console Terminal Background Jobs

```
R 4.6.1 ~/  
> # Density Curve  
> lines(density(purchase),  
+       col = "red",  
+       lwd = 2)  
> # Waiting Time  
> waiting <- c(12,15,18,20,22,  
+             24,25,28,30,32)  
>  
> # Q-Q Plot  
> qqnorm(waiting,  
+         main = "Normal Q-Q Plot of Waiting Time")  
>  
> qqline(waiting,  
+         col = "red",  
+         lwd = 2)  
> |
```

11:16 (Top Level) R Script

31°C Mostly cloudy

Search

ENG IN 7:29 PM 7/19/2026

