


Semester	T.E. Semester V – Information Technology
Subject	Advance DevOps Lab
Subject Professor In-charge	Prof. Indu Anoop
Laboratory	(Leave blank for now)

Student Name	Khot Mohammed Siddique	
Roll Number	20101A0048	
Grade and Subject Teacher's Signature		

Experiment	4	
Problem Statement	To install kubectl and execute kubectl commands to manage the Kubernetes cluster and deploy your first Kubernetes Application.	
Resources / Apparatus Required	Hardware: Computer System (Internet Connectivity)	Software: Web Browser
Details	<p>Theory: Kubernetes led by google is an open-source platform for managing container technologies such as Docker.</p> <p>Docker lets you create containers for a pre-configured image and application. <i>Kubernetes [Greek for "Pilot"] provides the next step, allowing you to balance loads between containers and run multiple containers across multiple systems.</i></p>	

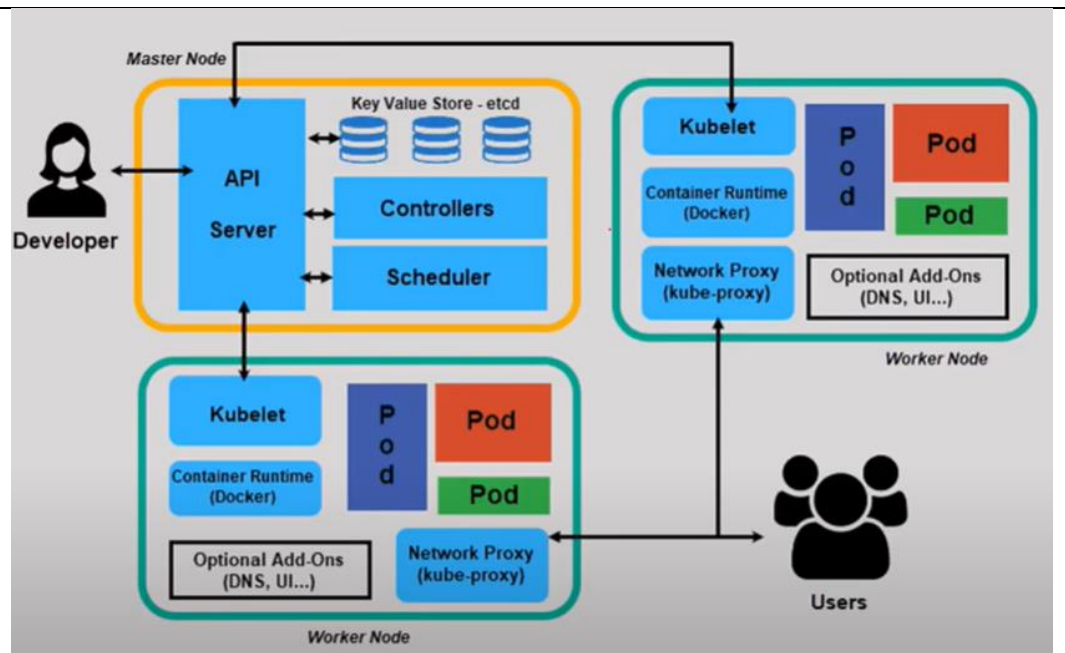

Container: Provides an isolated context in which an app together with its environment (supporting structure eg: web server) can run.

Pods: Represents a runnable unit usually consisting of a single container. [May contain more containers if containers are tightly coupled] Kubernetes connects the pod to the n/w and rest of the Kubernetes eco-system.

Code

Prerequisite:

2 AWS instance (virtual servers-ubuntu 20) one acting as Master Node and Other as Worker Node. Docker and Kubernetes installation done on both nodes.

<https://mobaxterm.mobatek.net/download.html>

Now that your cluster is verified successfully, let's schedule an example Nginx application on the cluster.

SECTION D: Running An Application on the Cluster

You can now deploy any containerized application to your cluster. To keep things familiar, let's deploy Nginx using Deployments and Services to see how this application can be deployed to the cluster. You can use the commands below for other containerized applications as well, provided you change the Docker image name and any relevant flags (such as ports and volumes).

https bhi add kar 443

aur jo bhi exp 3 me kiya tha wo bhi

Step 1: Create deployment named nginx [on master]

Still within the master node, execute the following command to create a deployment named nginx:

```
kubectrl create deployment nginx --image=nginx
```

A deployment is a type of Kubernetes object that ensures there's always a specified number of pods running based on a defined template, even if the pod crashes during the cluster's lifetime.

The above deployment will create a pod with one container from the Docker registry's Nginx Docker Image.

Next, run the following command to create a service named nginx that will expose the app publicly. It will do so through a NodePort, a scheme that will make the pod accessible through an arbitrary port opened on each node of the cluster:

```
kubectrl expose deploy nginx --port 80 --target-port 80 --type NodePort
```

Services are another type of Kubernetes object that expose cluster internal services to clients, both internal and external. They are also capable of load balancing requests to multiple pods, and are an integral component in Kubernetes, frequently interacting with other components.

Run the following command:

```
kubectrl get services
```

This will output text like the following:

Output

NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
kubernetes	ClusterIP	10.96.0.1	<none>	443/TCP	1d
nginx	NodePort	10.109.228.209	<none>	80: nginx_port /TCP	40m

From the third line of the above output, you can retrieve the port that Nginx is running on. Kubernetes will assign a random port that is **greater than 30000** automatically, while ensuring that the port is not already bound by another service.

Note: if you're running your setup on ec2 ensure the nginx_port is open under the inbound rules in the security groups.

To test that everything is working, visit

http://worker_1_ip:nginx_port //upar ka port number le aur ip dekh
worker ki public ip dekh aur port number use kar security groups
me jaa aur custom tcp me yeh port daal
https nhi hai yaad rakh search karte time

or

http://worker_2_ip:nginx_port

through a browser on your local machine. You will see Nginx's familiar
welcome page.

To see the deployed container on worker node switch to worker01

```
docker ps
```

Output: you will see the container for nginx image running.

SECTION E: Scale up replicas for a deployment

If you want to scale up the replicas for a deployment (nginx in our case)
the use the following command:

```
kubectl scale --current-replicas=1 --replicas=2 deployment/nginx  
kubectl get pods
```

Output: you will see 2/2 as output in nginx deployment.

```
kubectl describe deployment/nginx
```

Output: give details about the service deployed

If you would like to remove the Nginx application, first delete the nginx
service from the master node:

```
kubectl delete service nginx
```

Run the following to ensure that the service has been deleted:

```
kubectl get services
```

You will see the following output:

Output

NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
kubernetes	ClusterIP	10.96.0.1	<none>	443/TCP	1d

Then delete the deployment:

```
kubectl delete deployment nginx
```

Run the following to confirm that this worked:


```
kubectl get deployments
```

Output

No resources found.

Output

On master node:

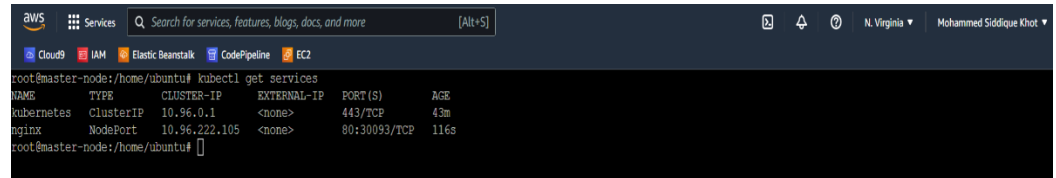


```
root@master-node:/home/ubuntu# kubectl get services
NAME          TYPE        CLUSTER-IP   EXTERNAL-IP   PORT(S)          AGE
kubernetes    ClusterIP   10.96.0.1     <none>         443/TCP          43m
nginx         NodePort    10.96.222.105 <none>         80:30093/TCP     116s
root@master-node:/home/ubuntu#
```

Access of worker node ip via browser to see successfully deployed application:




Replication of Pods:

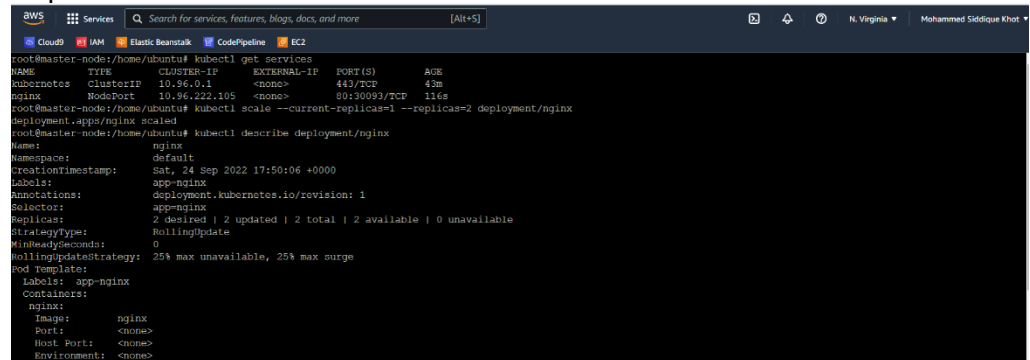

```
root@master-node:/home/ubuntu# kubectl describe deployment/nginx
Name:          nginx
Namespace:     default
CreationTimestamp: Sat, 24 Sep 2022 17:50:06 +0000
Labels:        app=nginx
Annotations:    deployment.kubernetes.io/revision: 1
Selector:      app=nginx
Replicas:      2 desired | 2 updated | 2 total | 2 available | 0 unavailable
StrategyType:  RollingUpdate
MinReadySeconds: 0
RollingUpdateStrategy: 25% max unavailable, 25% max surge
Pod Template:
  Labels:  app=nginx
  Containers:
    nginx:
      Image:          nginx
      Port:           <none>
      Host Port:      <none>
      Environment:    <none>
```

Deletion of application:

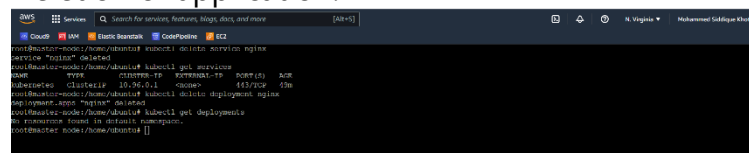

```
root@master-node:/home/ubuntu# kubectl delete deployment/nginx
deployment.apps/nginx deleted
root@master-node:/home/ubuntu# kubectl get deployments
No resources found in default namespace.
root@master-node:/home/ubuntu#
```

Conclusion	Executed kubectl commands to manage the Kubernetes cluster and deploy a nginx Application.
------------	--