Lecture 30.05: AdaBoost Ki Intuition — Decision Stumps Aur Sample Reweighting Ka Complete Concept [Hinglish]











📌 Topic Overview

AdaBoost (Adaptive Boosting) by Freund & Schapire sequentially chains weak learners (typically Decision Stumps with max_depth=1). It starts with uniform sample weights w_i = 1/N. Each learner's voting power alpha_m is derived from its weighted error epsilon_m via alpha_m = 0.5 * ln((1 - epsilon_m)/epsilon_m). Sample weights are dynamically multiplied by exp(+alpha_m) for misclassified instances and exp(-alpha_m) for correctly classified instances, forcing subsequent stumps to concentrate strictly on hard boundary cases.

📋 Is Topic Mein Hum Kya Seekhenge?

- AdaBoost (Adaptive Boosting) kya hota hai aur iska historical importance.
- Decision Stump: Ek single-split decision tree (max_depth=1) ko weak learner kyu bolte hain.
- Sample Weights Initialization ($w_i = 1/N$): Shuruat mein sabhi samples ko equal priority milna.
- Weighted Error (Total Error $E = \sum w_i$) aur Stump Importance Score ($\alpha = \frac{1}{2} \ln \frac{1-E}{E}$) ka formula.
- Sample Weights Update: Galat classify huye samples ka weight badhana ($e^{+\alpha}$) aur sahi walo ka ghatana ($e^{-\alpha}$).
- Weights Normalization (Z_m): Total sum ko wapas 1.0 banana.
- Shraddha ma'am ka Blackboard Email Spam Example (6 samples, Email Length, Links) step-by-step.

🔍 Har Ek Point Ka Simple & Detailed Explanation

Adaptive Ka Matlab: AdaBoost 'Adaptive' isliye hai kyunki har agla stump pichhle stump ki galtiyon ke mutabiq adapt hota hai — jin data points ko pehle galat classify kiya gaya tha, unka weight badh jata hai taaki agla model unhi par dhyan de!

Decision Stump (Weak Learner): AdaBoost mein full trees nahi bante! Sirf 1 split wala chota sa tree banta hai jise **Decision Stump** kehte hain (`max_depth=1`). Ek single stump slightly better than random guessing (e.g. 55-60% accuracy) hota hai.

Step 1: Uniform Initial Weights ($w_i = 1/N$): Maan lijiye dataset mein $N = 6$ emails hain. Har email ka starting weight hoga: $w_i = 1/6$. Total sum hamesha 1.0 rehta hai.

Step 2: Weighted Error (E): Stump 1 ne 6 mein se 1 email ko galat predict kiya. Total Error = us galat sample ka weight = $1/6 \approx 0.167$.


Step 3: Learner Weight / Voting Power (α): Formula: $\alpha = \frac{1}{2} \ln\left(\frac{1-E}{E}\right)$. Agar $E = 1/6$, toh $\frac{1-E}{E} = \frac{5/6}{1/6} = 5$. Toh $\alpha = \frac{1}{2}\ln(5) \approx 0.805$. Jis model ki error kam hoti hai, uska α (voting power) bohot high hota hai!

Step 4: Weights Update Rule:

- **Correctly Classified Sample**: $w_{new} = w_{old} \times e^{-\alpha}$ (Weight kam ho jayega!).
- **Misclassified Sample**: $w_{new} = w_{old} \times e^{+\alpha}$ (Weight exponentially badh jayega!).

Step 5: Normalize Weights: Naye weights ka sum 1.0 nahi hota, isliye unhe sum se divide karke normalize karte hain: $w_{norm} = w_{new} / \sum w_{new}$.

📊 Visual Flowchart / Diagram

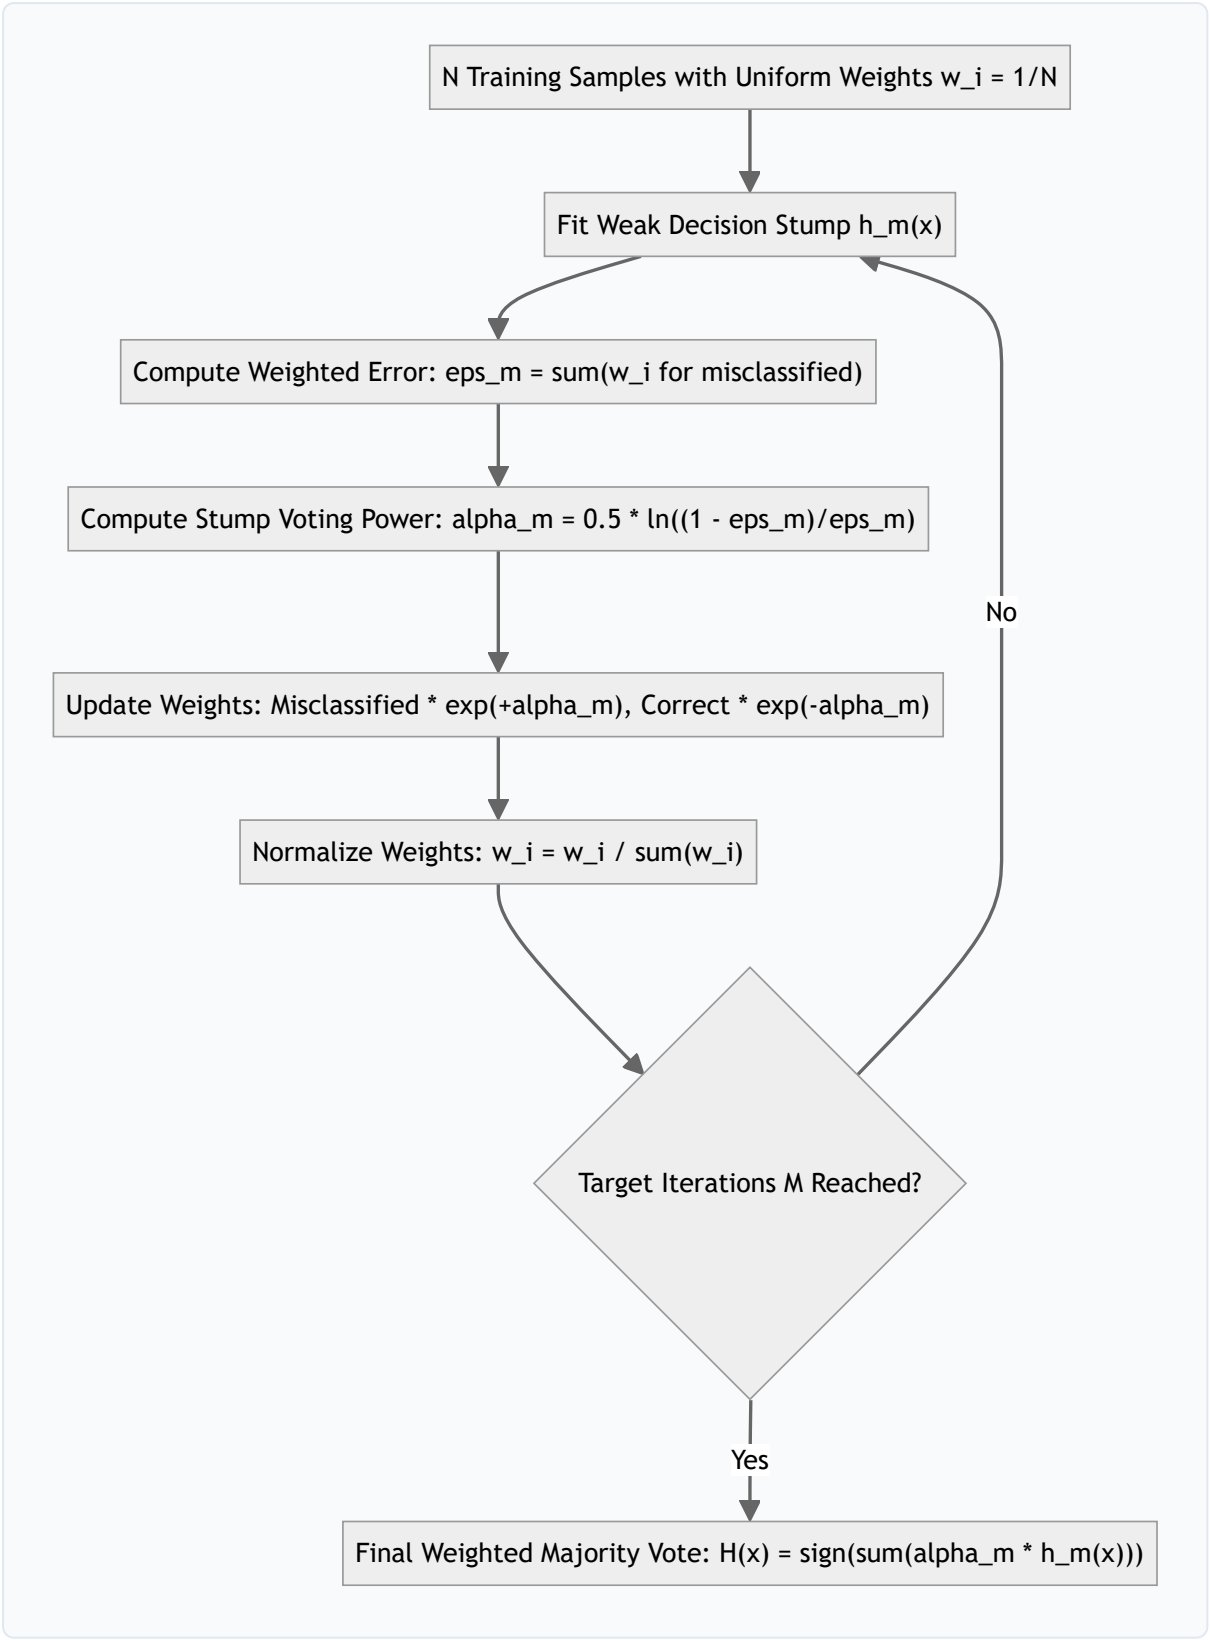

🛠️ Mathematical Formulations

The weighted classification error ϵ_m for stump m across sample weights $\mathbf{w}^{(m)}$:

$$\epsilon_m = \sum_{i=1}^{N} w_i^{(m)} \cdot \mathbb{I}(y_i \neq h_m(\mathbf{x}_i))$$

The stump importance weight α_m:

$$\alpha_m = \frac{1}{2} \ln \left(\frac{1 - \epsilon_m}{\epsilon_m} \right)$$

The multiplicative exponential weight update rule:

$$w_i^{(m+1)} = \frac{w_i^{(m)} \exp\left(-\alpha_m y_i h_m(\mathbf{x}_i)\right)}{Z_m}$$

where $Z_m = \sum_{i=1}^{N} w_i^{(m)} \exp(-\alpha_m y_i h_m(\mathbf{x}_i))$ is the normalization factor ensuring $\sum w_i^{(m+1)} = 1$. The final ensemble prediction for binary labels $y \in \{-1, +1\}$:

$$H(\mathbf{x}) = \text{sign} \left(\sum_{m=1}^{M} \alpha_m h_m(\mathbf{x}) \right)$$

💻 Python Code Implementation

```
import numpy as np
from sklearn.tree import DecisionTreeClassifier

def fit_adaboost_classifier_scratch(X, y, n_estimators=4):
    """
    First-principles implementation of Discrete AdaBoost (SAMME) binary classifier
    Labels must be encoded as {-1, +1}.

    Returns:
    --------
    stumps : list
        Trained DecisionTreeClassifier instances of depth 1.
    stump_weights : list
        Calculated alpha_m voting powers.
    final_preds : ndarray
        Ensemble predictions on training set.
```

```
    """
    X_arr = np.asarray(X, dtype=float)
    y_arr = np.asarray(y, dtype=float)  # Expected: -1 or +1
    N = len(y_arr)

    # 1. Initialize sample weights uniformly: w_i = 1/N
    weights = np.ones(N) / N

    stumps = []
    stump_weights = []

    for stage in range(n_estimators):
        # Fit decision stump using current sample weights
        stump = DecisionTreeClassifier(max_depth=1, random_state=42 + stage)
        stump.fit(X_arr, y_arr, sample_weight=weights)

        preds = stump.predict(X_arr)

        # Weighted error eps = sum(w_i * I(y != pred))
        misclassified = (y_arr != preds)
        error = np.sum(weights[misclassified])

        # Guard against zero or perfect error
        error = np.clip(error, 1e-10, 1.0 - 1e-10)

        # Stump importance alpha = 0.5 * ln((1 - error) / error)
        alpha = 0.5 * np.log((1.0 - error) / error)

        # Exponential weight updates
        weights *= np.exp(-alpha * y_arr * preds)

        # Normalization
        weights /= np.sum(weights)

        stumps.append(stump)
        stump_weights.append(alpha)

    # Aggregate predictions across stumps: sign(sum(alpha * h(x)))
    stump_preds = np.array([stump.predict(X_arr) for stump in stumps])
    final_raw = np.dot(np.array(stump_weights), stump_preds)
    final_preds = np.sign(final_raw)

    return stumps, stump_weights, final_preds

# ----------------- Driver Execution & Testing -----------------
if __name__ == "__main__":
    # Shraddha ma'am's Blackboard Email Spam Dataset (6 samples)
    # X1: Length, X2: Links, y: Spam (+1) or Not Spam (-1)
    X_emails = np.array([
        [1200.0, 10.0],
        [800.0,  0.0],
        [200.0,  2.0],
```

```
        [300.0,  1.0],
        [400.0,  2.0],
        [900.0,  8.0]
    ])
    y_emails = np.array([+1, -1, +1, -1, -1, +1])  # 3 Spam (+1), 3 Ham (-1)

    stumps, alphas, preds = fit_adaboost_classifier_scratch(X_emails, y_emails, n_

    print("=" * 60)
    print("--- ADABOOST CLASSIFIER (BLACKBOARD SCRATCH DEMO) ---")
    print(f"Stump Importance Weights (Alphas) : {[round(a, 4) for a in alphas]}")
    print(f"Actual Labels                     : {y_emails.tolist()}")
    print(f"AdaBoost Aggregated Predictions   : {[int(p) for p in preds]}")
    print(f"Accuracy                          : {np.mean(preds == y_emails) * 100:
    print("=" * 60)
```

📌 Summary Points & Key Takeaways

1. **Sequential Learning**: Har agla model pichhle model ki galtiyon ko seekhta hai.
2. **Shrinkage (Learning Rate)**: 0.1 jaise chote kadam lene se model overfit hone se bachta hai.
3. **Weak Learners**: Boosting mein shallow decision trees (depth 1 se 3) use kiye jaate hain.