Submodule 35.11: Git Init Command (Hinglish)

1. `git init` kya karta hai?

`git init` command kisi bhi aam normal folder ko ek active **Git Repository** mein convert kar deti hai.

Clone aur Init ka Farak:

- **`git clone`**: Jab project pehle se GitHub par bana hua hai, tab use apne computer par laane ke liye clone karte hain.
- **`git init`**: Jab aap apne computer par bilkul scratch se naya project shuru kar rahe ho aur chahte ho ki Git is folder ke changes track kare.

---

2. Command Execution

Terminal mein project folder ke andar jakar run karein:

```
git init
```

Output:

```
Initialized empty Git repository in C:/Users/Engineer/my_ml_project/.git/
```

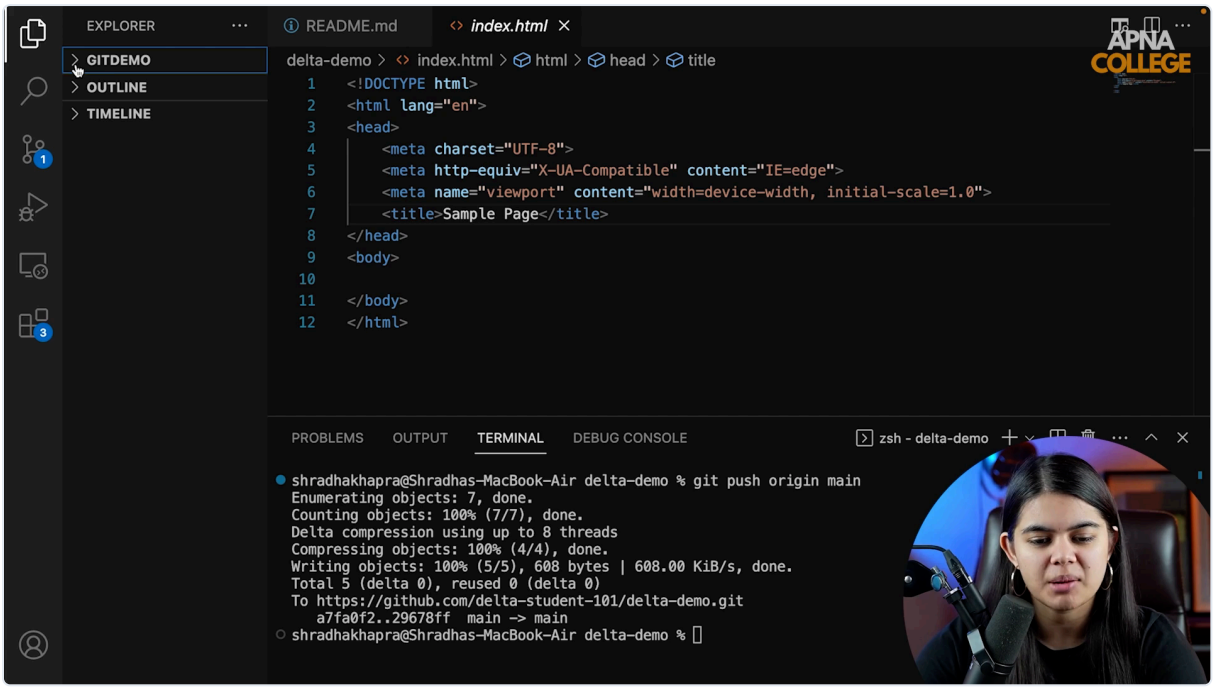
Parde ke peeche kya hota hai?

Git is folder ke andar ek hidden `.git/` folder create karta hai:

- Is `.git/` folder ke andar Git ka pura internal database hota hai (objects, commits, branches, config).
- **Caution**: Is hidden `.git/` folder ko kabhi manual delete mat karna, warna project ka pura commit history gayab ho jayega!

---

3. Visual Reference


EXPLORER
README.md
index.html
GITDEMO
OUTLINE
TIMELINE
delta-demo > index.html > html > head > title
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Sample Page</title>
</head>
<body>
</body>
</html>
APNA COLLEGE
PROBLEMS
OUTPUT
TERMINAL
DEBUG CONSOLE
zsh - delta-demo
shradhakhapra@Shradhas-MacBook-Air delta-demo % git push origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 8 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 608 bytes | 608.00 KiB/s, done.
Total 5 (delta 0), reused 0 (delta 0)
To https://github.com/delta-student-101/delta-demo.git
a7fa0f2..29678ff main -> main
shradhakhapra@Shradhas-MacBook-Air delta-demo %