
Submodule 35.17: The Git Pull Command

1. What is Pulling?

The `git pull` command downloads commits from a remote GitHub repository and instantly integrates (merges) them into your currently checked out local branch.



---

2. Command Syntax & Common Scenarios

```
git pull origin main
```


Typical Use Cases:

1. **Starting Your Work Day**: Always run `git pull` in the morning to incorporate code merged by teammates while you were offline.
2. **Post-PR Merges**: After merging a Pull Request on GitHub web, pull changes locally so your local `main` matches the remote `main`.
3. **Multi-Machine Development**: Syncing work between your office workstation and personal laptop.

---

3. `git fetch` VS `git pull`

It is important to understand what `git pull` does under the hood:

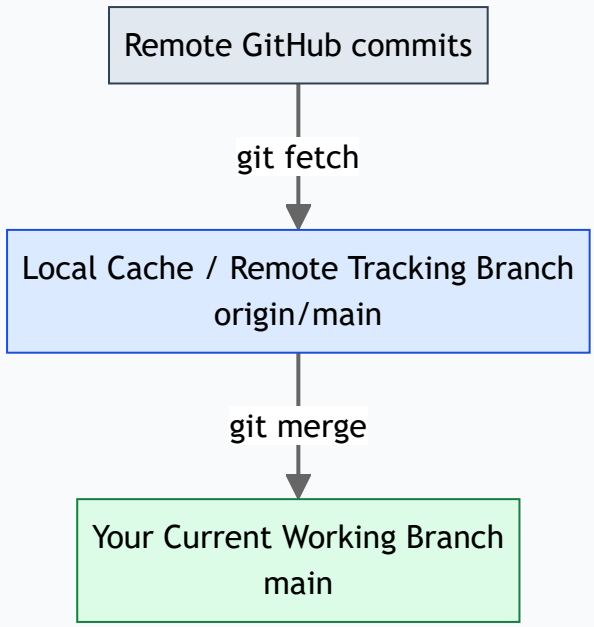


$$extgitpull = extgitfetch + extgitmerge$$

- `git fetch` : Downloads commits and branch updates from GitHub without altering your working files. It is 100% safe to run anytime.
- `git pull` : Automatically executes `git fetch` followed immediately by `git merge`. If conflicts exist between remote and local changes, Git flags a merge conflict.

---

4. Visual Reference

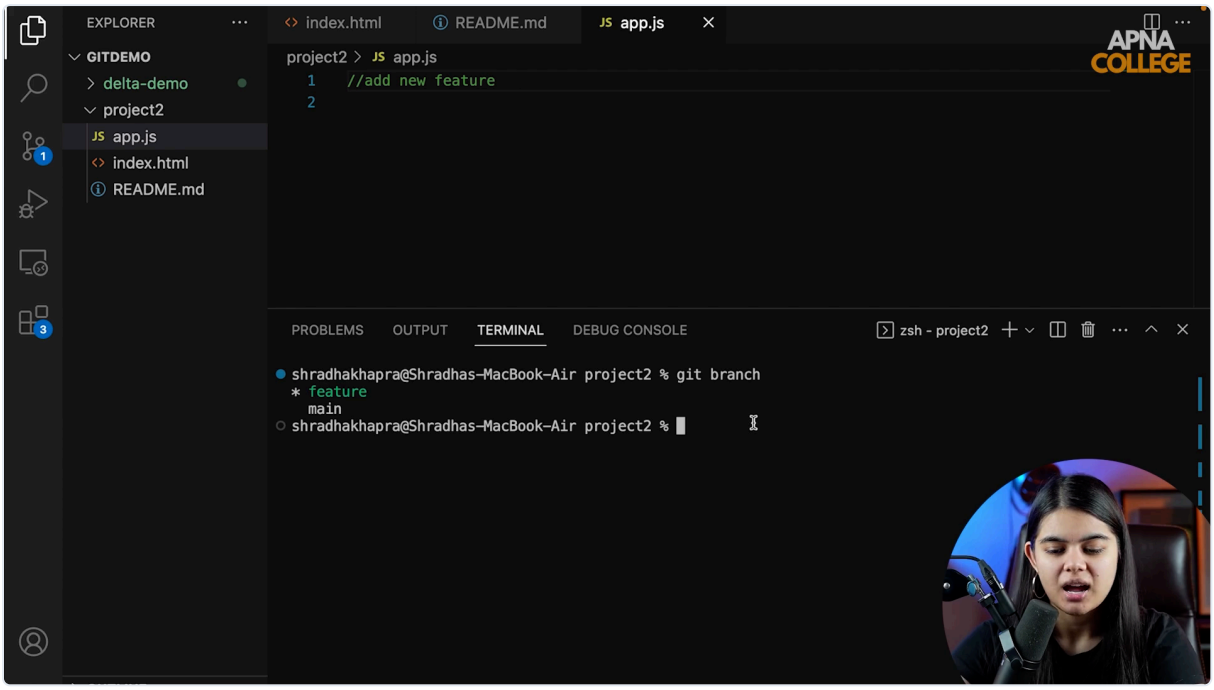
EXPLORER
GITDEMO
delta-demo
project2
app.js
index.html
README.md
index.html
README.md
app.js
project2 > app.js
1 //add new feature
2
APNA COLLEGE
PROBLEMS
OUTPUT
TERMINAL
DEBUG CONSOLE
zsh - project2
shradhakhapra@Shradhas-MacBook-Air project2 % git branch
* feature
main
shradhakhapra@Shradhas-MacBook-Air project2 %