
Submodule 34.08: Directory Creation: `mkdir`, Nested Trees, and Path Arguments (Hinglish)

Topic Overview & Syntax

Terminal se naye folders banane ke liye **`mkdir` (Make Directory)** command use ki jaati hai. Mouse se right-click karke "New Folder" banane ki jagah `mkdir` command se hum instant single ya multiple folders create kar sakte hain.

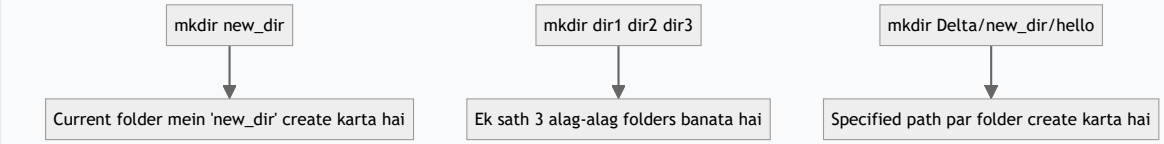

---

1. `mkdir` Command ke Use Cases

A. Single Folder Banana

Current working directory mein ek naya folder banane ke liye:

```
mkdir new_directory
```

`ls` run karke verify karein, `new_directory` list mein display ho jayegi.

B. Ek Sath Multiple Folders Banana

Agar aapko ek se zyada folders banane hain, toh space dekar unke naam likhein:

```
mkdir frontend backend database
```

Yeh ek hi second mein teeno folders create kar dega.

C. Path ke Through Folder Banana

Zaroori nahi hai ki aap pehle us folder mein `cd` karke jayein. Aap direct path dekar bhi folder create kar sakte hain:

```
# Relative path se
mkdir Delta/new_dir/hello

# Absolute path se
mkdir /Users/Shraddha/Desktop/Delta/new_dir2/hello2
```

---

2. Common Errors aur Best Practices

A. `File exists` Error

Agar usi naam ka folder pehle se wahan bana hua hai:

```
mkdir hello
# mkdir: hello: File exists
```

Terminal existing folder ko overwrite nahi karta, taaki purana data safe rahe.

B. Spaces wale Folder Names

Agar aapne likha `mkdir my project folder`, toh terminal 3 alag-alag folders bana dega: `my`, `project`, aur `folder`.

- **Solution**: Folder ke naam ko double quotes (`" "`) mein likhein ya backslash lagayein:

  ```
  mkdir "my project folder"
  mkdir my\ project\ folder
  ```

C. Intermediate Parent Folders Banana (`-p` Flag)

Agar parent folder exist nahi karta, toh error aati hai. Pure folder tree ko ek baar mein banane ke liye `-p` flag lagate hain:

```
mkdir -p project/src/components
```